

Surrounded by Friends: Design and Evaluation of Immersive Layouts of Egocentric Network for Visual Analytics

Kentaro Takahira
HKUST
Hong Kong, China
ktakahira@connect.ust.hk

Kento Shigyo
HKUST
Hong Kong, China
kshigyo@connect.ust.hk

Yalong Yang
Georgia Institute of Technology
Atlanta, Georgia, United States
yalong.yang@gatech.edu

Takanori Fujiwara
University of Arizona
Tucson, Arizona, United States
tfujiwara@arizona.edu

Leni Yang
Inria, CNRS
Bordeaux, France
leni.yang@inria.fr

Huamin Qu
HKUST
Hong Kong, China
huamin@cse.ust.hk

Wong Kam-Kwai
HKUST
Hong Kong, China
kkwongar@connect.ust.hk

Hiroaki Natsukawa
Osaka Seikei University
Osaka, Japan
natsukawa@g.osaka-seikei.ac.jp

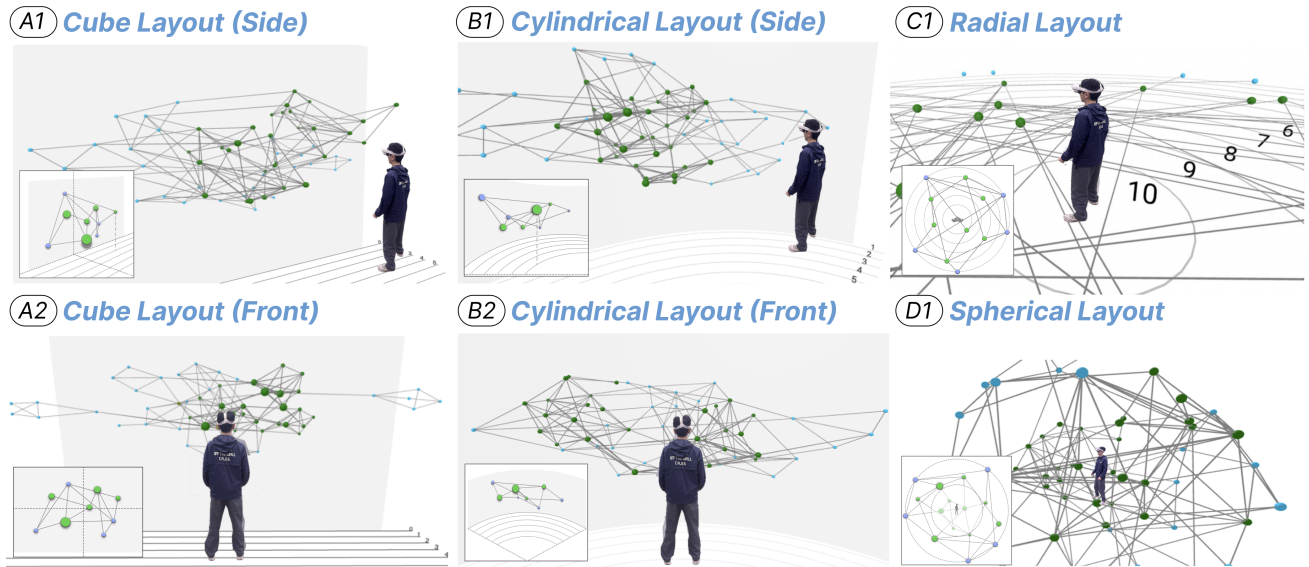


Figure 1: The Evaluated Immersive Egocentric Network Layouts: (A) *Cube*: Encodes ego–alter connection strength using depth along the Z-axis. (B) *Cylindrical*: Uses radii of semi-cylinders centered on the user to represent ego–alter connection strength. (C) *Radial*: Immersive extension of a radial layout common in desktop environments, centered at the user’s feet. (D) *Spherical*: Encodes ego–alter connection strength via radii of spheres centered on the user.

Abstract

This paper explores design considerations for egocentric network layouts in immersive environments, providing fresh empirical insights that enhance egocentric network analysis. An egocentric network focuses on the topological and semantic relationships around a focal node (*ego*) and its neighboring nodes (*alters*), targeting local sub-networks rather than the whole network. Traditional desktop environments, limited by display constraints,

often face visual clutter as node numbers grow. Building on recent findings that immersive environments enhance network analysis, we explore layouts tailored for these spaces. We begin by identifying essential design properties and dimensions for egocentric network layouts, taking into account the unique features of immersive environments. Based on these, we design four layouts—*Cube*, *Cylindrical*, *Radial*, and *Spherical*—that vary across design dimensions. We evaluate these layouts in a user study with 24 participants completing egocentric analysis tasks. Our study suggests that *Cube* performed well for tasks focused on ego–alter connection strength. In contrast, *Spherical* was more effective for understanding alter topology, minimizing occlusion, and efficiently utilizing 3D space. These findings inform design implications for future immersive egocentric network layouts.



This work is licensed under a Creative Commons Attribution 4.0 International License.

SUI '26, Bari, Italy

© 2026 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-2812-9/2026/10

<https://doi.org/10.1145/3822518.3830041>

CCS Concepts

• **Human-centered computing** → **Visualization design and evaluation methods**.

Keywords

Immersive Analytics, Egocentric Network, Network Visualization, Virtual Reality

ACM Reference Format:

Kentaro Takahira, Takanori Fujiwara, Wong Kam-Kwai, Kento Shigyo, Leni Yang, Hiroaki Natsukawa, Yalong Yang, and Huamin Qu. 2026. Surrounded by Friends: Design and Evaluation of Immersive Layouts of Egocentric Network for Visual Analytics. In *ACM Symposium on Spatial User Interaction (SUI '26), October 10–11, 2026, Bari, Italy*. ACM, New York, NY, USA, 12 pages. <https://doi.org/10.1145/3822518.3830041>

1 Introduction

Egocentric networks focus on a central node (*ego*) and its connections to neighboring nodes (*alters*). Egocentric analysis examines both the strengths of ego-alter connections and the topology among alters. This approach is widely applied in fields such as sociology, bioinformatics, and public health [47], offering insights into personal relationships across life stages [17], and behaviors shaped by network structure, such as health-related habits [51].

However, visualizing egocentric networks is challenging as it requires simultaneous representation of ego-alter connection strengths and alter topology. Radial layouts, which position the ego centrally and arrange alters around it based on proximity to encode connection strength, are commonly used [47]. Although intuitive and space-efficient [61], these layouts frequently suffer from visual clutter due to overlapping nodes and edges, especially as network size grows [5, 25]. While various radial layout modifications have aimed to reduce clutter [9, 61], effectively balancing clarity and connection strength encoding remains challenging. Alternative approaches using visual attributes such as color, edge thickness, and node size provide greater flexibility in node placement [25, 38, 60]. However, these rely on less effective visual channels compared to positional encodings and lack a clear central reference, weakening cues for interpreting alter hierarchy and impairing users' spatial memory [8, 18].

Virtual Reality (VR) offers new opportunities to overcome these limitations by leveraging spatial depth, stereoscopic views, and embodied interaction [23, 36, 54]. Stereoscopic displays provide a strong sense of 3D structure, helping reduce clutter and improve spatial comprehension [43, 58, 59]. Additionally, VR allows users to navigate through physical movement and directly manipulate objects [16], fostering intuitive exploration [30]. However, design strategies for effectively applying these capabilities to egocentric network analysis and how different layouts influence task performance remain underexplored.

To address this gap, we first discuss desirable properties of egocentric network layouts, emphasizing the importance of (1) the clear depiction of ego-alter connection strength and (2) the clear representation of alter-alter topology. Building on these desirable properties and drawing from prior research on desktop-based egocentric layouts, we identify four unique design dimensions: (1) positional encoding of ego-alter connection strength, (2) viewpoint assumptions, (3) spatial layout dimensions, and (4) the primary exploration strategies. Based on these dimensions, we propose four immersive layout designs—*Cube*, *Cylindrical*, *Radial*, and *Spherical*—each designed to satisfy desirable properties and representing diverse design choices (Fig. 1).

We evaluated these layouts with 24 participants performing representative egocentric network tasks. The study aimed to identify each layout's strengths and limitations, as well as user engagement and interaction patterns. The results show diverse interaction patterns and task efficiencies across the layouts, with *Cube* excelling in tasks focused on understanding ego-alter connection strengths and *Spherical* proving more effective for alter topology comprehension. Additionally, we explore how different layouts and design dimensions impact users' task strategies. Based on these insights, we discuss the lessons learned and summarize design guidelines to enhance egocentric network analysis in immersive environments. Our main contributions are:

- ◊ Identification of key design dimensions for egocentric network visualization in immersive environments.
- ◊ Development of four novel layouts, which are *Cube*, *Cylindrical*, *Radial*, and *Spherical* that span these dimensions.
- ◊ A controlled user study evaluating the layouts and providing actionable design implications.

2 Related work

Our research builds on desktop-based egocentric network visualization as well as immersive network visualization and analytics.

2.1 Egocentric Network Analysis

Egocentric networks focus on a central *ego* and its directly connected *1st alters* [38, 47, 60]; analyses sometimes also include *2nd alters*, connected to 1st alters but not to the ego [21, 38]. Such analysis emphasizes ego–alter relationships and interactions among alters, recognizing that individual behaviors are largely shaped by immediate relationships that channel information and resource exchange [11, 47, 48]. Common analytical tasks include examining individual egocentric networks [11, 47], comparing multiple egocentric networks [1, 11, 38], and studying network dynamics over time [25, 34, 52, 60].

It is widely applied across disciplines, revealing insights into how network structures influence both individual and collective behaviors [21, 24, 48, 49]: in social network analysis, exploring social support, personal behavior, and information flow [1, 4, 17]; in epidemiology, modeling disease transmission and health behaviors [51]; and in organizational studies, examining communication, collaboration, workflow, and group dynamics [13].

Effective visualization is crucial for hypothesis generation, validation, and understanding. Traditional approaches often use node-link diagrams, commonly the radial layout [21, 24, 28, 47]. Radial layouts position the ego centrally, with alters in concentric circles by connection strength [9, 15, 47]. However, they grow cluttered with link crossings and node occlusion as network size grows [9, 61], impairing readability [21, 25]. Solutions such as stress-based layouts [9] and annulus-constrained stress models [61] alleviate some occlusion and aid cluster detection but still struggle to encode strength precisely by distance, especially in dense networks. Alternatives encode strength via color, edge thickness, and node size [25, 38, 60], allowing more flexible placement, but these channels are less effective than position and lack a clear central reference, reducing salience and hindering recall of node positions and hierarchies [8, 18].

A central challenge is balancing positional encoding with topological clarity. Immersive environments, leveraging spatial dimensions and enhanced depth perception, present unique opportunities for improved egocentric network analysis.

2.2 Network Visualization in VR

Immersive technologies open new possibilities for network analysis through 3D space and embodied interaction. Early studies by Ware and Franck [58, 59] showed that stereoscopic displays with head-tracking—now standard in head-mounted displays—enhance depth perception and facilitate intuitive interpretation of 3D network structures. Their 360-degree space also reduces node overlap and edge crossings common in 2D displays [36], while the added spatial dimension supports novel layouts [5, 42, 54, 56] and embodied navigation through physical movement and hand gestures [29], helping users form clear mental models of network structure [32].

Recent studies have investigated diverse visual analytics approaches for immersive networks [31]. Kwon *et al.* [35, 36] examined spherical layouts and interaction methods, demonstrating their effectiveness for specific network tasks. Bauer *et al.* [5] integrated 3D networks with 2D projections to provide additional contextual cues. Sorokin *et al.* [56] arranged network nodes on spherical rings based on categorical attributes, effectively utilizing 3D space for detailed analyses. Other research has targeted particular structures, such as adjacency matrices for triangle detection [46] and layered visualizations for multi-layer network tasks [23]. Additionally, various interaction techniques, including gesture-based node manipulation [30], flying [19], walking [20], and teleporting to nodes [55], have been introduced to enhance immersive navigation.

However, most immersive network visualization research emphasizes broad overviews rather than detailed subnetwork analysis. Sorger *et al.* [54] introduced an egocentric network visualization in immersive environments, allowing exploration from the perspective of selected nodes to examine local subnetworks. While this approach effectively reduces clutter and facilitates local topology comprehension, it lacks explicit encoding of ego-alter relationship strength, which is crucial in egocentric analysis. Additionally, the effectiveness of this method for specific egocentric network tasks remains largely untested.

3 Egocentric Network Layouts

This study explores layout designs for egocentric network analysis in VR environments. We focus on a single static egocentric network and examine how layout design affects user performance. We first define desirable properties and design dimensions, and then introduce four layout designs grounded in these considerations and prior research.

3.1 Desirable Properties

P1 Effective Encoding of Ego–Alter Connection Strength: The ego-alter connection strength is central to egocentric network analysis [38, 47]. While visual attributes of links (e.g., width, color) can encode this strength, they often contribute to visual clutter [47]. Because every alter is directly connected to the ego, this strength can also be treated as a node attribute [15, 38]. Common approaches include encoding strength via node size, color, or position, which tend to be more scalable and visually clear [6, 56]. **P2 Effective Representation of Alter–Alter Topology:** Understanding the topology among 1st alters is another central goal [47]. Analysts often investigate centrality, cluster formation, and the ego’s structural role (e.g., as an articulation point between groups) [2, 47, 48]. These patterns help identify which alters are most significant. Additionally, analyzing both 1st and 2nd alters reveals extended structures and bridge roles, such as 1st alters

connected to many 2nd alters, which may indicate influence or network reach [60].

3.2 Design Dimensions

Building on insights from desktop-based egocentric network layouts, we examine how these concepts extend to immersive environments. We identify four key design dimensions critical for egocentric layouts in VR: **D1** positional encoding of connection strength, **D2** viewpoint assumptions, **D3** spatial layout dimensions, and **D4** primary exploration modes (Fig. 2).

3.2.1 Positional Encoding of Alter Strength (D1). In desktop environments, ego-alter connection strength is often shown via node position [47]. In immersive environments, this positional encoding can be applied along horizontal, vertical, radial, or depth axes (Fig. 2-D1). Horizontal and vertical encoding is generally effective, as users can easily distinguish positions along these axes. Radial encoding is also feasible but tends to be less precise when interpreting angular differences. While depth-based encoding, which uses proximity to the ego to signal stronger connections, seems intuitive, users often struggle to perceive depth as accurately as horizontal or vertical positions [26]. Depth encoding can be implemented in two ways. Anchored depth encoding places nodes on a shared plane, providing a consistent reference that aids depth perception. In contrast, non-anchored depth encoding distributes nodes freely in depth around the user, making depth judgments more difficult but potentially enhancing spatial immersion [41, 53].

3.2.2 Viewpoint Assumptions (D2). A key design consideration is whether the layout assumes a fixed viewpoint (Fig. 2-D2). Although immersive environments allow users to move freely in 3D space, layouts optimized for a specific viewpoint can reduce occlusion and improve initial comprehension by presenting a clear and structured view, which can also help reduce motion sickness [40]. However, such designs may restrict users’ ability to explore the network from alternative angles, limiting interaction flexibility. On the other hand, viewpoint-independent layouts support exploration from multiple perspectives, encouraging deeper engagement and the potential for new insights. Yet this freedom comes at a cost: it often requires more movement and frequent adjustments in viewpoint, which can increase cognitive load and exacerbate motion sickness [12, 62]. Moreover, these layouts may lack the clarity and low visual clutter afforded by fixed-viewpoint designs.

3.2.3 Spatial Layout Dimensions (D3). The spatial dimensionality of a layout shapes both the user’s understanding of network structures and the flexibility of layout algorithms (Fig. 2-D3). 2D layouts, which place nodes and links on a flat plane, are intuitive for users familiar with desktop-based visualizations. In immersive environments, these can be adapted into forms such as curved layouts that wrap around the user or projections onto a virtual floor [39, 40]. Such adaptations naturally guide user perspective and reduce cognitive load. Beyond the dimensionality of the space in which the network resides, each layout imposes distinct constraints on node placement. In 2D space, radial layouts restrict nodes to concentric rings at fixed distances from the ego, limiting positional flexibility [9]. Planar layouts allow free placement on a flat surface, offering more flexibility than radial layouts, though they remain susceptible to link crossings due to the absence of vertical separation. In 3D space, spherical

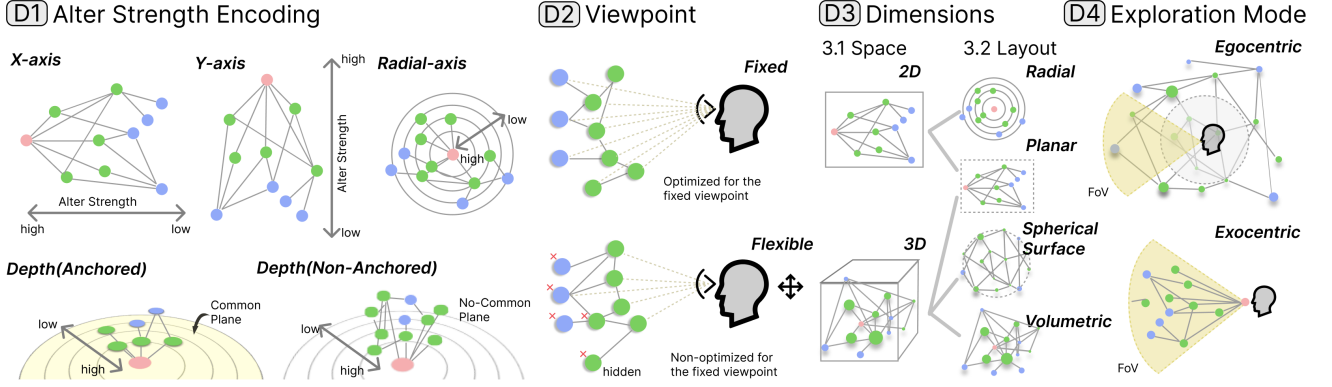


Figure 2: Design Dimensions for Egocentric Network Layouts in Immersive Environments: The red node represents the ego, green nodes are 1st-degree alters, and blue nodes are 2nd-degree alters. (D1) Alter strength can be encoded along the X/Y axes, radial axis, or depth, either with or without a shared reference plane. (D2) Viewpoint assumptions vary from fixed to flexible. (D3) Spatial layout dimensionality ranges from 2D to 3D. (D4) Primary exploration mode can be either egocentric or exocentric.

surface layouts constrain nodes to lie on the surface of a virtual sphere. In contrast, volumetric layouts allow nodes to be freely distributed throughout 3D space. These 3D layouts support natural user movement to resolve occlusion and enhance immersion [14, 29]. However, they can also increase cognitive load due to the challenges of navigating and interpreting complex 3D structures [10, 23].

3.2.4 Primary Exploration Mode (D4). Layout design in immersive environments typically emphasizes either an exocentric view or an egocentric view as the primary exploration mode [54, 57] (Fig. 2-D4). The exocentric view provides an external, global perspective of the network, enabling users to grasp its overall structure at a glance. This viewpoint supports a strong sense of scale and helps users build an initial mental model, with the ability to zoom in for detailed inspection as needed. However, additional navigation may be required to examine specific subnetworks or node-level details closely. In contrast, the egocentric view places the user inside the network, offering a first-person perspective that fills their field of vision. This immersive setup emphasizes subnetworks immediately surrounding the user, allowing focused inspection with minimal occlusion [54]. It is particularly effective for detailed, localized analysis. To explore the broader network, however, users must navigate across different areas. Prior work suggests that egocentric views can reduce cognitive load by enabling users to focus on one subregion at a time and improve memory recall through embodied spatial cues [57]. Users often rely on spatial memory to track node positions and connections across movements. Both views are widely used in VR-based network visualization [35, 54–56], and each offers unique advantages depending on task type and the phase of exploration.

3.3 Immersive Layouts of Egocentric Network

Building on the desirable properties (P1, P2) and the design dimensions, we introduce four immersive layouts for egocentric networks—*Cube*, *Cylindrical*, *Radial*, and *Spherical*—for further exploration (Fig. 3). In selecting and designing these layouts, we considered the unique potentials of immersive environments, particularly the use of spatial depth and flexible, viewpoint-driven navigation. These affordances create new opportunities to rethink

egocentric network layouts beyond the limitations of traditional 2D representations. At the same time, we ensured that the selected layouts collectively span a broad range of combinations across the four design dimensions, enabling comparative analysis in the subsequent user study. Following conventions from prior visualizations such as target diagrams [8, 45], we opted not to display the ego node or the links connecting it to 1st alters. This choice reduces visual clutter by removing the often numerous ego–alter links. Consequently, it becomes important to visually distinguish between first-degree and second-degree alters. In the following layout descriptions, we define the floor as the XZ-plane and the vertical axis as Y, assuming a standing user in an immersive space.

3.3.1 Cube Layout. The *Cube* layout encodes ego–alter connection strength along the Z-axis in 3D space. It begins with a 2D force-directed layout on the XY-plane (Fig. 3-A1), after which nodes are repositioned along the Z-axis based on their connection strength to the ego; stronger connections appear closer to the user’s initial viewpoint (Fig. 3-A2). Because nodes are distributed across multiple depth layers without a shared reference plane, users must interpret depth without anchored depth cues when viewing from the front. The user is positioned outside the network, offering an exocentric perspective that reveals the overall structure. This layout encourages flexible exploration from multiple angles, such as side views (XZ or YZ planes), allowing users to interpret connection strength through both horizontal and vertical positioning rather than relying solely on frontal depth cues.

3.3.2 Cylindrical Layout. The *Cylindrical* layout is a curved variant of the *Cube* layout, wrapped around the user along the Y-axis at their initial position (Fig. 3-B1). It begins with a 2D force-directed layout on the XY-plane, which is then bent semi-cylindrically around the user. To encode ego–alter connection strength, each node’s radial distance from the Y-axis is adjusted; nodes closer to the axis represent stronger ties (Fig. 3-B2). Unlike the *Cube* layout, the *Cylindrical* layout is optimized for a fixed viewpoint, reducing occlusion by curving the network around the user’s position. However, this design limits the effectiveness of side views compared to *Cube*. Users must primarily depend on depth cues from the front to assess connection strength.

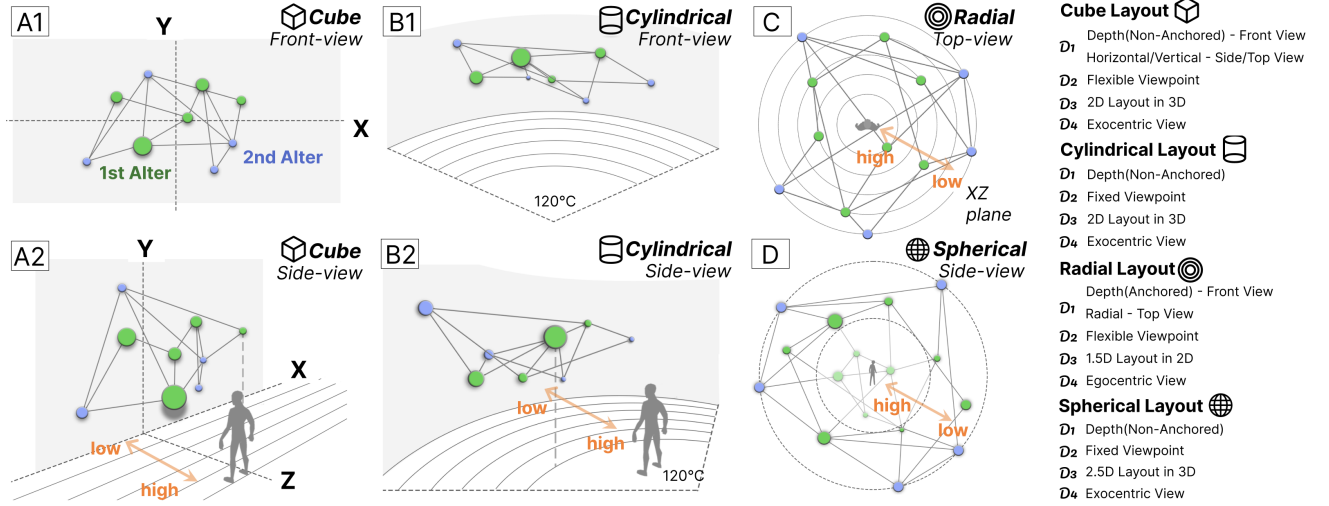


Figure 3: The Four Proposed Layouts: These layouts span diverse design dimensions. (A1) Front view of Cube Layout. (A2) Side view of Cube Layout. (B1) Front view of Cylindrical Layout. (B2) Side view of Cylindrical Layout. (C) Top view of Radial Layout. (D) Side view of Spherical Layout. Across all layouts, 1st alters are colored green, and 2nd alters are colored blue. The orange arrows denote the direction of the encoded value. The human figure illustrates the user’s initial viewpoint in immersive environments.

3.3.3 Radial Layout. The *Radial* layout adapts the widely used 2D radial layout for egocentric networks [8, 38, 45] to immersive environments (Fig. 3-C). Here, nodes are positioned on the floor (XZ-plane) using the radial layout algorithm by Brandes *et al.* [8], with concentric circles centered on the user’s initial position. Each node’s radial distance from the center represents its connection strength to the ego. This layout restricts node positions to fixed distances from the center, which limits placement flexibility and can lead to occlusion or link crossings. Because the network surrounds the user in 360 degrees, only a subnetwork is visible at a time. However, anchoring nodes to the floor provides a depth reference, aiding in depth perception. Users can also move vertically to obtain a top-down view, effectively replicating the traditional 2D radial layout and enabling familiar positional interpretation of ego–alter connection strength.

3.3.4 Spherical Layout. The *Spherical* layout arranges nodes using a spherical force-directed algorithm, positioning them within a 3D sphere centered on the user’s initial location (Fig. 3-D). Ego–alter connection strength is encoded by each node’s radial distance from the center, with stronger ties placed closer to the user. This design is inspired by the *Ego-Bubble* layout proposed by Sorger *et al.* [54], but differs in two key ways: the radial distance reflects connection strength, and a spherical force-directed algorithm is employed to preserve clustering patterns. Unlike 2D force-directed layouts, the spherical algorithm allows greater flexibility in node placement and creates a fully immersive 360-degree network view. The layout is optimized for a fixed central viewpoint, minimizing occlusion from that position. Because the user is situated “inside” the network, they cannot view the entire structure at once.

3.3.5 Other Layouts. We conducted internal tests on various layout candidates and selected four—*Cube*, *Cylindrical*, *Radial*, and *Spherical*—for further evaluation. These layouts were chosen for their ability to clearly expose trade-offs across the identified design dimensions and to effectively leverage key affordances of immersive environments. During the design exploration, we

tested layouts that encoded ego–alter strength along the X or Y axes by first placing nodes on a plane using a 2D algorithm and then displacing them along one axis. However, these approaches resulted in severe visual clutter from the initial viewpoint and made poor use of the depth dimension. We also explored a cone-shaped variant of the radial layout, similar to cone trees [50], which encoded strength in depth and helped reduce link crossings when users adjusted their viewpoint. Despite this benefit, it sacrificed the clarity provided by an anchored plane, making strength assessment more difficult. We ultimately selected the conventional *Radial* layout instead, as it was the only candidate employing anchored depth encoding and served as a comparative baseline, reflecting the common approach for egocentric network visualization in desktop settings.

4 User Study

We conducted a user study to examine user performance across different immersive egocentric network layouts. This study received approval from the Institutional Review Board at Hong Kong University of Science and Technology and proceeded only after the subjects signed consent forms.

4.1 Tasks

Our user-study tasks are grouped by the focus of egocentric network analysis: Tasks 1 and 2 target ego–alter connection strength, Tasks 3 through 6 target alter topology, and Task 7 combines both dimensions, requiring participants to consider connection strength and topology simultaneously. These tasks are grounded in previous research on egocentric networks [1, 25, 47, 51, 54, 60] and general network task taxonomies [37], aligning with our desirable properties P1 (strength) and P2 (topology) described in Section 3.1.

P1 Task 1: Identify Alter with Highest Strength to Ego. Participants select the 1st alter with the strongest connection to the ego, which is typically located near the initial viewpoint but not necessarily the closest.

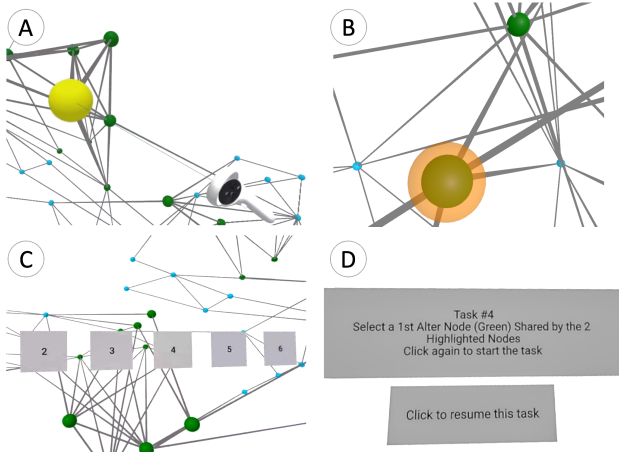


Figure 4: User View of the Experiment: (A) Highlighted nodes by a raycaster. (B) Highlighting of nodes using a halo effect. (C) Response menu for the counting tasks. (D) Result and resume menu.

[P1] Task 2: Identify Alter with Lowest Strength to Ego. From three randomly highlighted 1st alters, participants identify the one with the weakest connection to the ego (Fig. 4-B). We limited the selection to three nodes based on pilot testing to ensure task feasibility. As weaker connections tend to be positioned farther from the participant, this task requires assessing the strength of distant nodes.

[P2] Task 3: Identify Alter with Most Neighboring Nodes. Among the three highlighted nodes, participants select the one with the most connections to other alters, including both 1st and 2nd alters. This task reflects the identification of central nodes within the alter network. Based on pilot testing, we limited the choice to three nodes to keep the task manageable.

[P2] Task 4: Find Common Neighbor. Participants identify a common neighbor between a randomly highlighted node pair. This task supports topology understanding of the alter network, requiring participants to either observe multiple nodes simultaneously or recall their connections. To ensure consistent difficulty, each highlighted pair shares between three and six common neighbors.

[P2] Task 5: Count 2nd Alters. Participants count the number of 2nd alters connected to a randomly highlighted 1st alter. This task emphasizes identifying nodes that expand the network beyond immediate connections [25, 60]. Unlike Task 3, it focuses on the connections of a single 1st alter. The highlighted 1st alter is linked to one to six 2nd alters, a range chosen to ensure task feasibility. Participants submit their answers using an interactive panel (Fig. 4-C).

[P2] Task 6: Count 1st Alter Clusters. Participants count the number of clusters formed by 1st alters, where a cluster is defined as a group of mutually connected nodes. The number of clusters ranges from two to four. This task is critical for understanding the ego's social context and its role in bridging different groups [2, 48]. Among the topology-related tasks, it requires the broadest view, as participants must observe the largest number of nodes simultaneously.

[P1] [P2] Task 7: Identify Common Neighbor with Highest Connection Strength to Ego. Participants select the common neighbor with the strongest connection to the ego from among those shared by two highlighted nodes. This task combines the

goals of Task 1 (strength assessment) and Task 4 (common neighbor identification), requiring simultaneous evaluation of both connection strength and network topology. It provides insight into how users integrate positional and topological cues. As in Task 4, the highlighted node pair shares between three and six common neighbors.

4.2 Evaluation Metrics

We assessed participant performance using task completion time, accuracy rate, and movement distance in the immersive space. Completion time was measured from task start to response, which involved clicking a node (Tasks 1, 2, 3, 4, 7) or selecting an answer panel (Tasks 5, 6). Movement was recorded as the total camera travel distance. We also collected qualitative feedback through a questionnaire and a semi-structured interview.

4.3 Experiment Design

We conducted a within-subjects study comparing four egocentric network layouts—*Cube*, *Cylindrical*, *Radial*, and *Spherical*—each spanning diverse design dimensions for egocentric network layouts. To control for order effects, we used a Latin square design to counterbalance the layout presentation across participants. To minimize learning effects, each participant was assigned a unique network dataset for each layout, resulting in a distinct layout–dataset pair. Since computing optimal node positions for each dataset was time-consuming, we used the same dataset across all tasks within each layout, allowing us to focus the comparison on layouts rather than tasks. Each participant completed 28 tasks (4 layouts × 7 tasks).

4.3.1 Dataset. We used synthetic datasets derived from a widely studied co-authorship network [44], which is commonly employed in egocentric network analysis. To balance realism with experimental control, we referred to the structural properties of the larger ego networks in the source dataset, which feature edge densities of 10–30%, 20–40 first-degree alters, 30–60 second-degree alters, and 2–4 clusters among the 1st alters. Using these ranges as a reference and confirming task feasibility through pilot testing, we fixed each dataset at 60 nodes—one ego, 30 1st-degree alters, and 29 2nd-degree alters—with an edge density of approximately 20% and two to four clusters among the 1st-degree alters. Ego–alter strengths were assigned across ten discrete levels, while all 2nd alters were given a constant, lower strength to reflect their secondary analytical role.

4.3.2 VR Environment. The VR environment was built with A-Frame¹, Three.js², and d3.js [7], and ran in a web browser. Nodes and links used Three.js sphere and cylinder geometry with uniform size, and were placed within a depth range that remained perceptually effective from the initial viewpoint. The system ran at 80 FPS on Meta Quest 2 headsets. Participants navigated the environment using both physical movement and virtual controls. The left joystick enabled omnidirectional “flying” based on headset orientation, while the right joystick supported vertical movement. Following A-Frame’s default behavior, real-world physical movement was directly reflected in the virtual space at a 1:1 scale via headset position tracking. In our pilot studies, we observed that participants often returned to their starting viewpoint. Therefore, we provided a reset button for quick repositioning. We recorded the total camera travel distance as a single

¹<https://aframe.io/>

²<https://threejs.org/>

combined metric aggregating three components: physical walking, controller-based navigation, and the discrete repositioning produced by each reset. Because a reset instantly relocates the camera to the starting viewpoint, it adds travel distance without any corresponding bodily effort. We therefore interpret movement distance as an aggregate indicator of overall navigation activity rather than a measure of physical effort, and complement it with qualitative observations of how participants moved. Interaction with nodes was done via raycasters from both controllers. When a ray intersected a node, it turned yellow (Fig. 4-A), and pressing the trigger confirmed the selection. Further details on the implemented layout specifications, including sizes, angles, node dimensions, and movement speeds, are provided in the supplemental materials.

4.3.3 Participants. We recruited 24 participants for the study. Their VR experience varied: 8 participants had no experience, 10 had low experience, 5 had moderate experience, and 1 had high experience; none reported very high experience. Familiarity with 3D games, which may relate to spatial navigation, varied as well: 5 participants had no experience, 8 had low experience, 3 had moderate experience, 2 had high experience, and 6 had very high experience. Most participants had limited experience with network visualization: 8 had none, 7 had low experience, 4 had moderate experience, 2 had high experience, and 3 had very high experience. Each participant received \$10 for their participation.

4.3.4 Experiment Protocol. Participants began by signing a consent form and completing a demographic questionnaire. They were then introduced to the concepts of egocentric networks (e.g., ego and alters) using printed handouts. These materials also explained each task with 2D node-link diagrams and described the layouts' encoding methods, supplemented with VR screenshots (see supplemental materials). Before the main tasks, participants wore the VR headset and explored the immersive environment. The tutorial included practice with selecting highlighted nodes, clicking menu windows, and navigating using both physical and controller-based movement, following instructions from the instructors. For this phase, we used a layout generated with a 3D force-directed algorithm, which was different from any of the layouts used in the main experiment. Participants completed the tasks for each layout in an order determined by a Latin square design, which counterbalanced potential order effects of layout presentations, such as fatigue or learning. During the tasks, participants could ask questions, but instructors only referred to information covered in the tutorial to prevent unintended guidance. If a participant made an accidental selection, they could cancel their selection and resume the task (Fig. 4-D), while their completion time and movement data continued to be recorded without reset. After completing all tasks for each layout, participants removed the headset and filled out a questionnaire. Once all four layouts were tested, they ranked their preferences and took part in a brief interview. Each session lasted about 80 minutes.

4.4 Guiding Questions

Based on the layout design dimensions, task characteristics, and prior research reviewed in Section 2, we developed the following guiding questions along with our expectations:

GQ1: Which layouts support accurate and efficient assessment of ego–alter connection strength, and which hinder it? This addresses property **P1**. We expect *Radial*, with anchored depth encoding, to facilitate accurate strength assessment. While

Cube uses non-anchored encoding from the initial viewpoint, it also allows side-view inspection, making it effective. In contrast, *Cylindrical* and *Spherical* may impair depth perception due to the lack of a reference plane, potentially hindering performance.

GQ2: Which layouts facilitate accurate and efficient identification of alter topology? This addresses property **P2**. Understanding topology requires minimizing node and edge occlusion. We expect the *Spherical*, with minimal spatial constraints and occlusion, to perform well. In contrast, *Radial*, which flattens nodes onto a 2D plane and imposes strict layout constraints, is likely less effective for topological tasks.

GQ3: Which layout best supports simultaneous understanding of strength and topology? This question explores how layouts perform when tasks require both **P1** and **P2**. Since layouts may excel in one aspect but not the other, we aim to identify which layout offers the best balance for integrated tasks.

GQ4: Which layouts are most and least preferred by users? Beyond task performance, user experience matters. Viewpoint-optimized, exocentric layouts tend to reduce discomfort such as motion sickness; we therefore expect *Cylindrical* to be most preferred.

GQ5: How do user strategies differ across layouts? We expect navigation and interaction strategies to vary depending on layout design. In *Cylindrical* and *Spherical*, users can complete tasks with minimal movement, relying mainly on head motion due to good visibility from the starting point. In contrast, *Cube* and *Radial* require more movement and frequent viewpoint adjustments to resolve occlusions and interpret positional encoding.

5 Result

We analyzed task accuracy, completion time, movement distance, and subjective feedback from the user study. For each task, we assessed differences among the four layouts with an omnibus test followed by pairwise post-hoc comparisons for the six layout pairs $\binom{4}{2} = 6$. Because accuracy is a binary outcome in a within-subjects design, we used Cochran's Q test for the omnibus comparison and McNemar's exact test for the pairwise comparisons. Completion times and movement distances, being continuous, were analyzed with the Friedman test followed by Wilcoxon signed-rank tests. All pairwise comparisons used a significance level of $\alpha = 0.05$ with Bonferroni correction ($\alpha = 0.05/6 = 0.0083$). Subjective ratings (1–5 scale) were aggregated by score frequency. All scales were aligned so that 1 indicated the least favorable response (e.g., low visual clarity, high motion sickness) and 5 the most favorable (e.g., clear layout, low physical effort). Layout preferences were summarized by counting how often each layout was ranked in each position. Task performance results are shown in Fig. 5, with 95% confidence intervals. Subjective ratings appear in Fig. 6.

5.1 Tasks Understanding Ego–alter Strength

Tasks 1 and 2 addressed **GQ1** (assessment of ego–alter connection strength) and **GQ5** (differences in user strategies).

Task 1 yielded high accuracy rates for all layouts, with *Radial* performing perfectly (100% accuracy), aligning with our expectations in **GQ1**. Completion times showed no significant differences. However, *Spherical* and *Radial* required less movement. We observed that users could complete the task using head movements and visual scanning from the starting position. In contrast, users in the *Cylindrical* and *Cube* layouts often moved around to inspect nodes from multiple angles.

In **Task 2**, the accuracy rates were higher for the *Cube* (96%) and *Radial* (100%), both of which allow flexible viewpoint adjustment, compared to the more constrained *Cylindrical* and *Spherical* (71% each). The overall difference in accuracy was significant ($p = .003$), although no pairwise comparison survived Bonferroni correction. These findings support **GQ1**, suggesting that layouts providing an effective viewpoint can enhance the assessment of connection strength, while those relying solely on multi-plane depth perception result in lower accuracy. Although overall differences in completion time and movement distance were significant, pairwise comparisons did not yield significant layout-level differences. However, among the two most accurate layouts, *Radial* required substantially less movement (180m) than *Cube* (401m)—a twofold difference, which was even more pronounced than in Task 1. This gap reflects the fact that, in *Cube*, where nodes are distributed across multiple planes, users had difficulty judging depth and often moved laterally to verify node distances. As P20 noted, “*Relying on one perspective is a little bit deceiving. I can kind of double-verify it in that way.*”

5.2 Tasks Understanding Alter Topology

Tasks 3–6 examined **GQ2** (topology comprehension) and **GQ5** (user strategies across layouts).

In **Tasks 3 and 4**, all layouts yielded high accuracy, but *Cylindrical* and *Spherical* enabled faster completion and less movement due to reduced occlusions and optimized viewpoints. These results support **GQ2**, suggesting that these layouts facilitate efficient topology comprehension. Users typically completed the tasks near the starting point, relying on head movements and visual scanning rather than active navigation.

In **Task 5**, although differences were not statistically significant, the *Spherical* achieved the highest average accuracy, with the *Cylindrical* close behind. Both are 3D layouts with low occlusion from the initial viewpoint, which may have aided perception of the 2nd alters positioned farther from the user. Given the small effect, this offers weak support for **GQ2**. In contrast, the *Radial* had the lowest accuracy and significantly longer completion times, due to its constrained planar structure, which limited its ability to convey topological relationships.

In **Task 6**, the overall difference in accuracy was significant ($p = .003$), and pairwise comparisons showed that *Cube* and *Spherical* yielded significantly higher accuracy than *Radial* ($p < .05$). Completion times were comparable for *Cube* and *Spherical*, while *Radial* was significantly slower, likely due to its constrained layout, which made cluster structures difficult to perceive. Interestingly, *Cube* and *Spherical* also showed the highest movement distances (1062m and 900m, respectively). While high movement in *Cube* was consistent with earlier tasks, the increase in *Spherical* is notable. As per **GQ5**, this indicates differing task strategies across layouts: to grasp overall topology, many participants in *Spherical* transitioned from an egocentric to an exocentric viewpoint. As P11 noted, “*It’s possible to view all nodes in the Spherical layout from the initial position, but it was challenging to memorize cluster shapes, and I often lost track of counted clusters when they moved out of sight.*”

5.3 Task Understanding Strength & Topology

Task 7 required participants to identify a common neighbor with the highest strength to the ego, combining both ego–alter strength and alter topology. This addresses **GQ3** (integrated task). Accuracy rate was generally lower than in single-focus tasks

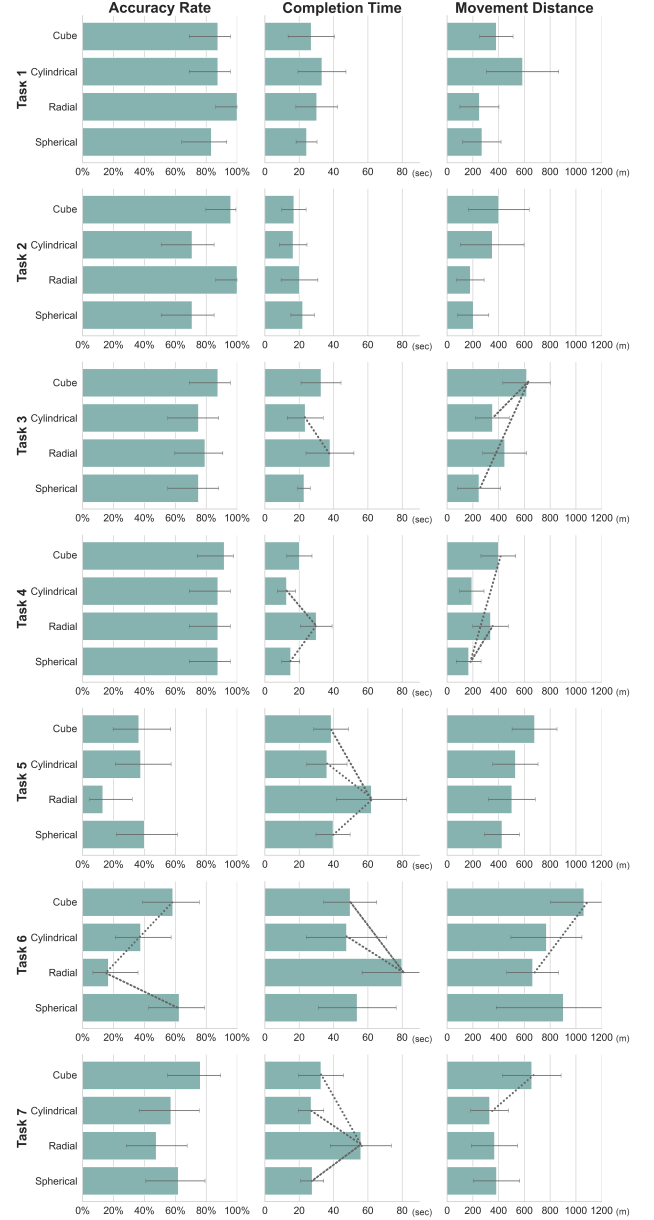


Figure 5: The Results for Mean Accuracy Rate, Completion Time (seconds), and Movement Distance (meters): The confidence intervals indicate a 95% confidence level for the mean values. Dashed lines signify significance in the pairwise tests.

(Tasks 1 and 4), indicating increased difficulty. Notably, the *Cube* maintained relatively high accuracy. Many users approached the task step by step: they first identified the topology from the front view and then shifted to a side view to assess strength. This strategy led to the largest average movement, significantly more than the other layouts. In contrast, the *Spherical* and *Cylindrical*, optimized for fixed viewpoints, showed more pronounced accuracy drops, highlighting their limitations for integrated analysis.

5.4 Subjective Ratings

We analyzed participants’ subjective ratings, focusing on those who gave positive (4 or 5) or negative (1 or 2) scores (Fig. 6).

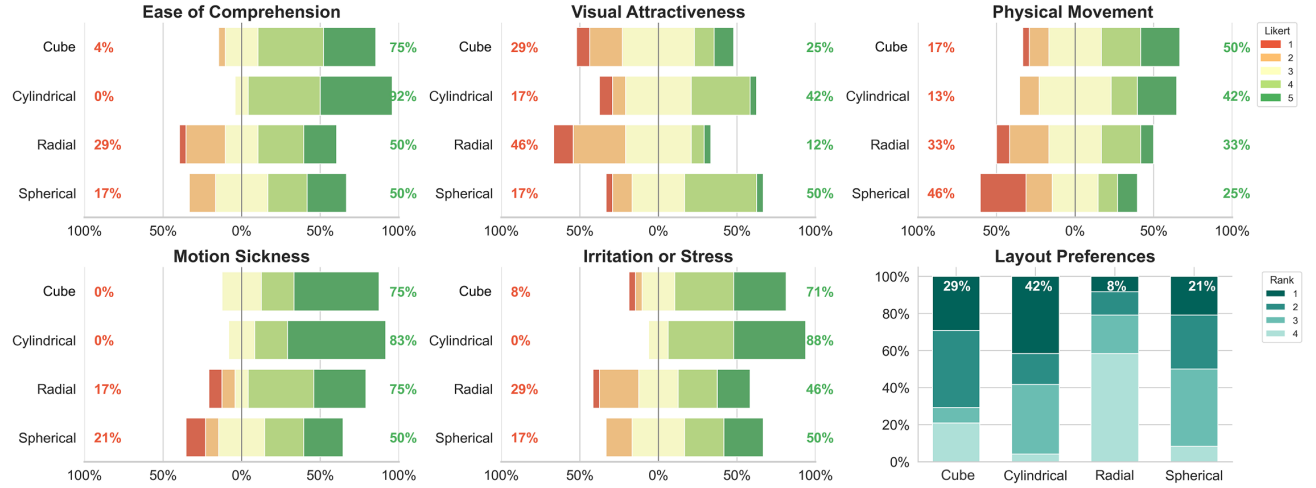


Figure 6: Subjective Feedback Results: Ratings of 1–2 indicate negative responses, and 4–5 indicate positive ones, centered on a neutral rating of 3. Layout preference percentages reflect the proportion of participants who selected each layout as their top choice.

Ease of Comprehension: Participants generally found strength encoding via depth intuitive across all layouts. Many understood that closer nodes indicated stronger ties to the ego even before tutorial explanations. P15 remarked, “*The closer nodes represent closer friends.*” *Cylindrical* and *Cube* received the highest ratings for ease of understanding (92% and 75% positive, respectively), with participants noting the clarity of having all nodes positioned in front, making strength relationships easy to perceive.

Visual Attractiveness: *Spherical* and *Cylindrical* were preferred for their visual appeal, largely due to their clean initial viewpoint and minimal visual clutter. Several participants highlighted the immersive experience of being surrounded by nodes in the *Spherical* as a key factor in its appeal.

Physical Movement and Comfort: *Radial* and *Spherical*, both offering 360-degree views, were seen as the most physically demanding, despite users generally recording the highest movement distances in the *Cube*. Participants noted that in *Cube*, they often walked or sidestepped, which felt more natural, whereas in *Radial* and *Spherical*, they tended to remain stationary while rotating, leading to greater fatigue and motion sickness. As P6 noted, “*Remaining stationary while rotating was more disorienting and physically uncomfortable than moving around.*”

Overall Preference: *Cylindrical* (42%) and *Cube* (29%) were the most preferred layouts, addressing **GQ4** (layout preference). Participants appreciated *Cylindrical* for its minimal occlusion, wide visibility from the initial viewpoint, and reduced need for body rotation. In contrast, *Radial* was the least preferred, owing to its frequent rotation requirements and low visual clarity.

6 Discussion

Our study reveals how egocentric network layouts affect user performance and experience across key analytical tasks, from which we derive design guidelines. The guidelines are bounded by our study conditions and should be read as informed suggestions within this scope.

6.1 Implications from Task Categories

P1 Use Anchored Depth Encoding for Accurate Ego-Alter Connection Strength Assessment: Encoding connection strength

via depth is most effective when nodes are aligned along a single reference plane. As demonstrated by the *Radial* layout, anchored depth encoding enables users to accurately judge ego–alter connection strength, even for distant nodes.

P1 Support Multi-Angle Viewing to Improve Depth Judgment: Layouts distributing nodes across multiple planes (e.g., *Cube*) benefit from allowing users to view the network from different angles. While non-anchored depth encoding can impair distance perception, multi-angle observation helps verify spatial relationships and improves accuracy. Incorporating viewpoint adjustment tools, such as rotation or repositioning widgets, can support layouts employing non-anchored depth encoding.

P2 Spherical Layout is Effective for Localized Topology Tasks: The *Spherical* layout effectively supports topology tasks through its relatively flexible node distribution and reduced occlusion in 3D, aided by an optimized initial viewpoint. It is well suited for exploring local network regions, such as finding common neighbors or counting 2nd alters. However, its reliance on an egocentric perspective can limit its effectiveness for tasks requiring a comprehensive view of the entire network. When users needed to count 1st alter clusters, they had difficulty recalling spatial relationships across different regions, leading to greater movement and longer completion times. This aligns with prior research indicating that exocentric views offer better support for memory and spatial understanding in overview tasks [33]. To mitigate this limitation, designers can incorporate orientation aids, such as annotations or spatial markers, to help users maintain their spatial awareness.

P2 Avoid Using Radial Layout for Topology Tasks: The *Radial* layout is generally inadequate for topology tasks due to its restrictive placement constraints, frequent node occlusion, and edge overlaps. These limitations hinder the accurate interpretation of complex network structures. Therefore, for topology-focused analysis we recommend exploring more flexible 3D layouts than *Radial*.

P1P2 Cube Layout Offers a Balance for Combined Tasks: The *Cube* layout offers a good balance between representing ego–alter strength and network topology, leading to higher accuracy in complex, combined tasks. Users often approach these

tasks sequentially, first examining the topology from the front and then evaluating strength from side views. This approach allows for efficient and accurate performance. However, this approach requires considerable movement. Designers can account for this by supporting easy viewpoint manipulation or layout transitions to reduce user effort and enhance usability.

Participants Prefer Layouts with Less Occlusion and an Exocentric View: The *Cylindrical* layout ranked highest in subjective evaluations, praised for its low visual clutter, minimal movement requirements, and ease of grasping the overall structure. The *Cube* layout was also well-received due to its similarly exocentric perspective, which aligns with preferences found in previous studies [33, 41]. In contrast, users found the *Spherical* layout to be more physically and cognitively demanding, reporting higher cognitive load and stress, which contradicts some earlier findings [57].

6.2 Implications for Design Dimensions

D1 Balance Strength Encoding with Topology Clarity: A key finding highlights the trade-off between effective ego-alter connection strength encoding and expressive topology representation. While connection strength to nearby alters is generally easy to assess, distant nodes are harder to judge, especially with non-anchored depth encoding that hampers depth perception. Conversely, anchored depth encoding improves depth clarity but limits spatial layout flexibility. To navigate this trade-off, adopting layouts that support multi-angle viewing (e.g., the *Cube* layout) enables users to shift perspectives and better integrate strength and topology cues.

D2 Consider Fixed Viewpoints When Multi-Angle Viewing is Less Critical: Optimizing the initial viewpoint involves a trade-off between clarity and flexibility. Layouts with fixed viewpoints, such as the *Cylindrical* and *Spherical* layouts, reduce occlusion and allow users to quickly grasp topological structures with minimal movement, making them well-suited for topology-focused tasks. However, this advantage comes at the cost of limiting multi-angle exploration. For tasks that require confirmation from different perspectives, such as assessing the depth of distant nodes or understanding the full network topology, we recommend opting for layouts that enable multi-angle exploration.

D3 Leverage 3D Layouts in Immersive Environments: Our findings show that 3D layouts support intuitive navigation and reduce occlusion through natural movement, even for VR novices, enabling clearer task-relevant views. While 2D layouts in VR simplify depth perception and offer a familiar, desktop-like experience, they underutilize 3D space, resulting in lower task accuracy, efficiency, and user preference. For networks comparable to those we studied, we therefore recommend prioritizing 3D layouts in immersive environments. For substantially smaller or sparser networks, however, where occlusion is less of a concern, simpler 2D layouts may be sufficient or even preferable—a trade-off that remains to be verified.

D4 Align View Mode with Task Types: Choosing between exocentric and egocentric views depends heavily on the analytical goals. Exocentric views are generally preferred for providing a comprehensive network overview and reducing motion sickness. In contrast, egocentric views, such as in the *Spherical* layout, arrange nodes around the user, reducing occlusion and enabling rapid, sequential inspection of subnetworks. However, these benefits must be carefully weighed against limitations like fatigue

from stationary rotation and the difficulty of viewing the entire network simultaneously.

7 Limitations

Our study has several limitations: dataset scope, participant expertise, and confounded design dimensions.

Network Diversity and Dynamics: Although derived from a real-world co-authorship dataset, our ego-networks were constrained to a fixed, modest size, a narrow density range, and a single static snapshot for experimental control. Since network size affects performance [23], denser or larger graphs would introduce more occlusion and clutter than we tested; *Spherical*, with its spacious arrangement, may better accommodate such cases, though this remains unverified. Real-world analysis also often compares multiple egocentric networks or tracks temporal dynamics [34, 38, 60], raising further considerations such as visualizing evolutionary patterns or shared nodes. We encourage future work to test how our findings extend to these larger, denser, and dynamic settings.

Participant Expertise: Although our tasks mirror common egocentric network analysis tasks that experts perform, our participants were not domain experts. Analysts' exploration strategies and workflows are strongly shaped by domain-specific goals and expectations about network structure [3]; experts may thus prioritize different structural cues, navigate differently, or hold stronger structural priors, affecting both performance and layout preferences. The applicability of our findings to professional contexts thus remains to be verified with expert participants.

Confounding of Design Dimensions: Each layout combines several design dimensions at once, so the four differ along multiple dimensions simultaneously. This holistic comparison evaluates complete, coherent designs as used in practice, but prevents isolating any single dimension's effect; performance differences should therefore be attributed to layouts as a whole rather than to individual design choices.

Enhancing Depth Perception through Depth Cues: Adding depth cues [22, 27] could improve distance perception, particularly in the *Spherical* and *Cylindrical* layouts where depth judgment is more difficult. While this may increase visual complexity, it could enhance task performance by making spatial relationships clearer.

8 Conclusion

This study identified key design considerations and layout dimensions for visualizing egocentric networks in immersive environments. Drawing on these insights, we proposed four novel layouts: *Cube*, *Cylindrical*, *Radial*, and *Spherical*. We evaluated these layouts through a user study involving 24 participants who performed tasks representative of egocentric network analysis. While no single layout proved universally optimal, our findings suggest that the *Cube* layout is particularly effective for tasks focused on assessing ego-alter connection strength. In contrast, the *Spherical* layout was more effective for conveying alter topology. The study also revealed how layout design influences users' strategies, affecting movement behavior, task efficiency, and overall subjective experience. Based on these results, we derived design guidelines, such as aligning viewpoint optimization with task demands and balancing the trade-off between the clarity of strength encoding and topology. These findings contribute to the growing body of research on immersive network visualization.

References

- [1] Alireza Abbasi, Kon Shing Kenneth Chung, and Liaquat Hossain. 2012. Egocentric analysis of co-authorship network structure, position and performance. *Information Processing & Management* 48, 4 (2012), 671–679. <https://doi.org/10.1016/j.ipm.2011.09.001>
- [2] Gautam Ahuja. 2000. Collaboration Networks, Structural Holes, and Innovation: A Longitudinal Study. *Administrative Science Quarterly* 45, 3 (2000), 425–455. <https://doi.org/10.2307/2667105>
- [3] Mashael AlKadi, Vanessa Serrano, James Scott-Brown, Catherine Plaisant, Jean-Daniel Fekete, Uta Hinrichs, and Benjamin Bach. 2023. Understanding Barriers to Network Exploration with Visualization: A Report from the Trenches. *IEEE Transactions on Visualization and Computer Graphics* 29, 1 (2023), 907–917. <https://doi.org/10.1109/TVCG.2022.3209487>
- [4] Valerio Arnaboldi, Marco Conti, Andrea Passarella, and Robin I.M. Dunbar. 2017. Online social networks and information diffusion: The role of ego networks. *Online Social Networks and Media* 1 (2017), 44–55. <https://doi.org/10.1016/j.osnem.2017.04.001>
- [5] David Bauer, Chengbo Zheng, Oh-Hyun Kwon, and Kwan-Liu Ma. 2024. A Multi-Layout Design For Immersive Visualization of Hierarchical Network Data. In *2024 IEEE International Symposium on Mixed and Augmented Reality (ISMAR)*. IEEE Computer Society, Los Alamitos, CA, USA, 1038–1047. <https://doi.org/10.1109/ISMAR62088.2024.00120>
- [6] Anastasia Bezerianos, Fanny Chevalier, Pierre Dragicevic, Niklas Elmqvist, and Jean-Daniel Fekete. 2010. GraphDice: A System for Exploring Multivariate Social Networks. *Computer Graphics Forum* 29, 3 (2010), 863–872. <https://doi.org/10.1111/j.1467-8659.2009.01687.x>
- [7] Michael Bostock, Vadim Ogievetsky, and Jeffrey Heer. 2011. D³ Data-Driven Documents. *IEEE Transactions on Visualization and Computer Graphics* 17, 12 (2011), 2301–2309. <https://doi.org/10.1109/TVCG.2011.185>
- [8] Ulrik Brandes, Patrick Kenis, and Dorothea Wagner. 2003. Communicating centrality in policy network drawings. *IEEE Transactions on Visualization and Computer Graphics* 9, 2 (2003), 241–253. <https://doi.org/10.1109/TVCG.2003.1196010>
- [9] Ulrik Brandes and Christian Pich. 2009. More flexible radial layout. In *Graph Drawing (Proceedings of the 17th International Symposium on Graph Drawing, GD'09)* (Chicago, IL) (GD'09). Springer-Verlag, Berlin, Heidelberg, 107–118. https://doi.org/10.1007/978-3-642-11805-0_12
- [10] Priska Breves and Jan-Philipp Stein. 2023. Cognitive load in immersive media settings: the role of spatial presence and cybersickness. *Virtual Reality* 27, 2 (2023), 1077–1089. <https://doi.org/10.1007/s10055-022-00697-5>
- [11] Nicolas Brich, Theresa Anisja Harbig, M Witte Paz, Kay Nieselt, and Michael Krone. 2024. ProtEGOnist: Visual Analysis of Interactions in Small World Networks Using Ego-graphs. *Computer Graphics Forum* 43, 3 (2024), e15078. <https://doi.org/10.1111/cgf.15078>
- [12] Umer Asghar Chattha, Uzair Iqbal Janjua, Fozia Anwar, Tahir Mustafa Madni, Muhammad Faisal Cheema, and Sana Iqbal Janjua. 2020. Motion Sickness in Virtual Reality: An Empirical Evaluation. *IEEE Access* 8 (2020), 130486–130499. <https://doi.org/10.1109/ACCESS.2020.3007076>
- [13] Liang Chen and Guy G. Gable. 2013. Larger or Broader: Performance Implications of Size and Diversity of the Knowledge Worker's Egocentric Network. *Management and Organization Review* 9, 1 (2013), 139–165. <https://doi.org/10.1017/S174087760000320X>
- [14] Xin Chen, Jessica Zeitz Self, Leanna House, and Chris North. 2016. Be the data: A new approach for immersive analytics. In *Proceedings of the IEEE Workshop on Immersive Analytics (IA)*. IEEE Computer Society, Los Alamitos, CA, USA, 32–37. <https://doi.org/10.1109/IMMERSIVE.2016.7932380>
- [15] Kenneth KS Chung, Liaquat Hossain, and Joseph Davis. 2005. Exploring sociocentric and egocentric approaches for social network analysis. In *Proceedings of the 2nd international conference on knowledge management in Asia Pacific*. Victoria University of Wellington, Wellington, New Zealand, 1–8. <https://doi.org/10.1109/BCFIC.2012.6217994>
- [16] Maxime Cordeil, Benjamin Bach, Yongchao Li, Elliott Wilson, and Tim Dwyer. 2017. Design space for spatio-data coordination: Tangible interaction devices for immersive information visualisation. In *2017 IEEE Pacific Visualization Symposium (PacificVis)*. IEEE Computer Society, Los Alamitos, CA, USA, 46–50. <https://doi.org/10.1109/PACIFICVIS.2017.8031578>
- [17] Alain Degenne and Marie-Odile Lebeaux. 2005. The dynamics of personal networks at the time of entry into adult life. *Social Networks* 27, 4 (2005), 337–358. <https://doi.org/10.1016/j.socnet.2004.11.002>
- [18] Stephan Diehl, Fabian Beck, and Michael Burch. 2010. Uncovering Strengths and Weaknesses of Radial Visualizations—an Empirical Approach. *IEEE Transactions on Visualization and Computer Graphics* 16, 6 (2010), 935–942. <https://doi.org/10.1109/TVCG.2010.209>
- [19] Adam Drogemuller, Andrew Cunningham, James Walsh, Maxime Cordeil, William Ross, and Bruce Thomas. 2018. Evaluating Navigation Techniques for 3D Graph Visualizations in Virtual Reality. In *Proc. BDVA*. IEEE Computer Society, Los Alamitos, CA, USA, 1–10. <https://doi.org/10.1109/BDVA.2018.8533895>
- [20] Adam Drogemuller, Andrew Cunningham, James Walsh, William Ross, and Bruce H Thomas. 2017. VRige: Exploring social network interactions in immersive virtual environments. In *Proceedings of the International Symposium on Big Data Visual and Immersive Analytics (BDVA)*. IEEE Computer Society, Los Alamitos, CA, USA, 1–6. <https://doi.org/10.13140/RG.2.2.34201.67689>
- [21] Henry Ehlers, Daniel Pahr, Velitchko Filipov, Hsiang-Yun Wu, and Renata G. Raidou. 2024. Me! Me! Me! Me! A study and comparison of ego network representations. *Computers & Graphics* 125 (2024), 104123. <https://doi.org/10.1016/j.cag.2024.104123>
- [22] Fatima El Jamiy and Ronald Marsh. 2019. Survey on depth perception in head mounted displays: distance estimation in virtual reality, augmented reality, and mixed reality. *IET Image Processing* 13, 5 (2019), 707–712. <https://doi.org/10.1049/iet-ipr.2018.5920>
- [23] Stefan P. Feyer, Bruno Pinaud, Stephen Kobourov, Nicolas Brich, Michael Krone, Andreas Kerren, Michael Behrisch, Falk Schreiber, and Karsten Klein. 2024. 2D, 2.5D, or 3D? An Exploratory Study on Multilayer Network Visualizations in Virtual Reality. *IEEE Transactions on Visualization and Computer Graphics* 30, 1 (2024), 469–479. <https://doi.org/10.1109/TVCG.2023.3327402>
- [24] Danyel Fisher. 2005. Using egocentric networks to understand communication. *IEEE Internet Computing* 9, 5 (2005), 20–28. <https://doi.org/10.1109/MIC.2005.114>
- [25] Kun Fu, Tingyun Mao, Yang Wang, Daoyu Lin, Yuanben Zhang, and Xian Sun. 2021. DyEgoVis: Visual Exploration of Dynamic Ego-Network Evolution. *Applied Sciences* 11, 5 (2021), 2399. <https://doi.org/10.3390/app11052399>
- [26] Jeffrey Heer and Michael Bostock. 2010. Crowdsourcing graphical perception: using mechanical turk to assess visualization design. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems* (Atlanta, Georgia, USA) (CHI '10). Association for Computing Machinery, New York, NY, USA, 203–212. <https://doi.org/10.1145/1753326.1753357>
- [27] Florian Heinrich, Kai Bornemann, Kai Lawonn, and Christian Hansen. 2019. Depth Perception in Projective Augmented Reality: An Evaluation of Advanced Visualization Techniques. In *Proceedings of the ACM Symposium on Virtual Reality Software and Technology (VRST)* (Parramatta, NSW, Australia). Article 26, 11 pages. <https://doi.org/10.1145/3359996.3364245>
- [28] Betina Hollstein, Tom Töpfer, and Jürgen Pfeffer. 2020. Collecting egocentric network data with visual tools: A comparative study. *Network Science* 8, 2 (2020), 223–250. <https://doi.org/10.1017/nws.2020.4>
- [29] Helen H Huang, Hanspeter Pfister, and Yalong Yang. 2023. Is embodied interaction beneficial? A study on navigating network visualizations. *Information Visualization* 22, 3 (2023), 169–185. <https://doi.org/10.1177/14738716231157082>
- [30] Yi-Jheng Huang, Takanori Fujiwara, Yun-Xuan Lin, Wen-Chieh Lin, and Kwan-Liu Ma. 2017. A gesture system for graph visualization in virtual reality environments. In *Proceedings of the IEEE Pacific Visualization Symposium (PacificVis)*. IEEE Computer Society, Los Alamitos, CA, USA, 41–45. <https://doi.org/10.1109/PACIFICVIS.2017.8031577>
- [31] Lucas Joos, Maximilian T. Fischer, Julius Rauscher, Daniel A. Keim, Tim Dwyer, Falk Schreiber, and Karsten Klein. 2025. Visual Network Analysis in Immersive Environments: A Survey. arXiv:2501.08500 [cs.HC] <https://doi.org/10.48550/arXiv.2501.08500>
- [32] Joseph Kotlarek, Oh-Hyun Kwon, Kwan-Liu Ma, Peter Eades, Andreas Kerren, Karsten Klein, and Falk Schreiber. 2020. A Study of Mental Maps in Immersive Network Visualization. In *2020 IEEE Pacific Visualization Symposium (PacificVis)*. IEEE Computer Society, Los Alamitos, CA, USA, 1–10. <https://doi.org/10.1109/PacificVis48177.2020.4722>
- [33] Matthias Kraus, Niklas Weiler, Daniela Oelke, Johannes Kehr, Daniel A Keim, and Johannes Fuchs. 2020. The Impact of Immersion on Cluster Identification Tasks. *IEEE Transactions on Visualization and Computer Graphics* 26, 1 (2020), 525–535. <https://doi.org/10.1109/TVCG.2019.2934395>
- [34] Yun-Hsin Kuo, Dongyu Liu, and Kwan-Liu Ma. 2025. SpreadLine: Visualizing Egocentric Dynamic Influence. *IEEE Transactions on Visualization and Computer Graphics* 31, 1 (Jan. 2025), 1050–1060. <https://doi.org/10.1109/TVCG.2024.3456373>
- [35] Oh-Hyun Kwon, Chris Muelder, Kyungwon Lee, and Kwan-Liu Ma. 2015. Spherical layout and rendering methods for immersive graph visualization. In *2015 IEEE Pacific Visualization Symposium (PacificVis)*. IEEE Computer Society, Los Alamitos, CA, USA, 63–67. <https://doi.org/10.1109/PACIFICVIS.2015.7156357>
- [36] Oh-Hyun Kwon, Chris Muelder, Kyungwon Lee, and Kwan-Liu Ma. 2016. A Study of Layout, Rendering, and Interaction Methods for Immersive Graph Visualization. *IEEE Transactions on Visualization and Computer Graphics* 22, 7 (2016), 1802–1815. <https://doi.org/10.1109/TVCG.2016.2520921>
- [37] Bongshin Lee, Catherine Plaisant, Cynthia Sims Parr, Jean-Daniel Fekete, and Nathalie Henry. 2006. Task taxonomy for graph visualization. In *Proceedings of the Workshop on Beyond Time and Errors: Novel Evaluation Methods for Information Visualization (BELIV)* (Venice, Italy). Association for Computing Machinery, New York, NY, USA, 1–5. <https://doi.org/10.1145/1168149.1168168>
- [38] Dongyu Liu, Fangzhou Guo, Bowen Deng, Huamin Qu, and Yingcai Wu. 2017. egoComp: A node-link-based technique for visual comparison of ego-networks. *Information Visualization* 16, 3 (2017), 179–189. <https://doi.org/10.1177/1473871616667632>
- [39] Jiazhou Liu, Barrett Ens, Arnaud Prouzeau, Jim Smiley, Isobel Kara Nixon, Sarah Goodwin, and Tim Dwyer. 2023. DataDancing: An Exploration of the Design Space For Visualisation View Management for 3D Surfaces and Spaces. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems*. Association for Computing Machinery, New York, NY, USA, 17 pages. <https://doi.org/10.1145/3544548.3580827>
- [40] Jiazhou Liu, Arnaud Prouzeau, Barrett Ens, and Tim Dwyer. 2020. Design and Evaluation of Interactive Small Multiples Data Visualisation in Immersive Spaces. In *Proceedings of the IEEE Conference on Virtual Reality and 3D User*

- Interfaces (VR)*. IEEE Computer Society, Los Alamitos, CA, USA, 588–597. <https://doi.org/10.1109/VR46266.2020.00081>
- [41] Tao Lu, Qian Zhu, Tiffany Ma, Wong Kam-Kwai, Anlan Xie, Alex Endert, and Yalong Yang. 2025. Ego vs. Exo and Active vs. Passive: Investigating the Individual and Combined Effects of Viewpoint and Navigation on Spatial Immersion and Understanding in Immersive Storytelling. In *Proceedings of the 2025 CHI Conference on Human Factors in Computing Systems (CHI '25)*. Association for Computing Machinery, New York, NY, USA, Article 976, 19 pages. <https://doi.org/10.1145/3706598.3713849>
 - [42] Yang Lu, Junxian Li, Zhitong Cui, Jiapeng Hu, Yanna Lin, and Shijian Luo. 2024. Designing Spatial Visualization and Interactions of Immersive Sankey Diagram in Virtual Reality. In *Proceedings of the 32nd ACM International Conference on Multimedia (Melbourne VIC, Australia) (MM '24)*. Association for Computing Machinery, New York, NY, USA, 98–107. <https://doi.org/10.1145/3664647.3681460>
 - [43] Tamara Munzner. 2008. *Process and Pitfalls in Writing Information Visualization Research Papers*. Springer, Berlin, Heidelberg, 134–153. https://doi.org/10.1007/978-3-540-70956-5_6
 - [44] M. E. J. Newman. 2006. Modularity and community structure in networks. *Proceedings of the National Academy of Sciences* 103, 23 (2006), 8577–8582. <https://doi.org/10.1073/pnas.0601602103>
 - [45] Mary L. Northway. 1940. A Method for Depicting Social Relationships Obtained by Sociometric Testing. *Sociometry* 3, 2 (1940), 144–150. <http://www.jstor.org/stable/2785439>
 - [46] Rusheng Pan, Helen C. Purchase, Tim Dwyer, and Wei Chen. 2024. Extending Adjacency Matrices to 3D with Triangles. In *2024 IEEE 17th Pacific Visualization Conference (PacificVis)*. IEEE Computer Society, Los Alamitos, CA, USA, 232–241. <https://doi.org/10.1109/PacificVis60374.2024.00033>
 - [47] Brea L. Perry, Bernice A. Pescosolido, and Stephen P. Borgatti. 2018. *Egocentric Network Analysis: Foundations, Methods, and Models* (1 ed.). Cambridge University Press, Cambridge, UK. <https://doi.org/10.1017/9781316443255>
 - [48] Christina Prell. 2011. *Social Network Analysis: History, Theory and Methodology*. SAGE Publications, Thousand Oaks, CA, USA.
 - [49] Keith G. Provan, Amy Fish, and Joerg Sydow. 2007. Interorganizational Networks at the Network Level: A Review of the Empirical Literature on Whole Networks. *Journal of Management* 33, 3 (2007), 479–516. <https://doi.org/10.1177/0149206307302554>
 - [50] George G. Robertson, Jock D. Mackinlay, and Stuart K. Card. 1991. Cone Trees: animated 3D visualizations of hierarchical information. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (New Orleans, Louisiana, USA) (CHI '91)*. Association for Computing Machinery, New York, NY, USA, 189–194. <https://doi.org/10.1145/108844.108883>
 - [51] Alex M T Russell, Lauren Monds, Nerilee Hing, Jeremy Kroll, Alex M Russell, and Hannah B Thorne. 2023. Social associations and alcohol consumption in an Australian community sample: An egocentric social network analysis. *Psychology of Addictive Behaviors* 38, 2 (2023), 211–221. <https://doi.org/10.1037/ad0000954>
 - [52] Lei Shi, Chen Wang, Zhen Wen, Huamin Qu, Chuang Lin, and Qi Liao. 2015. 1.5D Egocentric Dynamic Network Visualization. *IEEE Transactions on Visualization and Computer Graphics* 21, 5 (2015), 624–637. <https://doi.org/10.1109/TVCG.2014.2383380>
 - [53] Mel Slater. 2009. Place illusion and plausibility can lead to realistic behaviour in immersive virtual environments. *Philosophical Transactions of the Royal Society B: Biological Sciences* 364, 1535 (2009), 3549–3557. <https://doi.org/10.1098/rstb.2009.0138>
 - [54] J. Sorger, A. Arleo, P. Kán, W. Knecht, and M. Waldner. 2021. Egocentric Network Exploration for Immersive Analytics. *Computer Graphics Forum* 40, 7 (2021), 241–252. <https://doi.org/10.1111/cgf.14417>
 - [55] Johannes Sorger, Manuela Waldner, Wolfgang Knecht, and Alessio Arleo. 2019. Immersive Analytics of Large Dynamic Networks via Overview and Detail Navigation. In *Proceedings of the IEEE International Conference on Artificial Intelligence and Virtual Reality (AIVR)*. IEEE Computer Society, Los Alamitos, CA, USA, 1440–1447. <https://doi.org/10.1109/AIVR46125.2019.00030>
 - [56] Mikhail Sorokin, Galen Stetsyuk, Raghav Gupta, Alex Busch, Brian Russin, Celeste Lyn Paul, and Samir Khuller. 2018. Ring graphs in VR: Exploring a new and novel method for node placement and link visibility in VR-based graph analysis. In *SIGGRAPH Asia 2018 Posters*. Association for Computing Machinery, New York, NY, USA, Article 72, 2 pages. <https://doi.org/10.1145/3283289.3283371>
 - [57] Jorge Wagner, Wolfgang Stuerzlinger, and Luciana Nedel. 2022. The Effect of Exploration Mode and Frame of Reference in Immersive Analytics. *IEEE Transactions on Visualization and Computer Graphics* 28, 9 (2022), 3252–3264. <https://doi.org/10.1109/TVCG.2021.3060666>
 - [58] Colin Ware and Glenn Franck. 1996. Evaluating stereo and motion cues for visualizing information nets in three dimensions. *ACM Transactions on Graphics* 15, 2 (1996), 121–140. <https://doi.org/10.1145/234972.234975>
 - [59] Colin Ware and Peter Mitchell. 2008. Visualizing graphs in three dimensions. *ACM Transactions on Applied Perception* 5, 1, Article 2 (Jan 2008), 15 pages. <https://doi.org/10.1145/1279640.1279642>
 - [60] Yanhong Wu, Naveen Pitipornvivat, Jian Zhao, Sixiao Yang, Guowei Huang, and Huamin Qu. 2016. egoSlider: Visual Analysis of Egocentric Network Evolution. *IEEE Transactions on Visualization and Computer Graphics* 22, 1 (2016), 260–269. <https://doi.org/10.1109/TVCG.2015.2468151>
 - [61] Mingliang Xue, Yunhai Wang, Chang Han, Jian Zhang, Zheng Wang, Kaiyi Zhang, Christophe Hurter, Jian Zhao, and Oliver Deussen. 2023. Target Networks: An Annulus-Constrained Stress Model for Radial Graph Visualization. *IEEE Transactions on Visualization and Computer Graphics* 29, 10 (2023), 4256–4268. <https://doi.org/10.1109/TVCG.2022.3187425>
 - [62] Ying Zhong, Ke-Ao Zhao, Leping Zhang, Fangming Zhao, Wentao Wei, and Feilin Han. 2024. The Correlation Analysis Between Cybersickness and Postural Behavior in Immersive VR Experience. In *2024 IEEE International Conference on Multimedia and Expo (ICME)*. Association for Computing Machinery, New York, NY, USA, 1–6. <https://doi.org/10.1109/ICME57554.2024.10687394>