



Australian  
National  
University

程序代写代做 CS编程辅导



Normalisation – Part 1

WeChat: cstutorcs

BCNF

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>



## 程序代写代做 CS编程辅导 Schema Design



- A driving force for the **dependencies** has been **schema design**.
- The goal of schema design is to select **the most appropriate schema** for a particular database application.
- The **choice of a schema** is guided by **semantic information** about the application data provided by users and captured by dependencies.
- A common approach starts with a **universal relation** and applies decomposition to create new relations that satisfy certain normal forms (i.e. **normalization**).

<https://tutorcs.com>



程序代写代做 CS编程辅导

## Normal Forms

Normal forms

Test



1NF  
↓  
2NF  
↓  
3NF  
↓  
BCNF  
...

WeChat: cstutorcs




Assignment Project Exam Help

strong

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

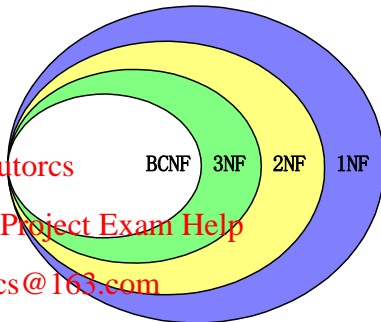

### Note that:

- 1NF is not based on any constraints.
- 2NF, 3NF and BCNF are based on keys and functional dependencies.
- 4NF and 5NF are based on other constraints (will not be covered).



程序代写代做 CS编程辅导

## Normalisation



- Decomposing a relation into smaller relations in a certain normal form

- Each normal form reduces certain kind of data redundancy.

- Each normal form does not have certain types of (undesirable) dependencies.

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

- What normal forms will we learn?

- 1 Boyce-Codd normal form (BCNF)

- 2 Third normal form (3NF)

<http://tutorcs.com>



程序代写代做 CS编程辅导

## BCNF - Definition



- A relation schema  $R$  is in **BCNF** if whenever a non-trivial FD  $X \rightarrow A$  holds in  $R$ , then  $X$  is a **superkey**.
- When a relation schema is in BCNF, all data redundancy based on functional dependencies are removed.

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

**Do not represent the same fact twice (within a relation)!**

<https://tutorcs.com>



## 程序代写代做 CS编程辅导 Normalisation to BCNF



- Consider the relation **TEACH** with the following FDs:

- $\{ \text{StudentID}, \text{CourseName} \} \rightarrow \{ \text{Instructor} \};$
- $\{ \text{Instructor} \} \rightarrow \{ \text{CourseName} \};$

WeChat: cstutorcs

### Assignment Project Exam Help

StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

- Is **TEACH** in **BCNF**? <https://tutorcs.com>

- Not in BCNF because of  $\{ \text{Instructor} \} \rightarrow \{ \text{CourseName} \};$



## 程序代写代做 CS编程辅导 Normalisation to BCNF



- **Algorithm** for a BCNF decomposition

**Input:** a relation schema  $R'$  and a set  $\Sigma$  of FDs on  $R'$ .

**Output:** a set  $\mathcal{S}$  of relation schemas in BCNF, each having a set of FDs

- Start with  $\mathcal{S} = \{R'\}$ .
- Do the following for each  $R \in \mathcal{S}$  iteratively until no changes on  $\mathcal{S}$ :
  - Find a (non-trivial) FD  $X \twoheadrightarrow Y$  on  $R$  that violates BCNF, if any;
  - Replace  $R$  in  $\mathcal{S}$  by two relation schemas  $XY$  and  $(R - Y)$  and project the FDs to these two relation schemas.



程序代写代做 CS编程辅导  
**Normalisation to BCNF**



QQ: 749389476

<https://tutorcs.com>





程序代写代做 CS编程辅导  
Normalisation to BCNF




WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

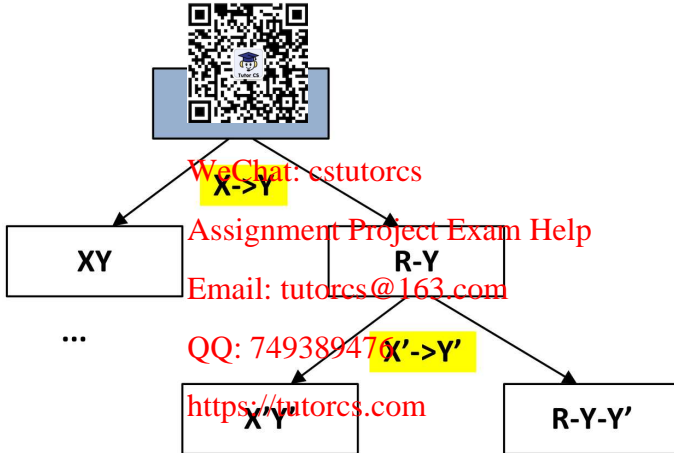



程序代写代做 CS编程辅导

## BCNF - Example



- Consider TEACH with the following FDs again:
  - {StudentID, CourseName} → {Instructor};
  - {Instructor} → {StudentID, CourseName}.

WeChat: cstutors

StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

Assignment Project Exam Help

Email: tutorscs@163.com

- Can we normalise TEACH into BCNF?

QQ: 749389476

<https://tutorscs.com>



程序代写代做 CS编程辅导

## BCNF - Example



- Consider TEACH with the following FDs again:

- $\{\text{StudentID}, \text{CourseName}\} \rightarrow \{\text{Instructor}\};$
- $\{\text{Instructor}\} \rightarrow \{\text{StudentID}, \text{CourseName}\}.$

WeChat: cstutors

StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

Assignment Project Exam Help

Email: tutors@163.com

- Replace TEACH with  $R_1$  and  $R_2$ :

QQ: 749389476

$R_1$

CourseName	Instructor
Operating Systems	Jane
Databases	Mark

$R_2$

StudentID	Instructor
u123456	Jane
u234567	Jane
u234567	Mark

<https://tutors.com>



程序代写代做 CS编程辅导

## BCNF - Example



- Consider the relation **TEACH** with the following FDs:

- $\{ \text{StudentID}, \text{CourseName} \} \rightarrow \{ \text{Instructor} \};$
- $\{ \text{Instructor} \} \rightarrow \{ \text{CourseName} \}.$

WeChat: cstutors

StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

Assignment Project Exam Help

Email: tutors@163.com

QQ: 749389476

<https://tutors.com>

$R_1$

CourseName	Instructor
Operating Systems	Jane
Databases	Mark

$R_2$

StudentID	Instructor
u123456	Jane
u234567	Jane
u234567	Mark

- Does this decomposition preserve all FDs on **TEACH**?



程序代写代做 CS编程辅导

## BCNF - Example



- Consider the relation **TEACH** with the following FDs:

- $\{\text{StudentID}, \text{CourseName}\} \rightarrow \{\text{Instructor}\}; \text{Lost!}$
- $\{\text{Instructor}\} \rightarrow \{\text{CourseName}\}.$

WeChat: cstutors

StudentID	CourseName	Instructor
u123456	Operating Systems	Jane
u234567	Operating Systems	Jane
u234567	Databases	Mark

Assignment Project Exam Help

Email: tutors@163.com

QQ: 749389476

https://tutors.com

$R_1$

CourseName	Instructor
Operating Systems	Jane
Databases	Mark

$R_2$

StudentID	Instructor
u123456	Jane
u234567	Jane
u234567	Mark

- No. We only have  $\{\text{Instructor}\} \rightarrow \{\text{CourseName}\}$  on  $R_1$ .



程序代写代做 CS编程辅导

## Two Properties



- We need to consider the following properties when decomposing a relation:

- 1 **Lossless join** – “capture the same data”

To disallow the possibility of generating spurious tuples when a NATURAL JOIN operation is applied to the relations after decomposition.

- 2 **Dependency preservation** – “capture the same meta-data”

To ensure that each functional dependency can be inferred from functional dependencies after decomposition.



程序代写代做 CS编程辅导

## Two Properties



### ● Facts

WeChat: cstutorcs

- (1) There exists an algorithm that can generate a **lossless decomposition into BCNF**.

Assignment Project Exam Help

- (2) However, a BCNF-decomposition that is **both lossless and dependency preserving** does not always exist.

Email: tutors@163.com

QQ: 749389476

<https://tutorcs.com>

- Does there exist a **less restrictive normal form** such that a lossless and dependency preserving decomposition can always be found?