

程序代写代做 CS编程辅导



COM

Foundations of Computer Science

WeChat: cstutorcs

Lecture 9: Recursion

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Topic 2: Recursion

程序代写代做 CS编程辅导



Email: tutorcs@163.com [RW] [Rosen]

Week 6 Recursion [QQ: 749389476](#) Ch. 6, 21 Ch. 4, 7 Ch. 5

Week 7 Induction; Ch. 5, 6.5 Ch. 4, 7 Ch. 5

Algorithmic Analysis Ch. 7 Ch. 3.3

Recursion in Computer Science

程序代写代做 CS编程辅导

Fundamental concept in Computer Science

- Defining complex structures from simpler ones
- Unbounded computation with a finite description



Recursive Data Structures

WeChat: cstutorcs

Finite definitions of **arbitrarily large** objects

Assignment Project Exam Help

- Natural numbers
- Words Email: tutorcs@163.com
- Linked lists QQ: 749389476
- Formulas
- Binary trees <https://tutorcs.com>

Recursion in Computer Science

程序代写代做 CS编程辅导

Recursive Algorithms:

Solving problems/calculus by reducing to smaller cases

- Factorial
- Euclidean gcd algorithm
- Towers of Hanoi
- Mergesort, Quicksort



WeChat: cstutorcs

Assignment Project Exam Help

Analysis of Recursion:

Email: tutorcs@163.com

Reasoning about recursive objects

QQ: 749389476

- Induction, Structural Induction
- Recursive sequences (<https://tutbbs.com> sequence)
- Asymptotic analysis of recursive functions

Outline

程序代写代做 CS编程辅导

Recursion



Recursive Data Structures

Recursive Programming

WeChat: cstutorcs

Solving Recurrences

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Outline

程序代写代做 CS编程辅导

Recursion



Recursive Data Structures

Recursive Programming

WeChat: cstutorcs

Solving Recurrences

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Recursion

程序代写代做 CS编程辅导

Consists of a basis (B) and a recursive process (R).

A sequence/object/a function is recursively defined when (typically)

- (B) some initial terms are specified, perhaps only the first one;
- (R) later terms stated as functional expressions of the earlier terms.

WeChat: cstutorcs
Assignment Project Exam Help

NB

Email: tutorcs@163.com

(R) also called recurrence formula (especially when dealing with sequences)
QQ: 749389476

<https://tutorcs.com>

Example: Factorial

程序代写代做 CS编程辅导

Example



Fac

(B) $0! = 1$

(R) WeChat: cstutorcs

Assignment Project Exam Help

(B) $\text{fact}(n):$
 if($n = 0$): 1

(R) QQ: 749389476

<https://tutorcs.com>

Example: Euclid's gcd algorithm

程序代写代做 CS编程辅导

Example



$$\text{gcd}(m, n) = \begin{cases} m & \text{if } m = n \\ \text{WeChat: cstutorcs} \\ \text{Assignment Project Exam Help} \\ \text{gcd}(m - n, n) & \text{if } m > n \\ \text{gcd}(m, n - m) & \text{if } m < n \end{cases}$$

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Towers of Hanoi

程序代写代做 CS编程辅导



- There are 3 towers
- n disks of decreasing size placed on the first tower
- You need to move all disks from the first tower to the last tower
- Larger disks cannot be placed on top of smaller disks
- The third tower can be used to temporarily hold disks

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Towers of Hanoi

程序代写代做 CS编程辅导



Questions

- Describe a general solution for n disks
- How many moves does it take?

WeChat: cstutorcs

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Towers of Hanoi

程序代写代做 CS编程辅导

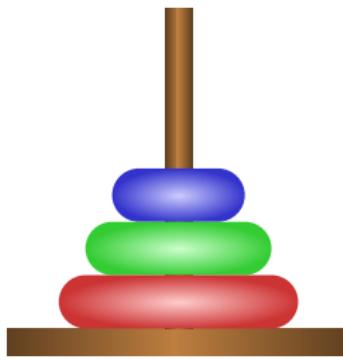

WeChat: cstutorcs

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Towers of Hanoi

程序代写代做 CS编程辅导

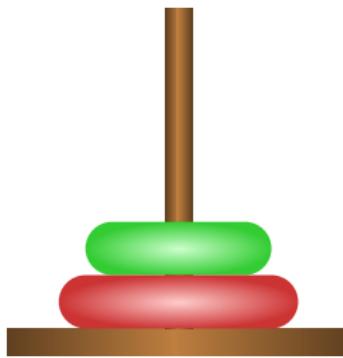

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>



Example: Towers of Hanoi

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Towers of Hanoi

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Towers of Hanoi

程序代写代做 CS编程辅导



Example: Towers of Hanoi

程序代写代做 CS编程辅导



Example: Towers of Hanoi

程序代写代做 CS编程辅导





WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

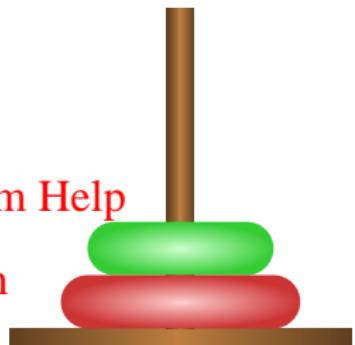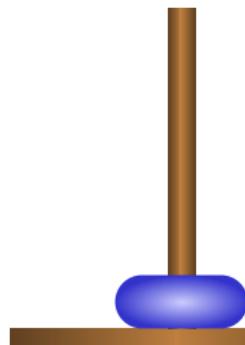

Example: Towers of Hanoi

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Towers of Hanoi

程序代写代做 CS编程辅导

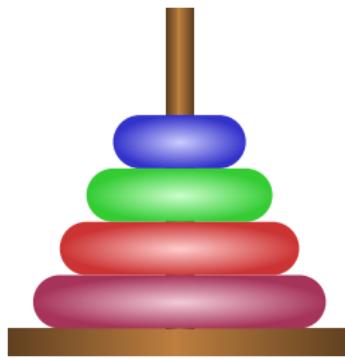

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com


QQ: 749389476

<https://tutorcs.com>



Example: Towers of Hanoi

程序代写代做 CS编程辅导

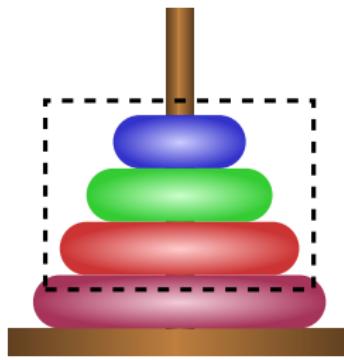

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>



Example: Towers of Hanoi

程序代写代做 CS编程辅导



Example: Towers of Hanoi

程序代写代做 CS编程辅导



Example: Towers of Hanoi

程序代写代做 CS编程辅导



Example: Towers of Hanoi

程序代写代做 CS编程辅导



Questions

- Describe a general solution for n disks
- How many moves does it take? $M(n) \leq 2M(n-1) + 1$

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Outline

程序代写代做 CS编程辅导

Recursion



Recursive Data Structures

Recursive Programming

WeChat: cstutorcs

Solving Recurrences

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Natural numbers

程序代写代做 CS编程辅导



Example

A natural number is either 0 (B) or one more than a natural number (R).

WeChat: cstutorcs

Formal definition of \mathbb{N} : Assignment Project Exam Help

- (B) $0 \in \mathbb{N}$ Email: tutorcs@163.com

- (R) If $n \in \mathbb{N}$ then $(n + 1) \in \mathbb{N}$

QQ: 749389476

<https://tutorcs.com>

Example: Odd/Even numbers

程序代写代做 CS编程辅导



Example

The set of even numbers can be defined as:

- (B) 0 is an even number
- (R) If n is an even number then $n + 2$ is an even number

WeChat: cs_tutors
Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Odd/Even numbers

程序代写代做 CS编程辅导



Example

The set of odd numbers can be defined as:

- (B) 1 is an odd number
- (R) If n is an odd number then $n + 2$ is an odd number

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Fibonacci numbers

程序代写代做 CS编程辅导

Example

The Fibonacci sequence is defined by 0, 1, 1, 2, 3, ... where, after 0, 1, each term is the sum of the previous two terms.



0, 1, 1, 2, 3, ... where, after 0, 1,

each term is the sum of the previous two terms.

Formally, the sequence of Fibonacci numbers: F_0, F_1, F_2, \dots where the n -th Fibonacci number F_n is defined as:

- (B) $F_0 = 0$, Assignment Project Exam Help
- (B) $F_1 = 1$, Email: tutorcs@163.com
- (R) $F_n = F_{n-1} + F_{n-2}$

QQ: 749389476

NB

Could also define the Fibonacci sequence as a function
 $\text{FIB} : \mathbb{N} \rightarrow \mathbb{F}$.

Example: Linked lists

程序代写代做 CS编程辅导

Example

A linked list is zero c



ked list nodes:



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

In C:

```
struct node{  
    int data;  
    struct node *next;  
}
```

QQ: 749389476

<https://tutorcs.com>

Example: Linked lists

程序代写代做 CS编程辅导



Example

We can view the linked list **structure** abstractly. A linked list is either:

- (B) an empty list, or
- (R) an ordered pair (Data, List)

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example: Words over Σ

程序代写代做 CS编程辅导

Example

A word over an alphabet Σ is either λ (B) or a symbol from Σ followed by a word (

Formal definition of Σ^* :
 WeChat: cstutorcs

- (B) $\lambda \in \Sigma^*$ Assignment Project Exam Help
- (R) If $w \in \Sigma^*$ then $aw \in \Sigma^*$ for all $a \in \Sigma$
Email: tutorcs@163.com

NB

QQ: 749389476

This matches the recursive definition of a **Linked List** data type.
<https://tutores.com>

Example: Expressions in the Proof Assistant

程序代写代做 CS编程辅导

Example

- (B) A, B, \dots, Z are expressions
- (B) \emptyset and \mathcal{U} are expressions
- (R) If E is an expression then so is (E) and E^c
- (R) If E_1 and E_2 are expressions then
 - $(E_1 \cup E_2)$,
 - $(E_1 \cap E_2)$,
 - $(E_1 \setminus E_2)$, and
 - $(E_1 \oplus E_2)$ are expressions.



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ:

749389476

<https://tutorcs.com>

Example: Propositional formulas

程序代写代做 CS编程辅导

Example

A well-formed formula (wff) over a set of propositional variables, PROP is defined as:



- (B) \top is a wff
- (B) \perp is a wff
- (B) p is a wff for all $p \in \text{PROP}$
- (R) If φ is a wff then $\neg\varphi$ is a wff
- (R) If φ and ψ are wffs then:
 - $(\varphi \wedge \psi)$,
 - $(\varphi \vee \psi)$,
 - $(\varphi \rightarrow \psi)$, and
 - $(\varphi \leftrightarrow \psi)$ are wffs.

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Exercises

程序代写代做 CS 编程辅导

Exercises

RW: 4.4.4

(a) Give a



definition for the sequence

(16, 256, ...)

WeChat: cstutorcs

Assignment Project Exam Help

(b) Give a recursive definition for the sequence

Email: tuforcs@163.com

QQ: 749389476
(2, 4, 16, 65536, ...)

<https://tutorcs.com>

Outline

程序代写代做 CS编程辅导

Recursion



Recursive Data Structures

Recursive Programming WeChat: cstutorcs

Solving Recurrences Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Programming over recursive datatypes

程序代写代做 CS编程辅导

Recursive datatypes



Recursive programming/functions easy.

Example

The factorial function:

WeChat: cstutorcs

fact(n):
(B) if($n = 0$): 1
(R) Email: tutorcs@163.com 1)

QQ: 749389476

<https://tutorcs.com>

Programming over recursive datatypes

程序代写代做 CS编程辅导

Recursive datatypes



Recursive programming/functions easy.

Example

Summing the first n natural numbers:

WeChat: cstutorcs

Assignment Project Exam Help

(B) $\text{sum}(n)$: if($n = 0$): 0

(R) Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Programming over recursive datatypes

程序代写代做 CS编程辅导

Recursive datatypes



Recursive programming/functions easy.

Example

Summing elements of a linked list:

WeChat: cstutorcs
sum(L):

(B)

Assignment Project Exam Help

return 0

(R)

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Programming over recursive datatypes

程序代写代做 CS编程辅导

Recursive datatypes make recursive programming/functions easy.

Example

Sorting elements of a list (insertion sort):

WeChat: estutorcs

(B) if(L.isEmpty()):
Assignment Project Exam Help
 return L

(R) else:
Email: tutorcs@163.com
 L2 = sort(L.next)

QQ: 749389476
Insert Ldata into L2

return L2
<https://tutorcs.com>



Programming over recursive datatypes

程序代写代做 CS编程辅导

Recursive datatypes



Recursive programming/functions easy.

Example

Concatenation of words (defining wv):

WeChat: cstutorcs

Assignment Project Exam Help

$$(B) \lambda v = v$$

$$(R) (aw)v = a(wv)$$

QQ: 749389476

<https://tutorcs.com>

Programming over recursive datatypes

程序代写代做 CS编程辅导

Recursive datatypes



Recursive programming/functions easy.

Example

Length of words: WeChat: cstutorcs

(B) $\text{length}(\lambda) = 0$

(R) $\text{length}(aw) = 1 + \text{length}(w)$

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Programming over recursive datatypes

程序代写代做 CS编程辅导



Recursive datatypes make recursive programming/functions easy.

Example

WeChat: cstutorcs

“Evaluation” of a propositional formula
Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Exercise

程序代写代做 CS编程辅导

Exercise

Let Σ be a finite set.

Define append : $\Sigma^* \times \Sigma^*$ by



$$\text{append}(w, a) = wa$$

WeChat: cstutorcs

Give a (direct) definition of append [i.e. only concatenates symbols on the left].

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Assignment Project Exam Help

Pitfall: Correctness of Recursive Definition

A recurrence formula is correct if the computation of any later term can be reduced to the initial values given in (B).

Example (Incorrect)



n)

- Function $g(n)$ is defined recursively by

$$g(n) = g(g(n-1)) + 1, \quad g(0) = 2.$$

The definition of $g(n)$ is incomplete—the recursion may not terminate:

Attempt to compute $g(1)$ gives

$$g(1) = g(g(0) - 1) + 1 = g(1) + 1 = \dots = g(1) + 1 + 1 + 1 \dots$$

https://tutorcs.com

When implemented, it leads to an overflow; most static analyses cannot detect this kind of ill-defined recursion.

Pitfall: Correctness of Recursive Definition

程序代写代做 CS编程辅导

Example (continued)



However, the definition is not yet correct. For example, we can add the specification specify $g(1) = 2$.

WeChat: cstutorcs

$$\text{Then } g(2) = g(2 - 1) + 1 = 3,$$

$$g(3) = g(g(2) - 1) + 1 = g(3 - 1) + 1 = 4,$$

...

Email: tutorcs@163.com

In fact, by induction $\dots g(n) = n + 1$

QQ: 749389476

<https://tutorcs.com>

Pitfall: Correctness of Recursive Definition

程序代写代做 CS编程辅导

Check your base cases!

Example

Function $f(n)$ is defi



$$f(n) = f(\lceil n/2 \rceil), \quad f(0) = 1$$

WeChat: cstutorcs

When evaluated for $n = 1$, it leads to

Assignment Project Exam Help

Email: tutore@163.com

This one can also be repaired. For example, one could specify that $f(1) = 1$.

QQ: 740389476

This would lead to a constant function $f(n) = 1$ for all $n \geq 0$.

Mutual Recursion

Sometimes recursive definitions use more than one function, with each calling each other.

Example (Fibonacci)

Recall:



- (B) $f(0) = 0; f(1) = 1,$
- (R) $f(n) = f(n - 1) + f(n - 2)$

WeChat: cstutorcs

Alternative, mutually recursive definition:

- (B) $f(1) = 1; g(1) = 0$
- (R) $f(n) = f(n - 1) + g(n - 1)$
- (R) $g(n) = f(n - 1)$

Email: tutorcs@163.com

QQ: 749389476

$$\begin{pmatrix} f(n) \\ g(n) \end{pmatrix} = \begin{pmatrix} f(n-1) \\ g(n-1) \end{pmatrix}$$

<https://tutorcs.com>

Outline

程序代写代做 CS编程辅导

Recursion



Recursive Data Structures

Recursive Programming WeChat: cstutorcs

Solving Recurrences Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Solving recurrences

程序代写代做 CS编程辅导

Question

How can we (asymptotically) compare recursively defined functions?



Compare recursively defined

Some practical approaches:

WeChat: cstutorcs

- Unwinding the recurrence
- Approximating with Big O
- The Master Theorem

Assignment Project Exam Help

Email: tutorcs@163.com

NB

QQ: 749389476

Each approach gives an informal “solution”: ideally one should prove a solution is correct (using e.g. induction).

<https://tutorcs.com>

Examples

Example (Unwinding) 程序代写代做 CS编程辅导

$$f(n) = 2f(n - 1)$$



Unwinding:

$$f(n) = 2f(n - 1)$$

$$\begin{aligned} &= 2(2f(n - 2)) = 4f(n - 2) \\ &= 4(2f(n - 3)) = 8f(n - 3) \end{aligned}$$

Email: tutorcs@163.com

⋮

QQ: 749389476

<https://tutorcs.com>

$$= 2^n f(0) = 2^n$$

Examples

Example (Unwinding) 程序代写代做 CS 编程辅导

$$f(1) \xrightarrow{\text{unwind}} f(n) = 1 + f\left(\left\lfloor \frac{n}{2} \right\rfloor\right)$$



Unwinding:

$$\begin{aligned} f(n) &= 1 + f(n/2) \\ &= 1 + (1 + f(n/4)) = 2 + f(n/4) \\ &= 2 + (1 + f(n/8)) \\ &\vdots \\ &= 2 + f(n/2) \\ &\vdots \\ &= \log(n) + f(0) = \log(n) \end{aligned}$$

Examples

Example (Approximating with Big-O) 程序代写代做CS编程辅导

$$f(0) = 1 \quad f(n) = f(n-1) + f(n-2)$$



Assuming $f(n)$ is inc

$$f(n+2) \leq 2f(n-1)$$

so:

Assignment Project Exam Help

Email: tutorcs@163.com

so (by unwinding):

QQ: 749389476
 $f(n) \leq 2^n$

so:

<https://tutorcs.com>

$$f(n) \in O(2^n)$$

Master Theorem

程序代写代做 CS编程辅导

The following result covers many recurrences that arise in practice
(e.g. divide-and-conquer problems)



Theorem

Suppose

$$T(n) = a \cdot T\left(\frac{n}{b}\right) + f(n)$$

WeChat: cstutorcs

where $f(n) \in \Theta(n^c(\log n)^k)$.

Email: tutorcs@163.com

Let $d = \log_b(a)$. Then:

Case 1: If $c < d$ then $T(n) = \Theta(n^d)$

Case 2: If $c = d$ then $T(n) = \Theta(n^c(\log n)^{k+1})$

Case 3: If $c > d$ then $T(n) = \Theta(f(n))$

Master Theorem: Examples

程序代写代做 CS编程辅导



Example (Master T)

$$T(n) = T\left(\frac{n}{2}\right) + n^2, \quad T(1) = 1$$

WeChat: cstutorcs

Here $a = 1$, $b = 2$, $c = 2$, $k = 0$ and $d = 0$. So we have Case 3 and the solution is

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Master Theorem: Examples

程序代写代做 CS编程辅导

Example (Master T)

Mergesort has



$$T(n) = 2T\left(\frac{n}{2}\right) + (n - 1)$$

WeChat: cstutorcs
for the number of comparisons.

Here $a = b = 2$, $c = 1$, $k = 0$ and $d = 1$. So we have Case 2, and the solution is

Email: tutorcs@163.com

$T(n) = \Theta(n^c \log(n)) = O(n \log(n))$

QQ: 749389476

<https://tutorcs.com>

Master Theorem: Examples

程序代写代做 CS编程辅导

Example (Master T)

Unwinding example:



$$T(1) = 0 \quad T(n) = 1 + T\left(\lfloor \frac{n}{2} \rfloor\right)$$

WeChat: cstutorcs

Assignment Project Exam Help

Here $a = 1$, $b = 2$, $c = 0$, $k = 0$, and $d = 0$. So we have Case 2, and the solution is

Email: tutorcs@163.com

$T(n) = \Theta(\log(n))$

QQ: 749389476

<https://tutorcs.com>

The Master Theorem: Pitfalls

NB

程序代写代做 CS编程辅导

- a, b, c, k have constants (not dependent on n).
- Only one recursive term.
- Recursive term is in form $T(n/b)$, not $T(n - b)$.
- Solution is only an asymptotic bound.



WeChat: cstutorcs

Examples

Assignment Project Exam Help

The Master theorem does not apply to any of these:

Email: tutorcs@163.com

$$T(n) = 2^n T(n/2) + n^2$$

QQ: 749389476

$$T(n) = T(n/5) + T(7n/10) + n$$

<https://tutorcs.com>

$$T(n) = 2T(n-1)$$

The Master Theorem: Linear differences

程序代写代做 CS编程辅导

NB

The Master Theorem
applies to recurrences where $T(n)$ is defined
in terms of $T(n/b)$ and $T(n - 1)$.



However, the following is a consequence of the Master Theorem:
WeChat: cstutorcs

Theorem

Suppose

Assignment Project Exam Help

$$T(n) = a \cdot T(n-1) + b n^k$$

Email: tutores@163.com

Then

$$T(n) = \begin{cases} O(n^{a-1}) & \text{if } a = 1 \\ O(a^n) & \text{if } a > 1 \end{cases}$$

QQ: 749389476 if $a = 1$
<https://tutores.com> if $a > 1$

Exercise

程序代写代做 CS编程辅导



Exercise

Solve $T(n) = 3^n T\left(\frac{n}{2}\right) + 1 = 1$

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>