

# Week 01a: Introduction - Elementary Data and Control Structures in C

---

**COMP9024 20T0**

1/105

Data Structures and Algorithms

*Ashesh Mahidadia*Web Site: <https://webcms3.cse.unsw.edu.au/COMP9024/20T0/>**Course Convenor**

2/105

Name: Ashesh Mahidadia

Email: [ashesh@cse.unsw.edu.au](mailto:ashesh@cse.unsw.edu.au)

Research: Machine Learning, Knowledge Based Systems, Artificial Intelligence

**Course Goals**

3/105

COMP9021 ...

- gets you thinking like a *programmer*
- solving problems by developing programs
- expressing your ideas in the language Python

COMP9024 ...

- gets you thinking like a *computer scientist*
- knowing fundamental data structures/algorithms
- able to reason about their applicability/effectiveness
- able to analyse the efficiency of programs
- able to code in C

**... Course Goals**

4/105

COMP9021 ...



## ... Course Goals

5/105

COMP9024 ...



Assignment Project Exam Help

## Pre-conditions <https://tutorcs.com>

6/105

At the *start* of this course you should be able to:

- produce correct programs from a specification
- understand the state-based model of computation (variables, assignment, function parameters)
- use fundamental data structures (characters, numbers, strings, arrays)
- use fundamental control structures (if, while, for)
- know fundamental algorithms (sorting)
- fix simple bugs in incorrect programs

WeChat: cstutorcs

## Post-conditions

7/105

At the *end* of this course you should be able to:

- choose/develop effective data structures (DS)
- analyse performance characteristics of algorithms
- choose/develop algorithms (A) on these DS
- package a set of DS+A as an abstract data type
- develop and maintain C programs

## COMP9024 Themes

8/105

## Data structures

- how to store data inside a computer for efficient use

## Algorithms

- step-by-step process for solving a problem (within finite amount of space and time)

Major themes ...

1. Data structures, e.g. for graphs, trees
2. A variety of algorithms, e.g. on graphs, trees, strings
3. Analysis of algorithms

For data types: alternative data structures and implementation of operations

For algorithms: complexity analysis

## Access to Course Material

9/105

All course information is placed on the main course website:

- <https://webcms3.cse.unsw.edu.au/COMP9024/20T0/>

Need to login to access material, submit homework and assignment, post on the forum, view your marks

<https://tutorcs.com>

## Schedule

WeChat: cstutorcs

10/105

Please note that the following schedule is subject to change.

Lecture Topic	Week(s)
Elementary data structures and algorithms in C	Week 1
Analysis of algorithms	Week 1-2
Dynamic data structures	Week 2
Graph data structures and algorithms	Week 2-3
Search tree data structures and algorithms	Week 3-4
Text Processing algorithms	Week 4
Ethics and Course review	Week 5

**Assignment:** Available at the end of week-1, due at 10am Monday 03 Feb 2020.

## Credits for Material

11/105

Always give credit when you use someone else's work.

The lecture slides are prepared by Michael Thielscher, and ideas for the COMP9024 material are drawn from

- slides by John Shepherd (COMP1927 16s2), Hui Wu (COMP9024 16s2) and Alan Blair (COMP1917 14s2)
- Robert Sedgewick's and Alistair Moffat's books, Goodrich and Tamassia's Java book, Skiena and Revilla's programming challenges book


---

## Resources

12/105

Textbook is a "double-header"

- Algorithms in C, Parts 1-4, Robert Sedgewick
- Algorithms in C, Part 5, Robert Sedgewick

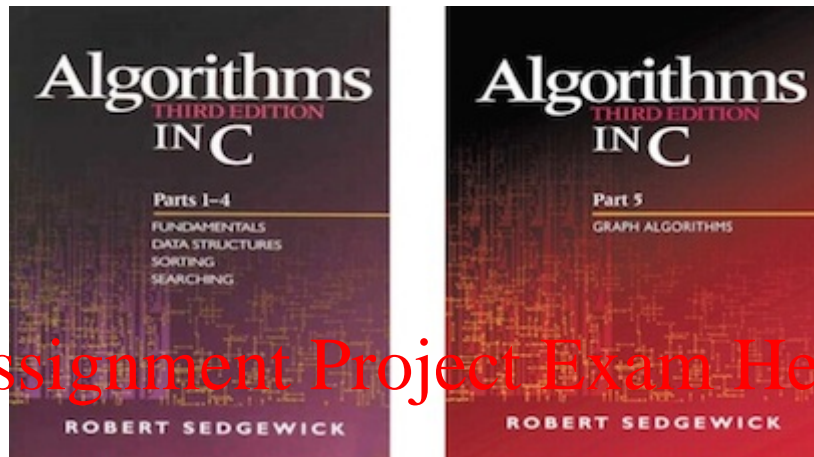

Good books, useful beyond COMP9024 (but coding style...)

<https://tutorcs.com>

---


## ... Resources

13/105

WeChat: cstutorcs

Supplementary textbook:

- Alistair Moffat  
*Programming, Problem Solving, and Abstraction with C*  
Pearson Educational, Australia, Revised edition 2013, ISBN 978-1-48-601097-4

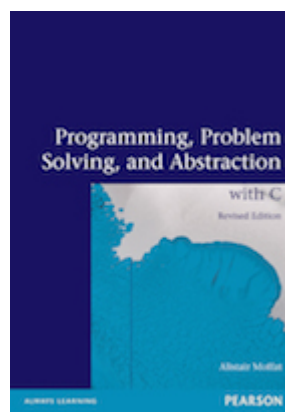

Also, numerous online C resources are available.

---

## Lectures

14/105

Lectures will:

- present theory
- demonstrate problem-solving methods
- give practical demonstrations

Lectures provide an alternative view to textbook

Lecture slides will be made available before lecture

Feel free to ask questions, but **No Idle Chatting**

---

## Problem Sets

15/105

The weekly homework aims to:

- clarify any problems with lecture material
- work through exercises related to lecture topics
- give practice with algorithm design skills (**think before coding**)

Problem sets available on web at the time of the lecture

Sample solutions will be posted in the following week

**Do them yourself!** and **Don't fall behind!**

---

## Assignment

16/105

The assignment gives you experience applying tools/techniques  
(but to a larger programming problem than the homework)

The assignment will be carried out individually.

The assignment will be released later in Week-1.

The assignment contributes 30% to overall mark.

**10% penalty** will be applied to the maximum mark for every 24 hours late after the deadline.

- 1 day late: mark is capped at 27 (90% of the maximum possible mark)
  - 2 days late: mark is capped at 24 (80% of the maximum possible mark)
  - 3 days late: mark is capped at 21 (70% of the maximum possible mark)
  - ...
- 

## ... Assignment

17/105

Advice on doing assignments:

They always take longer than you expect.

Don't leave them to the last minute.

Organising your time → no late penalty.

If you do leave them to the last minute:

- take the late penalty rather than copying
- 

## Plagiarism

18/105



Just Don't Do it

We get **very annoyed** by people who plagiarise.

---

## ... Plagiarism

19/105

Examples of **Plagiarism** ([student.unsw.edu.au/plagiarism](http://student.unsw.edu.au/plagiarism)):

### 1. Copying

Using same or similar idea *without acknowledging the source*  
This includes copying ideas from a website, internet

### 2. Collusion

Presenting work as independent when produced in collusion with others  
This includes *students providing their work to another student*

Plagiarism will be checked for and **punished** (0 marks for assignment or, in severe cases/repeat offenders, 0 marks for course)

<https://tutorcs.com>

---

## Help Sessions WeChat: cstutorcs

20/105

The *help Sessions*:

- aims to help you if you have difficulties with the weekly programming exercises
- ... and the assignments
- non-programming exercises from problem sets may also be discussed

Time and Location - to be published later.

Attendance is entirely voluntary

---

## Final Exam

21/105

3-hour practical exam (in the CSE labs) during the exam period.

Format:

- some multiple-choice questions
- some descriptive/analytical questions
- some **programming** questions

The final exam contributes 70% to overall mark.

Must score at least 35/70 in the final exam to pass the course.

---

22/105

## ... Final Exam

How to pass the Final Exam:

- do the Homework *yourself*
- do the Homework *every week*
- practise programming outside classes
- read the lecture notes
- read the corresponding chapters in the textbooks

---

## Assessment Summary

23/105

assn = mark for assignment (out of 30)  
exam = mark for final exam (out of 70)

```
if (exam >= 35)
    total = assn + exam
else
    total = exam * (100/70)
```

To pass the course, you must achieve:

- at least 35/70 for exam
- at least 50/100 for total

---

## Summary

24/105

The goal is for you to become a better Computer Scientist.

- more confident in your own ability to choose data structures
- more confident in your own ability to develop algorithms
- able to analyse and justify your choices
- producing a better end-product
- ultimately, enjoying the software design and development process

---

## C Programming Language

### Why C?

26/105

- good example of an imperative language
- gives the programmer great control
- produces fast code
- many libraries and resources
- widely used in industry (and science)

---

## Brief History of C

27/105

- C and UNIX operating system share a complex history
- C was originally designed for and implemented on UNIX
- Dennis Ritchie was the author of C (around 1971)
- In 1973, UNIX was rewritten in C
- B (author: Ken Thompson, 1970) was the predecessor to C, but there was no A



## ... Brief History of C

- B was a typeless language
- C is a typed language
- In 1983, American National Standards Institute (ANSI) established a committee to clean up and standardise the language
- ANSI C standard published in 1988
  - this greatly improved source code portability
- Current standard: C11 (published in 2011)
- C is the main language for writing operating systems and compilers; and is commonly used for a variety of applications

## Basic Structure of a C Program

```
// include files
// global definitions

// function definitions
function_type f(arguments) {

    // local variables

    // body of function

return ...;
}

:
.
```

```
// main function
int main(arguments) {

    // local variables

    // body of main function

return 0;
}
```

Assignment Project Exam Help

<https://tutorcs.com>

### Exercise #1: What does this program compute?

```
#include <stdio.h>
```

WeChat: cstutorcs

```
int f(int m, int n) {
    while (m != n) {
        if (m > n) {
            m = m-n;
        } else {
            n = n-m;
        }
    }
    return m;
}

int main(void) {
    printf("%d\n", f(30,18));
    return 0;
}
```

## Example: Insertion Sort in C

Reminder — Insertion Sort algorithm:

```
insertionSort(A):
|   Input array A[0..n-1] of n elements
|
|   for all i=1..n-1 do
|       element=A[i], j=i-1
```



```

|   |   while j ≥ 0 and A[j] > element do
|   |       A[j+1] = A[j]
|   |       j = j - 1
|   |   end while
|   |   A[j+1] = element
| end for

```

## ... Example: Insertion Sort in C

32/105

```

#include <stdio.h> // include standard I/O library defs and functions

#define SIZE 6     // define a symbolic constant

void insertionSort(int array[], int n) { // function headers must provide types
    int i; // each variable must have a type
    for (i = 1; i < n; i++) { // for-loop syntax
        int element = array[i];
        int j = i - 1;
        while (j >= 0 && array[j] > element) { // logical AND
            array[j+1] = array[j];
            j--; // abbreviated assignment j=j-1
        }
        array[j+1] = element; // statements terminated by ;
    } // code blocks enclosed in { }
}

int main(void) { // main: program starts here
    int numbers[SIZE] = { 3, 6, 5, 2, 4, 1 }; // array declaration and initialisation
    int i;
    insertionSort(numbers, SIZE);
    for (i = 0; i < SIZE; i++)
        printf("%d\n", numbers[i]); // printf defined in <stdio>

    return 0; // return program status (here: no error) to environment
}

```

Assignment Project Exam Help

<https://tutorcs.com>

WeChat: cstutorcs

## Compiling with gcc

33/105

**C source code:** `prog.c`



`a.out` **(executable program)**

To compile a program `prog.c`, you type the following:

```
prompt$ gcc prog.c
```

To run the program, type:

```
prompt$ ./a.out
```

## ... Compiling with gcc

34/105

Command line options:

- The default with `gcc` is not to give you any warnings about potential problems
- Good practice is to be tough on yourself:

```
prompt$ gcc -Wall prog.c
```

which reports all warnings to anything it finds that is potentially wrong or non ANSI compliant

- The `-o` option tells `gcc` to place the compiled object in the named file rather than `a.out`

```
prompt$ gcc -o prog prog.c
```

## Algorithms in C

### Basic Elements

36/105

Algorithms are built using

- assignments
- conditionals
- loops
- function calls/return statements

### Assignments

37/105

- In C, each statement is terminated by a semicolon `;`
- Curly brackets `{ }` used to enclose statements in a block
- Usual arithmetic operators: `+`, `-`, `*`, `/`, `%`
- Usual assignment operators: `=`, `+=`, `-=`, `*=`, `/=`, `%=`
- The operators `++` and `--` can be used to increment a variable (add 1) or decrement a variable (subtract 1)
  - It is recommended to put the increment or decrement operator after the variable:

```
// suppose k=6 initially
k++; // increment k by 1; afterwards, k=7
n = k--; // first assign k to n, then decrement k by 1
// afterwards, k=6 but n=7
```

- It is also possible (but NOT recommended) to put the operator before the variable:

```
// again, suppose k=6 initially
++k; // increment k by 1; afterwards, k=7
n = --k; // first decrement k by 1, then assign k to n
// afterwards, k=6 and n=6
```

### ... Assignments

38/105

C assignment statements are really expressions

- they return a result: the value being assigned
- the return value is generally ignored

Frequently, assignment is used in loop continuation tests

- to combine the test with collecting the next value
- to make the expression of such loops more concise

Example: The pattern

```
v = getNextItem();
while (v != 0) {
    process(v);
    v = getNextItem();
}
```

is often written as

```
while ((v = getNextItem()) != 0) {
    process(v);
}
```

## Exercise #2: What are the final values of a and b?

39/105

1.

```
a = 1; b = 5;
while (a < b) {
    a++;
    b--;
}
```

2.

```
a = 1; b = 5;
while ((a += 2) < b) {
    b--;
}
```

1. a == 3, b == 3
2. a == 5, b == 4

## Conditionals

41/105

```
if (expression) {
    some statements;
}
```

```
if (expression) {
    some statements1;
} else {
    some statements2;
}
```

- *some statements* executed if, and only if, the evaluation of *expression* is non-zero
- *some statements*<sub>1</sub> executed when the evaluation of *expression* is non-zero
- *some statements*<sub>2</sub> executed when the evaluation of *expression* is zero
- Statements can be single instructions or blocks enclosed in { }

## ... Conditionals

42/105

*Indentation* is very important in promoting the readability of the code

Each logical block of code is indented:

<pre>// Style 1 if (x) {     <i>statements</i>; }</pre>	<pre>// Style 2 (my preference) if (x) {     <i>statements</i>; }</pre>	<pre>// Preferred else-if style if (expression1) {     <i>statements</i><sub>1</sub>; } else if (exp2) {     <i>statements</i><sub>2</sub>; } else if (exp3) {     <i>statements</i><sub>3</sub>; } else {     <i>statements</i><sub>4</sub>; }</pre>
---	---	---

## ... Conditionals

43/105

Relational and logical operators

<code>a &gt; b</code>	<code>a</code> greater than <code>b</code>
<code>a &gt;= b</code>	<code>a</code> greater than or equal <code>b</code>
<code>a &lt; b</code>	<code>a</code> less than <code>b</code>
<code>a &lt;= b</code>	<code>a</code> less than or equal <code>b</code>
<code>a == b</code>	<code>a</code> equal to <code>b</code>
<code>a != b</code>	<code>a</code> not equal to <code>b</code>
<code>a &amp;&amp; b</code>	<code>a</code> logical <b>and</b> <code>b</code>
<code>a    b</code>	<code>a</code> logical <b>or</b> <code>b</code>
<code>! a</code>	logical <b>not</b> <code>a</code>

A relational or logical expression evaluates to **1** if true, and to **0** if false

### Exercise #3: Conditionals

44/105

1. What is the output of the following program fragment?

```
if ((x > y) && !(y-x == 0)) {
    printf("Aye\n");
} else {
    printf("Nay\n");
}
```

2. What is the resulting value of `x` after the following assignment?

```
x = (x >= 0) + (x < 0);
```

1. The condition is unsatisfiable, hence the output will always be

`Nay`

2. No matter what the value of `x`, one of the conditions will be true (`=1`) and the other false (`=0`)  
Hence the resulting value will be `x == 1`

### Sidetrack: Printing Variable Values with `printf()`

46/105

Formatted output written to standard output (e.g. screen)

```
printf(format-string, expr1, expr2, ...);
```

`format-string` can use the following placeholders:

<code>%d</code>	decimal	<code>%f</code>	fixed-point
<code>%c</code>	character	<code>%s</code>	string
<code>\n</code>	new line	<code>\"</code>	quotation mark

Examples:

```
num = 3;
printf("The cube of %d is %d.\n", num, num*num*num);
```

The cube of 3 is 27.

```
id = 'z';
num = 1234567;
printf("Your \"login ID\" will be in the form of %c%d.\n", id, num);
```

Your "login ID" will be in the form of z1234567.

- Can also use width and precision:

```
printf("%8.3f\n", 3.14159);
```

3.142

## Loops

47/105

C has two different "while loop" constructs

```
// while loop
while (expression) {
    some statements;
}

// do .. while loop
do {
    some statements;
} while (expression);
```

The do .. while loop ensures the statements will be executed at least once

## ... Loops

48/105

The "for loop" in C

```
for (expr1; expr2; expr3) {
    some statements;
}
```

- **expr1** is evaluated before the loop starts
- **expr2** is evaluated at the beginning of each loop
  - if it is non-zero, the loop is repeated
- **expr3** is evaluated at the end of each loop

Example: 

```
for (i = 1; i < 10; i++) {
    printf("%d %d\n", i, i * i);
}
```

## Exercise #4: What is the output of this program?

49/105

```
int i, j;
for (i = 8; i > 1; i /= 2) {
    for (j = i; j >= 1; j--) {
        printf("%d%d\n", i, j);
    }
    putchar('\n');
}
```

88  
87  
..  
81

44  
..  
41

22  
21

## Functions

51/105

Functions have the form

```
return-type function-name(parameters) {
    declarations
    statements
    return ...;
}
```

- if *return\_type* is `void` then the function does not return a value
- if *parameters* is `void` then the function has no arguments

### ... Functions

52/105

When a function is called:

1. memory is allocated for its parameters and local variables
2. the parameter expressions in the calling function are evaluated
3. C uses "call-by-value" parameter passing...
  - the function works only on its own local copies of the parameters, not the ones in the calling function
4. local variables need to be assigned before they are used (otherwise they will have "garbage" values)
5. function code is executed, until the first `return` statement is reached

### ... Functions

53/105

When a `return` statement is executed, the function terminates.

```
return expression;
```

1. the returned *expression* will be evaluated
2. all local variables and parameters will be thrown away when the function terminates
3. the calling function is free to use the returned value, or to ignore it

Example:

```
// Euclid's gcd algorithm (recursive version)
int euclid_gcd(int m, int n) {
    if (n == 0) {
        return m;
    } else {
        return euclid_gcd(n, m % n);
    }
}
```

The return statement can also be used to terminate a function of return-type `void`:

```
return;
```

## Data Structures in C

### Basic Data Types

55/105

- In C each variable must have a type
- C has the following generic data types:

<code>char</code>	character	<code>'A', 'e', '#', ...</code>
<code>int</code>	integer	<code>2, 17, -5, ...</code>
<code>float</code>	floating-point number	<code>3.14159, ...</code>
<code>double</code>	double precision floating-point	<code>3.14159265358979, ...</code>

There are other types, which are variations on these

- Variable declaration must specify a data type and a name; they can be initialised when they are declared:

```
float x;
char ch = 'A';
int j = i;
```

## Aggregate Data Types

56/105

Families of aggregate data types:

- homogeneous ... all elements have same base type
  - arrays (e.g. `char s[50]`, `int v[100]`)
- heterogeneous ... elements may combine different base types
  - structures

Assignment Project Exam Help

## Arrays

<https://tutorcs.com>

57/105

An *array* is

- a collection of same-type variables
- arranged as a linear sequence
- accessed using an integer subscript
- for an array of size  $N$ , valid subscripts are  $0..N-1$

WeChat: cstutorcs

Examples:

```
int a[20];    // array of 20 integer values/variables
char b[10];   // array of 10 character values/variables
```

## ... Arrays

58/105

Larger example:

```
#define MAX 20

int i;          // integer value used as index
int fact[MAX];  // array of 20 integer values

fact[0] = 1;
for (i = 1; i < MAX; i++) {
    fact[i] = i * fact[i-1];
}
```

## Sidetrack: C Style

59/105

We can define a **symbolic constant** at the top of the file



```
#define SPEED_OF_LIGHT 299792458.0
#define ERROR_MESSAGE "Out of memory.\n"
```

Symbolic constants make the code easier to understand and maintain

```
#define NAME replacement_text
```

- The compiler's pre-processor will replace all occurrences of `NAME` with `replacement_text`
- it will **not** make the replacement if `NAME` is inside quotes ("...") or part of another name

## ... Sidetrack: C Style

60/105

UNSW Computing provides a style guide for C programs:

[C Coding Style Guide](http://wiki.cse.unsw.edu.au/info/CoreCourses/StyleGuide) (<http://wiki.cse.unsw.edu.au/info/CoreCourses/StyleGuide>)

Not strictly mandatory for COMP9024, but very useful guideline

- use proper layout, including indentation
- keep functions short and break into sub-functions as required
- use meaningful names (for variables, functions etc)

Style considerations that *do* matter for your COMP9024 assignments:

- use symbolic constants to avoid burying "magic numbers" in the code
- use indentation consistently (3 or 4 spaces, *do not* use TABs)
- comment your code

Assignment Project Exam Help

## ... Sidetrack: C Style

61/105

C has a reputation for allowing obscure code, leading to ...

The International Obfuscated C Code Contest

- Run each year since 1984
- Goal is to produce
  - a working C program
  - whose appearance is obscure
  - whose functionality unfathomable
- Web site: [www.ioccc.org](http://www.ioccc.org)
- 100's of examples of bizarre C code (understand these → you are a C master)

WeChat: cstutorcs

<https://tutorcs.com>

## ... Sidetrack: C Style

62/105

Most artistic code (Eric Marshall, 1986)

```
extern int
    errno
;char
    grrr
    r,
    P( );
;main(
    int argc
    char *argv[];{int
#define x int i, j,cc[4];printf("
choo choo\n"
x ;if (P( ! i ) | cc[ ! j ]
& P(j )>2 ? j : i ){* argv[i++ +!-i]
; for (i= 0;; i++ );
_exit(argv[argc- 2 / cc[1*argc] |-1<4 ] ) ;printf("%d",P(""));}}
P ( a ) char a ; { a ; while( a > " B "
/* - by E ricM arsh all- */); }
```

## ... Sidetrack: C Style

63/105

Just plain obscure (Ed Lycklama, 1985)

```
#define o define
#o __o write
#o ooo (unsigned)
#o o_o_ 1
#o _o_ char
#o _oo goto
#o _oo_ read
#o o_o for
#o o_ main
#o o__ if
#o oo_ 0
#o _o(, __, __) (void) __o(, __, ooo(__))
#o _o_ (o_o_<<((o_o_<<(o_o_<<o_o_))+o_o_<<o_o_))+o_o_<<(o_o_<<(o_o_<<o_o_)))
o_() {o_ _=oo_, __, __, __[_o_]; oo_ ____; ____: __=o_o_o_; ____:
_o(o_o_, __, __=(_o_o_<?_o_o_:__)); o_o(, __; _o(o_o_, "\b", o_o_), __--);
_o(o_o_, " ", o_o_); o_(--__)_oo ____; _o(o_o_, "\n", o_o_); ____: o_(_=oo_(
oo_, __, __o))_oo ____; }
```

## Strings

64/105

"String" is a special word for an array of characters

- end-of-string is denoted by `'\0'` (of type `char` and always implemented as 0)

Example:

If a character array `s[11]` contains the string "hello", this is how it would look in memory:

0	1	2	3	4	5	6	7	8	9	10
h	e	l	l	o	\0					

## Array Initialisation

65/105

Arrays can be initialised by code, or you can specify an initial set of values in declaration.

Examples:

```
char s[6] = {'h', 'e', 'l', 'l', 'o', '\0'};
```

```
char t[6] = "hello";
```

```
int fib[20] = {1, 1};
```

```
int vec[] = {5, 4, 3, 2, 1};
```

In the third case, `fib[0] == fib[1] == 1` while the initial values `fib[2] .. fib[19]` are undefined.

In the last case, C infers the array length (as if we declared `vec[5]`).

## Exercise #5: What is the output of this program?

66/105

```
1 #include <stdio.h>
2
3 int main(void) {
4     int arr[3] = {10, 10, 10};
5     char str[] = "Art";
```

```

6   int i;
7
8   for (i = 1; i < 3; i++) {
9       arr[i] = arr[i-1] + arr[i] + 1;
10      str[i] = str[i+1];
11  }
12  printf("Array[2] = %d\n", arr[2]);
13  printf("String = \"%s\"\n", str);
14  return 0;
15 }

```

```

Array[2] = 32
String = "At"

```

## Sidetrack: Reading Variable Values with `scanf()` and `atoi()`

68/105

Formatted input read from standard input (e.g. keyboard)

```
scanf(format-string, expr1, expr2, ...);
```

Converting string into integer

```
int value = atoi(string);
```

Example:

```
#include <stdio.h> // includes definition of BUFSIZ (usually =512) and scanf()
#include <stdlib.h> // includes definition of atoi()
```

```
...
```

```
char str[BUFSIZ];
int n;
```

```
printf("Enter a string: ");
scanf("%s", str);
n = atoi(str);
printf("You entered: \"%s\". This converts to integer %d.\n", str, n);
```

```
Enter a string: 9024
```

```
You entered: "9024". This converts to integer 9024.
```

## Arrays and Functions

69/105

When an array is passed as a parameter to a function

- the address of the start of the array is actually passed

Example:

```
int total, vec[20];
...
total = sum(vec);
```

Within the function ...

- the types of elements in the array are known
- the size of the array is unknown

## ... Arrays and Functions

70/105

Since functions do not know how large an array is:

- pass in the size of the array as an extra parameter, or
- include a "termination value" to mark the end of the array

So, the previous example would be more likely done as:

```
int total, vec[20];
...
total = sum(vec, 20);
```

Also, since the function doesn't know the array size, it can't check whether we've written an invalid subscript (e.g. in the above example 100 or 20).

## Exercise #6: Arrays and Functions

71/105

Implement a function that sums up all elements in an array.

Use the *prototype*

```
int sum(int[], int)
```

```
int sum(int vec[], int dim) {
    int i, total = 0;

    for (i = 0; i < dim; i++) {
        total += vec[i];
    }
    return total;
}
```

Assignment Project Exam Help

<https://tutorcs.com>

## Multi-dimensional Arrays

73/105

Examples:

WeChat: cstutorcs

```
float q[2][2];
```

$$\begin{bmatrix} 0.5 & 2.7 \\ 3.1 & 0.1 \end{bmatrix}$$

```
int r[3][4];
```

$$\begin{bmatrix} 5 & 10 & -2 & 4 \\ 0 & 2 & 4 & 8 \\ 21 & 2 & 1 & 42 \end{bmatrix}$$

**Note:** `q[0][1]==2.7` `r[1][3]==8` `q[1]=={3.1, 0.1}`

Multi-dimensional arrays can also be initialised:

```
float q[][] = {
    { 0.5, 2.7 },
    { 3.1, 0.1 }
};
```

## Sidetrack: Defining New Data Types

74/105

C allows us to define new data type (names) via `typedef`:

```
typedef ExistingDataType NewTypeName;
```

Examples:

```
typedef float Temperature;

typedef int Matrix[20][20];
```

---

## ... Sidetrack: Defining New Data Types

75/105

Reasons to use typedef:

- give meaningful names to value types (documentation)
  - is a given number Temperature, Dollars, Volts, ...?
- allow for easy changes to underlying type

```
typedef float Real;
Real complex_calculation(Real a, Real b) {
    Real c = log(a+b); ... return c;
}
```

- "package up" complex type definitions for easy re-use
    - many examples to follow; Matrix is a simple example
- 

## Structures

76/105

A *structure*

- is a collection of variables, perhaps of different types, grouped together under a single name
- helps to organise complicated data into manageable entities
- exposes the connection between data within an entity
- is defined using the `struct` keyword

Example:

```
typedef struct {
    int day;
    int month;
    int year;
} DateT;
```

<https://tutorcs.com>

WeChat: cstutorcs

---

## ... Structures

77/105

One structure can be *nested* inside another:

```
typedef struct {
    int day, month, year;
} DateT;

typedef struct {
    int hour, minute;
} TimeT;

typedef struct {
    char plate[7]; // e.g. "DSA42X"
    double speed;
    DateT d;
    TimeT t;
} TicketT;
```

---

## ... Structures

78/105

Possible memory layout produced for TicketT object:

D   S   A   4   2   X   \0	7 bytes + 1 padding
68.4	8 bytes
27   7   2019	12 bytes
20   45	8 bytes

Note: padding is needed to ensure that `plate` lies on a 4-byte boundary.

Don't normally care about internal layout, since fields are accessed by name.

## ... Structures

79/105

Defining a structured data type itself does not allocate any memory

We need to declare a variable in order to allocate memory

```
DateT christmas;
```

The components of the structure can be accessed using the "dot" operator

```
christmas.day = 25;
christmas.month = 12;
christmas.year = 2019;
```

# Assignment Project Exam Help

## ... Structures

80/105

<https://tutorcs.com>

With the above `TicketT` type, we declare and use variables as ...

```
#define NUM_TICKETS 1500
```

WeChat: cstutorcs

```
typedef struct {...} TicketT;
```

```
TicketT tickets[NUM_TICKETS]; // array of structs
```

```
// Print all speeding tickets in a readable format
for (i = 0; i < NUM_TICKETS; i++) {
    printf("%s %6.3f %d-%d-%d at %d:%d\n", tickets[i].plate,
        tickets[i].speed,
        tickets[i].d.day,
        tickets[i].d.month,
        tickets[i].d.year,
        tickets[i].t.hour,
        tickets[i].t.minute);
}
```

## ... Structures

81/105

A structure can be passed as a parameter to a function:

```
void print_date(DateT d) {
    printf("%d-%d-%d\n", d.day, d.month, d.year);
}

int is_leap_year(DateT d) {
    return ( ((d.year%4 == 0) && (d.year%100 != 0))
```

```

    || (d.year%400 == 0) );
}

```

## Data Abstraction

### Abstract Data Types


83/105

A *data type* is ...

- a set of *values* (atomic or structured values) e.g. *integer stacks*
- a collection of *operations* on those values e.g. *push, pop, isEmpty?*

An *abstract data type* ...

- is a logical description of how we view the data and operations
- without regard to how they will be implemented
- creates an *encapsulation* around the data
- is a form of *information hiding*



Assignment Project Exam Help

<https://tutorcs.com>

### ... Abstract Data Types

WeChat: cstutorcs

84/105

Users of the ADT see only the *interface*

Builders of the ADT provide an *implementation*

ADT *interface* provides

- a user-view of the data structure
- function signatures (prototypes) for all operations
- semantics of operations (via documentation)
- $\Rightarrow$  a "contract" between ADT and its clients

ADT *implementation* gives

- concrete definition of the data structures
- function implementations for all operations

### ... Abstract Data Types

85/105

ADT interfaces are *opaque*

- clients *cannot* see the implementation via the interface

ADTs are important because ...

- facilitate decomposition of complex programs
- make implementation changes invisible to clients



- improve readability and structuring of software
- allow for reuse of modules in other systems

## ... Abstract Data Types

86/105

For a given data type

- many different data representations are possible

For a given operation and data representation

- several different algorithms are possible
- efficiency of algorithms may vary widely

Generally,

- there is no overall "best" representation/implementation
- cost depends on the mix of operations  
(e.g. proportion of inserts, searches, deletions, ...)

## ADOs and ADTs

87/105

We want to distinguish ...

- ADO = ~~abstract data object~~
- ADT = ~~abstract data type~~

Warning: Sedgewick's first few examples are ADOs, not ADTs.

## Example: Abstract Stack Data Object

88/105

Stack, aka *pushdown stack* or *LIFO data structure*

Assume (for the time being) stacks of `char` values

Operations:

- *create* an empty stack
- insert (*push*) an item onto stack
- remove (*pop*) most recently pushed item
- check whether stack *is empty*

Applications:

- undo sequence in a text editor
- bracket matching algorithm
- ...

## ... Example: Abstract Stack Data Object

89/105

Example of use:

Stack	Operation	Return value
?	create	-
-	isempty	true

-	push a	-
a	push b	-
a b	push c	-
a b c	pop	c
a b	isempty	false

## Exercise #7: Stack vs Queue

90/105

Consider the previous example but with a queue instead of a stack.

Which element would have been taken out ("dequeued") first?

a

## Stack as ADO

92/105

Interface (a file named `Stack.h`)

```
// Stack ADO header file
```

```
#define MAXITEMS 10
```

```
void StackInit();           // set up empty stack
int  StackIsEmpty();        // check whether stack is empty
void StackPush(char);       // insert char on top of stack
char StackPop();            // remove char from top of stack
```


Note:

- no explicit reference to Stack object
- this makes it an *Abstract Data Object (ADO)*

## ... Stack as ADO

93/105

Implementation may use the following data structure:

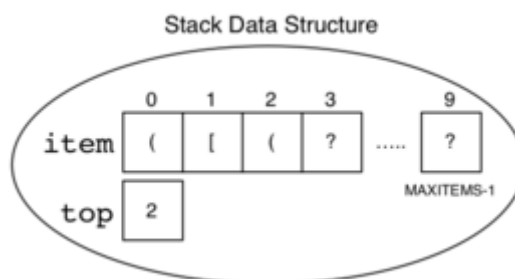

## ... Stack as ADO

94/105

Implementation (in a file named `Stack.c`):

```
#include "Stack.h"
#include <assert.h>
```

```

// define the Data Structure
typedef struct {
    char item[MAXITEMS];
    int top;
} stackRep;

// define the Data Object
static stackRep stackObject;

// set up empty stack
void StackInit() {
    stackObject.top = -1;
}

// check whether stack is empty
int StackIsEmpty() {
    return (stackObject.top < 0);
}

// insert char on top of stack
void StackPush(char ch) {
    assert(stackObject.top < MAXITEMS-1);
    stackObject.top++;
    int i = stackObject.top;
    stackObject.item[i] = ch;
}

// remove char from top of stack
char StackPop() {
    assert(stackObject.top > -1);
    int i = stackObject.top;
    char ch = stackObject.item[i];
    stackObject.top--;
    return ch;
}

```

- `assert(test)` terminates program with error message if *test* fails
- `static Type Var` declares *Var* as *local* to *Stack.c*

## Exercise #8: Bracket Matching

95/105

Bracket matching ... check whether all opening brackets such as '(', '[', '{' have matching closing brackets ')', ']', '}'

Which of the following expressions are balanced?

1.  $(a+b) * c$
2.  $a[i]+b[j]*c[k])$
3.  $(a[i]+b[j])*c[k]$
4.  $a(a+b)*c$
5. `void f(char a[], int n) {int i; for(i=0;i<n;i++) { a[i] = (a[i]*a[i])*(i+1); }}`
6.  $a(a+b * c$

<https://tutorcs.com>

WeChat: cstutorcs

1. **balanced**
2. **not balanced** (case 1: an opening bracket is missing)
3. **balanced**
4. **not balanced** (case 2: closing bracket doesn't match opening bracket)
5. **balanced**
6. **not balanced** (case 3: missing closing bracket)

## ... Stack as ADO

97/105

Bracket matching algorithm, to be implemented as a *client* for **Stack ADO**:

```

bracketMatching(s):
|   Input  stream s of characters
|   Output true if parentheses in s balanced, false otherwise
|
|   for each ch in s do
|       if ch = open bracket then
|           push ch onto stack
|       else if ch = closing bracket then
|           if stack is empty then
|               return false                // opening bracket missing (case 1)
|           else
|               pop top of stack
|               if brackets do not match then
|                   return false            // wrong closing bracket (case 2)
|               end if

```

```
| | | end if
| | end if
end for
if stack is not empty then return false // some brackets unmatched (case 3)
else return true
```

... Stack as ADO

98/105

Execution trace of client on sample input:

( [ { } ] )

Next char	Stack	Check
-	empty	-
(	(	-
[	( [	-
{	( [ {	-
}	( [	{ vs } ✓
]	(	[ vs ] ✓
)	empty	( vs ) ✓
eof	empty	-

Assignment Project Exam Help

<https://tutores.com>

Exercise #9: Bracket Matching Algorithm

99/105

Trace the algorithm on the input

WeChat: cstutorcs

```
void f(char a[], int n) {
    int i;
    for(i=0;i<n;i++) { a[i] = a[i]*a[i]*(i+1); }
}
```

Next bracket	Stack	Check
start	empty	-
(	(	-
[	( [	-
]	(	✓
)	empty	✓
{	{	-
(	{ (	-
)	{	✓
{	{{	-
[	{{ [	-

]	{ {	✓
[	{ { [	-
]	{ {	✓
[	{ { [	-
]	{ {	✓
)	{	false

## Exercise #10: Implement Bracket Matching Algorithm in C

101/105

- Use Stack ADT

```
#include "Stack.h"
```

- *Sidetrack: Character I/O Functions in C* (requires `<stdio.h>`)

```
int getchar(void);
```

- returns character read from standard input as an `int`, or returns `EOF` on end of file (keyboard: CTRL-D on Unix, CTRL-Z on Windows)

```
int putchar(int ch);
```

- writes the character `ch` to standard output
- returns the character written, or `EOF` on error

Assignment Project Exam Help

<https://tutores.com>

## Managing Abstract Data Types and Objects in C

WeChat: cstutores

## Compilers


103/105

*Compilers* are programs that

- convert program source code to executable form
- "executable" might be machine code or bytecode

The Gnu C compiler (`gcc`)

- applies source-to-source transformation (pre-processor)
- compiles *source code* to produce *object files*
- links object files and *libraries* to produce *executables*

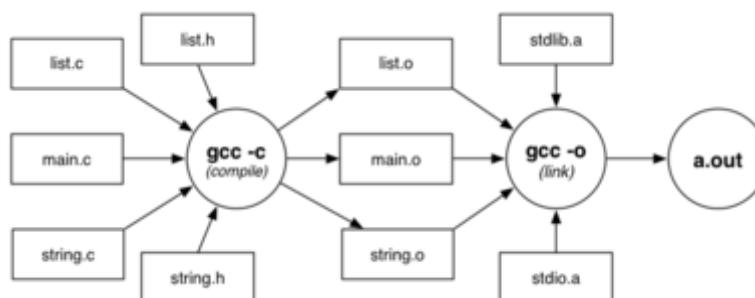

## ... Compilers

104/105

## Compilation/linking with `gcc`

`gcc -c Stack.c`  
produces `Stack.o`, from `Stack.c` and `Stack.h`

`gcc -c brackets.c`  
produces `brackets.o`, from `brackets.c` and `Stack.h`

`gcc -o rbt brackets.o Stack.o`  
links `brackets.o`, `Stack.o` and libraries  
producing executable program called `rbt`

Note that `stdio`, `assert` included implicitly.

`gcc` is a multi-purpose tool

- compiles (`-c`), links, makes executables (`-o`)

---

## Summary

105/105

- Introduction to Algorithms and Data Structures
- C programming language, compiling with `gcc`
  - Basic data types (`char`, `int`, `float`)
  - Basic programming constructs (`if ... else` conditionals, `while` loops, `for` loops)
  - Basic data structures (atomic data types, arrays, structures)
- Introduction to ADTs
  - Compilation

Assignment Project Exam Help

- Suggested reading (Moffat)
  - introduction to C ... Ch. 1; Ch. 2.1-2.3, 2.5-2.6;
  - conditionals and loops ... Ch. 3.1-3.3; Ch. 4.1-4.4
  - arrays ... Ch. 7.1, 7.5-7.6
  - structures ... Ch. 8.1
- Suggested reading (Sedgewick).
  - introduction to ADTs ... Ch. 4.1-4.3

<https://tutorcs.com>

WeChat: cstutorcs

---

Produced: 6 Jan 2020