

# COMP 251

程序代写代做 CS编程辅导



Algorithms Structures (Winter 2022)

Algorithm Paradigms – Greedy

WeChat: cstutorcs

---

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

# Announcements

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

# Outline

程序代写代做 CS编程辅导

- Complete Search
- Divide and Conquer
- Dynamic Programming
- Greedy.
  - Introduction.
  - Examples.



WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

# Greedy - Example

程序代写代做 CS编程辅导


Given  $1 \leq C \leq 5$  chambers which can store 0, 1, or 2 specimens,  $1 \leq S \leq 2C$  specimens, list of mass of the  $S$  specimens, determine in which chamber should store each specimen in order to minimize **IMBALANCE** 
$$\sum_{i=1}^C |X_i - A|$$
 i.e. sum of differences between the mass in each chamber w.r.t  $A$ . where  $X_i$  is the total mass of specimens in chamber  $A = (\sum_{j=1}^S M_j) / C$ ,  $A$  is the average of all mass over  $C$  chambers

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

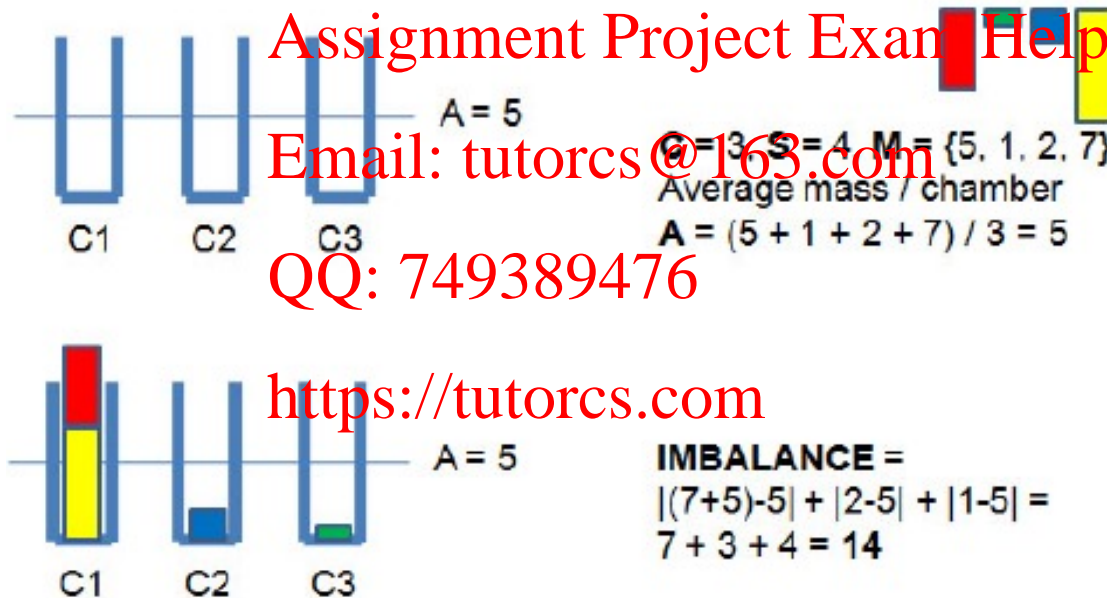

# Greedy - Example

程序代写代做 CS编程辅导

- Observations.

- If there exists an empty chamber, at least one chamber with 2 specimens must be moved to this chamber! Otherwise the empty chambers contribute too much to the IMBALANCE!



WeChat: cstutorcs


Imbalance  
too high in C3!

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

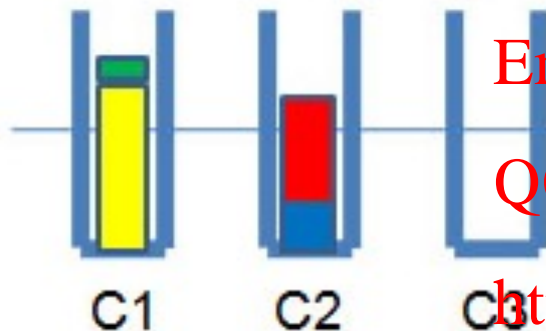

A = 5

**IMBALANCE =**

$$|(7+1)-5| + |(2+5)-5| + |0-5| = 3 + 2 + 5 = 10$$

# Greedy - Example

程序代写代做 CS编程辅导

- Observations. If  $S > C$ , then  $S - C$  specimens must be paired with one other specimen already in some chambers.



WeChat: cstutorcs


If we already assign 3 specimens to 3 chambers,

the 4th specimen and beyond must be paired...

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

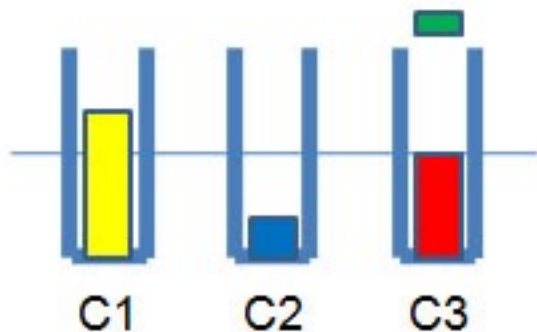

IMBALANCE =

$$|7-5| + |2-5| + |(5+1)-5| = 2 + 3 + 1 = 6$$

# Greedy - Example

程序代写代做 CS编程辅导

- Observations. If  $S < 2C$ , add dummy  $2C - S$  specimens with mass 0.
  - For example,  $C = 3, S = \{5, 1, 2, 7\} \rightarrow C = 3, S = 6, M = \{5, 1, 2, 7, 0, 0\}$ .
- Then, sort these specimens based on their mass such that  $M_1 \leq M_2 \leq \dots \leq M_{2C-1} \leq M_{2C}$ .
  - For example,  $M = \{5, 1, 2, 7, 0, 0\} \rightarrow \{0, 0, 1, 2, 5, 7\}$ .

WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)



QQ: 749389476

<https://tutorcs.com>

# Greedy - Example

程序代写代做 CS编程辅导

- By adding dummy specimens and then sorting them, a greedy strategy 'appears'. View how:
  - Pair the specimens with  $M_{2C}$  and put them in chamber 1, then
  - Pair the specimens with  $M_{2C-1}$  and put them in chamber 2, and so on

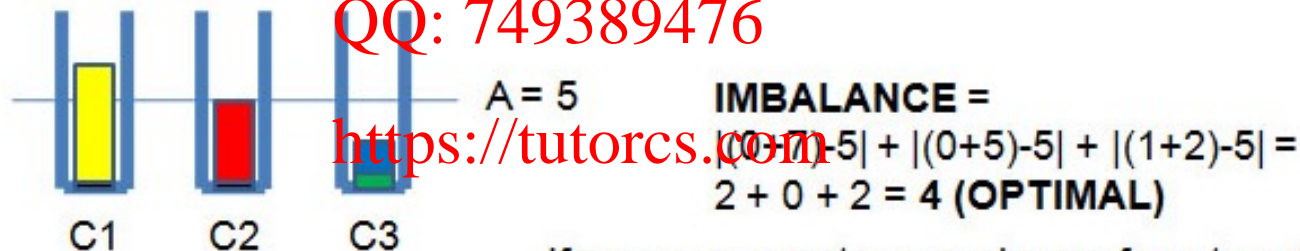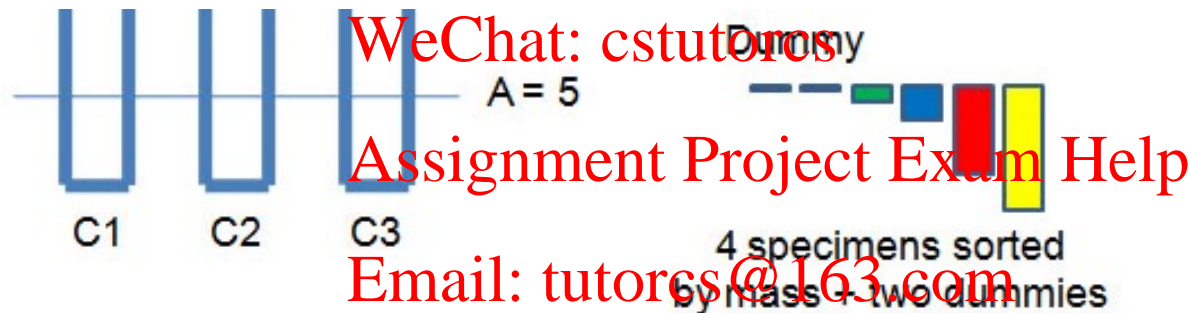


If you swap any two specimens from two different chambers, you will always have worse/equal solution



# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

- We've seen how greedy algorithms can be used to commit to certain parts of a solution based entirely on relatively short-sighted considerations. We will study now a problem on which a greedy rule is used, initially, to shrink the size of the problem instance, so that an equivalent smaller problem can then be solved by recursion.  
  
WeChat: cstutorcs
- Given a string X, efficiently encode X into a smaller string Y (Saves memory and/or bandwidth).  
Assignment Project Exam Help  
Email: [tutorcs@163.com](mailto:tutorcs@163.com)  
• Since computers ultimately operate on sequences of bits, one needs encoding schemes that take text written in richer alphabets (such as the alphabets underpinning human languages) and converts this text into long strings of bits.  
QQ: 749389476  
<https://tutorcs.com>

# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

- Given a string X, efficiently encode X into a smaller string Y.
- A data file of 100,000 characters contains only the characters a–f, with the frequencies indicated.



	a	b	c	d	e	f	
Frequency (in thousands)	45	13	12	16	9	5	
Fixed-length codeword	000	001	010	011	100	101	→ 300000 bits

WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

- The simplest way to do this would be to use a fixed number of bits for each symbol in the alphabet, and then just concatenate the bit strings for each symbol to form the text.
  - The letters in most human alphabets do not get used equally frequently.
  - English: the letters e, t, a, o, l, and n get used much more frequently than q, j, x, and z (by more than an order of magnitude)

# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

- Given a string X, efficiently encode X into a smaller string Y.
- A data file of 100,000 characters contains only the characters a–f, with the frequencies indicated.



	a	b	c	d	e	f	
Frequency (in thousands)	45	13	12	16	9	5	
Fixed-length codeword	000	001	010	011	100	101	→ 300000 bits
Variable-length codeword	0	101	100	111	1101	1100	→ 224000 bits

$(45 \cdot 1 + 13 \cdot 3 + 12 \cdot 3 + 16 \cdot 3 + 9 \cdot 4 + 5 \cdot 4) \cdot 1,000$

WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

- Given a string X, efficiently encode X into a smaller string Y.
- A data file of 100,000 characters contains only the characters a–f, with the frequencies indicated.



	a	b	c	d	e	f	
Frequency (in thousands)	45	13	12	16	9	5	
Fixed-length codeword	000	001	010	011	100	101	→ 300000 bits
Variable-length codeword	0	101	100	111	1101	1100	→ 224000 bits

$(45 \cdot 1 + 13 \cdot 3 + 12 \cdot 3 + 16 \cdot 3 + 9 \cdot 4 + 5 \cdot 4) \cdot 1,000$

WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

- To give frequent characters short codewords and infrequent characters long codewords.
- To consider here only codes in which no codeword is also a prefix of some other codeword.

QQ: 749389476

<https://tutorcs.com>

# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

- A good approach: **Huffman encoding**
  - Compute frequency for each character  $c$ .
  - Encode high-frequency characters with short code words
  - No code word is a prefix for another code
  - Use an optimal encoding tree to determine the code word.
    - Any prefix-free binary code can be visualized as a binary tree with the encoded characters stored at the leaves.

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>



WeChat: cs\_tutorcs

Assignment Project Exam Help

# Greedy – Huffman encoding

程序代写代做 CS编程辅导

- A **code** is a mapping of each character of an alphabet to a binary code-word
- A **prefix code** is a binary code such that no code-word is the prefix of another code-word
- An **encoding tree** represents a prefix code
  - Each external node (leaf) stores a character
  - The code word of a character is given by the path from the root to the external node storing the character (0 for a left child and 1 for a right child)

WeChat: cstutorcs


Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>



00	010	011	10	11
a	b	c	d	e

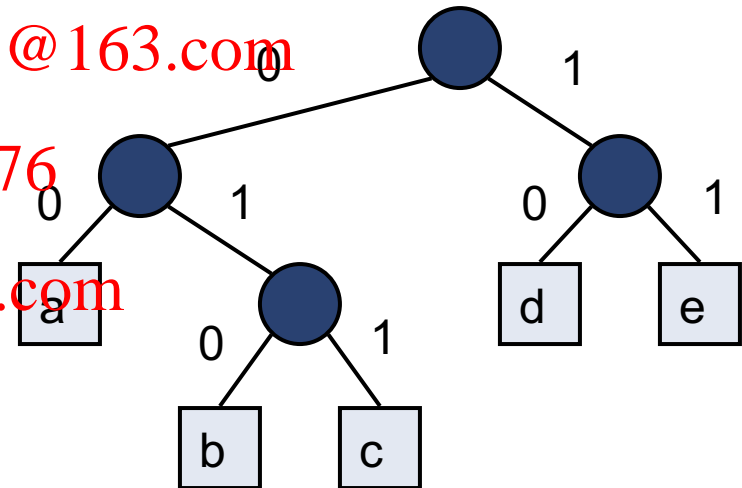

# Greedy – Huffman encoding

程序代写代做 CS编程辅导

00	010	011	10
a	b	c	d

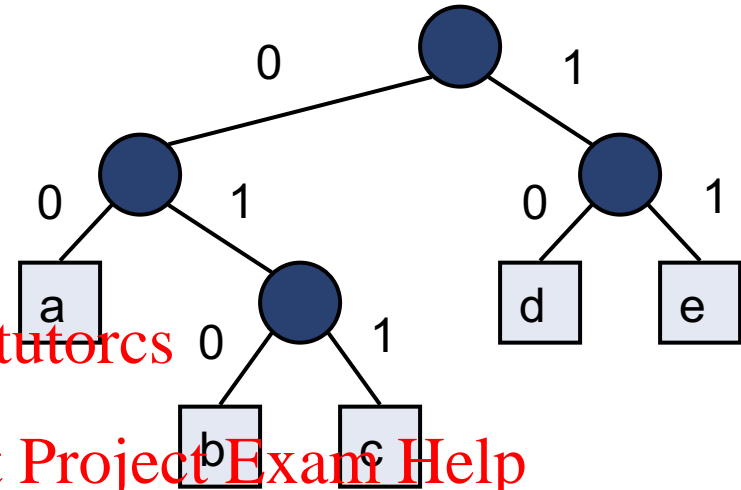

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

Initial string:  $X = \text{a} \text{b} \text{c} \text{d} \text{a}$

Encoded string:  $Y = 00 \ 011 \ 10 \ 00$

# Greedy – Huffman encoding

程序代写代做 CS编程辅导

- An **encoding tree** represents a prefix code

- The **tree** is a full binary tree
  - Every nonleaf node has two children
- Each external node (leaf) stores a character.
  - The number of leaves is  $|\text{alphabet}|$  (one for each letter of the alphabet)
  - The number of internal nodes is  $|\text{alphabet}| - 1$
- The code word of a character is given by the path from the root to the external node storing the character (0 for a left child and 1 for a right child)
  - We can compute the number of bits required.



WeChat: cstutorcs

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

$$\sum_{i=1}^n f[i] \cdot \text{depth}(i)$$

00	010	011	10	11
a	b	c	d	e

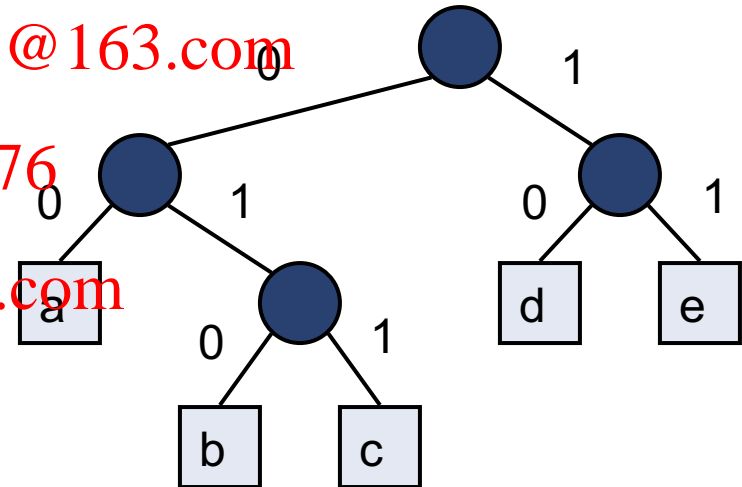



# Greedy – Huffman encoding

程序代写代做 CS编程辅导



- This is exactly the same cost function we considered for optimizing binary search trees, but the optimization problem is different, because code trees are not required to keep the keys in any particular order.
- The search for an optimal prefix code can be viewed as the search for a binary tree  $T$ , together with a labeling of the leaves of  $T$ , that minimizes the number of bits used (length of the path).

WeChat: cstutorcs

Assignment Project Exam Help

Email: prefixcode163.com

QQ: 749389476

<https://tutorcs.com>

# Greedy – Huffman encoding

程序代写代做 CS编程辅导



- The search for an optimal prefix code can be viewed as the search for a binary tree  $T$ , together with a labeling of the leaves of  $T$ , that minimizes the number of bits used (length of the path).




WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

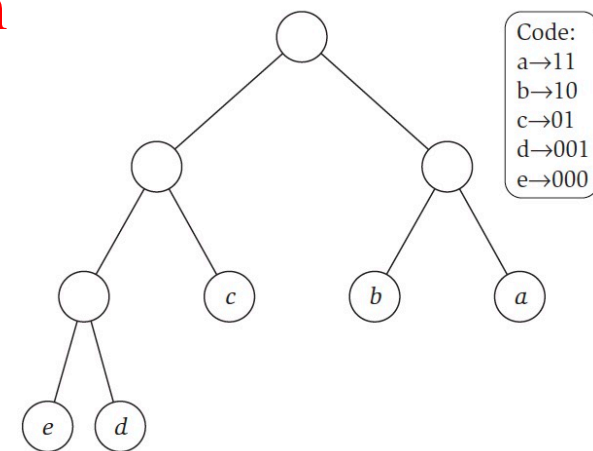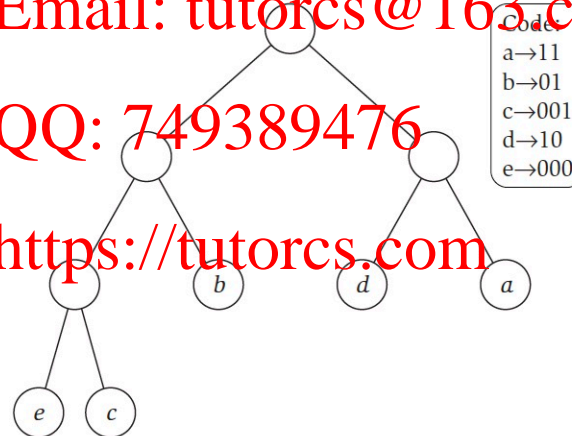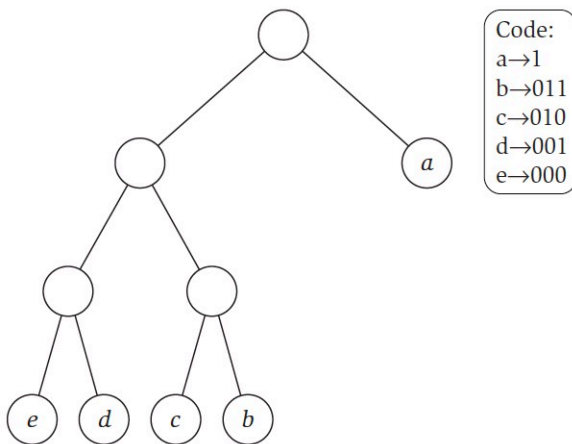

# Greedy – Huffman encoding

程序代写代做 CS编程辅导



- Example

- $X = \text{abracadabra}$
- $T_1$  encodes  $X$  into 29 bits,  $T_2$  encodes  $X$  into 24 bits


WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

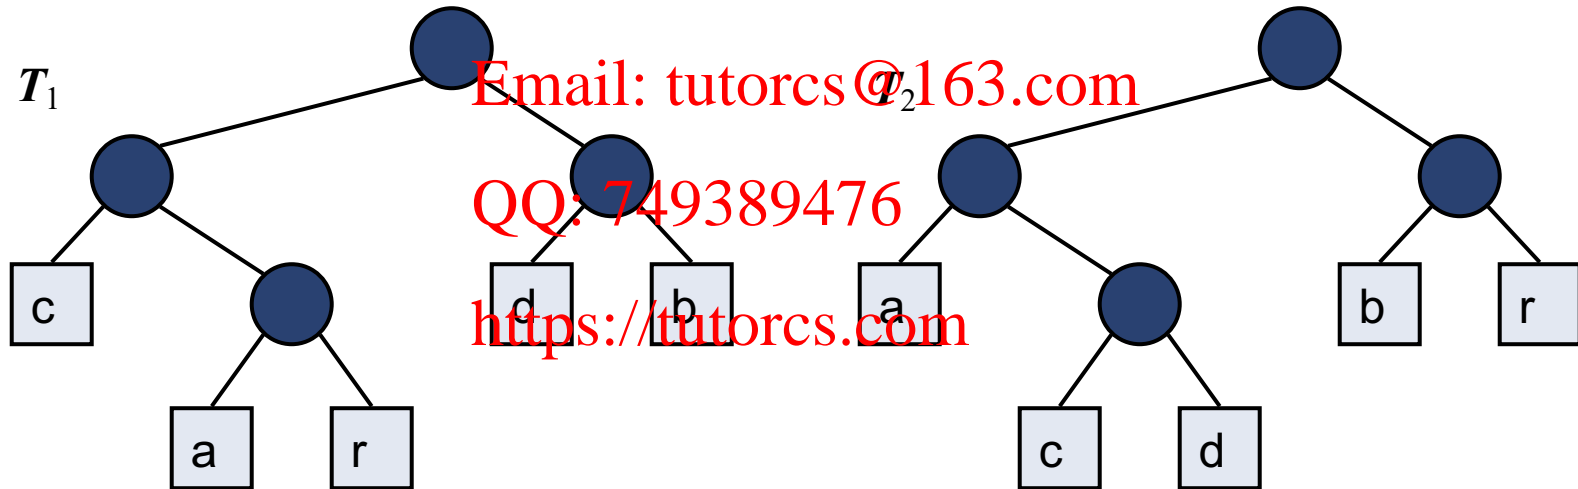

# Greedy – Huffman encoding

程序代写代做 CS编程辅导



- The search for an optimal prefix code can be viewed as the search for a binary tree  $T$ , together with a labeling of the leaves of  $T$ , that minimizes the number of bits used (length of the path).
- In 1951, as a PhD student at MIT, David Huffman developed the following greedy algorithm to produce such an optimal code

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

HUFFMAN: Merge the two least frequent letters and recurse.


QQ: 749389476

<https://tutorcs.com>

# Huffman's Algorithm

程序代写代做 CS编程辅导

- There is an optimal prefix code, with corresponding tree  $T^*$ , in which the two lowest frequency letters are assigned to leaves that are siblings in  $T^*$  and have the largest depth of any leaf.

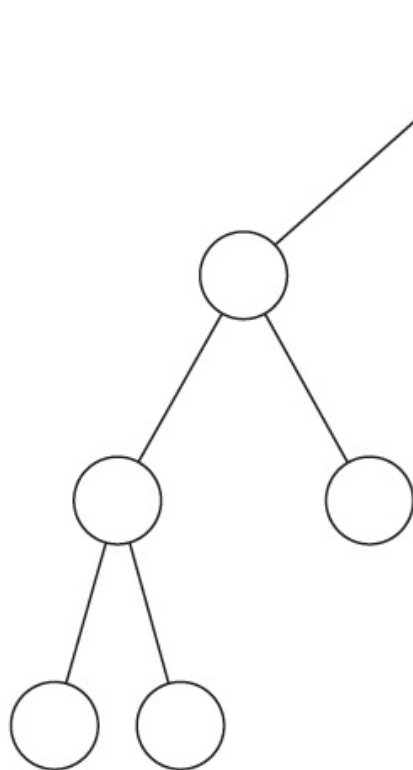

WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

By deleting the lowest-frequency letters yields an instant with a smaller alphabet

New merged letter with sum of frequencies

Two lowest-frequency letters

# Merge the two least frequent letters and recurse

程序代写代做 CS编程辅导

$X = \text{abracadabra}$

Frequencies

a	b	c	d	r
5	2	1	1	2








WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

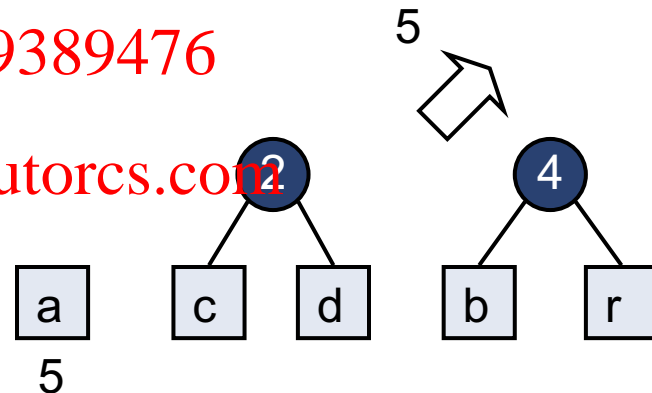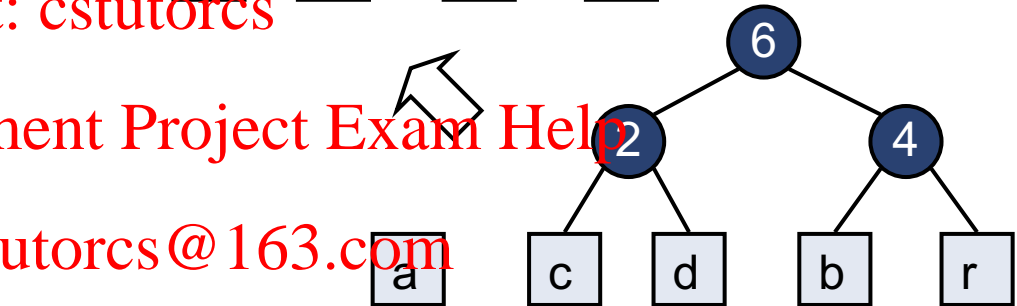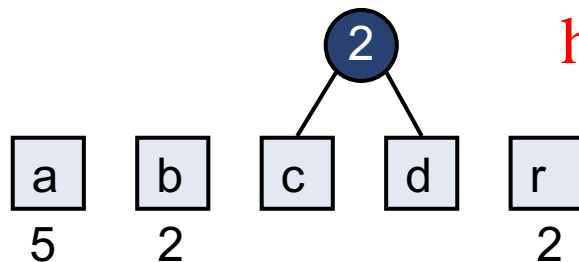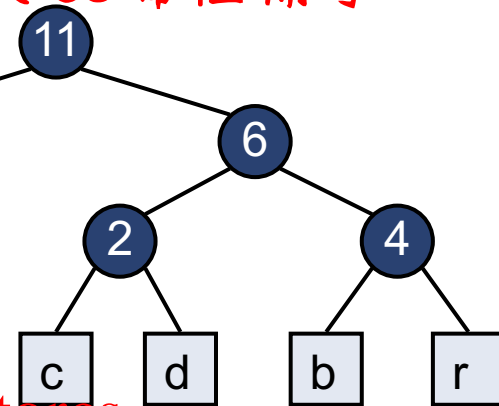

# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

- Suppose we want to encode the following helpfully self-descriptive sentence.



This sentence contains three a's, two d's, twenty-six e's, five f's, three g's, eight h's, thirteen i's, two n's, nine o's, six r's, twenty-seven s's, twenty-two t's, two u's, five v's, four x's, five y's, and only one z.

discovered by Lee Sallows

WeChat: cstutorcs

- let's ignore the forty-four spaces, nineteen apostrophes, nineteen commas, three hyphens, and only one period.

Assignment Project Exam Help

THISSENTENCECONTAINSTHREEASTHREECSTWODSTWENTYSIXESFIVEFST  
HREEGSEIGHTHSTHIRTETHIRTEENTWOLSEXTENSENINEOSIXRSTWENTYSEV  
ENSSTWENTYTWOTSTWOUSFIVEVSEIGHTWSFOURXSFFIVEYSANDONLYONEZ

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

- An the frequency table.

<https://tutores.com>

A	C	D	E	F	G	H	I	L	N	O	R	S	T	U	V	W	X	Y	Z
3	3	2	26	5	3	8	13	2	16	9	6	27	22	2	5	8	4	5	1

# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

A	C	D	E	F	G	H	I	L	N	O	R	S	T	U	V	W	X	Y	Z
3	3	2	26	5	3				16	9	6	27	22	2	5	8	4	5	1



- Huffman's algorithm picks two least frequent letters, breaking ties arbitrarily—in this case, C, Y, Z and D—and merges them together into a single new character DZ with frequency 3. This new character becomes an internal node in the code tree we are constructing, with Z and D as its children; it doesn't matter which child is which. The algorithm then recursively constructs a Huffman code for the new frequency table

WeChat: cstutorcs


Assignment Project Exam Help

Email: tutorcs@163.com

A	C	E	F	G	H	I	L	N	O	R	S	T	U	V	W	X	Y	DZ
3	3	26	5	3	8	13	2	16	9	6	27	22	2	5	8	4	5	3

QQ: 749389476

<https://tutorcs.com>






# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

A	C	E	F	G	H	T	I	N	O	R	S	T	U	V	W	X	Y	Z
3	3	26	5	3	8	6	9	6	27	22	2	5	8	4	5	3		

- After 19 merges, all letters have been merged together.

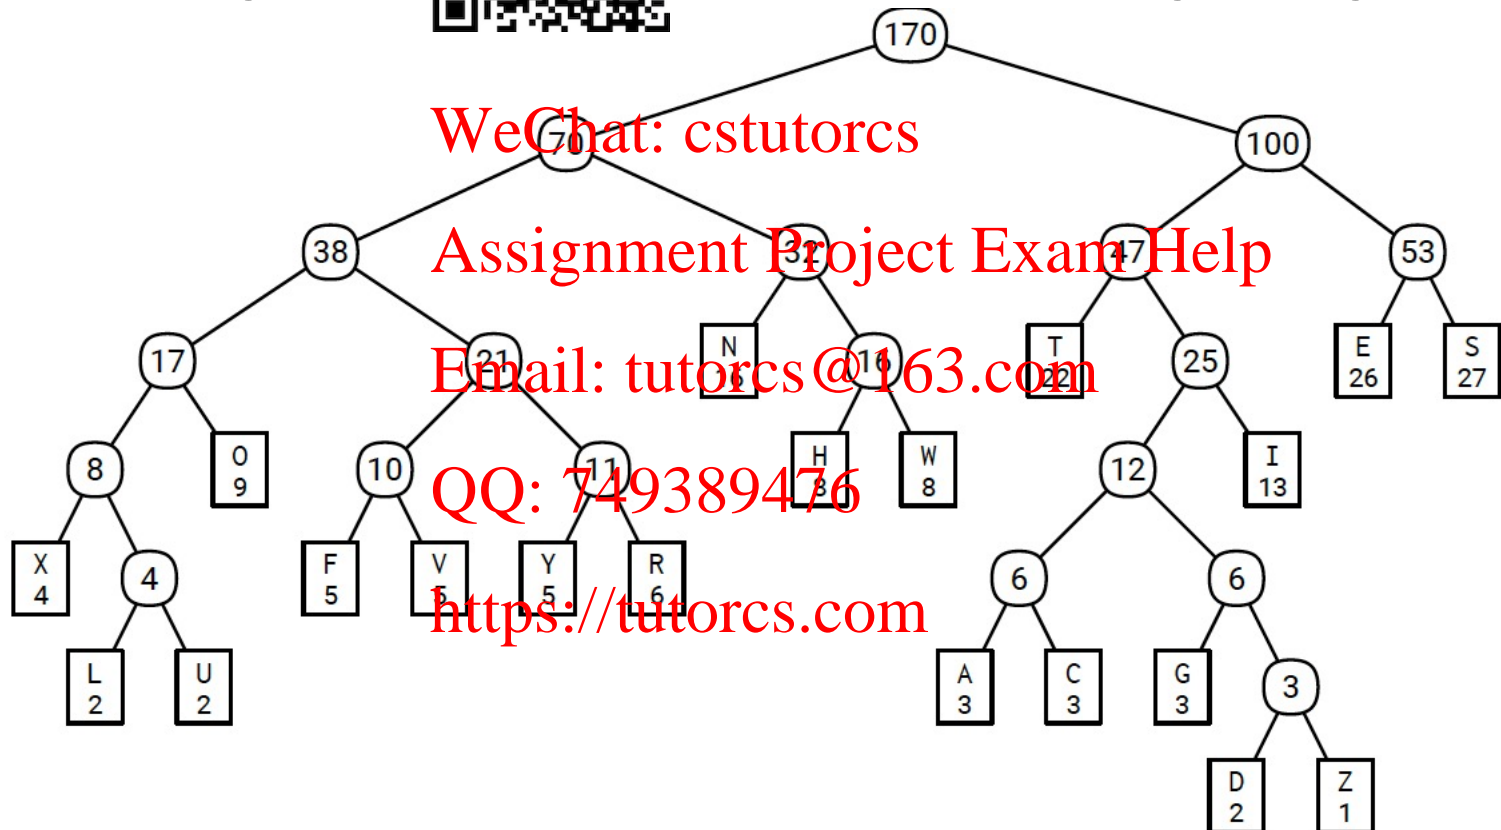

WeChat: cstutorcs

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

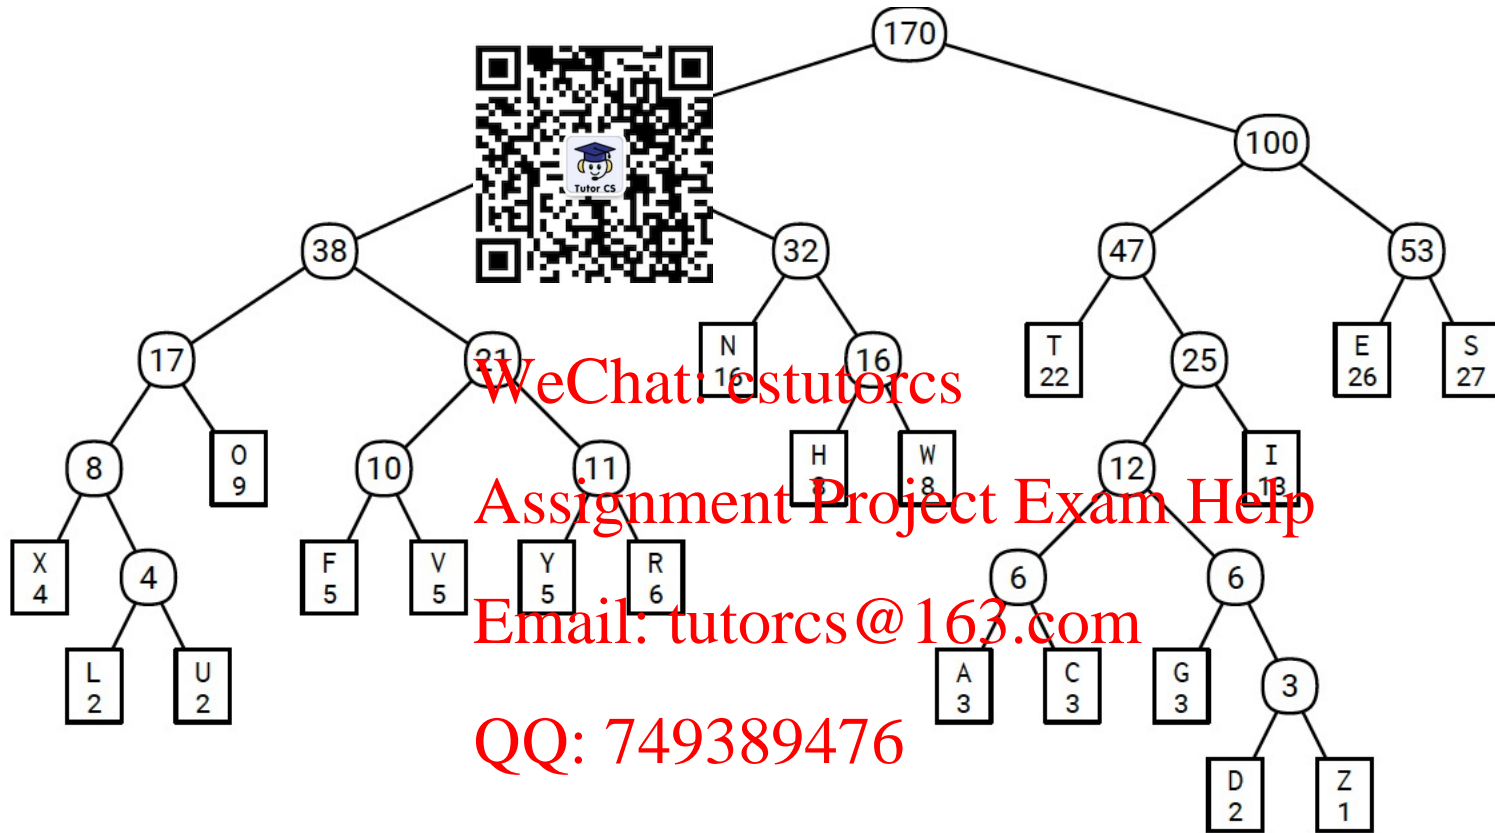

WeChat: estutorcs

Assignment Project Exam Help

Email: tutorcs@163.com


QQ: 749389476

<https://tutorcs.com>

100 0110 1011 111 111 110 010 100 110 010 101001 110 101001 0001 010 100 ...  
T H I S S E N T E N C E C O N T

# Greedy – Example – Data Compression

程序代写代做 CS编程辅导

char	A	C	D	E	F		L	N	O	R	S	T	U	V	W	X	Y	Z
freq	3	3	2	26	5		2	16	9	6	27	22	2	5	8	4	5	1
depth	6	6	7	3	5		6	3	4	5	3	3	6	5	4	5	5	7
total	18	18	14	78	25		12	48	36	30	81	66	12	25	32	20	25	7

WeChat: cstutorcs

- Altogether, the encoded message is 649 bits long.

- Different Huffman codes encode the same characters differently, possibly with code words of different length, but the overall length of the encoded message is the same for every Huffman code: 649 bits.

QQ: 749389476

<https://tutorcs.com>

# Huffman's Algorithm

程序代写代做 CS编程辅导

BUILDHUFFMAN( $f[1..n]$ )

for  $i \leftarrow 1$  to  $n$

$L[i] \leftarrow 0$ ;  $R[i] \leftarrow$

INSERT( $i, f[i]$ )

for  $i \leftarrow n$  to  $2n - 1$

$x \leftarrow \text{EXTRACTMIN}()$  *⟨⟨find two rarest symbols⟩⟩*

$y \leftarrow \text{EXTRACTMIN}()$

$f[i] \leftarrow f[x] + f[y]$  *⟨⟨merge points & prev symbol⟩⟩*

INSERT( $i, f[i]$ )

$L[i] \leftarrow x$ ;  $P[x] \leftarrow i$  *⟨⟨update tree pointers⟩⟩*

$R[i] \leftarrow y$ ;  $P[y] \leftarrow i$

$P[2n - 1] \leftarrow 0$



*⟨inserting leaves⟩⟩*

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

*⟨update tree pointers⟩⟩*

<https://tutorcs.com>

$2n - 1$  INSERT

$2n - 2$  EXTRACTMIN

If using a binary heap, each of these  $O(n)$  operations requires  $O(\log n)$

# Huffman's Algorithm

程序代写代做 CS编程辅导

- Given a string  $X$ , Huffman's algorithm constructs a prefix code that minimizes the size of the encoding of  $X$ .
- It runs in time  $O(d + n \log n)$ , where  $d$  is the size of  $X$  and  $n$  is the number of distinct characters of  $X$ .
- A heap-based priority queue is used as an auxiliary structure.



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

BUILDHUFFMAN( $f[1..n]$ ):

for  $i \leftarrow 1$  to  $n$

$L[i] \leftarrow 0$ ;  $R[i] \leftarrow 0$

INSERT( $i, f[i]$ )

for  $i \leftarrow n$  to  $2n - 1$

$x \leftarrow \text{EXTRACTMIN}()$

$y \leftarrow \text{EXTRACTMIN}()$

$f[i] \leftarrow f[x] + f[y]$

INSERT( $i, f[i]$ )

$L[i] \leftarrow x$ ;  $P[x] \leftarrow i$

$R[i] \leftarrow y$ ;  $P[y] \leftarrow i$

$P[2n - 1] \leftarrow 0$

# Outline

程序代写代做 CS编程辅导

- Complete Search
- Divide and Conquer
- Dynamic Programming
  - Introduction.
  - Examples.
- Greedy.
  - Introduction.
  - Examples.



WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>



## 程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

QQ: 749389476

<https://tutorcs.com>

