

[Main](#)[Course Info](#)[Staff](#)[Resources](#)[Beacon](#)[Ed](#)[OH Queue](#)

程序代写代做 CS 编程辅导

Project 3: BYOW

[FAQ](#)[Introduction](#)[Overview](#)[Skeleton Code](#)

WeChat: cstutorcs
Phase 1: World Generation

[Tileset and Tile Rendering](#)

Assignment Project Exam Help

[Starting Your Program](#)[Requirements](#)[Design Document](#)

QQ: 749389476
[Design Document Guidelines](#)

[Phase 2: Interactivity](#)

<https://tutorcs.com>

[UI \(User Interface\) Appearance](#)[UI Behavior](#)[Saving and Loading](#)[Interacting With Input Strings](#)[Ambition Score](#)[1080 Point Primary Features](#)[360 Point Secondary Features](#)[Requirements Summary](#)[Submission and Scoring Details](#)[Checkoff Script and Form](#)[Autograder Details](#)[Phase 1 Grader](#)

程序代写代做 CS编程辅导

FAQ



Each assignment has an FAQ linked at the top. You can also access it by appending "/faq" to the end of the URL. The FAQ for Project 3 is [here](#).

WeChat: cstutorcs **Introduction** Assignment Project Exam Help

In Project 3, you will create an engine for generating explorable worlds. This is a large design project that will require you and one partner to work through every stage of development from ideation to presentation. The goal of this project is to teach you how to handle a larger piece of code with little starter code in the hopes of emulating something like a product development cycle. In accordance with this, the grading of this project will be different from other projects. Since there is no notion of “the correct answer” when it comes to world design and implementation, you will be assessed much like a performance review you might receive at an internship or job in addition to a very general autograder. While this means you will be graded slightly subjectively, we promise to be pretty nice bosses and will respect you as any boss should respect their hardworking employees. Please talk to us if you feel the grading scheme feels unfair.

This project will require you a great deal of exploration and experimentation. Searching the web for answers (not solutions from past semesters) should be a regular activity



throughout this process. Please know that there are no right and wrong answers, as this is a very open-ended project. However, there are some implementations and ideas that are better than others. It is ok and expected that you will go through several iterations before settling on something that you deem good. This project is about **software engineering**.



You're not required to use any of the fancy data structures or concepts from class (A^* , MSTs, Disjoint Sets, etc.). This project is about software engineering, not about data structures or algorithms. The data structures and algorithms we've learned about in class will make your code significantly simpler and more efficient, but please don't use things just because we learned about them in class. Only use these tools if you feel comfortable using them in your implementation.

QQ: 749389476

A video playlist (from Spring 2018) discussing tips for working on this project can be found [at this link](#). Note that the API has changed slightly, but the basic ideas are all still true. Slides for these videos can be found [at this link](#).

There are several key deadlines for this assignment:

- Phase 0 - Team formation: You must submit the [Project 3 Partnerships Form](#) by Wednesday, April 5th at 11:59 PM PST. You will **not** be able to change your partner later. Read and understand the [partnership guidelines](#) before starting the assignment.
- Phase 1 - World Generation: Due on Gradescope by 4/14 at 11:59 PM.
- Phase 2 - Interactivity: Due on Gradescope by 4/24 at 11:59 PM.



You cannot submit Phase 2 of the project late, as it will be graded during a lab checkoff with a TA (including 47b students). While in theory you could submit Phase 1 and the supporting labs (Lab 12 and Lab 13) late, Phase 2 of the project builds upon these assignments, so it is unlikely that you will be able to turn in these assignments late and still complete Ph



For convenience, here are the form links for this project:

- [Partnerships Form](#)
- [Phase 1 Reflection](#)

- [Phase 1 Checkoff](#)

WeChat: cstutorcs

- [Phase 2 Reflection](#)

- [Phase 2 Checkoff](#)

Assignment Project Exam Help

Email: tutorcs@163.com


Now on to the assignment spec!

QQ: 749389476

<https://tutorcs.com> Overview

Your task for the next few weeks is to design and implement a 2D tile-based world exploration engine. By “tile-based”, we mean the worlds you generate will consist of a 2D grid of tiles. By “world exploration engine” we mean that your software will build a world, which the user will be able to explore by walking around and interacting with objects in that world. Your world will have an overhead perspective. As an example of a much more sophisticated system than you will build, the NES game “Zelda II” is (sometimes) a tile based world exploration engine that happens to be a video game:



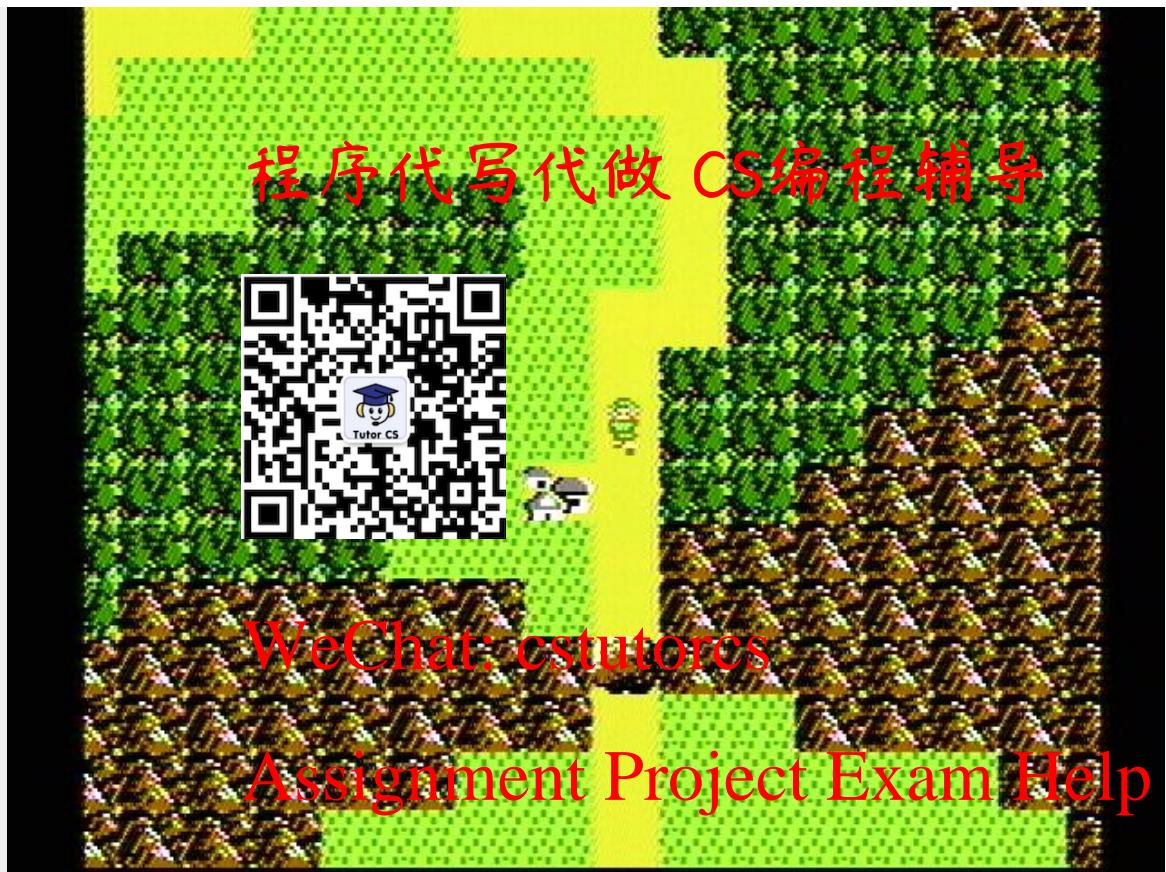

Email: tutorcs@163.com
The system you build can either use graphical tiles (as shown above), or it can use text based tiles, like the game shown below.

<https://tutorcs.com>



We will provide a tile renderer, a small set of starter tiles, and the headers for a few required methods that must be implemented for your world engine, and that will be used by the autograder. The project will have two major deadlines. By the first deadline, you should be able to generate random worlds that resemble the one below. By the second deadline, a user should be able to explore and interact with the world.



The major goal of this project is to give you a chance to attempt to manage the complexity that comes with building a large system. Be warned: The system you build probably isn't going to be that fun for users! Three weeks is simply not enough time, particularly for novice programmers. However, we do hope you will find it to be a fulfilling project, and the worlds you generate might even be beautiful.

Email: tutorcs@163.com

Skeleton Code

<https://tutorcs.com>

As you did in Project 2B, use `git pull skeleton main` in your group repo to pull the skeleton code. The skeleton code contains two key packages that you'll be using:

`byow.TileEngine` and `byow.Core`. `byow.TileEngine` provides some basic methods for rendering, as well as basic code structure for tiles, and contains:

- `TERenderer.java` - contains rendering-related methods.
- `TETile.java` - the type used for representing tiles in the world.
- `Tileset.java` - a library of provided tiles.

IMPORTANT NOTE: Do NOT change `TETile.java`'s `character` field or `character()` method as it may lead to undefined behavior.



to bad autograder results.

The other package `byow.Core` contains everything unrelated to tiles. We recommend that you put all of your code for this project in the `byow.Core` package, though this is not required. `byow.Core` package comes with the following classes:

- `Random` - Handy utility methods for doing randomness related things.
- `Main.java` - How the user starts the entire system. Reads command line arguments and calls the appropriate function in `Engine.java`.
- `Engine.java` - Contains the two methods that allow interacting with your system.

Email: tutorcs@163.com

`byow.Core.Engine` provides two methods for interacting with your system. The first is

```
public TETile[][] interactWithInputString(String input).
```

This method takes as input a series of keyboard inputs, and returns a 2D `TETile` array representing the state of the universe after processing all the key presses provided in input (described below). The second is

```
public void interactWithKeyboard().
```

 This method takes input from the keyboard, and draws the result of each keypress to the screen. Lab 12 covers how to render tiles, and Lab 13 covers how to get user input.

This project makes heavy use of `StdDraw`, which is a package that has basic graphics rendering capabilities. Additionally, it supports user interaction with keyboard and mouse clicks. You will likely need to consult the API specification for `StdDraw` at some points in the project, which can be found [here](#).



Your project should only use standard java libraries (imported from `java.*`) or any libraries we provided with your repo. Your final submission for the Phase 2 Autograder and Checkoff should not use any external libraries other than the ones provided in the skeleton.

程序代写代做 CS编程辅导

IMPORTANT

DO NOT use static variables unless they have the word! In 2018, many students ran into major issues by trying to use static variables. Static non-final variables add a huge amount of complexity to a system. Additionally, do not call `System.exit()` in `interactWithInputString` as this will cause the autograder to exit and fail.

Assignment Project Exam Help

Phase 1: World Generation

QQ: 749389476

<https://tutorcs.com>

As mentioned above, the first goal of the project will be to write a world generator. The requirements for your world are listed below:

- The world must be a 2D grid, drawn using our tile engine. The tile engine is described in [lab12](#).
- The world must be pseudo-randomly generated. Pseudo-randomness is discussed in lab 12.
- The generated world must include distinct rooms and hallways, though it may also include outdoor spaces.
- At least some rooms should be rectangular, though you may support other shapes as well.
- Your world generator must be capable of generating hallways that include turns (or equivalently, straight



hallways that intersect).

- The world should contain a random number of rooms and hallways.

程序代写代做 CS编程辅导

- The locations of the rooms and hallways should be random.



- The width of rooms should be random.

- Hallways should have a width of 1 or 2 tiles and a random length.

- Rooms and hallways must have walls that are visually distinct from floors. Walls and floors should be visually distinct from unused spaces.

Assignment Project Exam Help

- Rooms and hallways should be connected, i.e. there should not be gaps in the floor between adjacent rooms or hallways.

- All rooms should be reachable, i.e. there should be no rooms with no way to enter.

- The world should be substantially different each time, i.e. you should not have the same basic layout with easily predictable features.

As an example of a world that meets all of these requirements (click for higher resolution), see the image below. In this image, # represents a wall tile, a dot represents a floor tile, and there is also one golden colored wall segment that represents a locked door. All unused spaces are left blank.





Once you've completed lab 12, you can start working on your world generation algorithm.

WeChat: cstutorcs

It is very likely that you will end up throwing away your first world generation algorithm. This is normal. In real world systems, it is common to build several completely new versions before getting something you're happy with. The room generation algorithm above was my 3rd one, and was ultimately much simpler than either of my first two.

Email: tutorcs@163.com
QQ: 749389476

You're welcome to search the web for cool world generation algorithms. You should not copy and paste code from existing games or graphical demos online, but you're welcome to draw inspiration from code on the web. **Make sure to cite your sources using @source tags.** For inspiration, you can try playing existing 2D tile based games. [Brogue](#) is an example of a particularly elegant, beautiful game. [Dwarf Fortress](#) is an example of an incredibly byzantine, absurdly complex world generation engine.

Tileset and Tile Rendering

The tile rendering engine we provide takes in a 2D array of `TETile` objects and draws it to the screen. Let's call this `TETile[][] world` for now. `world[0][0]` corresponds to the bottom left tile of the world. The first coordinate is the x



coordinate, e.g. `world[9][0]` refers to the tile 9 spaces over to the right from the bottom left tile. The second coordinate is the y-coordinate and the value increases as we move upwards, e.g. `world[0][5]` is 5 tiles up from the bottom left tile. All values should be non-null, i.e. make sure to fill them all in before calling `renderFrame`. Make sure you understand the **representation of the world grid!** If you're unsure, write programs that draw to the grid to deepen your understanding. If you mix up x vs. y or up vs. down, you're going to have an incredibly confusing time debugging. WeChat: cstutorcs

We have provided a small set of default tiles in `Tileset.java` and these should serve as a good example of how to create `TETile` objects. We strongly recommend adding your own tiles as well.

The tile engine also supports graphical tiles! To use graphical tiles, simply provide the filename of the tile as the fifth argument to the `TETile` constructor. Images must be 16 x 16, and should ideally be in PNG format. There is a large number of open source tile-sets available online for tile based games. Feel free to use these.

Any `TETile` object you create should be given a unique character that other tiles do not use. Even if you are using your own images for rendering the tile, each `TETile` should still have its own character representation.

If you do not supply a filename, or the file cannot be opened, then the tile engine will use the unicode character provided instead. This means that if someone else does not have the image file locally in the same location you specified, your world will still be displayed, but using unicode characters instead of textures you chose.



Tutor CS



The tile rendering engine relies on `StdDraw`. We recommend against using `StdDraw` commands like `setXScale` or `setYScale`, unless you really know what you're doing, as you may considerably alter or damage the *aesthetic of the custom* otherwise.



Starting your program

Your program will be started by running the `main` method of the `Main` class. You will see that this method calls one of two possible methods, based on the way a user wants to interact with your program. Users can provide the program a command line argument, describing how they want to generate the random world and what exploration they wish to complete, in which case, `Main.main` calls the

`Core.Engine.interactWithInputString(String s)` method.

When running `Core.Main.main` with an input string, the format of the command argument should be

`-s inputStream`, where `inputString` is the input of `interactWithInputString()`. If no command line argument was provided, the user wants to interact with the program using a GUI menu and exploring the world using the keyboard, in which case `Main.main` calls the `Core.Engine.interactWithKeyboard()` method.

For phase 1, your project does not need to support `interactWithKeyboard()` but it must support `interactWithInputString()`. Specifically, you should be able to handle an input of the format `"N#####S"` where each # is a digit and there can be an arbitrary number of #s. This corresponds to requesting a new world (`N`), providing a seed (`#`s), and then pressing `S` to indicate that the seed has been completely entered.




We recommend that you do not implement

`Core.Engine.interactWithKeyboard()` until you get to phase 2 of the project (interactivity), though you're welcome to do so at anytime. It will be easier to test drive and debug your world generator by using `interactWithInputString` instead.




We also recommend using `Core.Main.main` until you get to phase 2. To do phase 1 by writing your own `main` method in the class you interact with the most, that creates a renderer, calls `interactWithInputString`, then draws the result. If you write your own `main` method, you can ignore the `-s` flag and make the input string your only program argument. To provide a `main` method command line argument through IntelliJ, if you've already tried to run the `main` method, go to Run > Edit Configurations, and you can edit the Program Arguments box to input your string, as shown below.

**WeChat: cstutorcs
Assignment Project Exam Help
Email: tutorcs@163.com
QQ: 749389476**

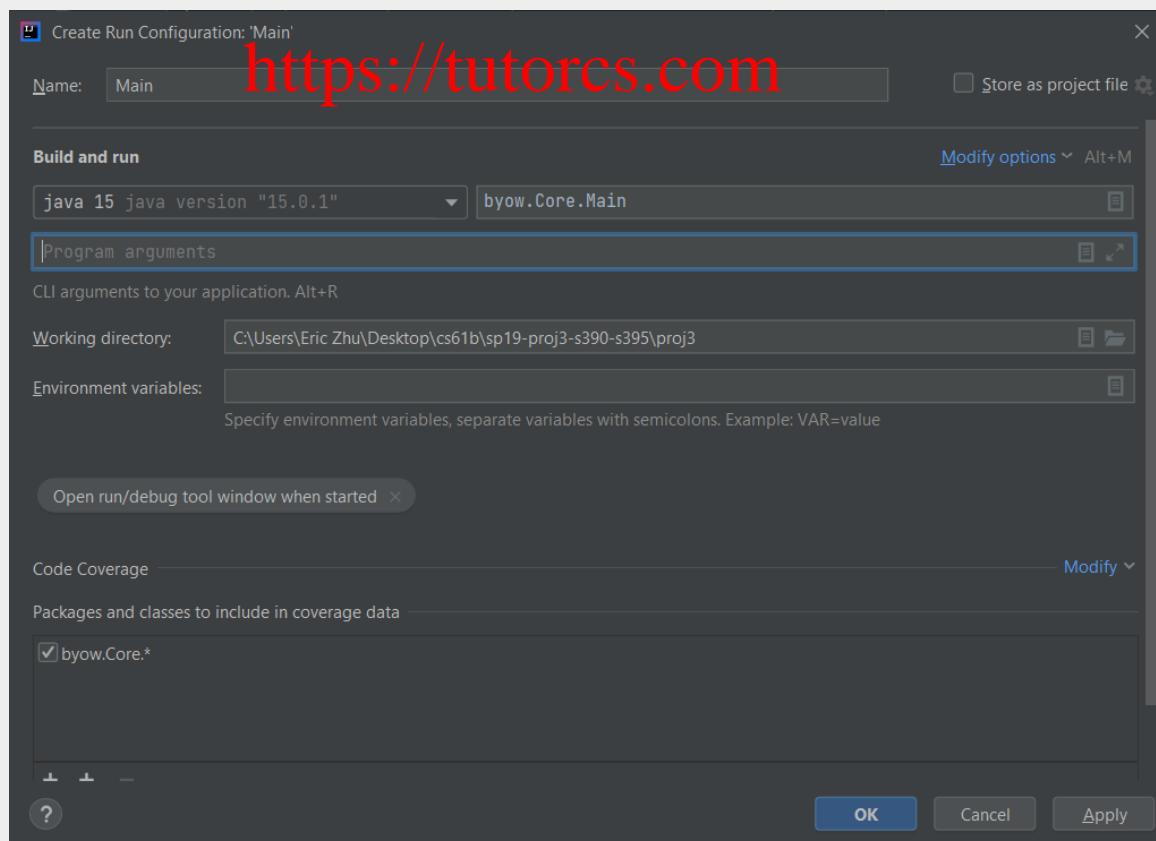

If you haven't run the `main` method yet, right-click the green arrow next to your main method like shown below, and click "Modify Run Configurations" to access the same window as above.

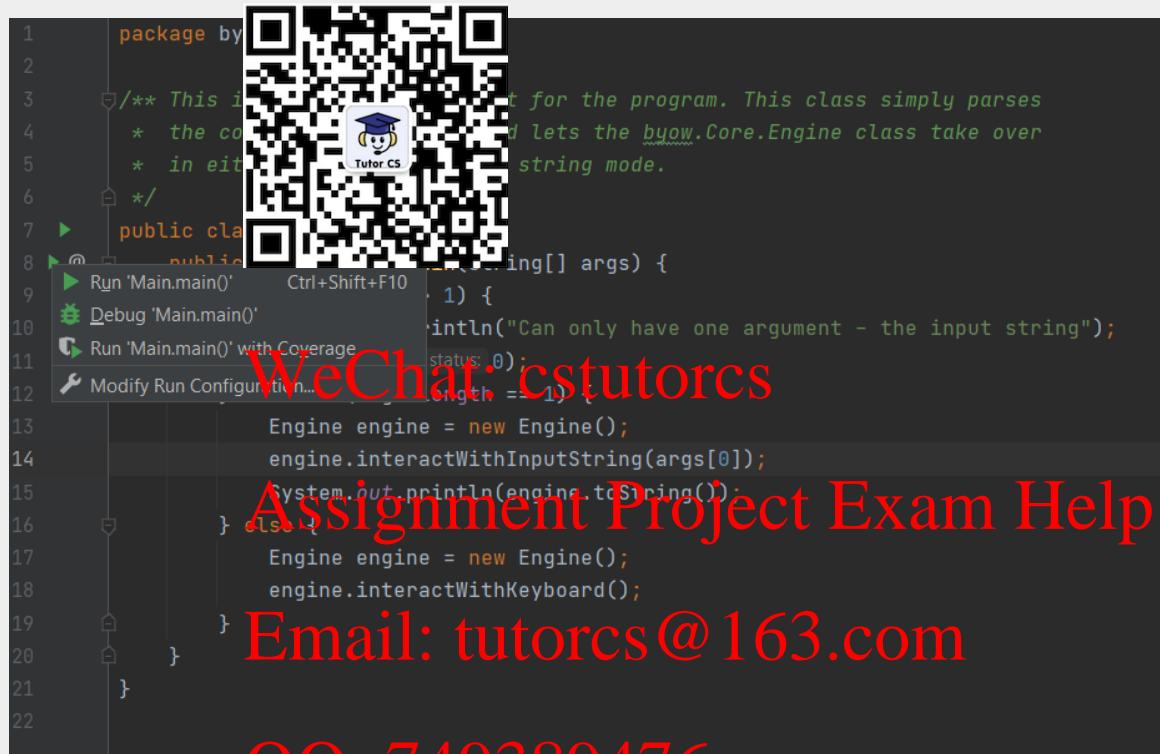

The screenshot shows a Java code editor with the following code:

```
1 package by.  
2  
3 /* This is the core of the game engine. It handles input and output for the program. This class simply parses command line arguments and lets the byow.Core.Engine class take over string mode.  
4 *  
5 */  
6  
7 public class Main {  
8     public static void main(String[] args) {  
9         if (args.length > 1) {  
10             System.out.println("Can only have one argument - the input string");  
11             System.exit(0);  
12         } else if (args.length == 1) {  
13             Engine engine = new Engine();  
14             engine.interactWithInputString(args[0]);  
15             System.out.println(engine.toString());  
16         } else {  
17             Engine engine = new Engine();  
18             engine.interactWithKeyboard();  
19         }  
20     }  
21 }  
22
```

A QR code is displayed in the center of the screen. Overlaid text in red reads:

WeChat: cstutorcs
Assignment Project Exam Help
Email: tutorcs@163.com
QQ: 749389476

Finally, we recommend that you make minimal modifications to the `Core.Main` class. It is a much better idea to delegate all the work of the program to other classes you will create.

When your `Core.Engine.interactWithKeyboard()` method is run, your program must display a Main Menu that provides at LEAST the options to start a new world, load a previously saved world, and quit. The Main Menu should be fully navigable via the keyboard, using N for “new world”, L for “load world”, and Q for quit. You may include additional options or methods of navigation if you so choose.



程序代写代做 CS编程辅导

CS61B: THE GAME



WeChat: cstutorcs
New Game (N)
Load Game (L)
Quit (Q)

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

After pressing N on the keyboard for “new world”, the user should be prompted to enter a “random seed”, which is a long value of their choosing. This long data type will be used to generate the world randomly (as described later and in lab 12). The UI should show the seed value that the user has entered so far. After the user has pressed the final number in their seed, they should press S to tell the system that they’ve entered the entire seed that they want. Your world generator should be able to handle any positive seed up to 9,223,372,036,854,775,807. There is no defined behavior for seeds larger than this.



The behavior of the “Load” command is described later in this specification.

If the system is instead started with

`Core.Engine.interactWithInputString()`, no menu should be displayed. Nothing should be drawn to the screen. The system should otherwise process the given String as if a user was pressing the given keys using the `Core.Engine.interactWithKeyboard()` method. For example, if we call

`Core.Engine.interactWithInputString("N3412S")`, your program should generate a world with seed 3412 and return the generated 2D tile array. Note that letters in the input string can be upper or lower case and your engine should be able to accept either keypress (i.e. “N” and “n” should both initiate the process of world generation). You should ** NOT** render any tiles or play any sound when using `interactWithInputString()`.

If you want to allow the user to have additional options, e.g. the ability to pick attributes of their character, specify world generation parameters, etc., you should create additional options. For example, you might add a fourth option “S” to the main menu for “select creature and create new world” if you want the user to be able to pick what sort of creature to play as. These additional options may have arbitrary behavior of your choosing, however, the behavior of N, L, and Q must be exactly as described in the spec!

Requirements

For Phase 1, you should be able to run `Main.main` by providing an input String, and have your program create a world, that adhere to the requirements mentioned above



along with our randomness requirements mentioned in the **Submission and Grading section** below. Note that you should render the world to check your code by writing your own `main` method, but for the autograder,

`interactWithTETile()` should not render the world, only returning a `TETile` array. Worlds should be visibly different based on the random seeds provided to the program.



Design Document

WeChat: cstutorcs

Since we did not provide you with any significant skeleton code for Project 3, and since the project is very open-ended, we expect that BYOW implementations will vary a fair amount between students. We recommend that you have a design document that reflects the current state of your project.

QQ: 749389476

Before you begin writing any code, use the guidelines listed here to create a plan for every feature of your BYOW program, and convince yourself that your design is correct. Writing a design document is an iterative process. After coming up with your initial design, you may find some flaws in it, requiring you to revisit your design and update its description according to your new findings.

Note: Your design document will NOT be graded.

Design Document Guidelines

You may use the following format for your BYOW design document.



Design Document Sections

1. Classes and Data Structures

Include here any class definitions. For each class, list the instance variables and include a brief description of each the class.

2. Algorithms



This is where you describe how your code works. For each class, include a high-level description of the methods in that class. That is, do not include a line-by-line breakdown of your code, but something you would write in a javadoc comment above a method, including any edge cases you are accounting for.

Email: tutorcs@163.com

3. Persistence

QQ: 749389476

You should only tackle this section after you are done with Phase 1. This section should describe how you are going to save the state of a world, and load it again, following the requirements in the spec. Again, try to keep your explanations clear and short. Include all the components your program interacts with - classes, specific methods, and files you may create.

Phase 2: Interactivity

In the second phase of the project, you'll add the ability for the user to actually interact with the world, and will also add user interface (UI) elements to your world to make it feel more immersive and informative.

The requirements for interactivity are as follows:



- The user must be able to control some sort of “avatar” that can moved around using the W, A, S, and D keys. By “avatar”, we just mean some sort of on-screen representation controlled by the user. For example, in my project, I have a character “@” that could be moved around.
- The avatar will be able to interact with the world in some way.
- Your system must be deterministic in that the same sequence of key-presses from the same seed must result in exactly the same behavior every time. Note that a `Random` object is guaranteed to output the same random numbers every time.

WeChat. cstutorcs Assignment Project Exam Help

- In order to support saving and loading, your program will need to create some files in your `proj3` directory (more details later in the spec and in the skeleton code). The only files you may create must have the suffix “.txt” (for example “`save-file.txt`”). You will get autograder issues if you do not do this.

<https://tutorcs.com>

Optionally, you may also include game mechanics that allow the user to win or lose. Aside from these feature requirements, there will be a few technical requirements for your system, described in more detail below.

UI (User Interface) Appearance

After the user has entered a seed and pressed S, the world should be displayed with a user interface. The user interface of your project must include:

- A 2D grid of tiles showing the current state of the world.
- A “Heads Up Display” (HUD) that provides additional information that maybe useful to the user. At the bare



minimum, this should include Text that describes the tile currently under the mouse pointer.

程序代写代做 CS编程辅导
As an example of the bare minimum, the simple interface below displays a grid of tiles and a HUD that displays the description of the tile under the mouse pointer (click image for higher resolution).



QQ: 749389476
You may include additional features if you choose. In the example below (click image for higher resolution), as with the previous example, the mouse cursor is currently over a wall, so the HUD displays the text "wall" in the top right. However, this HUD also provides the user with 5 hearts representing the avatar's "health". Note that this world does not meet the requirements of the spec above, as it is a large erratic cavernous space, as opposed to rooms connected by hallways.





As an example, the game below (click image for higher resolution) uses the GUI to list additional valid key presses, and provides more verbose information when the user mouses-over a tile (“You see grass-like fungus.”). The image shown below is a professional game, so we do not expect your project to have this level of detail (but we encourage you to try for some interesting visuals).





For information about how to specify the location of the HUP,
see the

`initialize(int width, int height, int xOffset, int yOffset)`
method of `TERenderer` or see lab 12.

QQ: 749389476

UI Behavior

<https://tutorcs.com>

After the world has been generated, the user must be in control of some sort of avatar that is displayed in the world. The user must be able to move up, left, down, and right using the `W`, `A`, `S`, and `D` keys, respectively. These keys may also do additional things, e.g. pushing objects. You may include additional keys in your engine. The avatar should not move when attempting to move into a wall and the program should not error.

The system must behave pseudo-randomly. That is, given a certain seed, the same set of key presses must yield the exact same results!

In addition to movement keys, if the user enters `:Q` (note the colon), the program should quit and save. The



description of the saving (and loading) function is described in the next section. **This command must immediately quit and save**, and should require no further key presses to complete, e.g. do not ask them if they are sure before quitting. We will call this single action of quitting and saving at the same time “**quit and save**”. This command is not case-sensitive, so `:Q` and `:q` both work as well. Additionally, `:` followed by anything else or nothing at all should not do anything.



This project uses `StdDraw` to handle user input. This results in a couple of important limitations:

WeChat: cstutorcs

- `StdDraw` does not support key combinations. When we say `:Q` we mean `:` followed by `Q`.
- It can only register key presses that result in a char. This means any unencoded character will be fine but keys such as the arrow keys and escape will not work.
- On some computers, it may not support holding down of keys without some significant modifications; i.e. you can't hold down the `e` key and keep moving east. If you can figure out how to support holding down of keys in a way that is compatible with `interactWithInputString`, you're welcome to do so.

Because of the requirement that your system must handle String input (via `interactWithInputString`), your engine cannot make use of real time, i.e. your system cannot have any mechanic which depends on a certain amount of time passing in real life, since that would not be captured in an input string and would not lead to deterministic behavior when using that string vs. providing input with the keyboard. Keeping track of the number of turns that have elapsed is a perfectly reasonable mechanic, and might be an interesting thing to include in your world, e.g. maybe the world grows steadily darker with each step. You're welcome to include



other key presses like allowing the user to press space bar in order to wait one turn.

If you're having trouble getting started on how to implement user interaction, check out [InputDemo.java](#) for inspiration.



Saving

Sometimes, you'll be exploring your world, and you suddenly notice that it's time to go to watch a CS 61B lecture. For times like these, being able to save your progress and load it later, is very handy. Your system must have the ability to save the state of the world while exploring, as well as to subsequently load the world into the exact state it was in when last saved.

Email: tutorcs@163.com

Within a running Java program, we use variables to store and load values. Keep in mind that when your program ends, all the variables will go out of scope. Thus, you will need to persist the state of your program on some files that your program should create.

When the user restarts `byow.Core.Main` and presses `L`, the world should be in **exactly the same state as it was before the project was terminated**. This state includes the state of the random number generator! More on this in the next section. In the case that a user attempts to load but there is no previous save, your system should simply quit and the UI interface should close with no errors produced.

In the base requirements, the command `:Q` should save and completely terminate the program. This means an input string that contains `:Q` should not have any more characters after it and loading a world would require the program to be run again with an input string starting with `L`.



Interacting With Input Strings

程序代写代做 CS 编程辅导

Your `Core.Engine.interactWithInputString(String s)` must be able to handle input strings that include movement



For example, the string `N543SWWWWAA` corresponds to the user creating the seed 543, then moving up four times, then left one time. This is called

`Core.Engine.interactWithInputString("N543SWWWWAA")`, your system would return a `TETile[][][]` representing the world EXACTLY as it would be if we'd used

`interactWithKeyboard` and typed these keys in manually. Since the system must be deterministic given a seed and a string of inputs, this will allow users to replay exactly what happened for a given sequence of inputs. This will also be handy for testing out your code, as well as for our autograder. **QQ: 749389476**

`Core.Engine.interactWithInputString(String s)` must also be able to handle saving and loading in a replay string, e.g. `N25SDDWD:Q` would correspond to starting a new world with seed 25, then moving right, right, up, right, then quit/saving. The method would then return the 2D `TETile[][][]` array at the time of save. If we then started the engine with the replay string `LDDDD`, we'd reload the world we just saved, move right four times, then return the 2D `TETile[][][]` array after the fourth move.

Your world should not change in any way between saves, i.e. the same exact `TETile[][][]` should be returned by the last call to `interactWithInputString` for all the following scenarios:

- `interactWithInputString(N999SDDDWWDWWDDDD)`



- `interactWithInputString(N999SDDD:Q)`, then
`interactWithInputString(LWWWDDD)`
- `interactWithInputString(N999SDDD:Q)`, then
`interactWithInputString(LWWW:Q)`, then
`interactWithInputString(LDDD:Q)`
- `interactWithInputString(N999SDDD:Q)`, then
`interactWithInputString(L:Q)`, then
`interactWithInputString(L:Q)` then
`interactWithInputString(LWWWDDD)`

we then called `InteractWithInputString` with input `L:Q`, we'd expect the exact same world state to be saved and returned as `GET THE FILE` as with the previous call where we provided `LDDD`.

Email: tutorcs@163.com
QQ: 749389476
 You do not need to worry about replay strings that contain multiple saves, i.e. `N5SDD:QD:QDD:Q` is not considered a valid replay string, since the program should have terminated before the second `:Q`. You do not need to worry about invalid replay strings, i.e. you can assume that every replay string provided by the autograder starts with either `N#S` or `L`, where `#` represents the user entered seed.

The return value of the `interactWithInputString` method should not depend on whether the input string ends with `:Q` or not. The only difference is whether the world state is saved or not as a side effect of the method.

Ambition Score

1440 points of your project score will be based on features of your choosing, which we call your “ambition score”. The big idea is that beyond the base requirements of this project, we



want you to try to polish your product a bit more and add some cool features. Below is a list of features worth either 1080 points (primary feature) or 360 points (secondary feature). From these two categories, you are required to implement at least one primary feature in order to get full credit. This “” category is only worth 1440 points. If you do 1800 points, you do not get extra credit. However, feel free to implement as many features as you'd like if you have the time.

Your project must still meet the basic requirements described above! For example, if you allow the user to use mouse clicks, the project should still allow keyboard based movement!

Under the description of some primary features, we've provided some GIFS that would score full points on their respective ambition point items to help clear any confusions. Yours do not need to look exactly like the examples given.

 Email: tutorcs@163.com

 QQ: 749589476

1080 Point Primary Features

- Create a system so that the tile renderer only displays tiles on the screen that are within the line of sight of the avatar. The line of sight must be able to be toggled on and off with a keypress. (The line of sight GIF below is a more complex version that involves bending around corners; we have also seen versions where it is just a square of light around the avatar).



程序代写代做 CS编程辅导



- Add the  sources to affect how the world is rendered, with at least one light source that can be turned on and off with a keypress

WeChat: cstutorcs


Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

- Add entities which chase the avatar/other entities by use of a search algorithm from class, with a toggle to display their projected path.

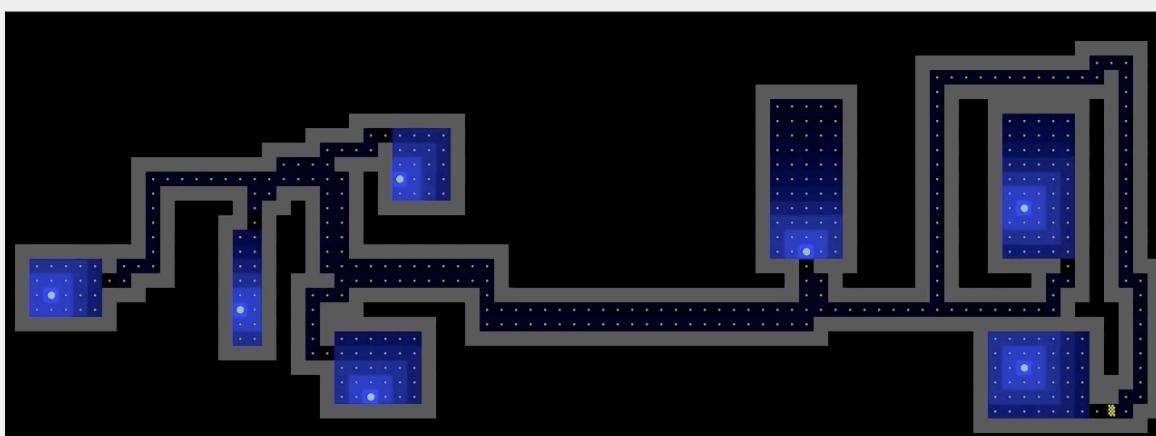

- Create a system for “encounters”, where a new interface appears when the avatar interacts with entities in the



world, returning the avatar to the original interface when the encounter ends (e.g. Pokémon).



WeChat: cstutorcs

- Add the ability for the user to “replay” their most recent save, visually displaying all the actions taken since the last time a new world was created. This must result in the same final state as would occur if the user had loaded the most recent save.

Assignment Project Exam Help

Email: tutorcs@163.com



- Add the ability for the user to change the perspective of their view (first-person, 2.5D, etc.) (We’ve never seen anyone do this primary feature before! The Nintendo 64 game ‘Kirby 64 - The Crystal Shards’ is an example of what a 2.5D world looks like).

360 Point Secondary Features

- Add multiple save slots that can be accessed with a new menu option, and a new keyboard shortcut to save to a



slot other than slot 1. You should be careful to still support the default behavior of saving and loading in order to be consistent with the replay string requirements.

- Add the QR code to open a new world without closing and reopening it either as a special option you can press while in the menu or when you reach a “game over” state if you want to turn your world into a game.
- Add a menu option to change your avatar’s appearance.
- Add a menu option to give your avatar a name which is displayed on the HUD.
- Add a menu option or randomly determine what the environment/theme of the world will be.
- Add a menu option to change all text in the interface to a different language. English should be the default and there should be a way to switch it back to English.
- Add support for mouse clicks on the main menu for anything that can be done with a keypress on the main menu.
- Make your engine render images instead of unicode characters.
- Add cool music to your menu and/or exploration interface. Also add sound effects for interactions the avatar makes with the world.
- Add a minimap somewhere which shows the entire map and the current avatar location. This feature is a lot more interesting if you also implement a map which is larger than the screen so that you are unable to see the entire map normally.
- Add ability to rotate the world, i.e. turn the board 90 degrees and adjust movement keys accordingly.

程序代写代做 CS编程辅导

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>



- Add a display of real date and time in the Heads-Up Display.
- Add support for movement with mouse clicks on any visible square. You'll need to implement some sort of algorithm to handle this. 
- Add support for two users to interact at the same time. This will require you to have two avatars on screen which can move independently. They should have separate control schemes.
- Add support for undoing a movement (even moves that occurred in a previous save before the current one was loaded). Undoing a movement should reset the world back to before the most recent keypress but should add to the replay string instead of removing a character (i.e. undo command should be logged in the replay string).

QQ: 749389476

Requirements Summary

<https://tutorcs.com>

Here is a list of the requirements and restrictions on your project. Please note that this section does not substitute reading the entire spec since there are a lot of details which are not captured here.

- When using `interactWithKeyboard`, your program must have a menu screen that has New World (N), Load (L), and Quit (Q) options, navigable by the keyboard, which are all not case-sensitive.
- When entering New World, the user should enter an integer seed followed by the S key. Upon pressing S, the world should be generated and displayed.
- The UI should show the numbers entered so far when the user is giving the seed.



- Must have pseudo-randomly generated worlds/variety in worlds, i.e. the world should be different for every seed.
- All generated worlds must include all previous features described in phase 1 above.

- Users must move around in the world using W, A, S,



- Users must press ":Q" to quit, and after starting up again, the L option on the main menu should load the world state **exactly as it was before**.

WeChat: cstutorcs

- All random events should be pseudorandom. That is, your program gives deterministic behavior given a seed.

Assignment Project Exam Help

- Users must be able to interact using

`interactWithInputString`, and behavior other than accepting input and drawing to the screen should be identical to `interactWithKeyboard`.
QQ: 749389476

- `interactWithInputString` must return a `TETile[][]` array of the world at the time after the last character in the string is processed.

- `interactWithInputString` must be able to handle saving and loading, just like `interactWithKeyboard`.

- Your program must use our `TileEngine` and `StdDraw` for displaying graphics.

- Your program must have a HUD, which displays relevant information somewhere outside the area displaying the world/tiles.

- HUD must display a description of tile upon hovering over the tile.

- Your program must not use real time. Nothing should be moving if no input is being received.



- Your program must include features that make up 1440 points from the Ambition categories, **with at least one primary feature**

程序代写代做 CS编程辅导

Submission and Scoring Detail



As usual, we'll have a grader for this project on Gradescope. **WeChat: cstutorcs** Remember to add your partner as a group member to your Gradescope submission. In addition, you'll also submit [this form](#) when you've completed the project. More details in the next section about checkoffs. If you do not submit this form, then you will receive a 0 on the checkoff portion of the project. Only one of your partners needs to submit this, but you should write the responses together.

<https://tutorcs.com>

Partnership Preferences Form: 50 points

Filling out the [Project 3 Partnership Preferences Form](#) is worth 50 points for this project. You must fill out the form by **Wednesday, April 5th at 11:59pm** to get these points.

Autograders: 500 points

See [this section](#) for autograder details.

- Phase 1: 100 points
- Phase 2: 400 points

Phase 1 Manual Review: 250 points



A TA will pull your code, and run your game 5 separate times with 5 separate seeds. They will then check that your 5 different worlds meet our randomness criteria defined below:

- Location should be in different places each time.
- Sizes of rooms should be different each time.
- The number of rooms and hallways should be different each time. If you have questions or concerns about whether your game matches these criteria, you may ask a TA in Office Hours to confirm.

Assignment Project Exam Help

In order to get credit for the Phase 1 Checkoff, you must fill out [this form](#) by Friday, April 14th at 11:59PM.

Email: tutorcs@163.com

Partner Review Points: 640 points

- [Phase 1 Review Form](#): 320 points (due April 14th at 11:59PM) <https://tutorcs.com>
- [Phase 2 Review Form](#): 320 points (due April 24th at 11:59PM)

Phase 2 Checkoff Demo: 4960 points

To get credit for the checkoff demo, you **must** submit [this form](#).

- 3520 points: Obeying base spec for Phase 1 and Phase 2.
- 1440 points: Ambition points.

You'll also need identify a commit so we can grade it. You should:



1. Identify the SHA of the commit that you'd like us to grade for the demo. **This SHA must be from the same as the commit you submitted to Gradescope**. It's OK if they're not exactly the same, though we recommend using the  so that you're sure that it compiles the way you expect it to. But if you need to remove lines out to pass the autograder and then add them back in for the checkoff, that's OK. You can [use githash](#) to help you here. Copy this SHA and save it somewhere.

WeChat: cstutorcs

2. Ensure that this commit is before the deadline, and run your code from this commit to double-check that it is indeed the commit you'd like graded. If your commit was from after the deadline, you'll receive a 50% penalty.

Email: tutorcs@163.com

3. Paste it carefully into the form submission.
4. **Do not ignore step 3.** If you paste the incorrect SHA, we'll grade an incorrect version of your code, and if you paste an invalid SHA we'll by default grade the <https://tutorcs.com> origin/HEAD commit (which is likely to incur lateness penalties).

Checkoff Script and Form

In the hopes of keeping this process as transparent as possible, click [here](#) for the exact script the instructor will use when checking your project. Though checkoffs are synchronous, we want to have a record of everyone's project on file in case there are technical difficulties during the checkoff, or if we need to look at your project for whatever reason. Please be clear and concise so the grader knows exactly how to use your feature. If you find that explaining how to use your feature is too complicated, then consider



simplifying the work the user must do to use it. If there are any known quirks in using the ambition feature, let us know that here: e.g. “After you turn the lights on, you need to press T to change the brightness”.

It's also extra effort to read over the specifications again and ensure your project fits them exactly. It's easy to miss a specification, especially when there are so many of them, and so we ask that you read through them again right before you submit what ambition points they've attempted as well as how to use those features. Please be clear and concise so the grader knows exactly how to use your feature. If you find that explaining how to use your feature is too complicated, then consider simplifying the work the user must do to use it.

Once you've ensured that you have:

Email: tutorcs@163.com

1. Completed the project
QQ: 749389476
2. Read through all the specifications again to ensure you didn't miss any
<https://tutorcs.com>
3. Identified the commit you want graded (see previous section)
4. **Ensure you only use libraries in `library-sp23` or `java.*`**
5. **Ensure any file manipulation uses OS-agnostic file-path joining.**

then you are ready to submit the [Project 3 Checkoff Form](#).

That last section about the OS-agnostic file-path joining means to **not** hardcode a path like the one below, since your checkoff grader might be using an OS with different file separators:



WeChat: cstutorcs

Assignment Project Exam Help



```
String pathToImage = "images/image1.jpg";
```

To fix this, you should use a `join` function that looks like this:

```
import java.nio.file.Paths;  
  
/** Returns a file representation of FIRST and OTHERS into  
 * analogous to the {@link java.nio.file.Paths#get( String... )}  
 * method. */  
static File join(String first, String... others){  
    return Paths.get(first, others).toFile();  
}
```

WeChat: cstutorcs
Assignment Project Exam Help

Email: tutorcs@163.com

Autograder Details

QQ: 749389476

We have two autograders for BYOW: the Phase 1 grader and the Phase 2 grader.

Phase 1 Grader

Phase 1 is due on **April 14th at 11:59 PM** for 100 points. It will test:

- `interactWithInputString` returns a world
- `interactWithInputString` recreates the same world given the same seed multiple times
- `interactWithInputString` creates different worlds given different seeds

There will be **no** movement in these tests.



Phase 2 Grader

程序代写代做 CS编程辅导

Phase 2 is due on April 24th at 11:59 PM for 400 points. It will test:



- `interactWithInputString` recreates the same world given the same seed and same movements multiple times
- `interactWithInputString` creates different worlds given different seeds and different movement
- `interactWithInputString` creates the same world even with saving and loading throughout the input string

WeChat: cstutorcs

Assignment Project Exam Help

Remember to add your partner as a group member when
submitting to the autograder.

QQ: 749389476

Last built: 2023-04-10 23:15 UTC

<https://tutorcs.com>

