

程序代写代做 CS编程辅导

FIT2014 Theory of Computation



Lecture 18

Turing machines and computability

WeChat: cstutorcs

Assignment Project Exam Help

slides by Graham Farr

based in part on previous slides by David Albrecht

QQ: 749389476

COMMONWEALTH OF AUSTRALIA
<https://tutorcs.com>

Copyright Regulations 1969

Warning

This material has been reproduced and communicated to you by or on behalf of Monash University in accordance with s113P of the Copyright Act 1968 (the Act).

The material in this communication may be subject to copyright under the Act.

Any further reproduction or communication of this material by you may be the subject of copyright protection under the Act.

Do not remove this notice.

Overview

程序代写代做 CS编程辅导



- ▶ Turing Machines
- ▶ Converting Finite Automaton to a Turing Machine
- ▶ Building Turing Machines
- ▶ Turing machines for computing functions
- ▶ Church's thesis

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Effective process = Algorithmic process

程序代写代做 CS编程辅导



- ▶ Can be done with pencil and paper
- ▶ Follows a finite set of instructions
- ▶ Demands neither insight or ingenuity

WeChat: cstutorcs

- ▶ Will definitely work without error.

- ▶ Produces in a finite number of steps either:

Assignment Project Exam Help

- ▶ A final result, or

Email: tutorcs@163.com

- ▶ If the result is a sequence, each symbol in the sequence.

QQ: 749389476

<https://tutorcs.com>



Alan Turing (1912–1954)

<http://www.npg.org.uk/collections/search/portrait/mw165875>

How to model computation?

Consider a person doing a computation (pencil & paper).

程序代写代做C/C++编程辅导

At any given time, the person is



- ▶ focused on some particular symbol on the paper;
- ▶ reading the symbol at the current position;
- ▶ in some particular mental state, i.e., is doing some particular part of the computation.

WeChat: cstutorcs

Assignment Project Exam Help

Depending on the state and symbol, the person then ...

Email: tutorcs@163.com

- ▶ writes a symbol there
(possibly overwriting what is already there);
- ▶ may change their state;
- ▶ moves their attention nearby.

QQ: 749389476

<https://tutorcs.com>



程序代写代做 CS编程辅导

carry ...

go to top of column ...

add column ...



WeChat: estutores

Assignment Project Exam Help

Email: tutores@163.com


QQ: 749389476

https://tutores.com

Annie Jump Cannon (1863–1941)

Photo: Harvard College Observatory

<http://www.skyandtelescope.com/astronomy-news/digitizing-harvards-century-of-sky/>




<http://www.pelicanpub.com/proddetail.php?prod=9781589809116>

Turing machine

Tape:

- ▶ infinite sequence of **cells** (or **squares**)
- ▶ each cell may contain a symbol from a finite alphabet
- ▶ initially, the tape contains a string, followed by empty cells (blanks)

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

Tape Head:

- ▶ at any time, it is positioned at one cell of the tape
- ▶ can **read** the letter from the current tape cell.
- ▶ can **write** a letter onto the current tape cell.
- ▶ can **move** one unit left or right, at each step

QQ: 749389476

<https://tutorcs.com>

Turing machine

Program:

- ▶ has a set of **states**, each numbered by an integer, including
 - ▶ Start State (1)
 - ▶ Accept State (2)
 - ▶ optionally, a Reject State
 - ▶ crash = reject.
 - ▶ at any time, the machine is in one state
 - ▶ initially, it's in the Start State
 - ▶ a state \simeq a single instruction or statement (but very low level!)
 - ▶ **transitions**: for each *state* and *symbol*, specify: *next state*, *next symbol*, and *direction* (one step left, or one step right).
- (state, symbol) \rightarrow (next state, next symbol, direction).

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 744938947

<https://tutorcs.com>

Computation:

- ▶ At each step, apply the appropriate instruction.
- ▶ Computation is *deterministic*.

Initially:

program

1.
2.
-
- q.
-

程序代写代做 CS编程辅导



WeChat: cstutorcs


Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

tape
head



input string

all blanks

Later:

program

1.
2.
-
- q.
-

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutors@163.com


tape
head

QQ: 749389476

<https://tutorcs.com>

.....

...

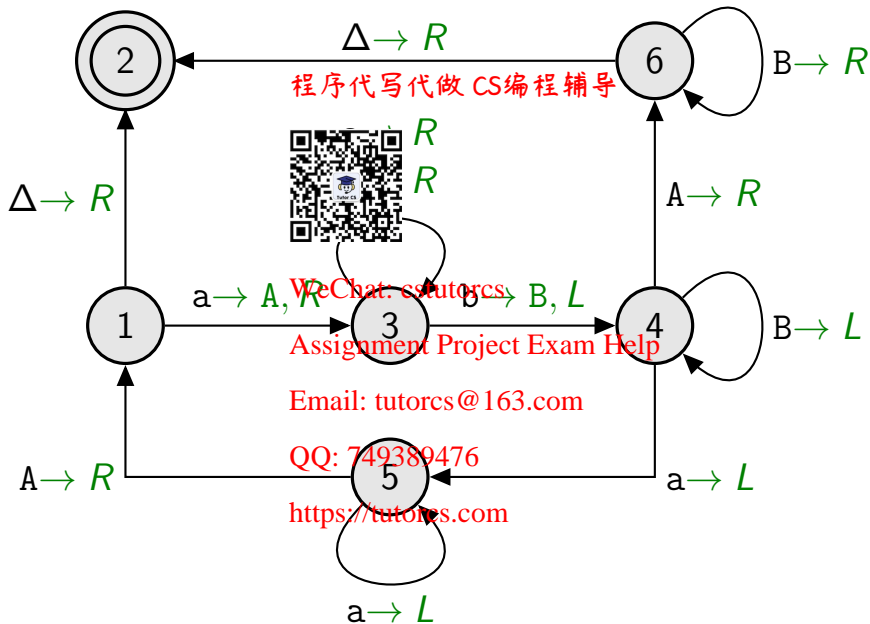

Languages associated with Turing machines

程序代写代做 CS编程辅导

For a Turing Machine T :



► $\text{Accept}(T)$

- the set of strings leading to the Accept state.
- called **the language accepted by T** .

WeChat: cstutorcs

► $\text{Reject}(T)$

- the set of strings that crash, or lead to a Reject state (if there is one), during execution.

Assignment Project Exam Help

Email: tutorcs@163.com

► $\text{Loop}(T)$

- the set of strings that cause T to loop forever.

QQ: 749389476


<https://tutorcs.com>

$\Delta \rightarrow R$

$b \rightarrow R$

程序代写代做 CS编程辅导

$a \rightarrow R$

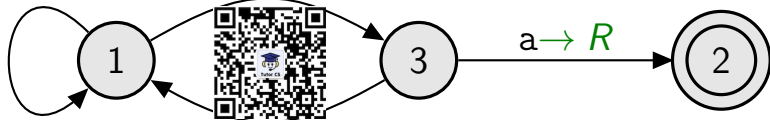

$b \rightarrow R$

WeChat: cstutorcs

Assignment Project Exam Help

Accept(T) = strings with aa

QQ: 749389476

Reject(T) = strings without aa that end in a

<https://tutorcs.com>

Loop(T) = ε or strings without aa that end in b

Deciders, decidability

程序代写代做 CS编程辅导

A **decider** is a Turing machine that halts for all inputs.

- ▶ i.e., $\text{Loop}(T) = \emptyset$



Let L be a language.

A Turing machine T is a **decider for L** if T is a decider and $\text{Accept}(T) = L$.

- ▶ So, $\text{Reject}(T) = \bar{L}$.
- ▶ Such a TM always *decides* in finite time whether or not any input string is in L . It never “dithers” forever.

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutors@163.com

QQ: 749389476

A language L is **decidable** if there is a decider T for it.

https://audecs.com

Finite Automaton \longrightarrow Turing Machine

程序代写代做 CS编程辅导

Every Regular Language has a decision



FA \longrightarrow TM:

1. Label start state with 1.
2. Label all other states with an integer ≥ 0 .
3. Change the edge labels:
 - ▶ a to $a \rightarrow R$
 - ▶ b to $b \rightarrow R$
4. Delete the second circle from all the Final states, and add an edge from each Final state to State 2, labelled with $\Delta \rightarrow R$.
5. Make State 2 the sole Final state.

WeChat: tutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>


程序代写代做 CS编程辅导

Problem

Build a Turing Machine that accepts the language $\{a^n b^n : n \geq 0\}$.



At start:
if Δ : Accept.



WeChat: cstutorcs

Assignment Project Exam Help


Otherwise ...

Email: tutorcs@163.com

QQ: 749389476


<https://tutorcs.com>

At first a



程序代写代做CS编程辅导


Mark first a



Move to right,
until b



WeChat: cstutorcs




Assignment Project Exam Help

Email: tutorcs@163.com

Mark b




QQ: 749389476




<https://tutorcs.com>


Move to first a




At first a



Mark first a




Move to right,
until b




Email: tutorcs@163.com

Mark b



Move to first a



程序代写代做 CS编程辅导



d so on ...

... and so on ...

WeChat: [cstutorcs](#)

... until eventually ...


Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

No first a!
Last A
followed by B



Move to right,
past every B



WeChat: cstutorcs

What is just
after last B?



Assignment Project Exam Help

Email: tutorcs@163.com

If it's Δ,
then Accept,
else Reject.

QQ: 749389476

<https://tutorcs.com>

If the current letter is blank, then Accept string.

Loop {

If current letter is a then change a to A & move right.

Move right over every a.

If current letter is b then change b to B & move left.

Move left over every B.

If current letter is A then move right & exit the loop.

If current letter is a then move left over every a.

If current letter is A then move right.

}

Move right over every B.

If current letter is blank, then Accept string.




WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

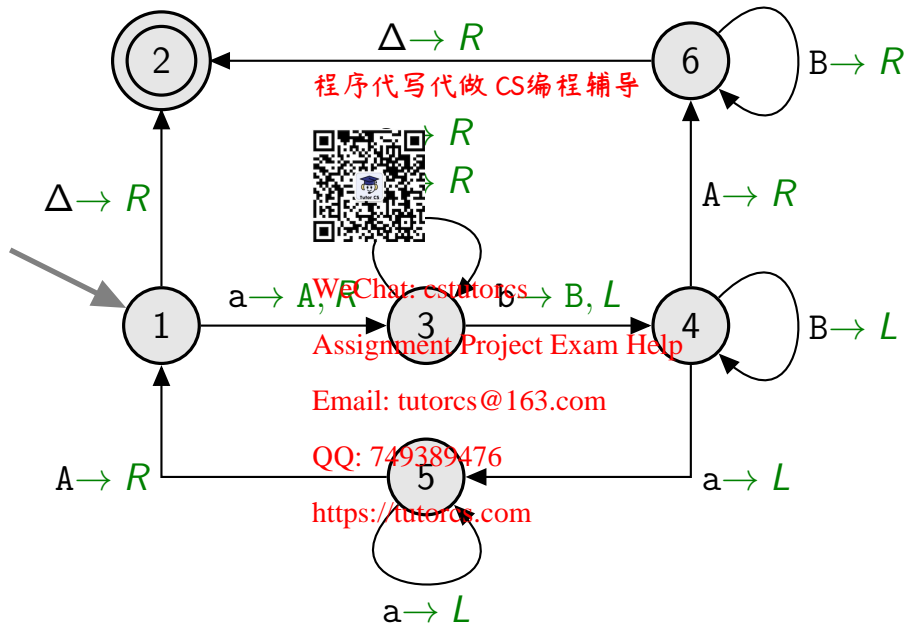

Example

程序代写代做 CS编程辅导



Build a Turing Machine that accepts the language $\{a^n b^n a^n : n \geq 0\}$.

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Example

程序代写代做 CS编程辅导

Loop {

If current letter is blank, then delete string.

If current letter is a, then change a to A & move right.

Move right over a^*bb^* .

If current letter is a, then move left.

If current letter is b, then change b to a & move right.

Move right over every a.

If current letter is blank, then delete aa on the left.

Move left over every a and b.

If current letter is A, then move right.

}




WeChat: tutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

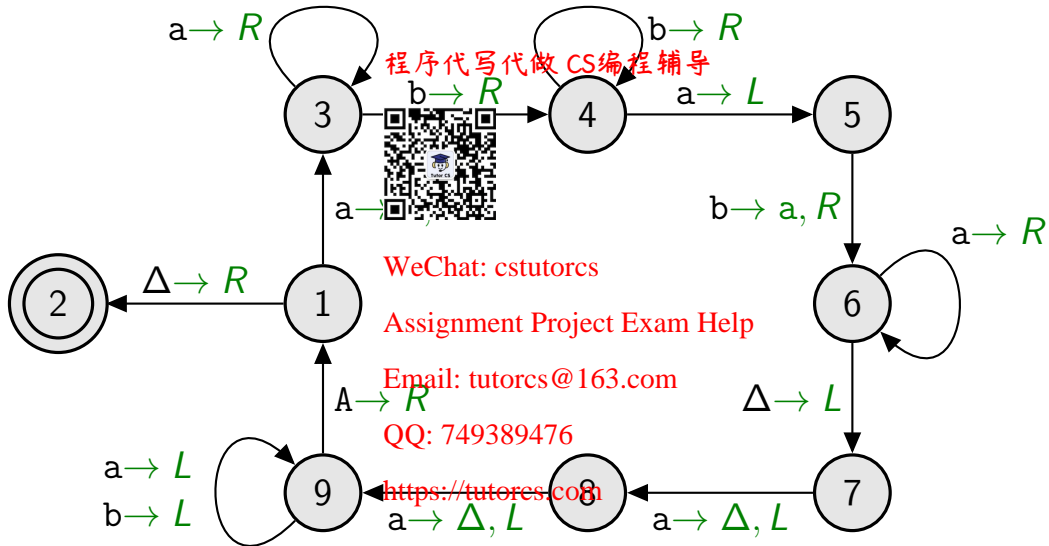

Other Machines

程序代写代做 CS编程辅导

Queue automaton

- ▶ Like a deterministic PDA, but with a Queue.



2PDA

- ▶ Like a deterministic PDA, but with 2 Stacks.

NTM

- ▶ A Nondeterministic Turing Machine.

kTM

- ▶ A Turing Machine with k Tapes.

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Equivalences among these machines

程序代写代做 CS编程辅导



Theorem.

Any language which a Turing machine can accept can also be defined by any of these machines, and visa versa.

There are algorithms to convert all these machines (including Turing Machines) into each other.

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Turing machines for computing functions

程序代写代做 CS编程辅导

So far, our Turing machines just accept/reject.

TMs can also compute function



Function computed by a Turing machine M :

► Domain: $\text{Accept}(M)$

WeChat: cstutorcs

► If input string is $x \in \text{Accept}(M)$

Assignment Project Exam Help

$x \mapsto$ the string on the tape after M halts (excluding all the blanks at the end)

Email: tutors@163.com

QQ: 749389476

What kinds of objects can Turing machines work with?

https://tutors.com

Any objects that can be encoded as strings ...

Encoding objects as strings

	ASCII	binary	unary
0	bbaaaa	a	ϵ a^0
1	bbaaab	b	a a^1
2	bbaaba	ba	aa a^2
3	bbaabb	bb	aaa a^3
4	bbabaa	baa	aaaa a^4
5	bbabab	bab	aaaaa a^5
6	bbabba	bba	aaaaaa a^6
7	bbabbb	bbb	aaaaaaa a^7
8	bbbaaa	baaa	aaaaaaaa a^8
9	bbbaab	baab	aaaaaaaaa a^9
10		baba	aaaaaaaaaa a^{10}
11		babb	aaaaaaaaaaa a^{11}
12		bbaa	aaaaaaaaaaaa a^{12}
:		:	:

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutormcs@163.com

QQ: 749389476

https://tutorcs.com

Encoding objects as strings

程序代写代做 CS编程辅导



Unary code for tuples of nonnegative integers

- ▶ Each nonnegative integer n is encoded using the unary code: $n \mapsto a^n$
- ▶ Integers are separated by b .
- ▶ Example:

WeChat: cstutorcs

Assignment Project Exam Help
(1, 3, 2, 3) \mapsto abbaabaaa

- ▶ To extend to all integers: adopt some convention to represent minus sign by a letter.

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Successor

$$f(n) = n + 1.$$

Using the unary code for nonnegative integers:



WeChat: estutorcs



Assignment Project Exam Help




Email: tutorcs@163.com

QQ: 749389476

$a \rightarrow R$

<https://tutorcs.com>

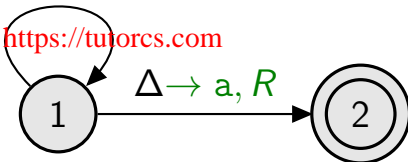

Double

$$f(n) = 2n.$$

Using the unary code:

Δ	Δ	Δ	Δ	...
----------	----------	----------	----------	-----

a	Δ	Δ	Δ	...
---	----------	----------	----------	-----

a	a	Δ	Δ	...
---	---	----------	----------	-----

程序代写代做 CS编程辅导



— WeChat: [tutorcs](#)

Assignment Project Exam Help

→ Email: tutorcs@163.com

→ QQ: 749389456


<https://tutorcs.com>

Δ	Δ	Δ	Δ	...
----------	----------	----------	----------	-----

a	a	Δ	Δ	...
---	---	----------	----------	-----

a	a	a	a	Δ	...
---	---	---	---	----------	-----


Double

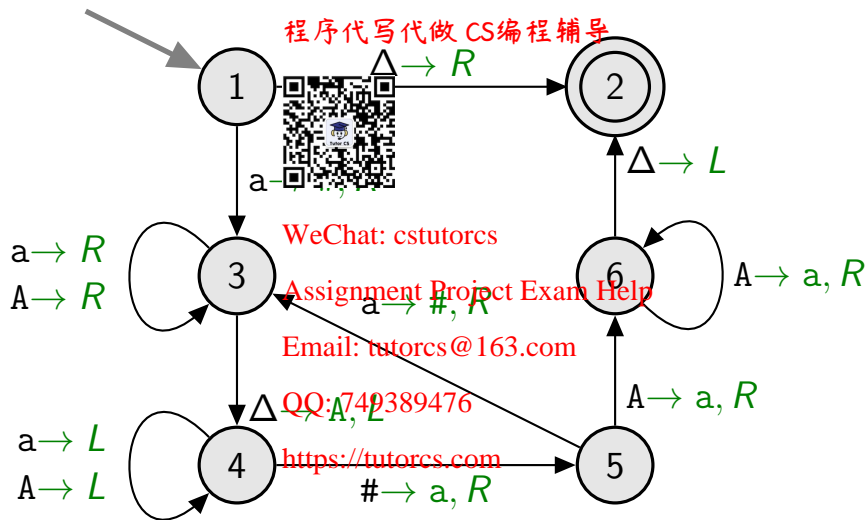

Addition

$f(n, m) = n + m$, using the unary code for pairs of integers:

程序代写代做 CS编程辅导




WeChat: cstutores

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

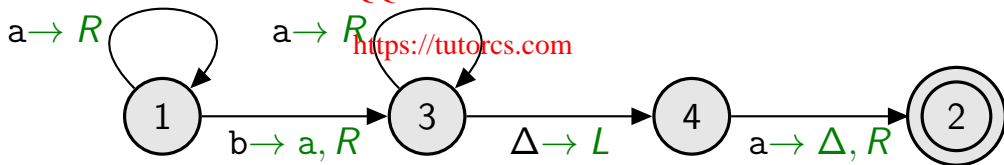

Computability

程序代写代做 CS编程辅导

Definition

A function is **computable** if it is a function computed by some Turing machine.



This assumes that the function maps strings to strings, $f : \Sigma^* \rightarrow \Sigma^*$.

To be able to talk about computability of functions on other objects (numbers, sequences, arrays, graphs, ...), we need to have in mind some reasonable scheme for encoding the objects as strings.

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

For example, a function that takes any sequence of natural numbers and returns some sequence of natural numbers is computable if, when the sequences are encoded as strings (e.g., using the scheme we described earlier), the resulting function from strings to strings is computable.

QQ: 749389476

<https://tutorcs.com>

Variations on Turing machines

程序代写代做 CS编程辅导

Variations on Turing machines



- ▶ Direction:

- ▶ stay still, as well as Left/Right

- ▶ Tapes:

- ▶ two-way infinite
 - ▶ multiple tapes
 - ▶ separate input, output, work tapes
 - ▶ “tapes” of 2 or more dimensions
 - ▶ ...

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

Same class of computable functions

<https://tutorcs.com>

Other approaches to computability

程序代写代做 CS编程辅导



Recursive function theory

- ▶ starting with Kurt Gödel, 1931

Lambda calculus

- ▶ Alonzo Church, 1936

Turing machines

- ▶ Alan Turing, 1936–37

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>



<https://mathshistory.st-andrews.ac.uk/Biographies/Godel/>

Kurt Gödel (1906–1978)



<https://mathshistory.st-andrews.ac.uk/Biographies/Church/>

Alonzo Church (1903–1995)

Church-Turing Thesis

程序代写代做 CS编程辅导

Any function v can defined by an algorithm
can be computed by a Turing Machine.



WeChat: cstutorcs

Note: not a Theorem! But widely accepted

Assignment Project Exam Help

Evidence:

Email: tutorcs@163.com

- ▶ different approaches to computability end up in agreement;
- ▶ long experience, that algorithms can be implemented as programs, and therefore on Turing machines;
- ▶ no known counterexamples, i.e., no algorithms which seem to be unimplementable.

QQ: 719389476

<https://tutorcs.com>

Alan Turing

- ▶ Alan Turing Centenary Year (2012) website: <http://www.turingcentenary.eu/>
- ▶ B. Jack Copeland, *Turing: A Guide to the Information Age*, OUP, 2013.
- ▶ Andrew Hodges, *Alan Turing: The Enigma*, Vintage, London, 1983.
- ▶ Andrew Hodges, *Turing*, Pimlico, London, 1997.
- ▶ Turing bibliography: <http://www.turing.org.uk/sources/biblio.html>
- ▶ G. Farr, Calls for a posthumous pardon ... but who was Alan Turing?, *The Conversation*, 22 Dec 2011, <https://theconversation.com/calls-for-a-posthumous-pardon-but-who-was-alan-turing-4773>
- ▶ G. Farr, The Imitation Game: is it history, drama or myth?, *The Conversation*, 9 Jan 2015, <https://theconversation.com/the-imitation-game-is-it-history-drama-or-myth-35849>

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Revision

程序代写代做 CS编程辅导



- ▶ Know what a Turing Machine is and how to use one.
- ▶ Be able to convert a Finite Automaton into a TM.
- ▶ Be able to build a Turing Machine to define a language.
- ▶ Know the unary code for natural numbers, and tuples
- ▶ Know what a computable function is, and how to define one using a TM.
- ▶ Know and understand the Church-Turing Thesis.

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

Reading: Sipser, Ch. 3: Section 3.1, pp. 165–176, 181–190.

Preparation: Sipser, Ch. 3, start & end of Section 3.2; Section 3.3

<https://tutorcs.com>