

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Overview

程序代写代做 CS编程辅导

- Faults and Fault-Tolerant Systems
- Distributed Cons



WeChat: cstutorcs

Assignment Project Exam Help

Learning outcome(s) related to this topic

Email: tutorcs@163.com

- Compare and contrast different parallel computing architectures, algorithms and communication schemes using research-based knowledge and methods (<https://tutorcs.com>)

QQ: 749389476

<https://tutorcs.com>

Dependability in a distributed memory parallel computing system

程序代写代做 CS编程辅导



- Availability: System is available and can be used immediately
- Reliability: System can operate continuously without failure
- Safety: When a system (temporarily) fails to operate correctly, nothing catastrophic happens
- Maintainability: How easily a failed system can be repaired
 - Building a dependable system comes down to controlling failure and faults.

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Failure

程序代写代做 CS编程辅导

- Failure: a system fails when it fails to meet its promises or cannot provide its services in the specified manner

- Error: part of the system that leads to failure (i.e., it differs from its intended value)



- Fault: the cause of an error (results from design errors, manufacturing faults, deterioration, or external disturbance)

WeChat: estutorcs

Assignment Project Exam Help

- Recursive:

- Failure may be initiated by a mechanical fault
- Manufacturing fault leads to disk failure
- Disk failure is a fault that leads to database failure
- Database failure is a fault that leads to email service failure

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Total vs Partial Failure

程序代写代做 CS编程辅导

Total Failure:

- All components in a system fail
- Typical in non-distributed systems



Partial Failure:

- One or more (but not all) components in a distributed system fail
- Some components affected
- Other components completely unaffected
- Considered as fault for the whole system

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Classification of failures

程序代写代做 CS编程辅导

- Our view of a distributed system is a process-level view, so we begin with the description of certain types of failures that are visible at the process level.



- The major classes of failures follows:-

- Crash Failure

- Omission Failure

- Transient Failure

- Byzantine Failure

- Software Failure

- Temporal Failure

- Security Failure

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Classification of failures

程序代写代做 CS编程辅导

Crash Failure



- A process undergoes crash failure when it permanently ceases to execute its actions. This is an irreversible failure.
- In an asynchronous model, crash failures cannot be detected with total certainty, since there is no lower bound of the speed at which a process can execute its actions.
- In a synchronous system where processor speed and channel delays are bounded, crash failures can be detected using timeouts.

WeChat: tutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Classification of failures

程序代写代做 CS编程辅导

▪ Omission Failure



If the receiver does not receive one or more of the messages sent by the transmitter, an omission occurs. For wireless networks, collision occurs in MAC layer or receiving node moves out of range.

WeChat: cstutorcs

▪ Transient Failure

Assignment Project Exam Help

Email: tutorcs@163.com

A transient failure can disturb the state of processes in an arbitrary way. The agent inducing this problem may be momentarily active but it can make a lasting effect on the global state. E.g., a power surge, or a mechanical shock, or a lightning.

QQ: 749389476

<https://tutorcs.com>

Classification of failures

程序代写代做 CS编程辅导

■ Byzantine Failure

Byzantine failures represent the weakest of all failure models that allow every conceivable form of malicious behaviour. The term alludes to uncertainty and was first introduced by Pease et al.



- Assume that process i forwards the value x of a local variable to each of its neighbours. The following inconsistencies may occur:

Assignment Project Exam Help

- two distinct neighbours j and k receive values x and y , where $x \neq y$
- one or more neighbours do not receive any data from i
- every neighbour receives a value z where $z \neq x$

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Classification of failures

程序代写代做 CS编程辅导

- Some possible causes of runtime failures are:



- total or partial break of a link joining i with one of its neighbours
- software problems in process i
- hardware synchronization problems – assume that every neighbour is connected to the same bus, and reading the same copy sent out by i , but since the clocks are not perfectly synchronized, they may not read the value of x at the same time. If value of x varies with time, then different neighbours of i may read different values of x from process i .

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Classification of failures

程序代写代做 CS编程辅导

Software Failure

- Primary causes of software failure
- **Coding error or human error** – A program fails to use the appropriate physical parameters. September 1999 NASA lost \$125 million Mars Orbiter spacecraft because of a programming team used metric units while another used English units, leading to a navigation fiasco, causing it to burn in the atmosphere.

WeChat: cstutorcs

- **Software design error** – Mars pathfinder mission landed flawlessly on the Martial surface on July 4, 1997. However, later its communication failed due to a design flaw in the real-time embedded software kernel VxWorks. The problem was later diagnosed to be caused due to **priority inversion**

- Priority inversion: Low priority task **LP** locks file **F**
- High priority task **HP** is scheduled next, it also needs to lock file **F**
- A medium priority **MP** task (with high CPU requirement) becomes ready to run
- **MP** is the highest priority unblocked task, its allowed to run, consumes all CPU
- **LP** has no CPU, it stops. **HP**'s priority < **MP**'s priority (priority inversion)



Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Classification of failures 程序代写代做 CS编程辅导

▪ Memory Leaks

- Processes fail to give up the physical memory that has been allocated to them. This effectively reduces the size of available physical memory over time. When the available memory falls below the minimum requirement by the system, a crash becomes inevitable.

WeChat: cstutorcs

Assignment Project Exam Help

- Problem with inadequacy of specification e.g. Y2K bug

Email: tutorcs@163.com

Note: that many of the failures like crash, omission, transient and Byzantine can be caused by **software bugs**. For example, a poorly designed loop that does not terminate can **trigger a crash failure** in the sender process. An inadequate policy in the router software can cause packets to drop and trigger **omission failure**.

Classification of failures

程序代写代做 CS编程辅导

- **Temporal Failure**



Real-time systems require tasks to be completed within a specific time frame. When this time limit is not met, a temporal failure occurs.

WeChat: cstutorcs

- **Security Failure**

Assignment Project Exam Help

Email: tutorcs@163.com

Virus and other malicious software may lead to unexpected behaviour that manifests itself as a system fault.

QQ: 749389476

<https://tutorcs.com>

Classification of failures

程序代写代做 CS编程辅导

Finally,

Human errors play can play a role in system failure.



- In November 1988, much of the long distance service along the East Coast of USA was disrupted when a construction crew accidentally detached a major fibre optic cable in New Jersey; as a result 3,500,000 call attempts were blocked

WeChat: cstutorcs

Assignment Project Exam Help

- On September 17, 1991 AT&T technicians in NY attending a seminar on warning systems failed to respond to an activated alarm for six hours. The resulting power failure blocked nearly 5 million domestic and international calls and paralysed air travel throughout the Northeast, causing nearly 1,170 flights to be cancelled or delayed.

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

History of Fault Tolerant Systems

程序代写代做 CS编程辅导

- The first known fault-tolerant computer was SAPO, built in 1951 in Czechoslovakia by Antonín Šafařík.



- Most of the development in the so called LLNM (Long Life, No Maintenance) computing was done by NASA during the 1960's, in preparation for Project Apollo and other research aspects. NASA's first machine went into a space observatory, and their second attempt, the JSTAR computer, was used in Voyager. This computer had a backup of memory arrays to use memory recovery methods and thus it was called the JPL Self-Testing-And-Repairing computer. It could detect its own errors and fix them or bring up redundant modules as needed.

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

- Smart Sensor Network in the Ageless Space Vehicle Project

<https://tutorcs.com>

Fault-Tolerant System

程序代写代做 CS编程辅导

- We designate a system that does not tolerate failures as a fault-tolerant system. In such systems, the occurrence of failures states *liveness* and *safety* properties.
- There are four major types of fault tolerance
 - Masking tolerance
 - Non-masking tolerance
 - Fail-safe tolerance
 - Graceful degradation



WeChat: cstutorcs

Assignment Project Exam Help

Note:

- *Safety* properties specify that “something bad never happens”
 - Doing nothing easily fulfils a safety property as this will never lead to a “bad” situation
- *Safety* properties are complemented by *liveness* properties
- *Liveness* properties assert that: “something good” will eventually happen [Lamport]

Email: tutorcs@163.com

QQ: 749389476

<https://tutores.com>

Masking Tolerance

程序代写代做 CS编程辅导

- Let P be the set of configurations for the fault-tolerance system.
- Given a set of fault actions F , a fault span Q corresponds to the largest set of configurations that the system can support.
- In Masking tolerance system, when a fault F is masked its occurrence has no impact on the application, that is $P = Q$.

WeChat: cstutorcs

Assignment Project Exam Help

- Masking tolerance is important in many safety-critical applications where the failure can endanger human life or cause massive loss of properties.

Email: tutorcs@163.com

- An aircraft must be able to fly even if one of its engines malfunctions.

QQ: 749389476

- Masking tolerance preserve both *safety* and *liveness* properties of the original system.

<https://tutorcs.com>

Implementing Failure Masking

- Introduce Redundancy
 - Information redundancy
 - Time redundancy
 - Physical redundancy




WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

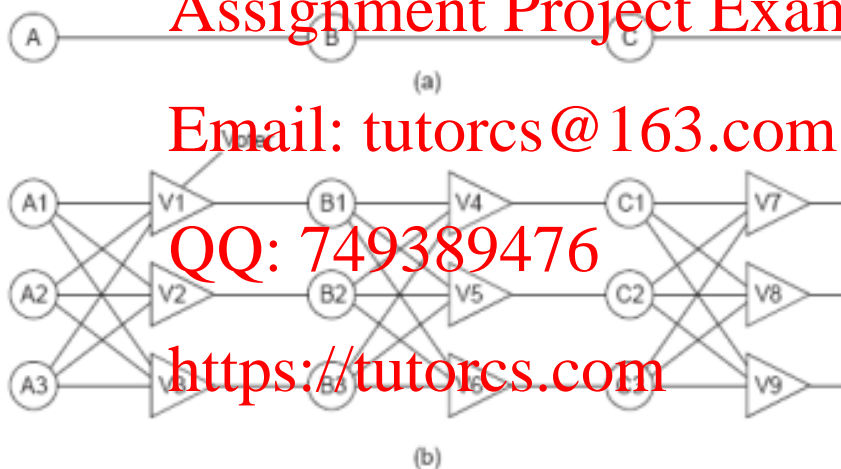

Non-Masking Tolerance

程序代写代做 CS编程辅导

- In non-masking fault tolerance, the system may temporarily affect and violate the *safety* property, that is
- However, *liveness* is not compromised, and eventually normal behaviour is restored.
- Consider that while watching a movie, the server crashed, but the system automatically restored the service by switching to a standby proxy server.
- Stabilization and Checkpointing represent two opposing scenarios in non-masking tolerance.
 - Checkpointing relies on history and recovery is achieved by retrieving the lost computation.
 - Stabilization is history-insensitive and does not care about lost computation as long as eventual recovery is guaranteed.



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Fail-Safe Tolerance

程序代写代做 CS编程辅导

- Certain faulty configurations affect the application in an adverse way and therefore considered as failures.
- A fail-safe system relaxes the safety requirement by avoiding only those faulty configurations that will have catastrophic consequences (notwithstanding the failure).



WeChat: cstutorcs

As an example,

Assignment Project Exam Help

- At a four-way traffic crossing, if the lights are green in both directions then a collision is possible. However, if the lights are red, at best traffic will stall but will not have any catastrophic side effect.

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Graceful Degradation

程序代写代做 CS编程辅导



- There are systems that recover, nor fully recover from the effect of failures, but exhibit a degraded behaviour that falls short of normal behaviour, but is still considered acceptable.
- The notion of acceptability is highly subjective and entirely dependent on the user running the application.

WeChat: cstutorcs

Some examples

Assignment Project Exam Help

Email: tutorcs@163.com

- While routing a message between two points in a network, a program computes the shortest path. In the presence of a failure, if this program returns another path but not the shortest, then this may be acceptable.

QQ: 749389476

<https://tutorcs.com>

- An operating system may switch to a safe mode where users cannot create or modify files, but can read the files that already exist.

Distributed Consensus



- Why we need distributed consensus? Let us consider the following examples:
- Example1. The leader election problem in a network of processes. Each process begins with an initial proposal for leadership. At the end one of it a candidate is elected as a leader, it reflects the final decision of every process.

WeChat: estutorgcs

- Example2. Fund transfer

Assignment Project Exam Help

- Example3. Synchronizing clocks

Email: tutorcs@163.com

QQ: 749389476

- Consensus is easier to achieve in the absence of failures. We will study distributed consensus in the presence of failures.

<https://tutorcs.com>

Problem Definition

程序代写代做 CS编程辅导

The Consensus may be defined as follows:



- A distributed system has n processes $\{0, 1, 2, \dots, n-1\}$.
- Every process has an initial value in a mutually agreed domain.
- The challenge is to devise an algorithm, which in spite of the occurrence of failures, allows processes to reach an irrevocable decision that fulfils the following conditions:

WeChat: cstutorcs

Assignment Project Exam Help

- **Termination.** Every (non-faulty) process must eventually come to a decision.

Email: tutorcs@163.com

- **Agreement.** The final decision of every (non-faulty) process must be identical.

QQ: 749389476

<https://tutorcs.com>

- **Validity.** If every (non-faulty) process begins with the same initial value v , their final decision must be v .

Consensus in Asynchronous System

- If there is no failure, then reaching an agreement is trivial.
- Reaching consensus, however, becomes surprisingly difficult when one or more members fail to execute actions.



WeChat: cstutorcs

- Assume that at most k members ($k > 0$) can fail.
 - An important finding by Fischer et al. is that in a fully asynchronous system, it is impossible to reach consensus even if $k=1$.

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Bivalent and Univalent States

程序代写代做CS编程辅导

- A decision state is bivalent if from a state, there exist at least two distinct executions leading to distinct decision values e.g. 0 or 1.
- On the other hand, a state from which only one decision value can be reached is called a univalent state. Univalent states can be either 0-valent or 1-valent.



WeChat: cstutorcs

Assignment Project Exam Help

- Consider a best-of-five-sets tennis match between A and B. If the score is 6-3, 6-4 in favour of A, the decision state is bivalent, since anyone can win at this point. However, if the score becomes 6-3, 6-4, 7-6 in favour of A, then the state becomes univalent.

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

The Byzantine General Problem

- Lamport showed (by proof) that:
 - For a system of n nodes, there cannot be more than $n/3$ faulty nodes. (if we want to reach distributed consensus)
 - Alternatively:
 - There must be more than $3m$ troops in an army with up to m traitors to launch a concerted attack.

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Credits to Leslie Lamport [2002]

