

程序代写代做 CS编程辅导



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Topic Overview

程序代写代做 CS编程辅导



- Revisiting Collective Communications with MPI Scatter & Gather
- Introduction to MPI Virtual Topologies

WeChat: cstutorcs

A portion of the content in the following slides were adopted from:

Assignment Project Exam Help

a) Introduction to the Message Passing Interface (MPI), Irish Centre for High-End Computing (ICHEC) (www.ichec.ie)

Email: tutorcs@163.com

QQ: 749389476

Learning outcome(s) related to this topic

<https://tutorcs.com>

- Design and develop parallel algorithms for various parallel computing architectures (LO3)

程序代写代做 CS编程辅导



Revisiting Collective Communications with MPI Scatter & Gather

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Collective Communication

程序代写代做 CS编程辅导

- Communication involving a group of processes.
- Must be called by all processes in a communicator.
- Examples:
 - Barrier synchronization.
 - Broadcast, scatter, gather.
 - Global sum, global maximum, etc.



WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Characteristics of Collective Communication



- Optimised Communication routines involving a group of processes
- Collective action over a communicator, i.e. all processes must call the collective routine.
- Synchronization may or may not occur.
- All collective operations are blocking.
- No tags.
- Receive buffers must have exactly the same size as send buffers.

程序代写代做 CS编程辅导

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Barrier Synchronization

程序代写代做 CS编程辅导



- C: `int MPI_Barrier(MPI_Comm comm)`
- MPI_Barrier is normally never needed:
 - all synchronization is done automatically by the data communication.
 - a process cannot continue before it has the data that it needs.
 - if used for debugging:
 - please guarantee, that it is removed in production.

Email: tutorcs@163.com


QQ: 749389476

<https://tutorcs.com>

Broadcast

程序代写代做 CS编程辅导

- C: `int MPI_E`  `buf, int count, MPI_Datatype datatype, MPI_Op op, MPI_Comm comm)`

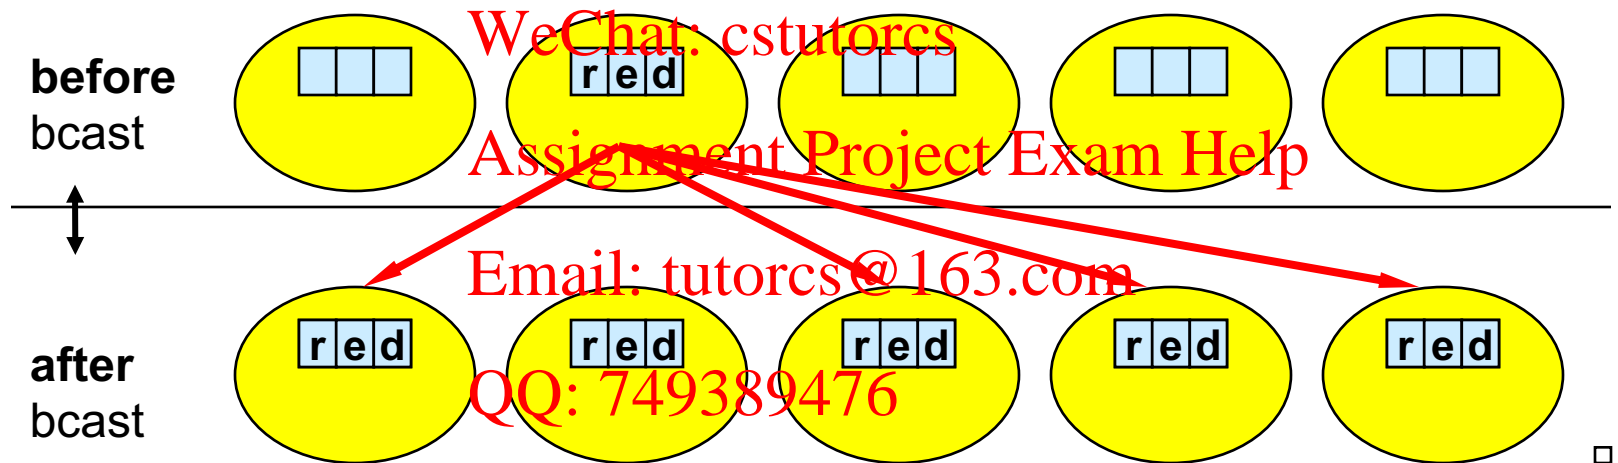

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476


<https://tutorcs.com>

e.g., `root=1`

- rank of the sending process (i.e., root process)
- must be given identically by all processes

Scatter


程序代写代做 CS编程辅导

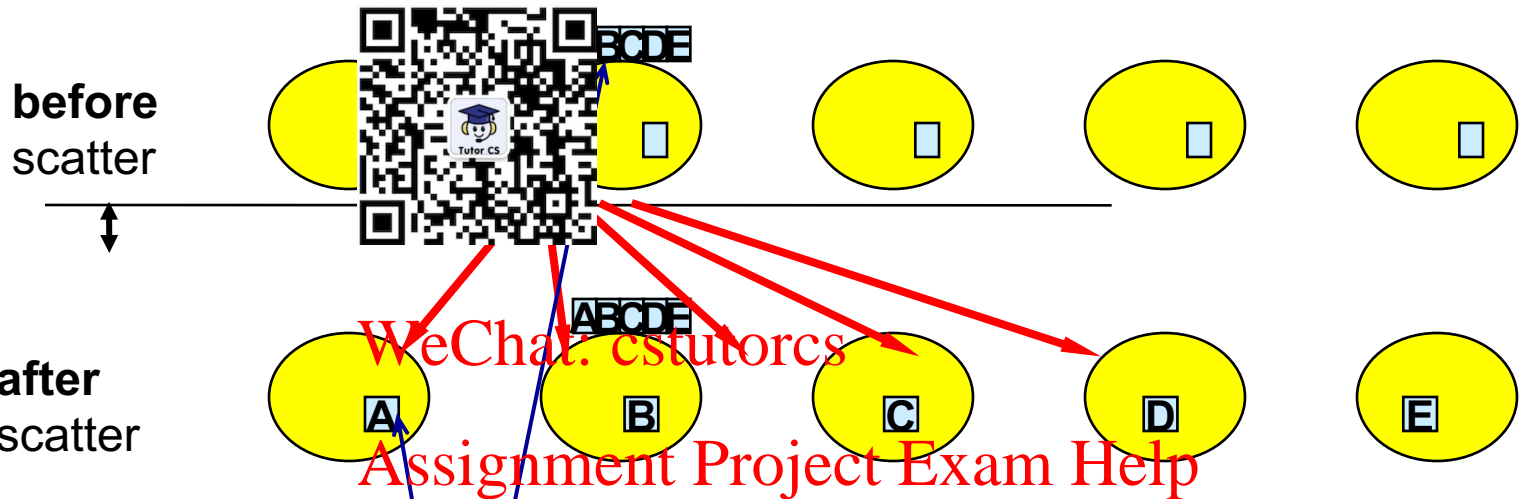

- C: int MPI_Scatter(void ***sendbuf**, int sendcount, MPI_Datatype sendtype, void ***recvbuf**, int recvcount, MPI_Datatype recvtype, int root, MPI_Comm comm)
- C: int MPI_Scatterv(const void ***sendbuf**, const int *sendcounts, const int *displs, MPI_Datatype sendtype, void ***recvbuf**, int recvcount, MPI_Datatype recvtype, int root, MPI_Comm comm)

Gather

程序代写代做 CS编程辅导

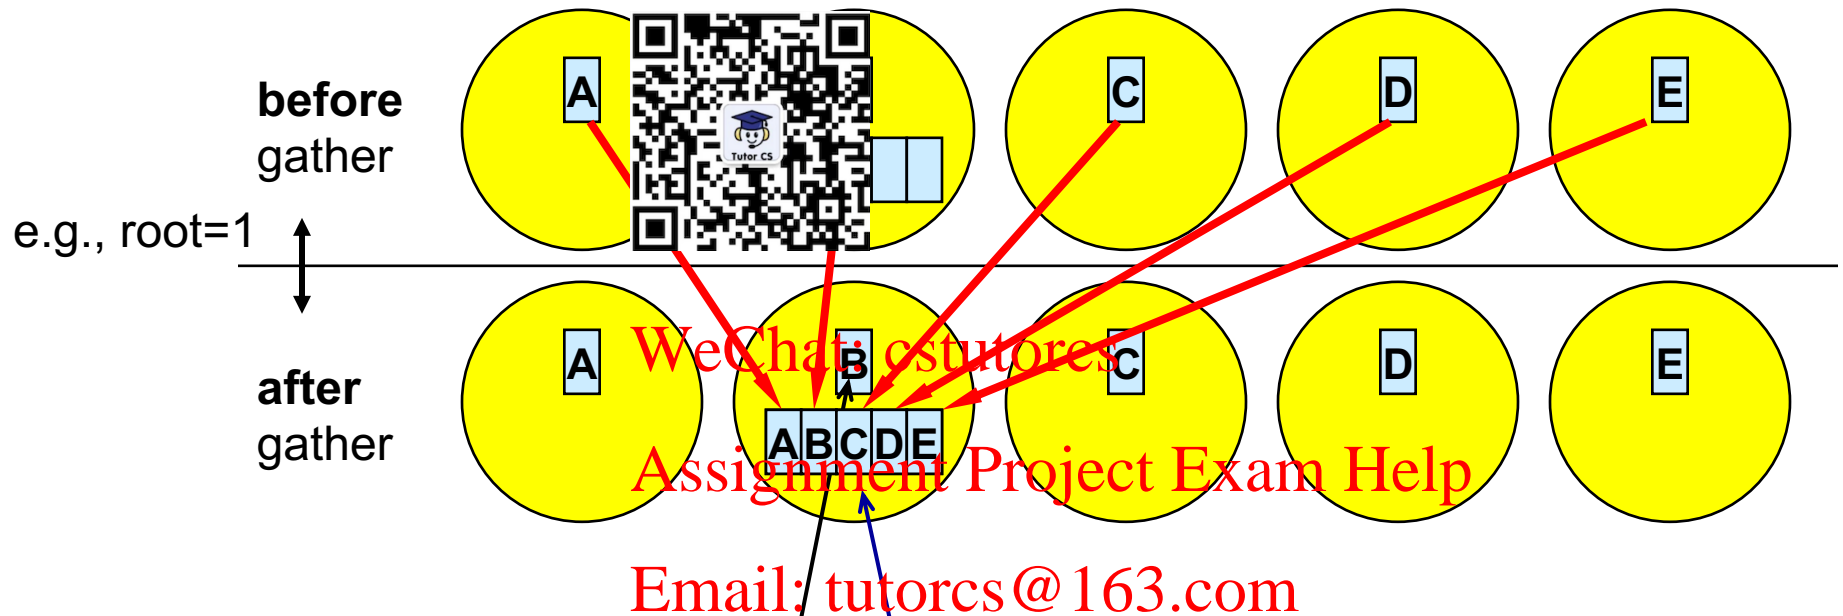

- C: int MPI_Gather(void ***sendbuf**, int sendcount, MPI_Datatype sendtype, void ***recvbuf**, int recvcount, MPI_Datatype recvtype, int root, MPI_Comm comm)
- C: int MPI_Gatherv(const void ***sendbuf**, int sendcount, MPI_Datatype sendtype, void ***recvbuf**, const int *recvcounts, const int *displs, MPI_Datatype recvtype, int root, MPI_Comm comm)

Click [here](#) for sample C code implementation of MPI Scatter & Gather

程序代写代做 CS编程辅导



Introduction to MPI Virtual Topologies

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Topologies - Motivations

程序代写代做 CS编程辅导



- Need to create sets of processes
 - For programming convenience
 - Make use of collective routines
- Need to map the abstract topology onto the natural topology of the problem domain
 - For programming convenience
 - For performance

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Groups & communicators

程序代写代做 CS编程辅导



- A group is a ordered set of process identifiers
- Each process in a group is associated with an rank
- Usually one associates to groups communicators

WeChat: cstutorcs

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Working with groups

程序代写代做 CS编程辅导

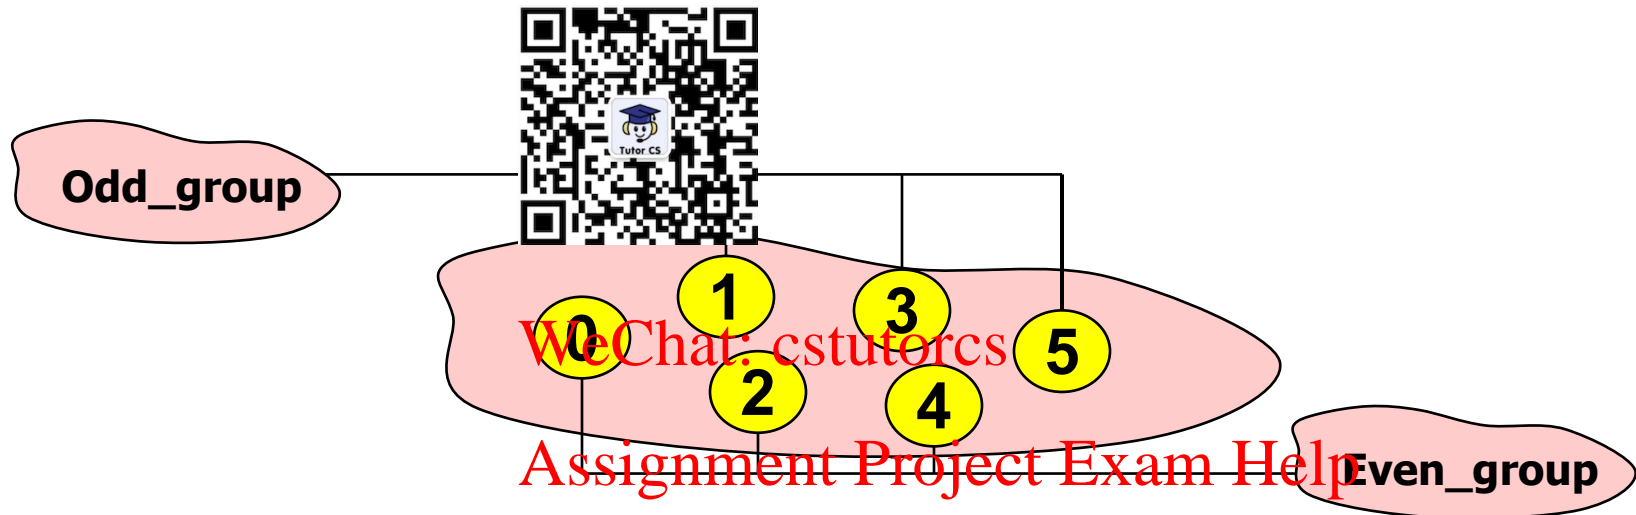

- Select processes ranks to create groups
- Associate to these groups *new* communicators
- Use these new communicators as usual
- `MPI_Comm_group(comm, group)` returns in *group* the group associated to the communicator *comm*

For the previous example

程序代写代做 CS编程辅导



- Odd_ranks={1, 3, 5}, Even_ranks={0, 2, 4}
- 1. MPI_Comm_group(MPI_COMM_WORLD, Old_group)
- 2. MPI_Group_incl(Old_group, 3, Odd_ranks, &Odd_group)
- 3. MPI_Group_incl(Old_group, 3, Even_ranks, &Even_group)
- int MPI_Comm_create(MPI_COMM_WORLD, Odd_group, Odd_Comm)
- int MPI_Comm_create(MPI_COMM_WORLD, Even_group, Even_Comm)
- Alternatively...
- color = modulo(myrank, 2)
- MPI_Comm_split(MPI_COMM_WORLD, color, key, &newcomm)

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Group Management

程序代写代做 CS编程辅导



- Group Accessors
 - MPI_Group_size(...)
 - MPI_Group_rank(...)
 - ...

WeChat: cstutorcs

- Group Constructors
 - MPI_COMM_GROUP(...)
 - MPI_GROUP_INCL(...)
 - MPI_GROUP_EXCL(...)
 - ...

Assignment Project Exam Help

Email: tutorcs@163.com

- Group Destructors
 - MPI_GROUP_FREE(group)

QQ: 749389476

<https://tutorcs.com>

Communicator Management

程序代写代做 CS编程辅导



- Communicator Accessors

- MPI_COMM_SIZE(comm)
- MPI_COMM_RANK(comm)
- ...

WeChat: cstutorcs

- Communicator Constructors

- MPI_COMM_CREATE(comm, rank)
- MPI_COMM_SPLIT(comm, rank, color, comm)

Assignment Project Exam Help

Email: tutorcs@163.com

- Communicator Destructors

- MPI_COMM_FREE(comm)

QQ: 749389476

<https://tutorcs.com>

Virtual topology

程序代写代做 CS编程辅导

- For more complex, MPI routines are available
- Global array decomposition, e.g., $A(2001:3000, 1:1000, 301:400) = 0.1 \cdot 10^9$ words
- on **processors** $4 \times 5 = 60$
- process coordinates $0..2, 0..3, 0..4$
- example:
on process $ic_0=2, ic_1=0, ic_2=3$
(rank=43)
decomposition, e.g., $A(2001:3000, 1:1000, 301:400) = 0.1 \cdot 10^9$ words
- **process coordinates:** handled with
virtual Cartesian topologies
- Array decomposition: handled by the application program directly



WeChat: estutorcs

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Graphical representation

程序代写代做 CS编程辅导

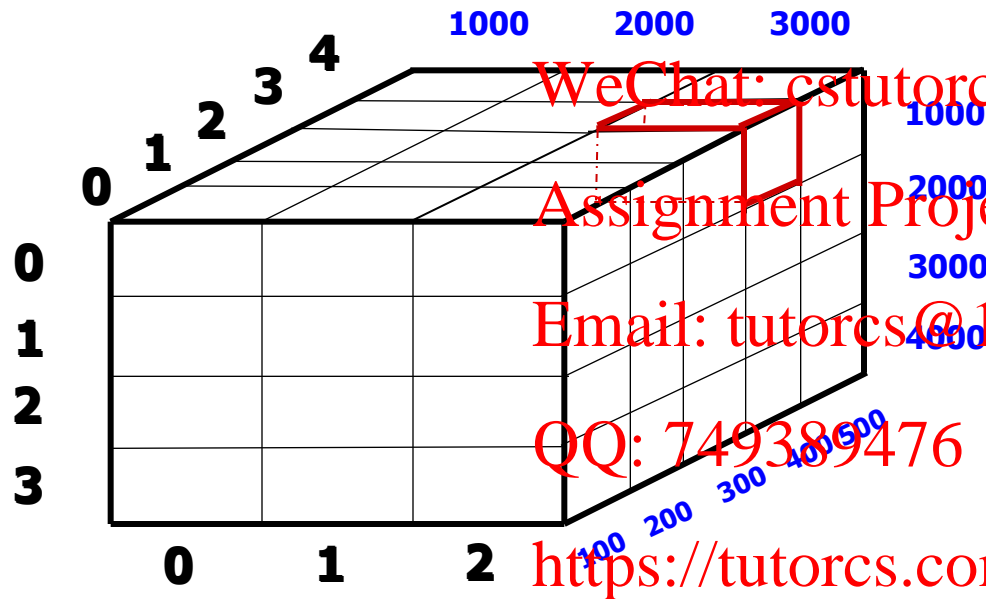

- Distribution of processes over the grid
- Distribution of the Global Array
- Coordinate (2, 0, 3) represents process number 43
- It is being assigned the cube A(2001:3000, 1:1000, 301:400)

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Virtual Topologies

程序代写代做 CS编程辅导



- Convenient class naming.

- Simplifies writing of code.

WeChat: cstutorcs

- Can allow MPI to optimize communications.

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

How to use a Virtual Topology

程序代写代做 CS编程辅导



- Creating a topology produces a new communicator.
- MPI provides mapping functions:
 - to compute process ranks, based on the topology naming scheme,
 - and vice versa.

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Topology Types

程序代写代做 CS编程辅导



- Cartesian Topology

- each process is *connected* to its neighbor in a virtual grid,
- boundaries can be cyclic, or not,
- processes are identified by Cartesian coordinates,
- of course, communication between any two processes is still allowed.

WeChat: cstutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

- Graph Topologies

- general graphs,
- not covered here.

QQ: 749389476

<https://tutorcs.com>

Creating a Cartesian Virtual Topology

程序代写代做 CS编程辅导



- `int MPI_Cart_create(MPI_Comm comm_old, int ndims, int *dims, int *periods, int reorder, MPI_Comm *comm_cart)`


WeChat: cstutorcs

```
comm_old = MPI_COMM_WORLD
ndims = 2
dims = ( 4, 3 )
periods = ( 1/.true., 0/.false. )
reorder = see next slide
```

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

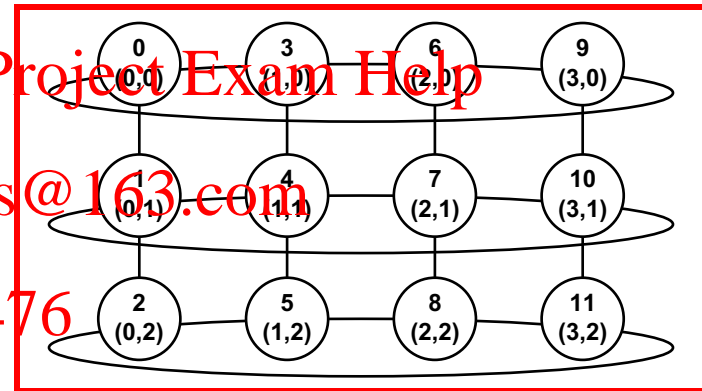


<https://tutorcs.com>

Example – A 2-dimensional Cylinder


程序代写代做 CS编程辅导

- **Ranks** and **Cartesian** coordinates in **comm_cart**
- Ranks in **comm** and **cart** may differ, if **reorder = 1** or **.TRUE.**
- This reordering can all optimize communications

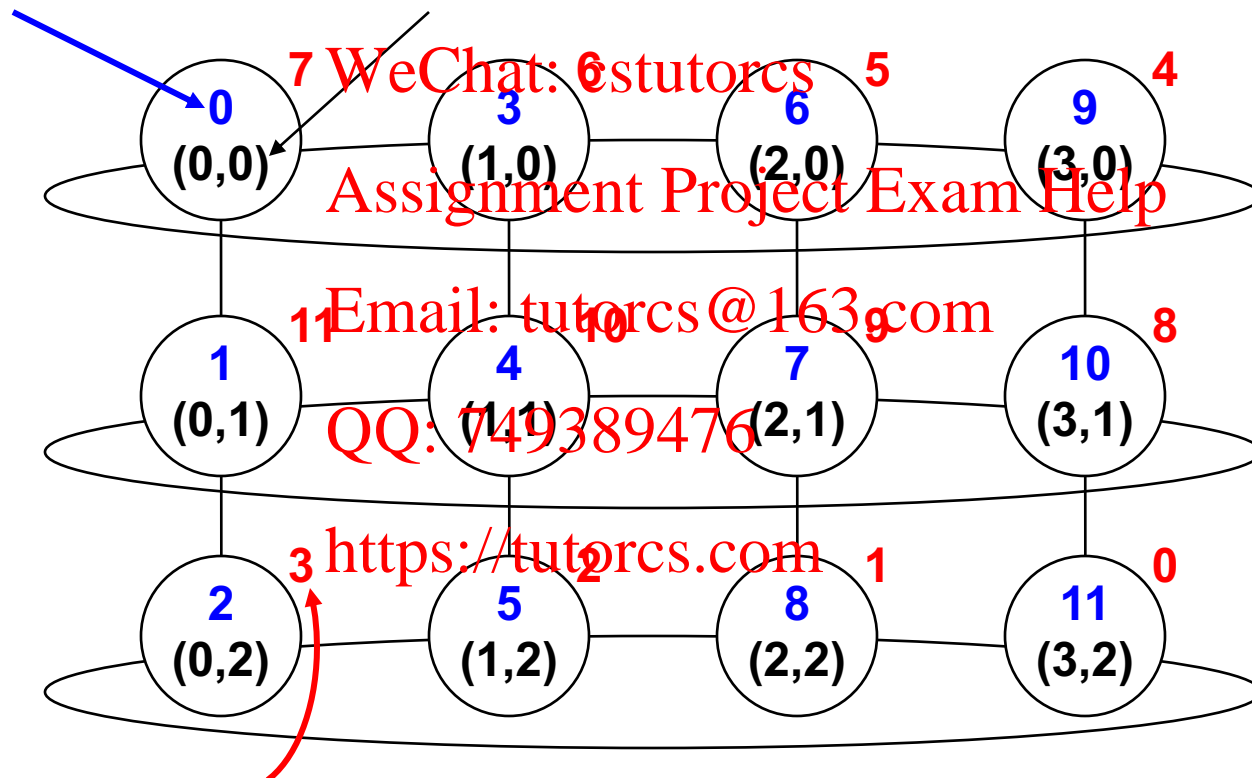

Cartesian Mapping Functions

程序代写代做 CS编程辅导

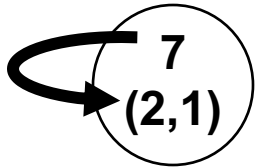

- Mapping ranks to process grid coordinates



WeChat: cstutorcs

- `int MPI_Cart_coords(MPI_Comm comm_cart,`
`int rank, int maxdims, int *coords)`

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Cartesian Mapping Functions

程序代写代做 CS编程辅导



- Mapping process and coordinates to ranks

- `int MPI_Cart_rank(MPI_Comm comm_cart,`
`int *coords, int *rank)`

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

Own coordinates

程序代写代做 CS编程辅导

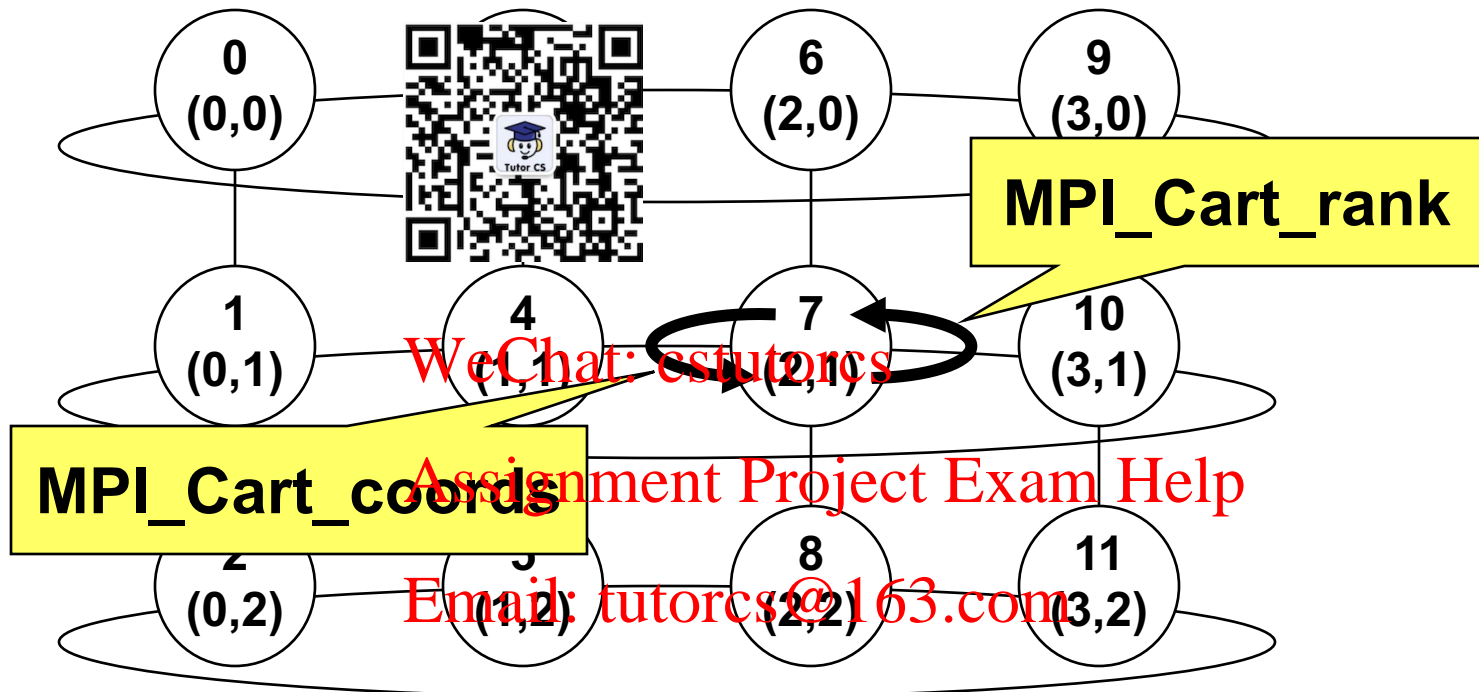

WeChat: estutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

- Each process gets its own coordinates with
`MPI_Comm_rank(comm_cart, my_rank, ierror)`
`MPI_Cart_coords(comm_cart, my_rank, maxdims,
my_coords, ierror)`

Cartesian Mapping Functions?

程序代写代做 CS编程辅导



- Computing ranks of processes
- `int MPI_Cart_shift(MPI_Comm comm_cart, int direction, int disp, int *rank_prev, int *rank_next)`
- Returns MPI_PROC_NULL if there is no neighbor
- MPI_PROC_NULL can be used as source or destination rank in each communication

WeChat: [tutorcs](#)

Assignment Project Exam Help


Email: tutorcs@163.com

QQ: 749389476

<https://tutorcs.com>

MPI_Cart_shift – Example

程序代写代做 CS编程辅导

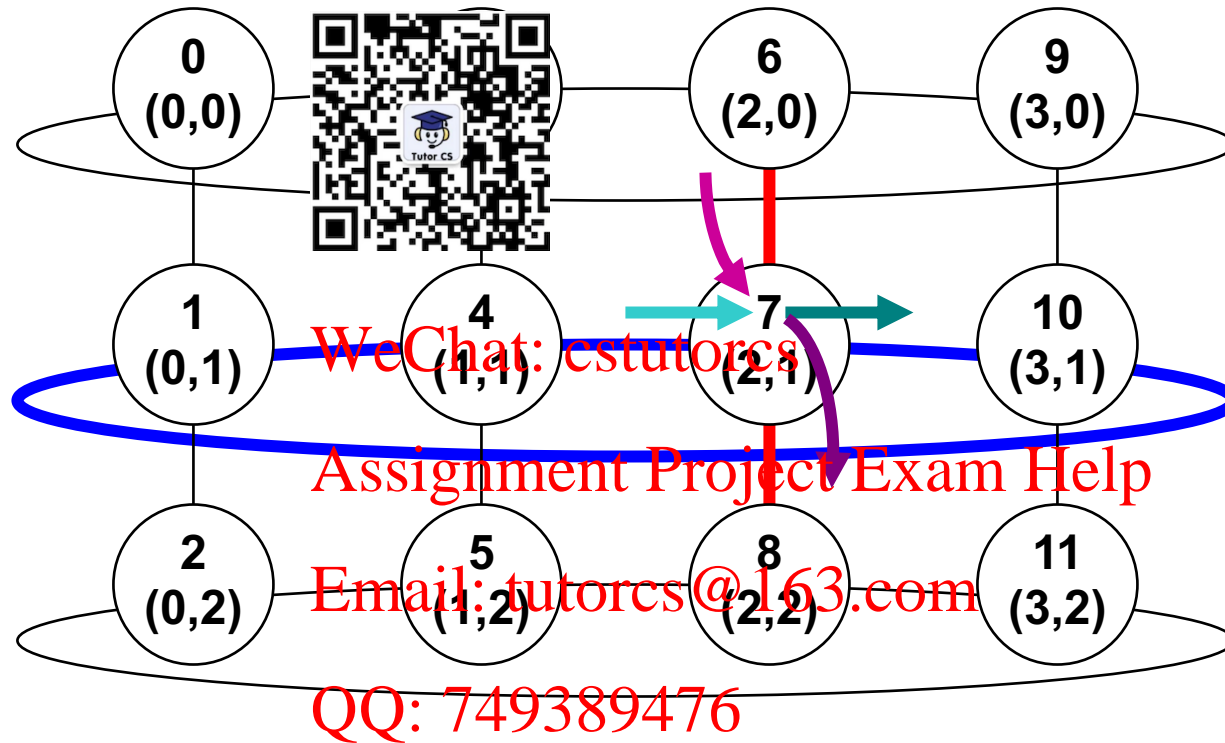

invisible input argument: **my_rank** in cart

<https://tutorcs.com>

- MPI_Cart_shift(cart, direction, displace, *rank_prev*, *rank_next*, *ierror*)
 example on process rank=7 0 or +1 4 10
 1 +1 6 8

Cartesian Partitioning

程序代写代做 CS编程辅导



- Cut a grid up in
- A new communicator is produced for each slice.
- Each slice can then perform its own collective communications.
- `int MPI_Cart_sub(MPI_Comm comm_cart, int *remain_dims, MPI_Comm *comm_slice)`


WeChat: cs_tutorcs

Assignment Project Exam Help

Email: tutorcs@163.com

QQ: 749389476


<https://tutorcs.com>

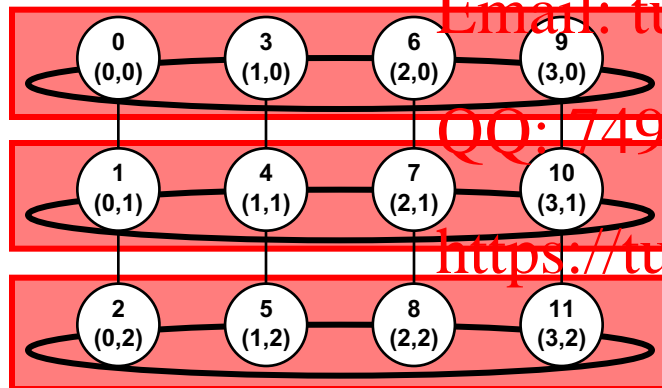

MPI_Cart_sub – Example

程序代写代做 CS编程辅导

- Ranks and Cartesian process coordinates in **comm_sub**

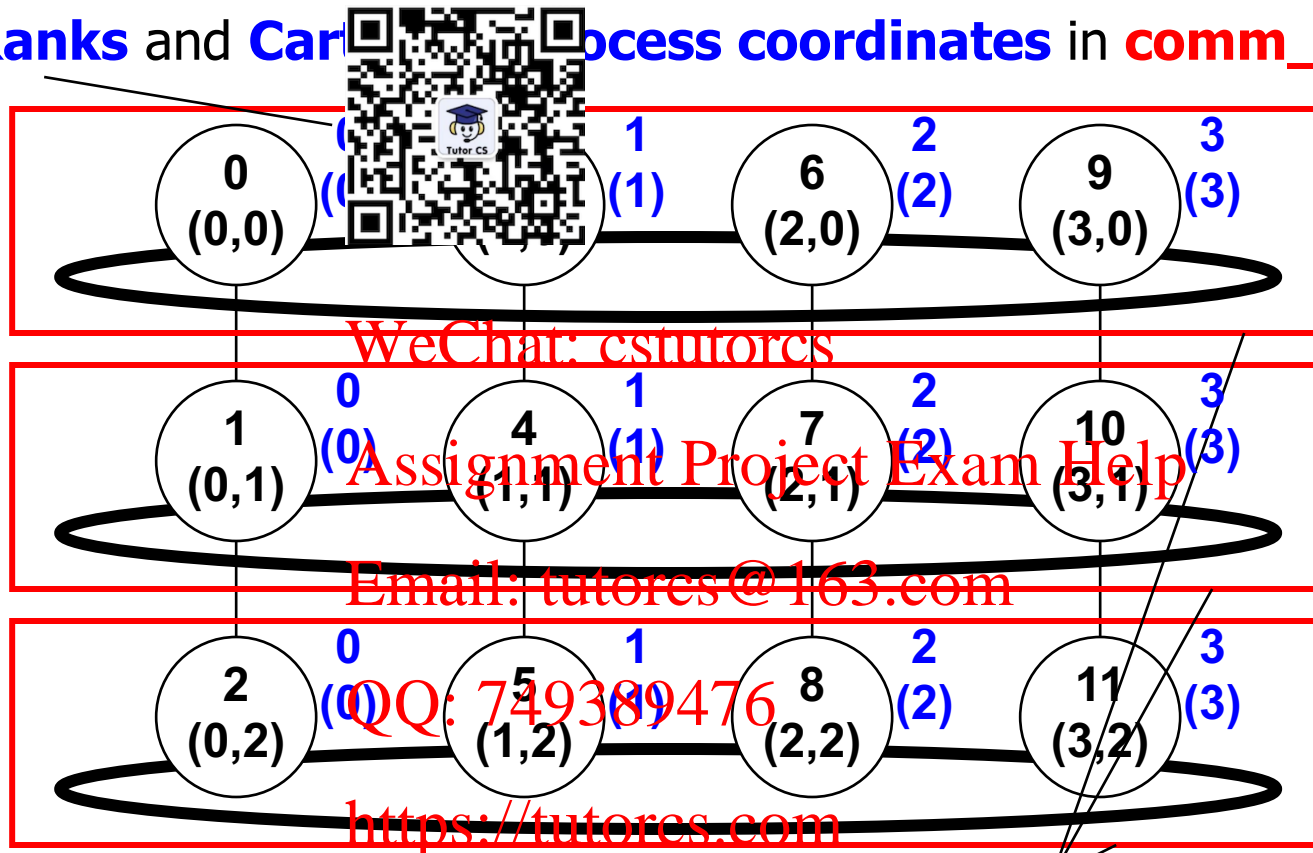

- MPI_Cart_sub(comm_cart, remain_dims, **comm_sub**, ierror)

(true, false)