

# Project 2: The Raft Consensus Algorithm



pages before writing code.

## 1 Overview

### Important Dates

Project release: Tuesday, November 14, 2023

Checkpoint due: Monday, November 6, 2023 at 11:59pm

Full project due: Thursday, November 16, 2023 at 11:59pm

Submission limits: 15 Gradescope submissions per checkpoint

In this project, you'll implement the **Raft** consensus algorithm, a replicated state machine protocol. You will want to start early. For more information regarding what portion of the project is expected to be completed by the checkpoint and the final due, please refer to sections 4 and 5.

The starter code for this project is hosted as a read-only repository on **GitHub**. For instructions on how to build, run, test, and submit your server implementation, see the **README.md** file in the project's root directory. To clone a copy, execute the following **Git** command:

**git clone https://github.com/15-440/p2.git**

You must work on this project **individually**. You will have 15 submissions for each due date. The same policy of Pt will apply here as well - at most 3 late days per due date. No submissions will be accepted 3 days after each deadline.

### About Gradescope:

Your Gradescope submission will output a message showing how many submissions you have made and how many you have left. Gradescope will allow you to submit beyond this limit, but we will be checking manually. Gradescope will also allow you to select a submission to grade. **Only your selected submission within the first 15 submissions counts. If your selected submission is not within the first 15 submissions, your last submission of the first 15 submissions will be graded.** We won't accept requests to update scores if you miscount the number of your submissions.

**Please remove all your print statements before making the submission.** The autograder may not work properly with print statements.

程序代写代做 CS编程辅导

There will be no manual style grading for the checkpoint. However, 4 points are allocated for manual style grading on the final submission. Specifically, we are looking for good function headers, comments for variables, and no debugging print statements or chunks of dead code. For more information, please refer to the [Style Guide](#). You're allowed to use mutexes for the checkpoint (see the Project Requirements).



## 2 Raft

A replicated service (e.g., a database) achieves fault tolerance by storing copies of its data on multiple replicas. Replication allows the service to continue operating even if some of its replicas experience failures (crashes or a broken/flaky network). The challenge is that failures may cause the replicas to hold differing copies of the data.

One protocol to ensure all of these copies of the data are consistent across all non-faulty replicas is Raft. Raft implements a replicated state machine by sequencing client requests into a log, and ensuring that the replicas agree on the contents and ordering of the log entries. Each replica *asynchronously* applies the client requests in the order they appear in the replica's log of the service's state. If a replica fails and later recovers, Raft takes care of bringing the log of the recovered replica up to date. Raft will continue to operate as long as at least a quorum of replicas is alive and able to communicate. If a quorum is not available, Raft will stop making progress but will resume as soon as a quorum becomes available.

In this project, you will implement Raft in Go. Your Raft module will implement a replicated log using the Raft protocol, using RPC to communicate between replicas. Your implementation should support an indefinite sequence of numbered commands (log entries). Each log entry is comprised of a client command and an index number. After a log entry is committed, Raft will “apply” the log entry by sending the committed log entry to the application that is using your Raft module.

**Note:** Only RPC may be used for interaction between different Raft instances. For example, different peers in your Raft implementation are not allowed to share Go variables or access shared files/sockets. Communicating between 2 replicas using anything except the approved `rpc` package will result in losing 50% of the points on this project.

You'll implement a part of the Raft protocol described in the extended paper. You do not need to implement persistence, cluster membership changes (Section 6) or log compaction / snapshotting (Section 7).

You should consult the [extended Raft paper](#). You may also find it useful to look at this [illustrated](#) guide to Raft. For a broader perspective, have a look at Paxos, Chubby, Paxos Made Live, Spanner, Zookeeper, Harp, Viewstamped Replication, and [Bolosky et al.](#)

## 程序代写代做 CS编程辅导

**Tip 1:** Start early. Although you can implement Raft in a relatively small number of lines of code (our reference solution is  $\approx 700$  lines), getting it to work correctly will be challenging. Both the algorithm and the code are tricky, and there are many corner cases to consider. When things fail, it may take a bit of puzzling to understand in what scenario you are stuck, and how to fix your solution.

**Tip 2:** Read and understand the [added Raft paper](#) before you start. Your implementation should follow the paper closely, particularly Figure 2, since that's what the tests expect. See the end of the last page of this handout.

**Tip 3:** Your first implementation may not be clean enough to easily reason about its correctness. Give yourself enough time to rewrite your implementation at least once.



### 3 The code WeChat: cstutorcs

Implement Raft by adding code to `raft/raft.go`. In that file, you'll find a bit of skeleton code and examples of how to send and receive RPCs.

Your implementation must support the following interface, which the tester will use. You'll find more details in comments in `raft.go`.

```
// rf = NewPeer(...)
//   Create a new Raft peer.
//
// rf.PutCommand(command interface{}) (index, term, isleader)
//   Start agreement on a new log entry
//
// rf.GetState() (me, term, isLeader)
//   Ask a Raft peer for me (see line raft.go:75),
//   its current term, and whether it thinks it is a leader
//
// ApplyCommand
//   Each time a new entry is committed to the log, each Raft peer
//   should send an ApplyCommand message to the service (e.g. tester) on the
//   same server, via the applyCh channel passed to NewPeer()
```

A service calls `NewPeer(peers, me, ...)` to create a Raft peer. The `peers` argument is an array of established RPC connections, one to each Raft peer (including this one). The `me` argument is the index of this peer in the `peers` array. `PutCommand(command)` asks Raft to start the processing to append the command to the replicated log. `PutCommand()` should

return immediately, without waiting for this process to complete. The service expects your implementation to send an `ApplyCommand` for each new committed log entry to the `applyCh` argument to `NewPeer()`.

Your Raft peers must use the `rpc` Go package that we provide to you (<https://github.com/cmu440/rpc>). It is modeled after Go's `rpc` library but uses Go channels rather than sockets. `raft.go` contains some example code for sending `sendRequestVote()` and that handles an incoming RPC (`RequestVote`). You must use `rpc` instead of Go's RPC package is that the tester tells you to order them, and delete them to simulate challenging network conditions under which your code should work correctly. Any modifications you make to `rpc` will be discarded before grading.

**Note:** The `rpc` package only provides a subset of the functionality of Go's RPC system. For instance, asynchronous RPC calls are not provided by `rpc`.

## 4 Checkpoint

### 4.1 Task

Implement leader election and `Heartbeats()` (responds to `Heartbeats` RPCs with `log` entries). The goal for the checkpoint is for a single leader to be elected, for the leader to remain the leader if there are no failures, and for a new leader to take over if the old leader fails or if packets to/from the old leader are lost. Run `go test -race -run 2A` to test your checkpoint code.

Be sure you pass the checkpoint tests before submitting. Note that the checkpoint tests test the basic operation of leader election. The final tests will test leader election under more challenging settings and may expose bugs in your leader election code which the checkpoint tests miss.

### 4.2 General Guidelines

Add any state you need to the `Raft` struct in `raft.go`. You'll also need to define a struct to hold information about each log entry. Your code should follow Figure 2 in the paper as closely as possible.

Fill in the `RequestVoteArgs` and `RequestVoteReply` structs. Modify `NewPeer()` to create a background goroutine that will kick off leader election periodically by sending out `RequestVote` RPCs when it hasn't heard from another peer for a while. This way a peer

## 程序代写代做 CS编程辅导

will learn who the leader is, if there is already a leader, or become the leader itself. Implement the `RequestVote()` RPC handler so that servers will vote for one another.

To implement heartbeat, you need to implement the `AppendEntries` RPC struct (though you may not need all the arguments). The leader should send them out periodically. Write an `AppendEntries` handler that resets the election timeout so that other servers don't step forward if the current leader has already been elected.

Make sure the election timeouts on different peers don't always fire at the same time, or else all peers will become leaders, and no one will become the leader.

The tester requires that the leader send heartbeat RPCs *no more than* ten times per second.

The tester requires your Raft to elect a new leader *within five seconds* of the failure of the old leader (if a majority of peers can still communicate). Remember, however, that leader election may require multiple rounds in case of a split vote (which can happen if packets are lost or if candidates unluckily choose the same random backoff times). You must pick election timeouts (and thus heartbeat intervals) that are short enough that it's very likely that an election will complete in less than five seconds even if it requires multiple rounds.

The paper's Section 5.2 mentions election timeouts in the range of 150 to 300 milliseconds. **DO NOT USE THEIR RECOMMENDED TIMEOUT INTERVALS.** Those values only make sense if you use a heartbeat interval significantly smaller than 150 ms (the lower bound), which is not the case in this project. Instead, here are some general guidelines on how to choose intervals in this project:

1. You should not send heartbeat RPCs more than 10 times per second.
2. Election timeout should be multiple times greater than your heartbeat interval.
3. Election timeout should be small enough to allow re-election of a leader in under 5 seconds.
4. Make sure the election timeouts on different peers don't always fire at the same time, as explained earlier.
5. We recommend you run tests  $> 10$  times locally to make sure you do not have concurrency issues before you submit to Gradescope.

QQ: 749389476

https://tutorcs.com

WeChat: cstutorcs


Assignment Project Exam Help

Email: tutorcs@163.com

# 程序代写代做 CS编程辅导

## 4.3 Notes and hints

There are some details and hints we want to emphasize here to help you pass our tests:

- 
- If an RPC is unexpectedly nil on the receiver side:
    - Check that sub-struct field names are capitalized. Go RPC only serializes capitalized names. Sub-structures must also have capital letters (e.g., fields of log records in an array). Forgetting to capitalize any RPC is the single most frequent source of bugs while using RPCs.
    - Check that the args struct and its sub-structs are not completely empty. (If the struct or any sub-structs are completely empty, it will cause an encoding error and give nil for the whole args value.) Also, it appears that sending an empty slice will cause that slice to decode as nil instead of an empty slice. So either add a check for the (slice == nil) case (treated as an empty slice), avoid empty slices, or use an array instead of a slice.
  - You may find Go's `time.Sleep()` and `rand` useful.
  - Unlike in P1, you may use buffered channels of any size in this project. Additionally, you are also permitted to use mutexes in this project.
  - You'll need to write code that takes actions periodically or after delays in time. The easiest way to do this is to create a goroutine with a loop that calls `time.Sleep()`.
  - If your code has trouble passing the tests, read the paper's Figure 2 again; the full logic for leader election is spread over multiple parts of the figure.
  - A good way to debug your code is to insert debug logs when a peer sends or receives a message, redirect it to a file (`go test -race > out.txt`) and examine the file to trace the execution of your system.
  - You should check your code with `go test -race`, and fix any races it reports.
  - You should try your code with varying numbers of CPU cores (`go test -race -cpu=N`)

## 4.4 Debugging

In the starter code, we provide you a simple logging framework to allow you to maintain separate debug logs for for each peer, with the option to output to files or stdout. You

are welcome to use, modify, remove, or ignore this logging code— however, we expect you to have clear, understandable debug log files before asking questions at office hour or on Edstem. The easiest way to do this is to use our included debug logging framework.

These debug logs are enabled by setting

`kEnableDebugLog`

at the top of `raft.go`. Please enable your debug logs before submitting to Gradescope.

You can output your debug logs to stdout by setting

`kLogToStdout = true`

at the top of `raft.go`. Each log line will be prefixed by the peer's unique name.

If you set `kLogToStdout` to false, each peer's log will instead be output into a separate `.txt` file in the directory described by `kLogOutputDir`. By default, we enable debug logs and output them to stdout.

## 5 Final Test

We want Raft to keep a consistent, replicated log of operations. A call to `PutCommand()` at the leader starts the process of adding a new operation to the log; the leader sends the new operation to the other servers using `AppendEntries` RPCs.

### 5.1 Task

Implement the leader and follower code to append new log entries. This will involve implementing `PutCommand()`, completing the `AppendEntries` RPC structs, sending them, fleshing out the `AppendEntry` RPC handler, and advancing the `commitIndex` at the leader. Your first goal should be to pass the `TestBasicAgree2B()` test (in `raft_test.go`). Once you have that working, you should get all the final tests to pass (`go test -race -run 2B`).

### 5.2 General Guidelines

While the Raft leader is the only server that initiates appends of new entries to the log, all the replicas need to independently give each newly committed log entry to their local service



replica (via their `applyCh` passed to `NewPeer()`). You should try to keep the goroutines that implement the Raft protocol as separate as possible from the code that sends committed log entries on the `applyCh` (e.g., by using a separate goroutine for delivering committed messages). If you don't separate these activities cleanly, then it is easy to create deadlocks. Without a clean separation, a deadlock scenario is as follows: an RPC handler sends on the `applyCh` but gets blocked because no goroutine is reading from the channel (e.g., perhaps because it is blocked on the mutex). Now, the RPC handler is blocked while holding the mutex on the `applyCh` and the reading goroutine is also blocked on the mutex because `PutCommand` is blocked on the mutex. Furthermore, no other RPC handler that needs the lock on the `applyCh` can proceed.



You will need to implement the election restriction (section 5.4.1 in the paper).

## 6 Hand In WeChat: cstutorcs

**Reminder:** Please disable or remove **all** debug prints regardless of whether you are using our logging framework or not before submitting to Gradescope. This helps avoid inadvertent failures, messy autograder outputs and style point deductions.

For both the checkpoint and the final submission, create `handin.zip` using the following command under the `p2/` directory, and then upload it to Gradescope.

```
sh make_submit.sh
```

## 7 Testing and Grading QQ: 749389476

We will use Gradescope to automatically grade your implementation for correctness, and manual grading for style. In addition to tests we provide you in `raft_test.go`, we will run additional, more extensive tests on Gradescope for both your checkpoint and the final submissions. We will not be able to provide you any details (except for the `stdout` you'll see on Gradescope) about any of these new tests. We will run each test multiple times – you should pass every invocation of a test to pass that test.

You are encouraged to write new tests on your own. You are, however, not required to do so and will not be graded on any new tests you write. Here are some tips to do this. Refer to `raft_test.go` as you read these tips.

- See `TestInitialElection2A`: you can use `cfg.checkOneLeader()` to check for a leader's election and to get the current leader's ID.



# 程序代写代做 CS编程辅导

- See `TestFailAgree2B`: you can use `cfg.one(value, num_servers)` to start an agreement.
- See `TestFailAgree2B`: you can use `cfg.disconnect(server_id)` and `cfg.connect(server_id)` to disconnect and connect servers. You can also directly call `PutCom` to put a value in the Raft peers by using `cfg.rafts`.

The checkpoint (1) is worth 45 points. The following table shows the point distribution for the final version of the project's Gradescope assignment.



Part A	45 points
Part B	145 points
Manual Grading of Part B	4 points
go fmt of Part B	1 point
Total	195 points

WeChat: estutorcs

# Assignment Project Exam Help

Note that the tests for Part A are run and graded for points for both the checkpoint and the final version of the project's Gradescope assignment. However, there is no manual style grading for the checkpoint.

Email: [tutorcs@163.com](mailto:tutorcs@163.com)

## 8 Project Requirements


As you write code for this project, also keep in mind the following requirements:

QQ: 749389476

- You must work on this project individually. You are free to discuss high-level design issues with other people in the class, but every aspect of your implementation must be entirely your work.
- You must format your code using `go fmt` and must follow Go's standard naming conventions. See the [Formatting](https://tutorcs.com) and [Names](https://tutorcs.com) sections of Effective Go for details.
- You may use any of the synchronization primitives in Go's `sync` package for this project.
- For the tester to function correctly, please use the provided `rpc` package instead of Go's native one.

<https://tutorcs.com>

# 程序代写代做 CS编程辅导

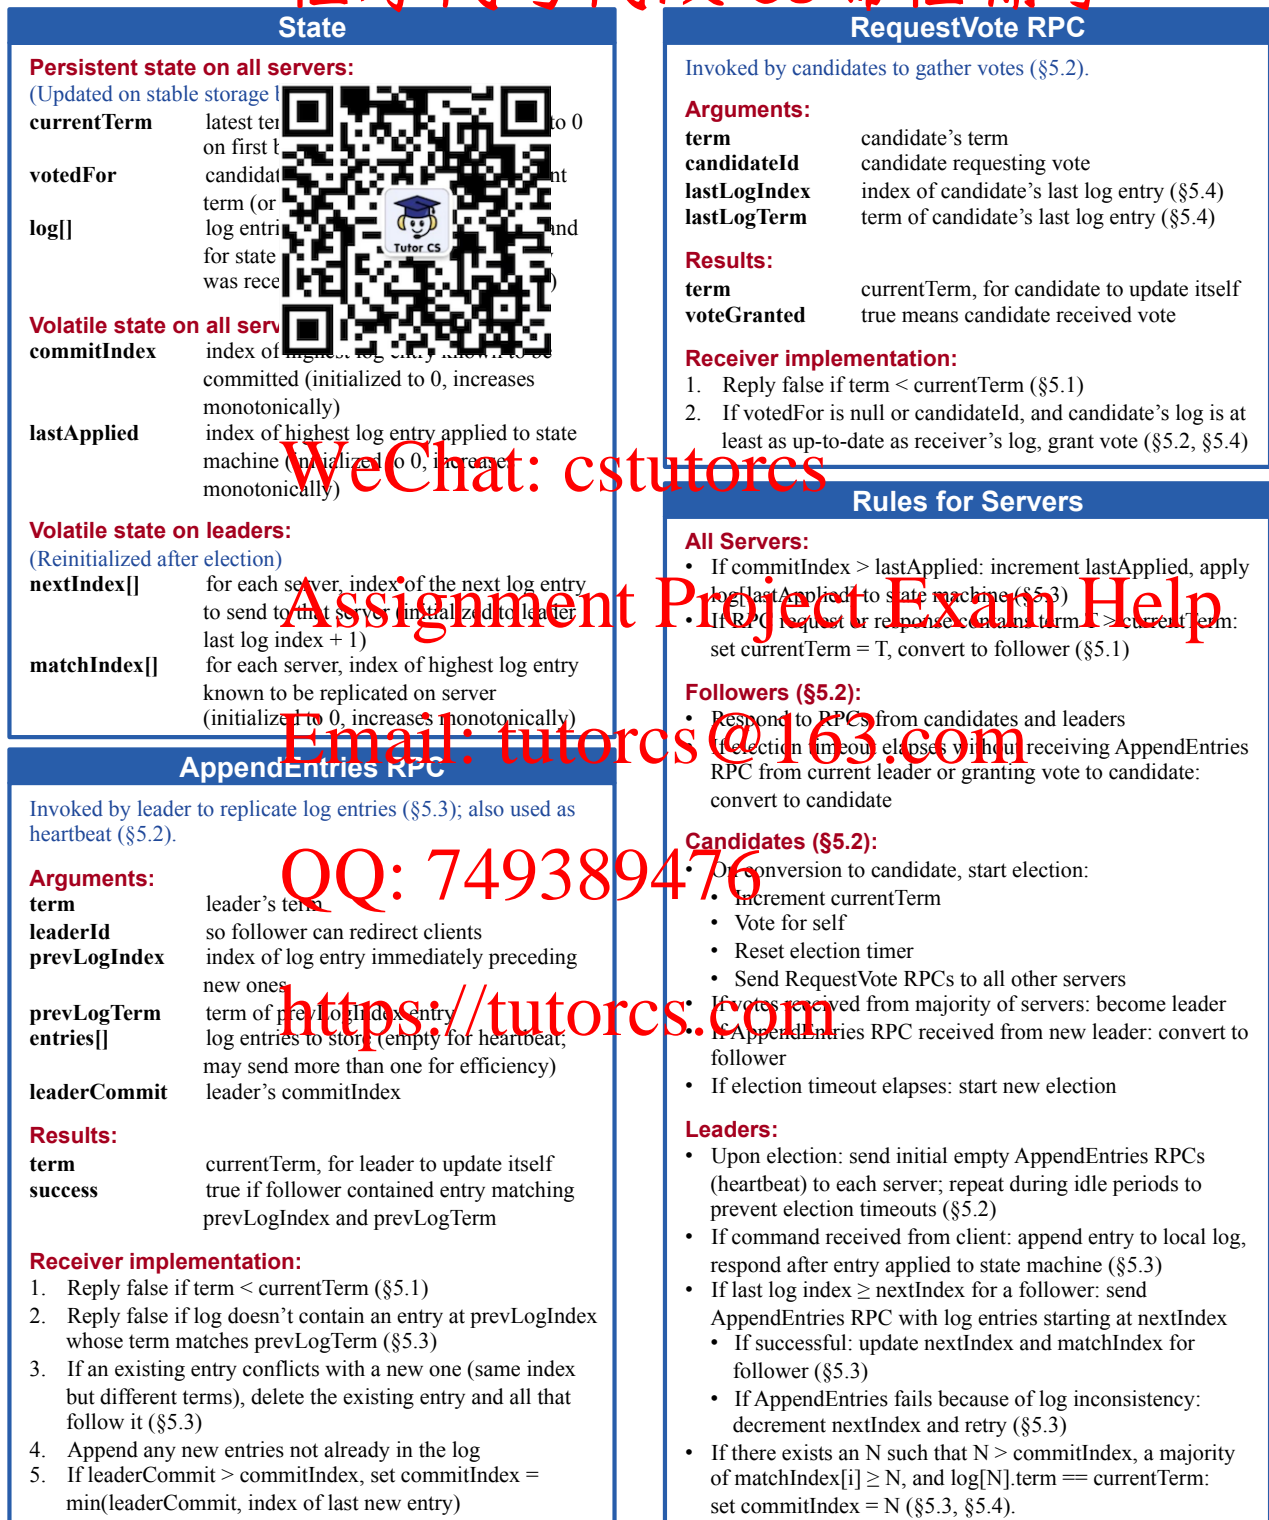

**Figure 2:** A condensed summary of the Raft consensus algorithm (excluding membership changes and log compaction). The server behavior in the upper-left box is described as a set of rules that trigger independently and repeatedly. Section numbers such as §5.2 indicate where particular features are discussed. A formal specification [31] describes the algorithm more precisely.