

QUESTION 1:

Project :EmployeeDetails

Package :org.emp


Class :Employee

Methods :empId(),empName(),empDob(),empPhone(),empEmail(),empAddress()

Description:

Create an object for employee class and call above methods

Solution:

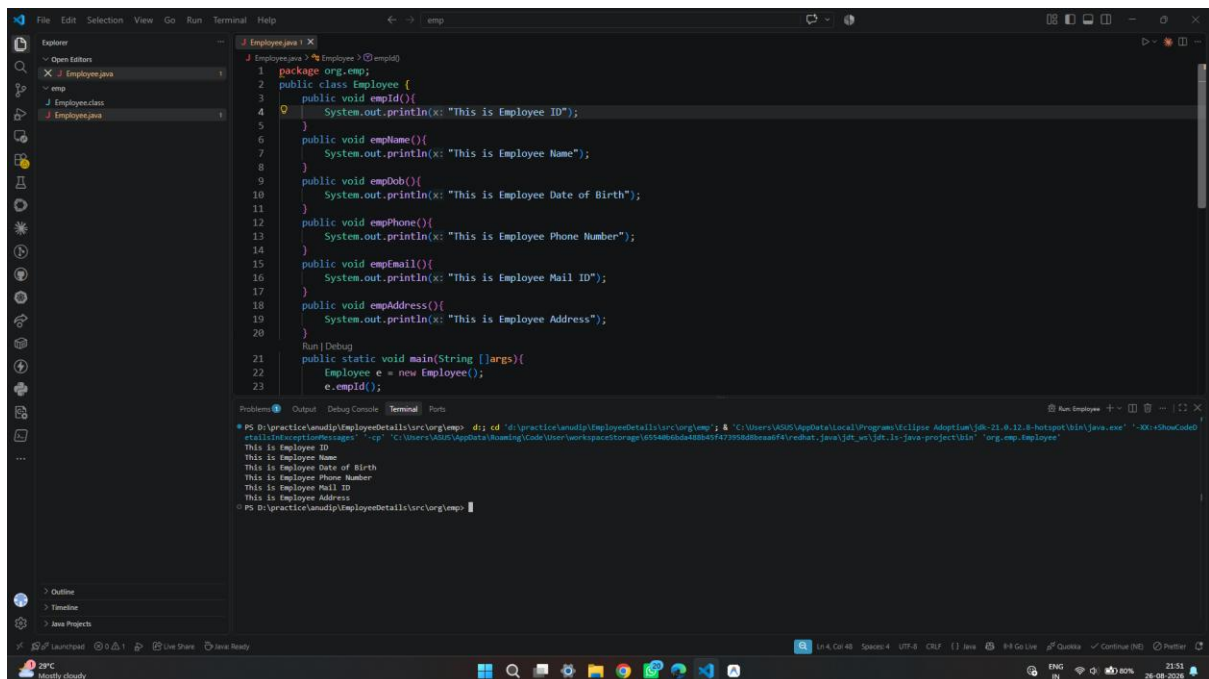

The screenshot shows an IDE with the following content:

```
1 package org.emp;
2 public class Employee {
3     public void empId(){
4         System.out.println(x: "This is Employee ID");
5     }
6     public void empName(){
7         System.out.println(x: "This is Employee Name");
8     }
9     public void empDob(){
10        System.out.println(x: "This is Employee Date of Birth");
11    }
12    public void empPhone(){
13        System.out.println(x: "This is Employee Phone Number");
14    }
15    public void empEmail(){
16        System.out.println(x: "This is Employee Mail ID");
17    }
18    public void empAddress(){
19        System.out.println(x: "This is Employee Address");
20    }
21    Run | Debug
22    public static void main(String []args){
23        Employee e = new Employee();
24        e.empId();
25    }
26 }
```

The Output console shows the following execution results:

```
PS D:\practice\anadi\EmployeeDetails\src\org\emp> cd .; java -cp . Employee
This is Employee ID
This is Employee Name
This is Employee Date of Birth
This is Employee Phone Number
This is Employee Mail ID
This is Employee Address
```

QUESTION 2:

Project :LanguageDetails

Package :org.lang

Class :LanguageInfo

Methods :tamilLanguage(),englishLanguage(),hindiLanguage()


Class :StateDetails

Methods :southIndia(),northIndia()

Description:

Create an object for LanguageInfo and StateDetails inside the StateDetails class and call both classes methods

Solution:

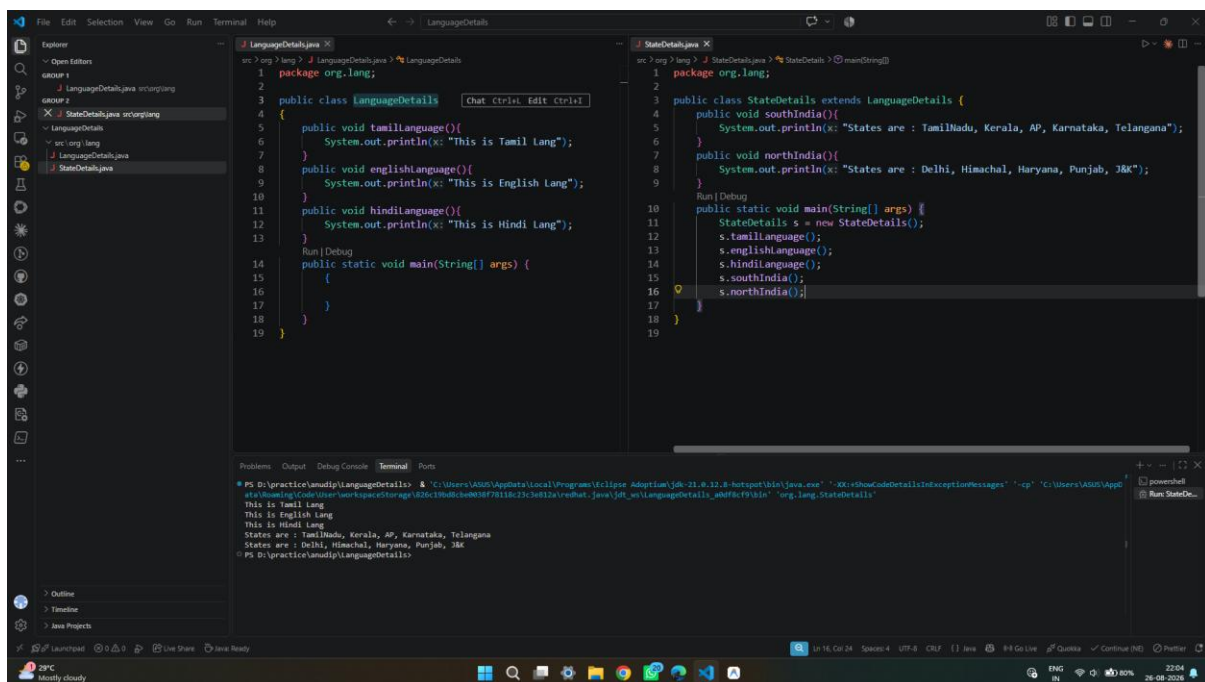

The screenshot shows an IDE with two Java files: `LanguageDetails.java` and `StateDetails.java`. The `LanguageDetails` class has methods for Tamil, English, and Hindi languages. The `StateDetails` class extends `LanguageDetails` and has methods for South and North India states. A `main` method in `StateDetails` creates an instance of `StateDetails` and calls its methods. The terminal output shows the execution results.

```
LanguageDetails.java
1 package org.lang;
2
3 public class LanguageDetails {
4     public void tamilLanguage(){
5         System.out.println("This is Tamil Lang");
6     }
7     public void englishLanguage(){
8         System.out.println("This is English Lang");
9     }
10    public void hindiLanguage(){
11        System.out.println("This is Hindi Lang");
12    }
13
14    Run [Debug]
15    public static void main(String[] args) {
16    }
17
18
19 }

StateDetails.java
1 package org.lang;
2
3 public class StateDetails extends LanguageDetails {
4     public void southIndia(){
5         System.out.println("States are : TamilNadu, Kerala, AP, Karnataka, Telangana");
6     }
7     public void northIndia(){
8         System.out.println("States are : Delhi, Himachal, Haryana, Punjab, J&K");
9     }
10
11    Run [Debug]
12    public static void main(String[] args) {
13        StateDetails s = new StateDetails();
14        s.tamilLanguage();
15        s.englishLanguage();
16        s.hindiLanguage();
17        s.southIndia();
18        s.northIndia();
19    }
20 }
```

```
PS D:\practice\amdip\LanguageDetails> & "C:\Users\ASUS\AppData\Local\Programs\Microsoft Java Virtual Machine Binaries\bin\java.exe" -XX:+ShowCodeDetailsInExceptionMessages -cp "C:\Users\ASUS\AppData\Local\Programs\Microsoft Java Virtual Machine Binaries\bin\java\jdt_ws\LanguageDetails_wd\src" org.lang.StateDetails
This is Tamil Lang
This is English Lang
This is Hindi Lang
States are : TamilNadu, Kerala, AP, Karnataka, Telangana
States are : Delhi, Himachal, Haryana, Punjab, J&K
PS D:\practice\amdip\LanguageDetails>
```