

QUESTION 1:

Project :BankDetails

Package :org.bank

Class :BankInfo


Methods :saving(),fixed(),deposit()

Class :AxisBank

Methods :deposit()

Description:

You have to override the method deposit in AxisBank.

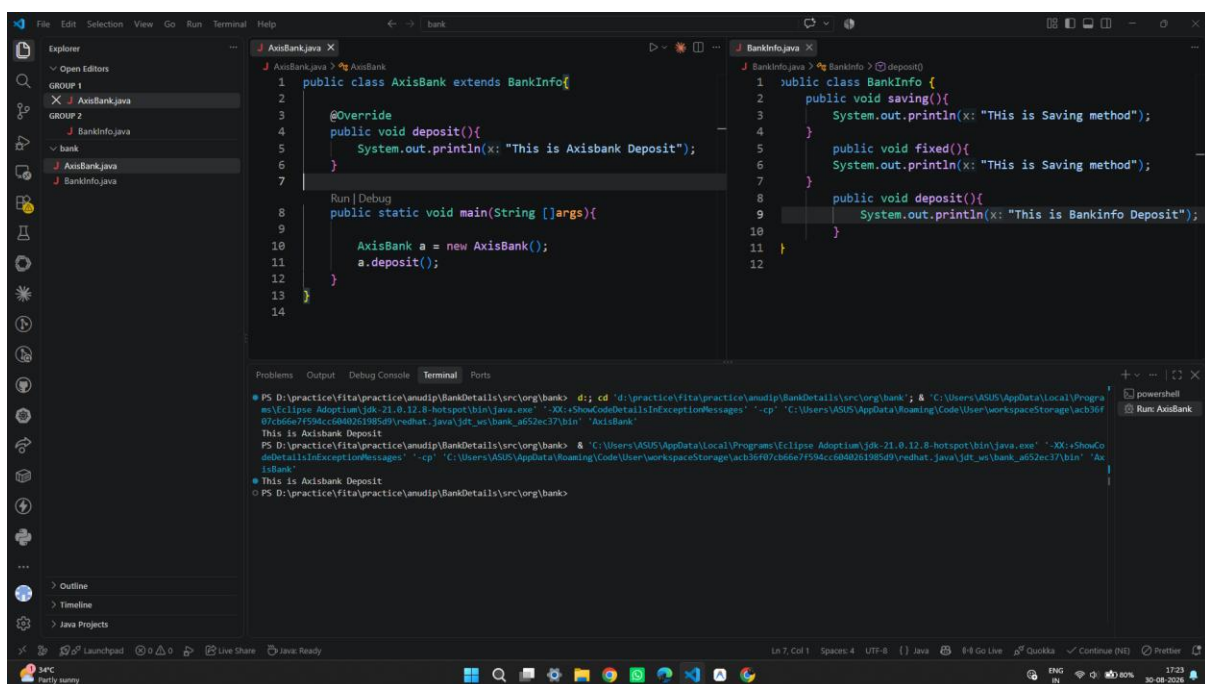


QUESTION 2:

Project :CompanyDetails
Package :org.company
Class :CompanyInfo
Methods :companyName()

Description

You have to overload the method companyName() based on different Number of arguments.

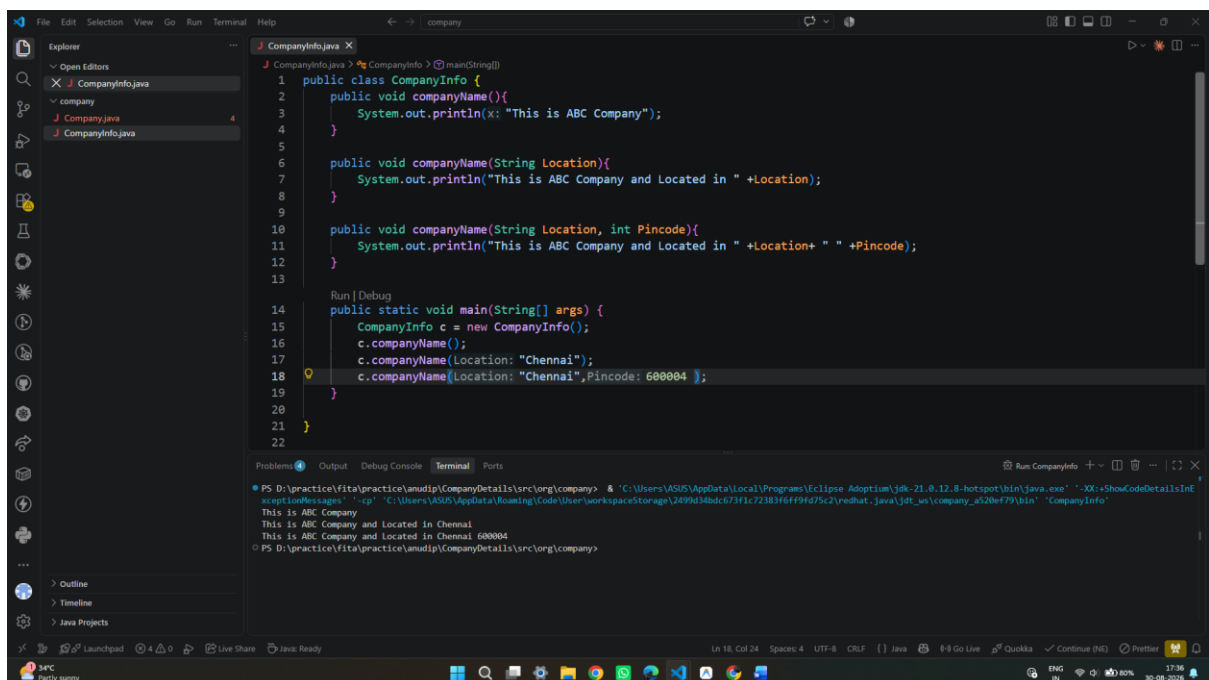

```
1 public class CompanyInfo {
2     public void companyName(){
3         System.out.println("This is ABC Company");
4     }
5
6     public void companyName(String Location){
7         System.out.println("This is ABC Company and Located in " +Location);
8     }
9
10    public void companyName(String Location, int Pincode){
11        System.out.println("This is ABC Company and Located in " +Location+ " " +Pincode);
12    }
13
14    Run | Debug
15    public static void main(String[] args) {
16        CompanyInfo c = new CompanyInfo();
17        c.companyName();
18        c.companyName(Location: "Chennai");
19        c.companyName(Location: "Chennai",Pincode: 600004 );
20    }
21 }
22 }
```

```
PS D:\practice\lita\practice\anandip\CompanyDetails\src\org\company> & 'C:\Users\ASUS\AppData\Local\Programs\Eclipse Adoptium\jdk-21.0.12.8-hotspot\bin\java.exe' "-Xmx6ShowCodeDetailsInExceptionMessages" "-cp" "C:\Users\ASUS\AppData\Local\Programs\Eclipse Adoptium\workspace\storage\2499d3bdc673f1c72383f6ff9d75c2\redhat_java\jdk_w\company_a520ef79\bin" "CompanyInfo"
This is ABC Company
This is ABC Company and located in Chennai
This is ABC Company and located in Chennai 600004
PS D:\practice\lita\practice\anandip\CompanyDetails\src\org\company>
```

QUESTION 3:

Project :UniversityInformation

Package :org.univ

Class :University


Methods :ug(),pg()

Class :College

Methods :ug(),pg()

Description:

ug(),pg() is just a template in University class and You have to override the method ug(),pg() in College class.

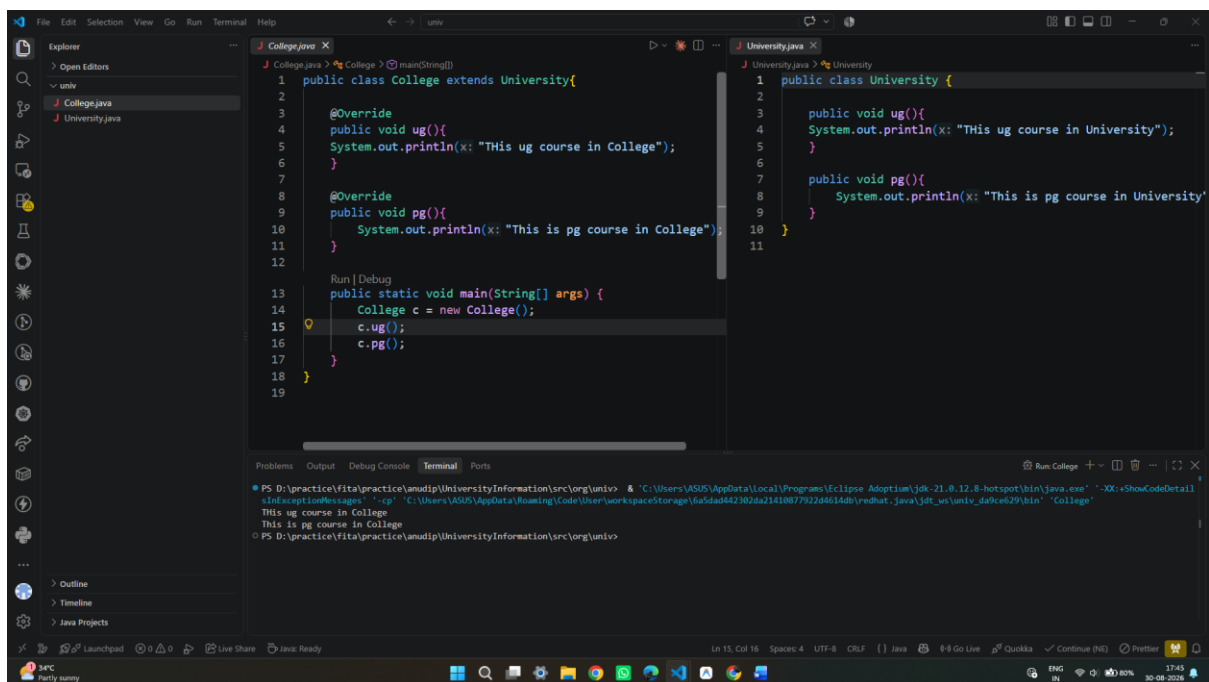

```
College.java
1 public class College extends University{
2
3     @Override
4     public void ug(){
5         System.out.println(x: "This ug course in College");
6     }
7
8     @Override
9     public void pg(){
10         System.out.println(x: "This is pg course in College");
11     }
12
13     Run | Debug
14     public static void main(String[] args) {
15         College c = new College();
16         c.ug();
17         c.pg();
18     }
19
University.java
1 public class University {
2
3     public void ug(){
4         System.out.println(x: "This ug course in University");
5     }
6
7     public void pg(){
8         System.out.println(x: "This is pg course in University");
9     }
10 }
11

Terminal
PS D:\practice\file\practice\andip\UniversityInformation\src\org\univ> & 'C:\Users\ASUS\AppData\Local\Programs\Eclipse Adoptium\jdk-21.0.12-hotspot\bin\java.exe' -XX:+ShowCodeDetails -s
This is ug course in College
This is pg course in College
PS D:\practice\file\practice\andip\UniversityInformation\src\org\univ>
```

QUESTION 4:

Project :MyPhone


Package :org.phone

Class :Phone

Methods :phoneInfo()

Description

You have to overload the method phoneInfo() based on different datatype order in arguments.

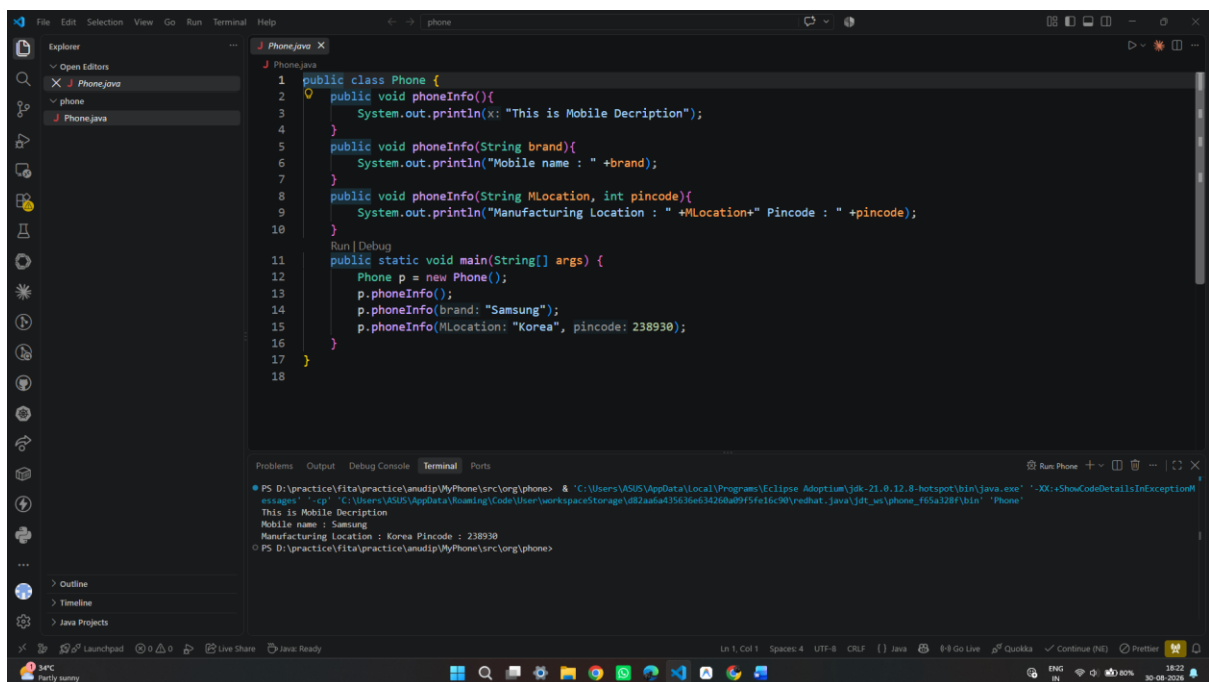

```
1 public class Phone {
2     public void phoneInfo(){
3         System.out.println("This is Mobile Description");
4     }
5     public void phoneInfo(String brand){
6         System.out.println("Mobile name : " +brand);
7     }
8     public void phoneInfo(String MLocation, int pincode){
9         System.out.println("Manufacturing Location : " +MLocation+" Pincode : " +pincode);
10    }
11    Run [Debug]
12    public static void main(String[] args) {
13        Phone p = new Phone();
14        p.phoneInfo();
15        p.phoneInfo(brand: "Samsung");
16        p.phoneInfo(MLocation: "Korea", pincode: 238930);
17    }
18 }
```

PS D:\practice\ita\practice\anadip\MyPhone\src\org\phone> & "C:\Users\VSUS\AppData\Local\Programs\Eclipse Adoptium\jdk-21.0.12-hotspot\bin\java.exe" "-XX:+ShowCodeDetailsInExceptionMessages" -cp "C:\Users\VSUS\AppData\Roaming\Code\User\workspaceStorage\d82a6a435636e34268a09f5f16c90\redhat.java\jdk_ws\phone_fe5a128f\bin" "Phone"

This is Mobile Description
Mobile name : Samsung
Manufacturing Location : Korea Pincode : 238930
PS D:\practice\ita\practice\anadip\MyPhone\src\org\phone>