

Document Translator


User Manual

Mutual translation between English, Japanese, Korean, and Chinese

Version 1.0.0 · Designed by Codecider Lab

1. Overview

Document Translator is a local desktop app for translating text and documents between English, Japanese, Korean, and Chinese (Simplified and Traditional), in any direction. You can paste text or upload a document, edit the translation, and save it as TXT, DOCX, or PDF, or print it. The app runs entirely on your own computer; only the translation step uses an online service, so an internet connection is required for translation.

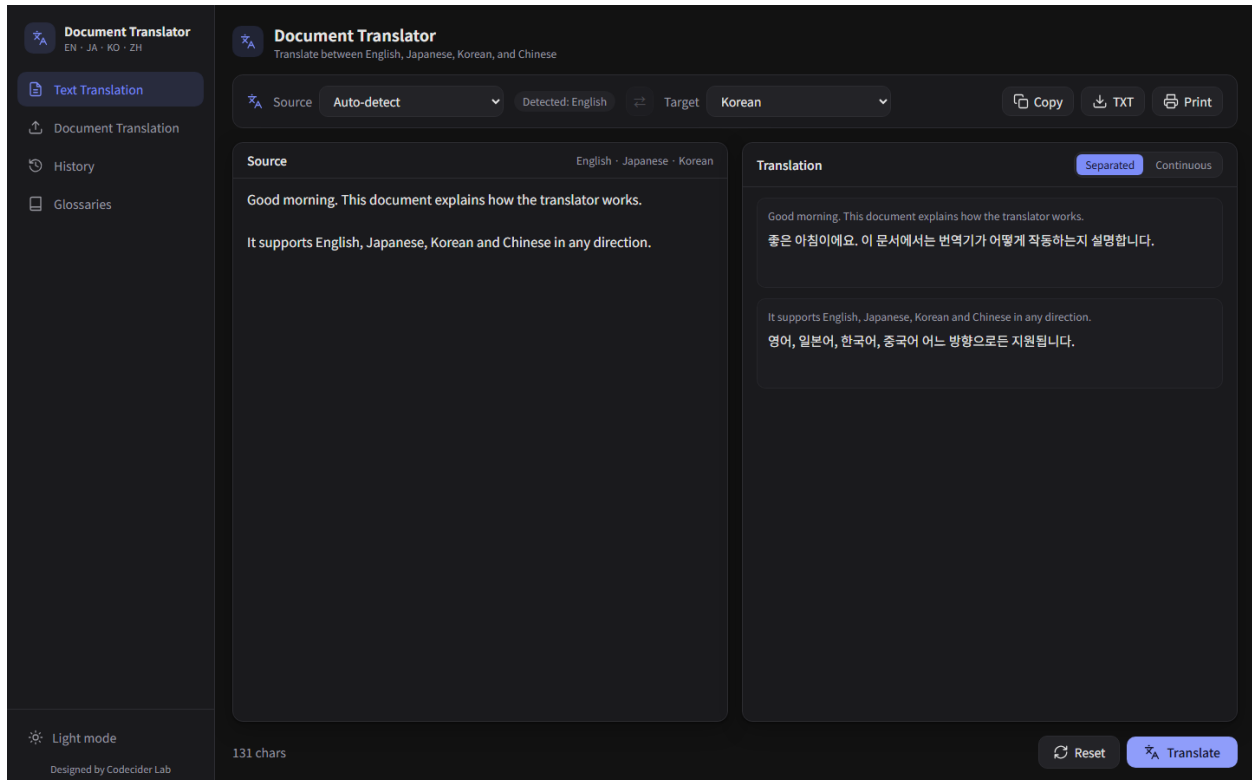

The main screen: source text on the left, editable translation on the right.

2. Getting Started

- Download the latest release archive and unzip it to any folder.
- Double-click **run.bat** (or open the **document-translator-server** folder and run **document-translator-server.exe**).
- A console window opens and your browser navigates to **http://localhost:8000**.
- To stop the app, close the console window.
- If Windows SmartScreen warns about an unsigned app, choose “More info” → “Run anyway”.

3. Text Translation

Open **Text Translation** from the sidebar.

- Choose the **source** language (or Auto-detect) and the **target** language. Use the swap button between the two selectors to reverse them.
- Type or paste your text on the left. The character count is shown at the bottom.
- Click **Translate**. A progress bar appears while translating.
- The result appears on the right and can be edited directly; edits are saved automatically.

- Switch the result view between **Separated** (one box per paragraph) and **Continuous** (one flowing text).
- Use **Copy**, **TXT**, or **Print** for quick output.

4. Document Translation

Open **Document Translation** from the sidebar.

- Pick the source and target languages, then drag a file onto the drop zone or click to choose one.
- Supported files: **TXT**, **DOCX**, **text PDF**, **scanned PDF (OCR)**, **HWPX**. DOC is converted when LibreOffice is available; HWP is not supported (convert to HWPX or DOCX first).
- Upload progress is shown as a percentage; then the job is processed in the background.
- The progress page shows the live status (Analyzing → Translating → Completed) and opens the editor automatically when finished.
- For scanned PDFs, low-confidence OCR paragraphs are flagged for review in the editor.

5. Exporting Results

- In the editor, click **Export** and choose a format: **TXT**, **DOCX**, or **PDF**.
- Choose a layout: translation only, source then translation, or source and translation side by side.
- Enable **Preserve original layout** (DOCX/PDF, uploaded documents only) to keep the original formatting and positions and replace only the text.
- Use the browser's **Print** option to print the translation directly.

6. Glossaries, History, and Appearance

Glossaries


Under **Glossaries**, create a glossary and add source→target term pairs. Matching terms are applied automatically so your preferred terminology stays consistent.

Job History

Under **History**, review past jobs, open a completed result, or delete a job. Deleting a job also removes its source and exported files.

Theme

Use the theme toggle at the bottom of the sidebar to switch between dark and light mode. Your choice is remembered.

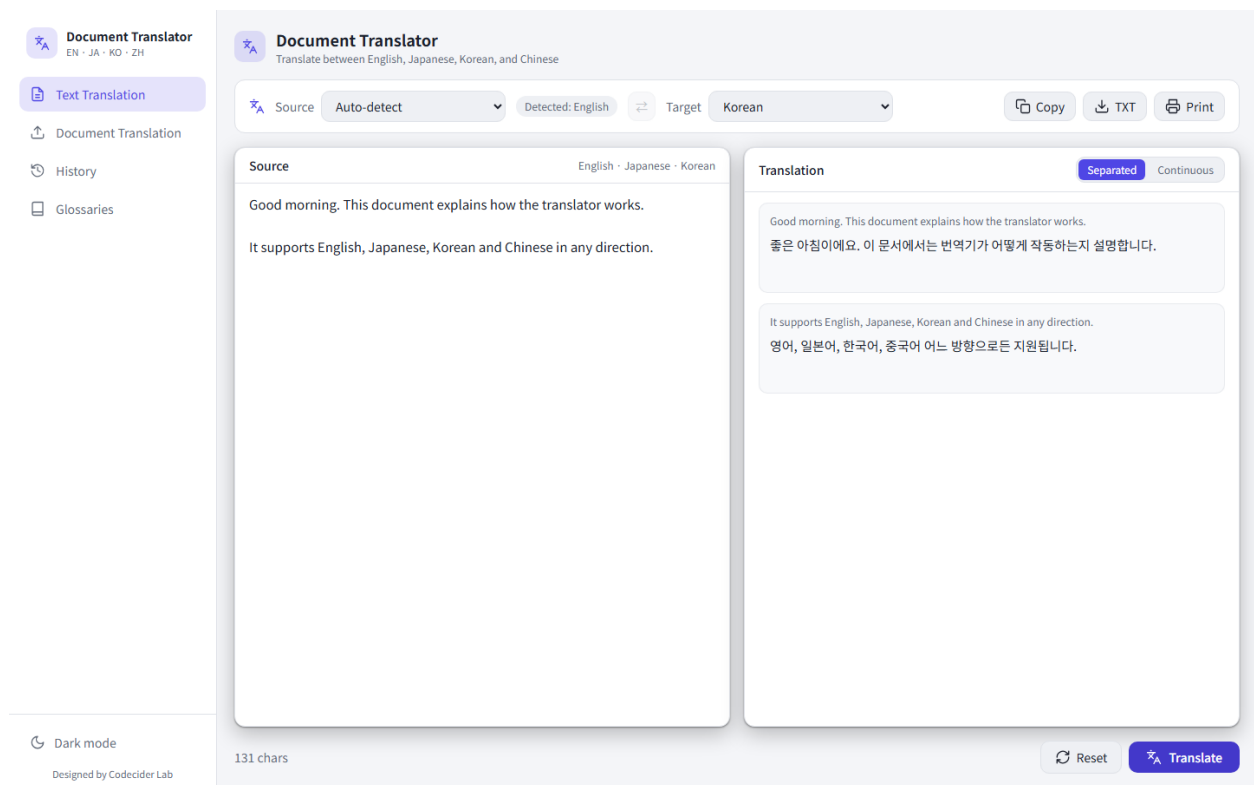

The same screen in light theme.

7. Notes & Troubleshooting

- **Internet:** translation uses a free online engine, so translation requires an internet connection. All other processing is local.
- **Privacy:** your documents are processed on your machine. A local database (document_translator.db) and a storage_data folder are created next to the program.
- **Port in use:** if http://localhost:8000 does not open, another program may be using port 8000. Close it and restart the app.
- **Nothing happens on a click:** make sure the console window is still open (closing it stops the server), then refresh the browser.

8. License

The frontend is open source under the MIT License. The backend is distributed as a prebuilt binary and bundles third-party components, each under its own permissive license (see THIRD_PARTY_LICENSES). For production use, an official translation provider (DeepL, Google Cloud, or Azure) can be configured. Designed by Codecider Lab.