


There were issues affecting this run of Lighthouse:

- Chrome extensions negatively affected this page's load performance. Try auditing the page in incognito mode or from a Chrome profile without extensions.



Performance

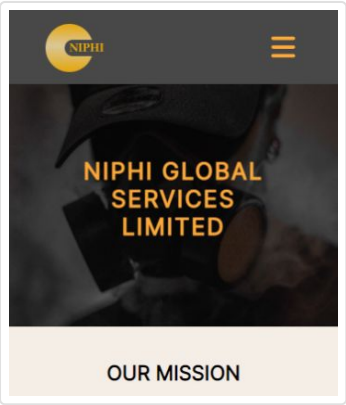

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49

50–89

90–100


METRICS

Expand view

▲ First Contentful Paint 4.9 s	▲ Time to Interactive 17.3 s
▲ Speed Index 24.3 s	▲ Total Blocking Time 9,350 ms
▲ Largest Contentful Paint 5.9 s	Cumulative Layout Shift 0.004

View Original Trace

View Treemap

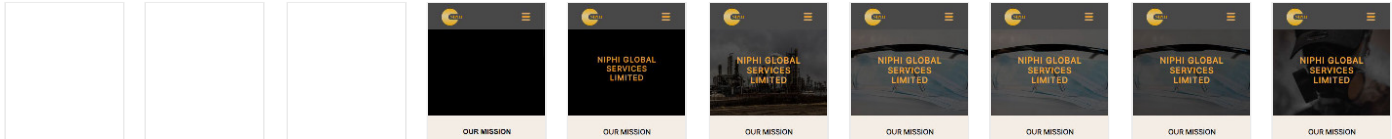

OPPORTUNITIES

Opportunity

Estimated Savings

▲ Serve images in next-gen formats

7.2 s ^

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more](#).

	URL	Resource Size	Potential Savings
	div#slide1slide ...hero-bg/bg-1.png (niphiglobal.com)	1,065.1 KiB	521.3 KiB
	div#slide3slide ...hero-bg/bg-3.png (niphiglobal.com)	1,038.4 KiB	419.6 KiB
	img /images/about-img.png (niphiglobal.com)	212.3 KiB	191.7 KiB
img	...services/underground-drill.png (niphiglobal.com)	125.2 KiB	113.8 KiB
img	...services/manifold.png (niphiglobal.com)	44.0 KiB	36.3 KiB
img	...service-sect/guages.png (niphiglobal.com)	41.6 KiB	35.1 KiB
img	...partners/pmi.png (niphiglobal.com)	34.2 KiB	29.8 KiB
img	...partners/asme.png (niphiglobal.com)	22.3 KiB	17.8 KiB
img	...partners/energy-api.png (niphiglobal.com)	20.1 KiB	15.6 KiB
img	...partners/nmsdc.png (niphiglobal.com)	16.1 KiB	14.4 KiB
img	...partners/general-electric.png (niphiglobal.com)	16.6 KiB	13.7 KiB
img	...partners/aws.png (niphiglobal.com)	17.2 KiB	12.7 KiB

These suggestions can help your page load faster. They don't [directly affect](#) the Performance score.

DIAGNOSTICS

▲

Minimize main-thread work — 23.1 s

^

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn more](#) TBT


Category	Time Spent
Rendering	6,763 ms
Script Evaluation	5,638 ms
Other	5,574 ms
Script Parsing & Compilation	2,296 ms
Style & Layout	1,919 ms
Parse HTML & CSS	682 ms
Garbage Collection	243 ms

▲


Image elements do not have explicit [width](#) and [height](#)

^

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn more](#) CLS

URL	
<div>img</div>	/images/about-img.png (niphiglobal.com)
img	...partners/aws.png (niphiglobal.com)
img	...partners/energy-api.png (niphiglobal.com)
img	...partners/asme.png (niphiglobal.com)
img	...partners/pmi.png (niphiglobal.com)

URL	
img	...partners/honeywell.png (niphiglobal.com)
img	...partners/general-electric.png (niphiglobal.com)
img	...partners/schlumberger.png (niphiglobal.com)
img	...partners/exxon-mobil.png (niphiglobal.com)
img	...partners/halliburton.png (niphiglobal.com)
img	...partners/shell.png (niphiglobal.com)
img	...partners/nmsdc.png (niphiglobal.com)
	img#nav-logo /logo.svg (niphiglobal.com)
img	/logo.svg (niphiglobal.com)
img.icon.p	...icons/phone.svg (niphiglobal.com)
img.icon.p	...icons/phone.svg (niphiglobal.com)
img.icon.l	...icons/location.svg (niphiglobal.com)
img.icon.l	...icons/location.svg (niphiglobal.com)

 Reduce JavaScript execution time — 7.9 s

^

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn more.](#) TBT

URL	Total CPU Time	Script Evaluation	Script Parse
https://niphiglobal.com	12,415 ms	1,623 ms	786 ms
chrome-extension://fdjamakpfbbddfjaoaikfcpapjohcfmg/content/contentScripts/kwift.CHROME.js	5,125 ms	2,739 ms	1,126 ms

URL	Total CPU Time	Script Evaluation	Script Parse
Unattributable	3,487 ms	108 ms	1 ms
chrome-extension://kbfnbcaeplbcioakkpcpgfkobkghlhen/src/js/Grammarly-check.js	813 ms	586 ms	141 ms
chrome-extension://c1ldacgmdnnanihiibdgemajcfkmfhia/jquery.min.js	283 ms	135 ms	137 ms
/css/style.css (niphiglobal.com)	191 ms	0 ms	0 ms
chrome-extension://hnmpcagpplmpfojmgmnngilcnaddlhb/js/contentscript.js	132 ms	50 ms	0 ms
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/contentscript.js	99 ms	94 ms	0 ms
chrome-extension://ljjeml1ljcmogpfapbkkighbhppjdbg/build/detector.js	95 ms	56 ms	36 ms
chrome-extension://amaakahonnfjjemodnpmeenfpnnbkco/content_page2.js	88 ms	55 ms	19 ms
chrome-extension://fmkadmapgofadopljbjfkapdkoienihi/build/injectGlobalHook.js	87 ms	43 ms	0 ms
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/inpage.js	74 ms	73 ms	0 ms
chrome-extension://bfbameneiokkbgdmiekhjnmfkcndlhhm/content/content.js	50 ms	3 ms	39 ms

▲ Serve static assets with an efficient cache policy — 32 resources found

^

A long cache lifetime can speed up repeat visits to your page. [Learn more.](#)

URL	Cache TTL	Transfer Size
...hero-bg/bg-1.png (niphiglobal.com)	7 d	1,066 KiB
...hero-bg/bg-3.png (niphiglobal.com)	7 d	1,039 KiB
...hero-bg/bg-2.png (niphiglobal.com)	7 d	349 KiB

URL	Cache TTL	Transfer Size
/images/about-img.png (niphiglobal.com)	7 d	213 KiB
...hero-bg/bg-4.png (niphiglobal.com)	7 d	206 KiB
...services/underground-drill.png (niphiglobal.com)	7 d	126 KiB
...services/manifold.png (niphiglobal.com)	7 d	44 KiB
...service-sect/guages.png (niphiglobal.com)	7 d	42 KiB
...partners/pmi.png (niphiglobal.com)	7 d	35 KiB
...partners/asme.png (niphiglobal.com)	7 d	23 KiB
...partners/energy-api.png (niphiglobal.com)	7 d	20 KiB
...partners/aws.png (niphiglobal.com)	7 d	18 KiB
...partners/general-electric.png (niphiglobal.com)	7 d	17 KiB
...partners/nmsdc.png (niphiglobal.com)	7 d	17 KiB
...service-sect/boots.png (niphiglobal.com)	7 d	13 KiB
...service-sect/sealed-eyeglass.png (niphiglobal.com)	7 d	11 KiB
...service-sect/safety-helmet.png (niphiglobal.com)	7 d	10 KiB
...partners/schlumberger.png (niphiglobal.com)	7 d	6 KiB
...partners/honeywell.png (niphiglobal.com)	7 d	6 KiB
...partners/exxon-mobil.png (niphiglobal.com)	7 d	5 KiB
...partners/halliburton.png (niphiglobal.com)	7 d	4 KiB
...partners/shell.png (niphiglobal.com)	7 d	3 KiB
/css/style.css (niphiglobal.com)	7 d	2 KiB
/logo.svg (niphiglobal.com)	7 d	1 KiB
/css/navbar.css (niphiglobal.com)	7 d	1 KiB

URL	Cache TTL	Transfer Size
...icons/phone.svg (niphiglobal.com)	7 d	1 KiB
/css/hero.css (niphiglobal.com)	7 d	1 KiB
/css/footer.css (niphiglobal.com)	7 d	1 KiB
/css/base.css (niphiglobal.com)	7 d	1 KiB
/scripts/navbar.js (niphiglobal.com)	7 d	1 KiB
...icons/location.svg (niphiglobal.com)	7 d	1 KiB
/scripts/partner.js (niphiglobal.com)	7 d	1 KiB

Avoid enormous network payloads — Total size was 3,302 KiB



Large network payloads cost users real money and are highly correlated with long load times. [Learn more.](#) LCP

URL	Transfer Size
...hero-bg/bg-1.png (niphiglobal.com)	1,066.1 KiB
...hero-bg/bg-3.png (niphiglobal.com)	1,039.4 KiB
...hero-bg/bg-2.png (niphiglobal.com)	348.6 KiB
/images/about-img.png (niphiglobal.com)	212.8 KiB
...hero-bg/bg-4.png (niphiglobal.com)	206.4 KiB
...services/underground-drill.png (niphiglobal.com)	125.6 KiB
...services/manifold.png (niphiglobal.com)	44.4 KiB
...service-sect/guages.png (niphiglobal.com)	42.0 KiB
...partners/pmi.png (niphiglobal.com)	34.6 KiB
...partners/asme.png (niphiglobal.com)	22.7 KiB



The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn more](#). FCP LCP

Maximum critical path latency: **6,370 ms**

Initial Navigation

- https://niphiglobal.com
 - /css/style.css (niphiglobal.com)
 - /css/base.css (niphiglobal.com)
 - /css2?family=Inter&display=swap (fonts.googleapis.com)
 - ...v12/UcCO3FwrK....woff2 (fonts.gstatic.com) - **100 ms, 16.44 KiB**
 - /css/navbar.css (niphiglobal.com) - **3,770 ms, 1.16 KiB**
 - /css/hero.css (niphiglobal.com) - **3,820 ms, 1.05 KiB**
 - /css/footer.css (niphiglobal.com) - **3,820 ms, 1.02 KiB**
 - /scripts/navbar.js (niphiglobal.com) - **440 ms, 0.73 KiB**
 - /scripts/partner.js (niphiglobal.com) - **440 ms, 0.62 KiB**

User Timing marks and measures

3 user timings

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more](#).

Name	Type	Start Time	Duration
__v3	Mark	1,569.29 ms	
@grammarly-extension:checkScriptInitStart	Mark	7,666.17 ms	
@grammarly-extension:checkScriptInitEnd	Mark	7,699.14 ms	

Keep request counts low and transfer sizes small

36 requests • 3,302 KiB

To set budgets for the quantity and size of page resources, add a budget.json file. [Learn more](#).

Resource Type	Requests	Transfer Size
Total	36	3,302.2 KiB
Image	25	3,275.1 KiB
Font	1	16.4 KiB

Resource Type	Requests	Transfer Size
Stylesheet	6	6.5 KiB
Document	1	2.8 KiB
Script	2	1.3 KiB
Media	0	0.0 KiB
Other	1	0.0 KiB
Third-party	2	17.1 KiB

☐ Largest Contentful Paint element — 1 element found



This is the largest contentful element painted within the viewport. [Learn More](#) LCP

Element


p

☐ Avoid large layout shifts — 3 elements found



These DOM elements contribute most to the CLS of the page. CLS

Element	CLS Contribution
<div><div></div><div>h1</div></div>	0.002
<div><div></div><div>h1</div></div>	0.001

Element	CLS Contribution
<div>img</div>	0

Avoid long main-thread tasks — 20 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn more](#) TBT


URL	Start Time	Duration
chrome-extension://fdjamakpfbbddfjaoaikfcpapjohcfmg/content/contentScripts/kwift.CHROME.js	6,382 ms	3,909 ms
https://niphiglobal.com	2,894 ms	2,722 ms
https://niphiglobal.com	1,943 ms	951 ms
chrome-extension://fdjamakpfbbddfjaoaikfcpapjohcfmg/content/contentScripts/kwift.CHROME.js	14,082 ms	914 ms
https://niphiglobal.com	15,539 ms	642 ms
https://niphiglobal.com	16,622 ms	570 ms
https://niphiglobal.com	17,192 ms	545 ms
chrome-extension://kbfnbcaeplbcioakkpcpgfkobkghlhen/src/js/Grammarly-check.js	10,989 ms	486 ms
https://niphiglobal.com	15,041 ms	449 ms
chrome-extension://c1ldacgmdnnanihiibdgemajcfkmfhia/jquery.min.js	10,622 ms	281 ms
Unattributable	13,528 ms	272 ms
https://niphiglobal.com	12,904 ms	240 ms
https://niphiglobal.com	6,000 ms	236 ms
Unattributable	16,181 ms	232 ms
https://niphiglobal.com	12,374 ms	207 ms

URL	Start Time	Duration
https://niphiglobal.com	13,144 ms	134 ms
/css/style.css (niphiglobal.com)	5,616 ms	133 ms
https://niphiglobal.com	10,402 ms	130 ms
https://niphiglobal.com	12,202 ms	127 ms
https://niphiglobal.com	16,413 ms	127 ms

Avoid non-composited animations — 1 animated element found

^

Animations which are not composited can be janky and increase CLS. [Learn more](#) CLS

Element	Name
<div><div>h1</div><div>Unsupported CSS Properties: font-size, width</div></div>	zoom-h1

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (27)

Hide

Eliminate render-blocking resources	^
Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. Learn more . FCP LCP	
Properly size images	^
Serve images that are appropriately-sized to save cellular data and improve load time. Learn more .	
Defer offscreen images — Potential savings of 118 KiB	^
Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. Learn more .	

	URL	Resource Size	Potential Savings
img	...services/manifold.png (niphiglobal.com)	44.0 KiB	44.0 KiB
img	...service-sect/guages.png (niphiglobal.com)	41.6 KiB	41.6 KiB
img	...service-sect/boots.png (niphiglobal.com)	12.1 KiB	12.1 KiB
img	...service-sect/sealed-eyeglass.png (niphiglobal.com)	10.5 KiB	10.5 KiB
img	...service-sect/safety-helmet.png (niphiglobal.com)	9.6 KiB	9.6 KiB

Minify CSS



Minifying CSS files can reduce network payload sizes. [Learn more.](#) FCP LCP

Minify JavaScript



Minifying JavaScript files can reduce payload sizes and script parse time. [Learn more.](#) FCP LCP

Reduce unused CSS



Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn more.](#) FCP LCP

Reduce unused JavaScript



Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn more.](#) LCP

Efficiently encode images



Optimized images load faster and consume less cellular data. [Learn more.](#)

Enable text compression



Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more.](#) FCP LCP

Preconnect to required origins



Consider adding `preconnect` or `dns-prefetch` resource hints to establish early connections to important third-party origins. [Learn more.](#) FCP LCP

Initial server response time was short — Root document took 390 ms



Keep the server response time for the main document short because all other requests depend on it. [Learn more.](#) FCP LCP

URL	Time Spent
https://niphiglobal.com	390 ms

Avoid multiple page redirects



Redirects introduce additional delays before the page can be loaded. [Learn more.](#) FCP LCP

☐ Preload key requests



Consider using `<link rel=preload>` to prioritize fetching resources that are currently requested later in page load. [Learn more.](#) FCP LCP

Use HTTP/2



HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more.](#)

Use video formats for animated content



Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more](#) LCP

Remove duplicate modules in JavaScript bundles



Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. TBT

Avoid serving legacy JavaScript to modern browsers



Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. [Learn More](#) TBT

Preload Largest Contentful Paint image



Preload the image used by the LCP element in order to improve your LCP time. [Learn more.](#) LCP

Avoids an excessive DOM size — 130 elements



A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn more](#). TBT

Statistic	Element	Value
Total DOM Elements		130
Maximum DOM Depth	strong	8
Maximum Child Elements	ul	11

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. [Learn more](#). FCP LCP

Minimize third-party usage — Third-party code blocked the main thread for 0 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn more](#). TBT

Third-Party	Transfer Size	Main-Thread Blocking Time
Google Fonts	17 KiB	0 ms
...v12/UcCO3FwrK....woff2 (fonts.gstatic.com)	16 KiB	0 ms

☐ Lazy load third-party resources with facades

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. [Learn more](#). TBT

☐ Largest Contentful Paint image was not lazily loaded

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more](#).

Uses passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as `passive` to improve your page's scroll performance. [Learn more](#).

Avoids `document.write()`

For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn more](#).

Has a `<meta name="viewport">` tag with `width` or `initial-scale`



A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more](#). TBT

Avoids `unload` event listeners



The `'unload'` event does not fire reliably and listening for it can prevent browser optimizations like the Back-Forward Cache. Use `'pagehide'` or `'visibilitychange'` events instead. [Learn more](#)



Accessibility


These checks highlight opportunities to [improve the accessibility of your web app](#). Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

NAMES AND LABELS

▲ Buttons do not have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn more](#).

Failing Elements




button#menu

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio.

Low-contrast text is difficult or impossible for many users to read. [Learn more](#).

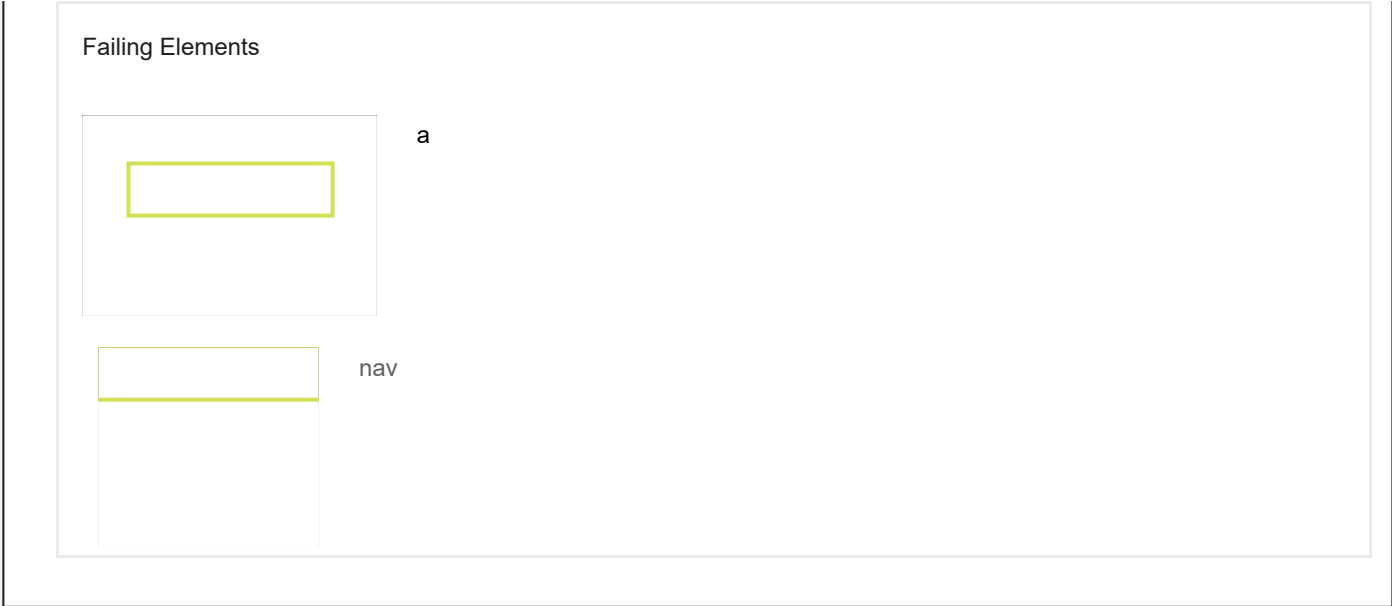

These are opportunities to improve the legibility of your content.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div></div> <div>The page has a logical tab order</div> <div></div>	^
Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. Learn more.	
<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div></div> <div>Interactive controls are keyboard focusable</div> <div></div>	^
Custom interactive controls are keyboard focusable and display a focus indicator. Learn more.	
<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div></div> <div>Interactive elements indicate their purpose and state</div> <div></div>	^
Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn more.	
<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div></div> <div>The user's focus is directed to new content added to the page</div> <div></div>	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn more.	
<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div></div> <div>User focus is not accidentally trapped in a region</div> <div></div>	^
A user can tab into and out of any control or region without accidentally trapping their focus. Learn more.	
<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div></div> <div>Custom controls have associated labels</div> <div></div>	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more.	
<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div></div> <div>Custom controls have ARIA roles</div> <div></div>	^

Custom interactive controls have appropriate ARIA roles. Learn more.	
<div><div></div>Visual order on the page follows DOM order</div>	^
DOM order matches the visual order, improving navigation for assistive technology. Learn more.	
<div><div></div>Offscreen content is hidden from assistive technology</div>	^
Offscreen content is hidden with display: none or aria-hidden=true. Learn more.	
<div><div></div>HTML5 landmark elements are used to improve navigation</div>	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more.	

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (18)

Hide

[aria-*] attributes match their roles	^
Each ARIA `role` supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. Learn more.	
[aria-hidden="true"] is not present on the document <code><body></code>	^
Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document ` <code><body></code> `. Learn more.	
[role] s have all required [aria-*] attributes	^
Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more.	
[role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more.	
[aria-*] attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more.	
[aria-*] attributes are valid and not misspelled	^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more.](#)

Image elements have `[alt]` attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more.](#)

`[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5.



Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more.](#)

The page contains a heading, skip link, or landmark region



Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more.](#)

Document has a `<title>` element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more.](#)

`[id]` attributes on active, focusable elements are unique



All focusable elements must have a unique ``id`` to ensure that they're visible to assistive technologies. [Learn more.](#)

`<html>` element has a `[lang]` attribute



If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more.](#)

`<html>` element has a valid value for its `[lang]` attribute



Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn more.](#)

Links have a discernible name



Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn more.](#)

Lists contain only `` elements and script supporting elements (`<script>` and `<template>`).



Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more.](#)

List items (``) are contained within `` or `` parent elements



Screen readers require list items (``) to be contained within a parent `` or `` to be announced properly. [Learn more](#).

No element has a `[tabindex]` value greater than 0



A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more](#).

Heading elements appear in a sequentially-descending order



Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more](#).

NOT APPLICABLE (24)

Hide

☐ `[accesskey]` values are unique



Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more](#).

☐ `button`, `link`, and `menuitem` elements have accessible names



When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more](#).

☐ `[aria-hidden="true"]` elements do not contain focusable descendents



Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn more](#).

☐ ARIA input fields have accessible names



When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more](#).

☐ ARIA `meter` elements have accessible names



When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more](#).

☐ ARIA `progressbar` elements have accessible names



When a `progressbar` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more](#).

- Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more](#).

- `[role]`s are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more](#).

- ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more](#).

- ARIA `tooltip` elements have accessible names ^

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more](#).

- ARIA `treeitem` elements have accessible names ^

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more](#).

- `<dl>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn more](#).

- Definition list items are wrapped in `<dl>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. [Learn more](#).

- ARIA IDs are unique ^

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn more](#).

- No form fields have multiple labels ^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn more](#).

☐ `<frame>` or `<iframe>` elements have a title



Screen reader users rely on frame titles to describe the contents of frames. [Learn more.](#)

☐ `<input type="image">` elements have `[alt]` text



When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn more.](#)

☐ Form elements have associated labels



Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more.](#)

☐ The document does not use `<meta http-equiv="refresh">`



Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more.](#)

☐ `<object>` elements have alternate text



Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more.](#)

☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table.



Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more.](#)

☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe.



Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more.](#)

☐ `[lang]` attributes have a valid value



Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn more.](#)

☐ `<video>` elements contain a `<track>` element with `[kind="captions"]`



When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more.](#)




Best Practices

USER EXPERIENCE

▲ Serves images with low resolution

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn more](#).

URL	Displayed size	Actual size	Expected size
 i m g /images/about-img.png (niphiglobal.com)	302 x 222	415 x 304	604 x 444

TRUST AND SAFETY

○ Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn more](#)

Description	Directive	Severity
No CSP found in enforcement mode		High

PASSED AUDITS (12)

Hide

Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more](#).

Avoids requesting the geolocation permission on page load

Avoids requesting the geolocation permission on page load	
Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more.	
Avoids requesting the notification permission on page load	
Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more.	
Avoids front-end JavaScript libraries with known security vulnerabilities	
Some third-party scripts may contain known security vulnerabilities that are easily identified and exploited by attackers. Learn more.	
Allows users to paste into password fields	
Preventing password pasting undermines good security policy. Learn more.	
Displays images with correct aspect ratio	
Image display dimensions should match natural aspect ratio. Learn more.	
Page has the HTML doctype	
Specifying a doctype prevents the browser from switching to quirks-mode. Learn more.	
Properly defines charset	
A character encoding declaration is required. It can be done with a ` <meta/> ` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more.	
Avoids deprecated APIs	
Deprecated APIs will eventually be removed from the browser. Learn more.	
No browser errors logged to the console	
Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more	
No issues in the Issues panel in Chrome Devtools	
Issues logged to the `Issues` panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.	

Page has valid source maps

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more](#).

NOT APPLICABLE (2)

Hide

○

Fonts with `font-display: optional` are preloaded

Preload `optional` fonts so first-time visitors may use them. [Learn more](#)

○

Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. [Learn more](#).



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more](#).

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

○

Structured data is valid

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more](#).

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (13)

Hide

Has a `<meta name="viewport">` tag with `width` or `initial-scale`

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more](#).

TBT

Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more.](#)

Document has a meta description ^

Meta descriptions may be included in search results to concisely summarize page content. [Learn more.](#)

Page has successful HTTP status code ^

Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more.](#)

Links have descriptive text ^

Descriptive link text helps search engines understand your content. [Learn more.](#)

Links are crawlable ^

Search engines may use `href` attributes on links to crawl websites. Ensure that the `href` attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn More](#)

Page isn't blocked from indexing ^

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more.](#)

Image elements have `[alt]` attributes ^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more.](#)

Document has a valid `hreflang` ^

hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more.](#)

Document has a valid `rel=canonical` ^

Canonical links suggest which URL to show in search results. [Learn more.](#)

Document uses legible font sizes — 100% legible text ^

Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥12px. [Learn more.](#)

7/22/22, 4:22 PMabout:blank

Source	Selector	% of Page Text	Font Size
Legible text		100.00%	≥ 12px

Document avoids plugins

Search engines can't index plugin content, and many devices restrict plugins or don't support them. [Learn more.](#)

Tap targets are sized appropriately — 100% appropriately sized tap targets

Interactive elements like buttons and links should be large enough (48x48px), and have enough space around them, to be easy enough to tap without overlapping onto other elements. [Learn more.](#)

NOT APPLICABLE (1)

Hide

○ robots.txt is valid

^

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more.](#)