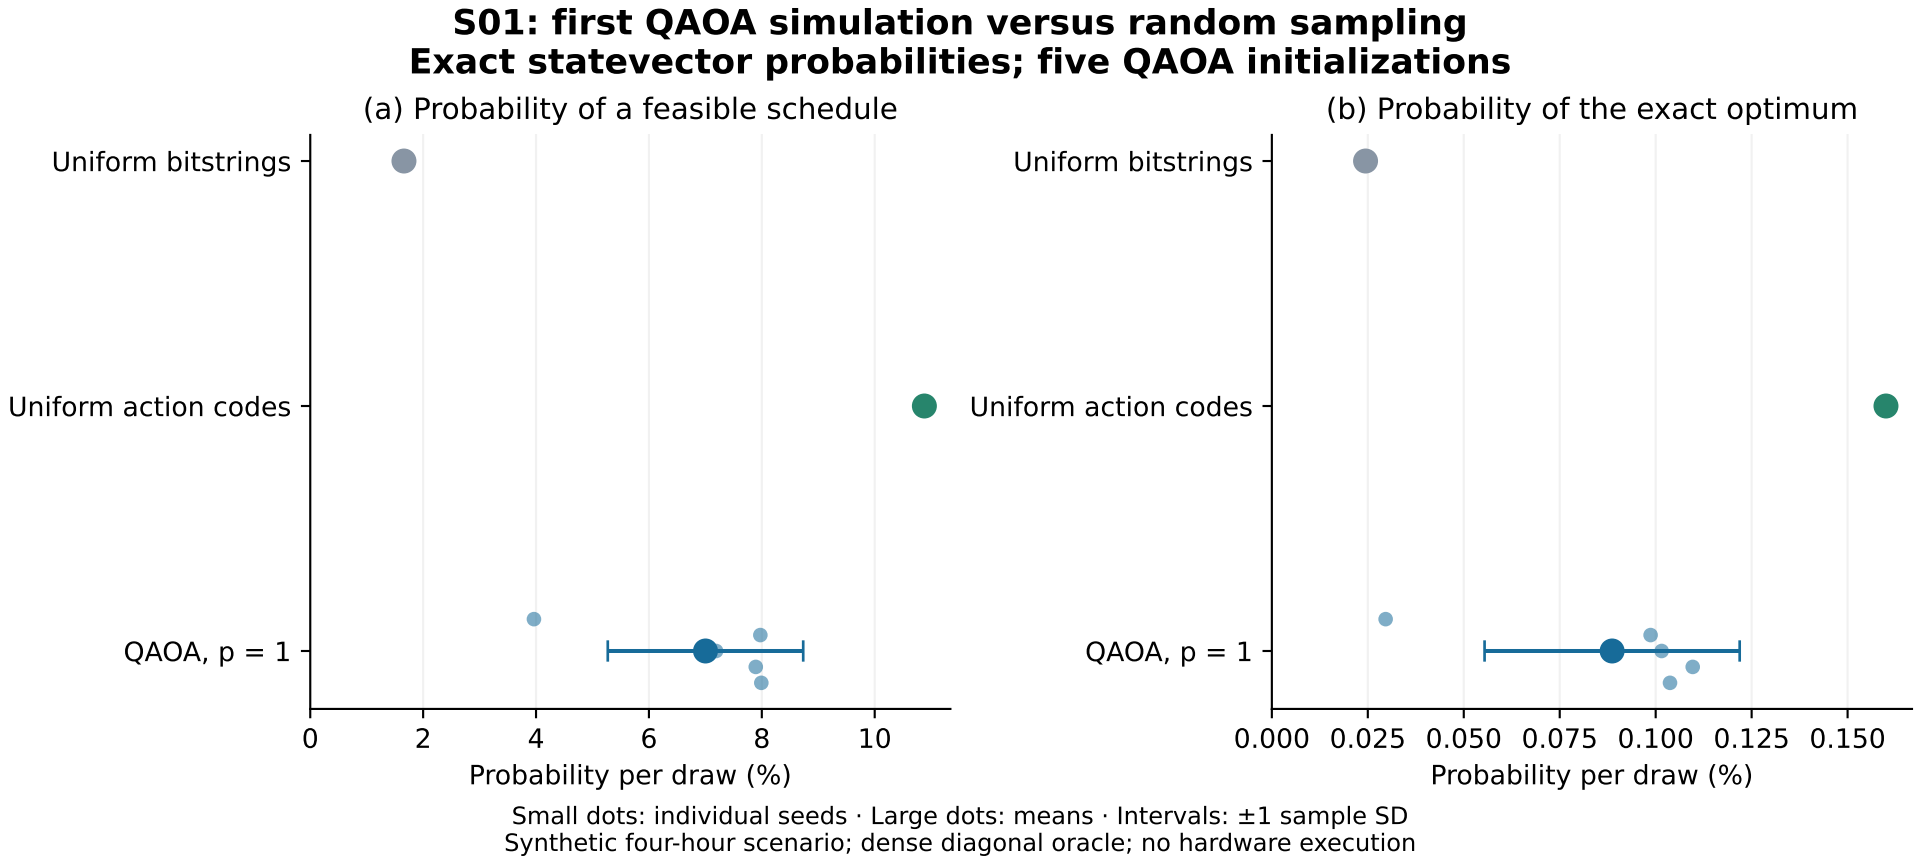
S01: first QAOA simulation versus random sampling
Exact statevector probabilities; five QAOA initializations
(a) Probability of a feasible schedule
(b) Probability of the exact optimum
Uniform bitstrings
Uniform action codes
QAOA, p = 1
0
2
4
6
8
10
0.000
0.025
0.050
0.075
0.100
0.125
0.150
Probability per draw (%)
Small dots: individual seeds · Large dots: means · Intervals: ±1 sample SD
Synthetic four-hour scenario; dense diagonal oracle; no hardware execution