CodeGreedy



User Input in JAVA



"Every problem you solve today is one step closer to your dream company."

Made with Goodnotes

SCANNER CLASS

CodeGreedy

The Scanner class is used to take input from the user in a Java program.

It is part of the Java utility package

Import statement: import java.util.Scanner;

```
Scanner sc = new Scanner(System.in);
```



Made with Goodnotes

1. Program (.c .cpp .java) (Source code)
2. Extendend source code
3. compiler → machine
4. Assembler → Assembly
5. Linker
6. Object code → Runnable
7. HDD → RAM (loader)

Made with Goodnotes


import java.utit.Scanner

Scar

human lang

Scanner (sc) = ne Sc

Made with Goodnotes

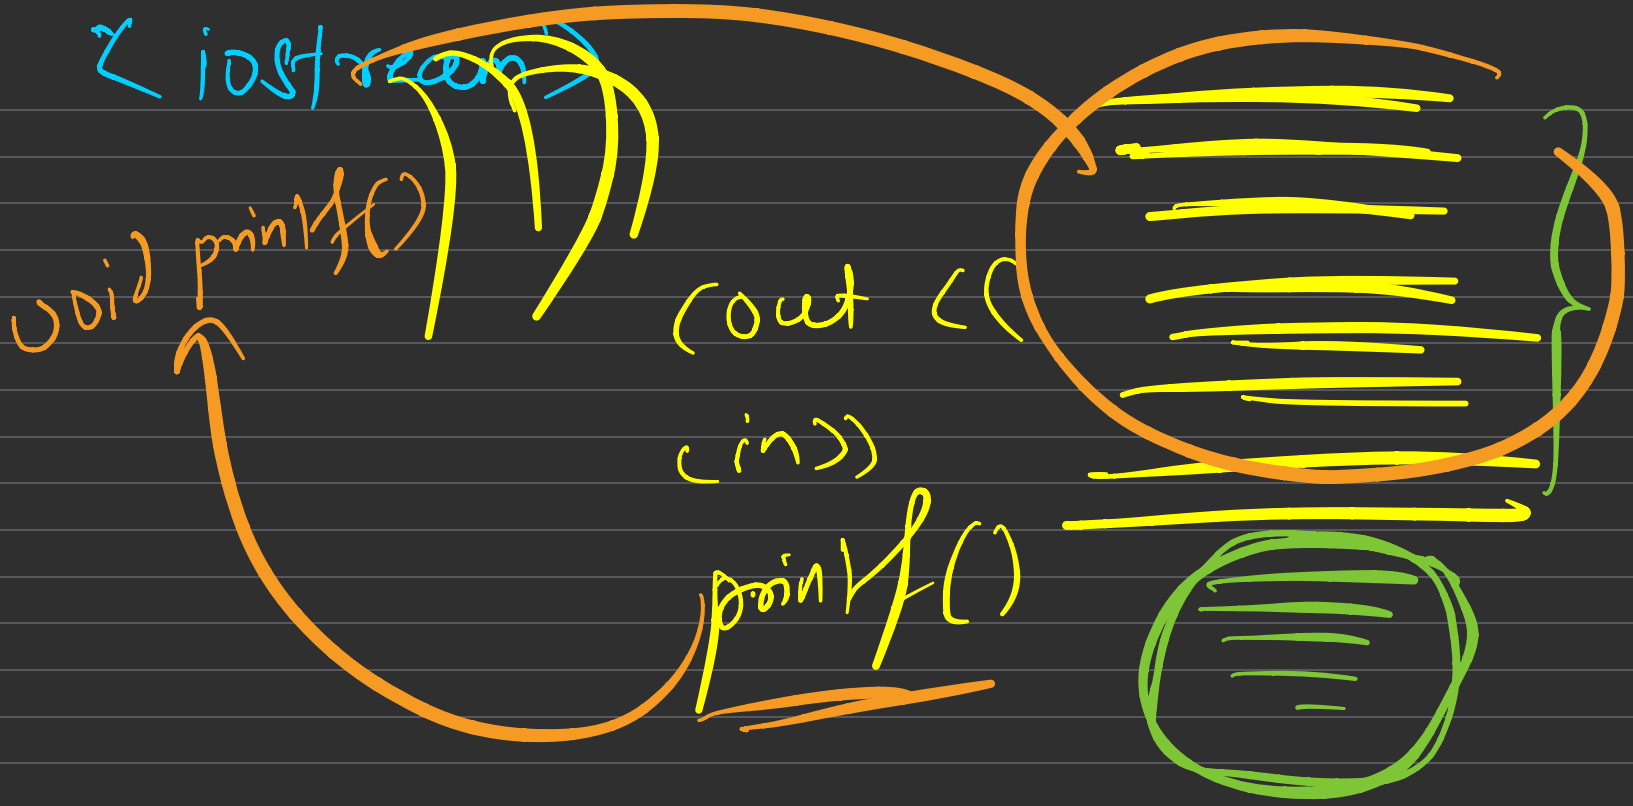

Made with Goodnotes

Scanner sc = new Scanner(System.in);

CodeGreedy

Class

Object

Allocates Memory

Constructor

System.in tells where input will come from

System → built-in class
in → input stream (keyboard input)

CodeGreedy

Made with Goodnotes

TAKING INPUT

CodeGreedy

int a = sc.nextInt()	// integer
double d = sc.nextDouble()	// decimal
String word = sc.next()	// single word
String line = sc.nextLine()	// full line



Made with Goodnotes

Strings in Java

Sequence of char

Capital

```
char ch = 'a'
char c = '?'
```


```
String s = "Pramod"
```

Not a data Type

Class


Made with Goodnotes

How Strings works in Java

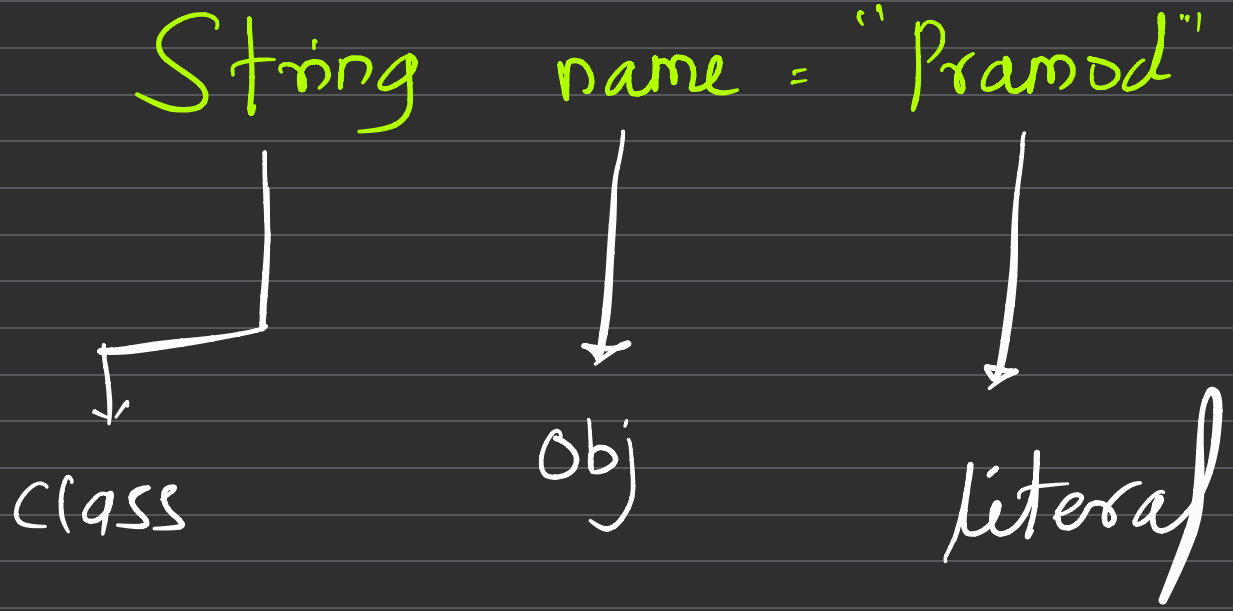

Made with Goodnotes

Where does the string get stored in Java

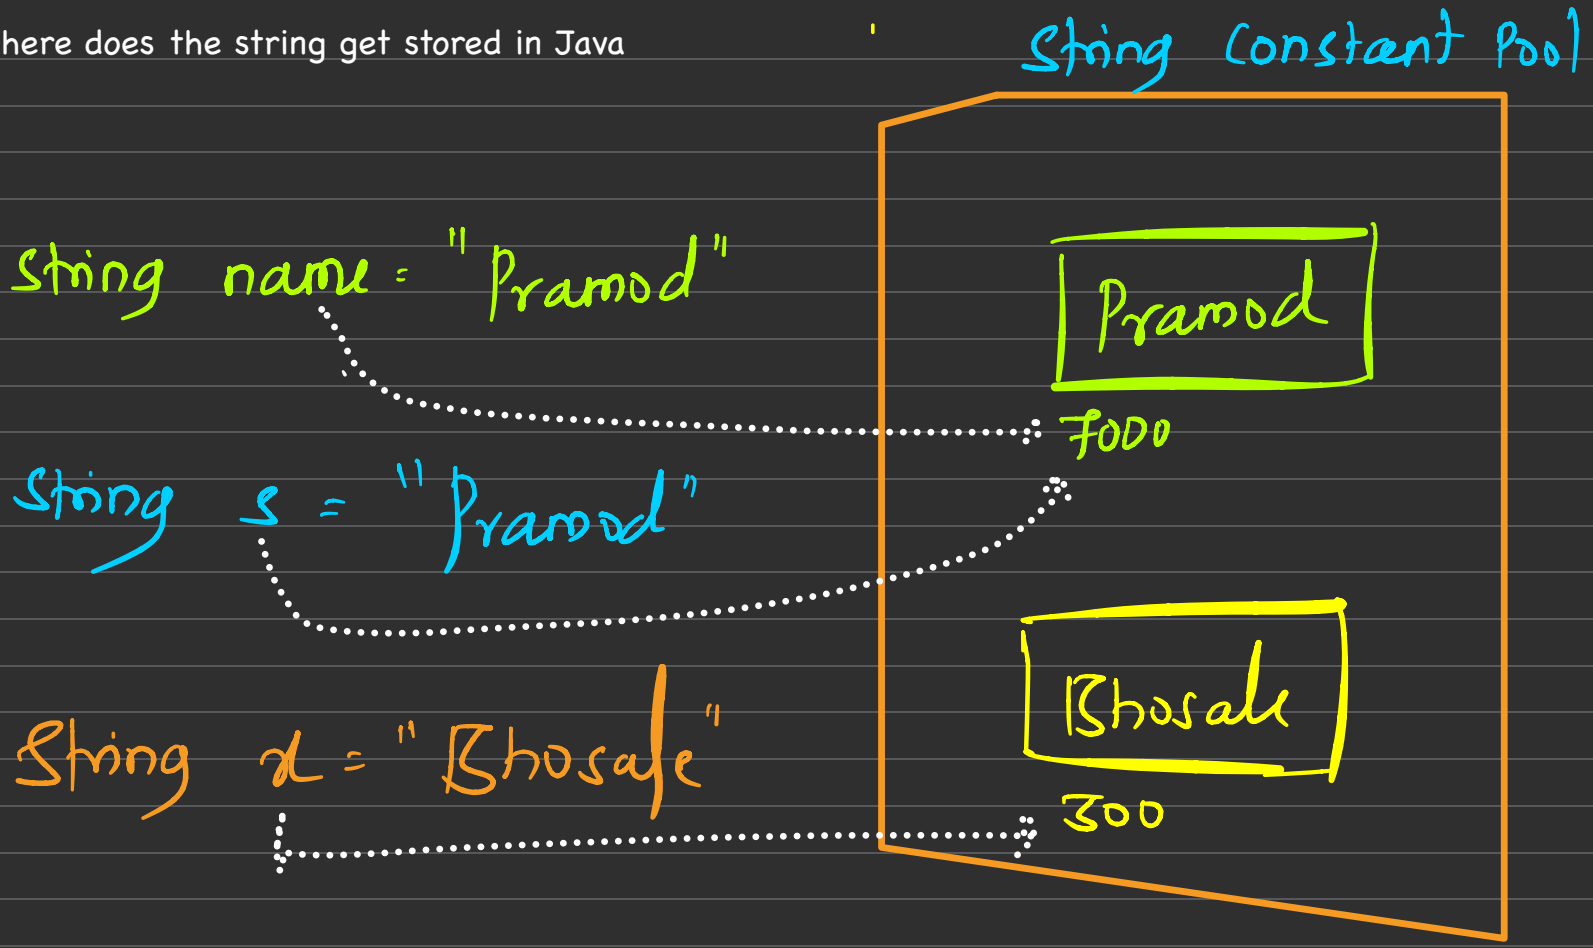

Made with Goodnotes


Why Strings in Java are immutable

Whose value cannot be changed

String v = "Java"

String s = "Java"

String d = "Java"

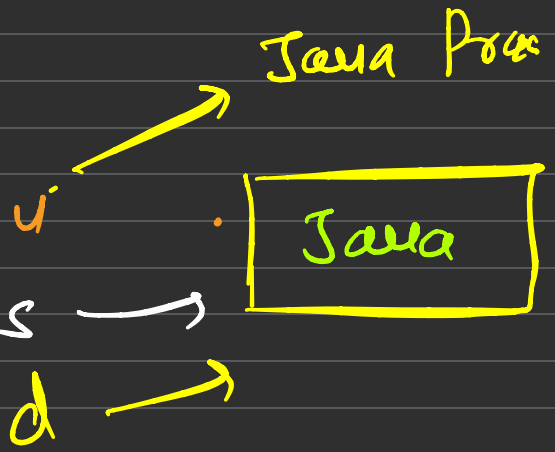

Made with Goodnotes


String x = new String("Pramod")

String s = new String("Pramod")

String — class

s — obj


new String("Pramod") — Constructor

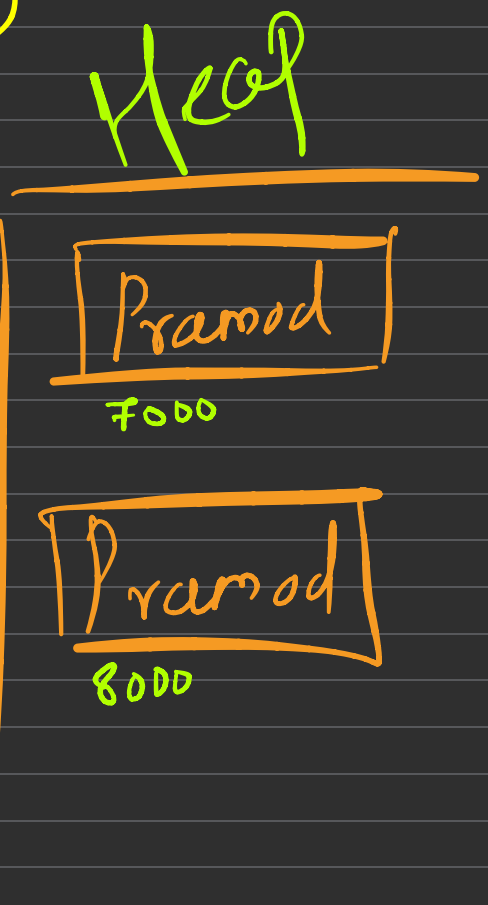

Made with Goodnotes

```
String name = "Pramod";
String prevName = name;

name = name + "Bhosale";
```

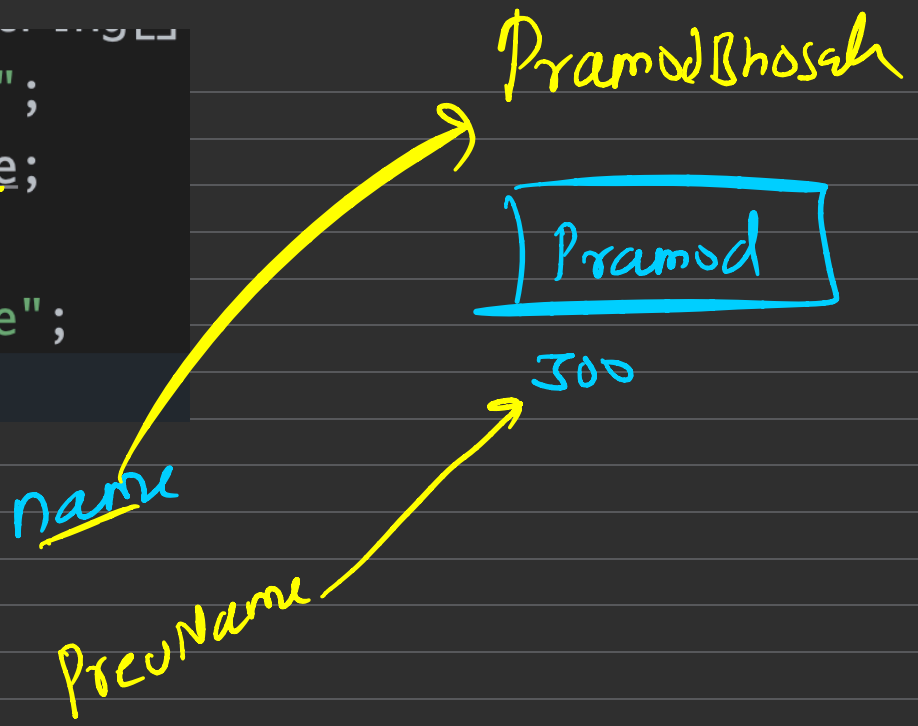

name = name + Bhosale

Made with Goodnotes

Mutable String

- StringBuilder
- StringBuffer (Thread safe)

String Builder Buffer

String s = "Pramod"

Made with Goodnotes

```
StringBuilder s = new StringBuilder("Java");

String name = "Pramod";

StringBuilder s = new StringBuilder(name);

StringBuffer s = new StringBuffer("Java");
```

Made with Goodnotes

Functions of String

charAt(index)

length()

substring(x, y)

isEmpty()

equals(Object of another string)

contains(char)

toLowerCase()

toUpperCase()

Made with Goodnotes


String name = "Pramod"

String fullname = "Pramod"

name == fullName

Pramod == Pramod

700 == 700

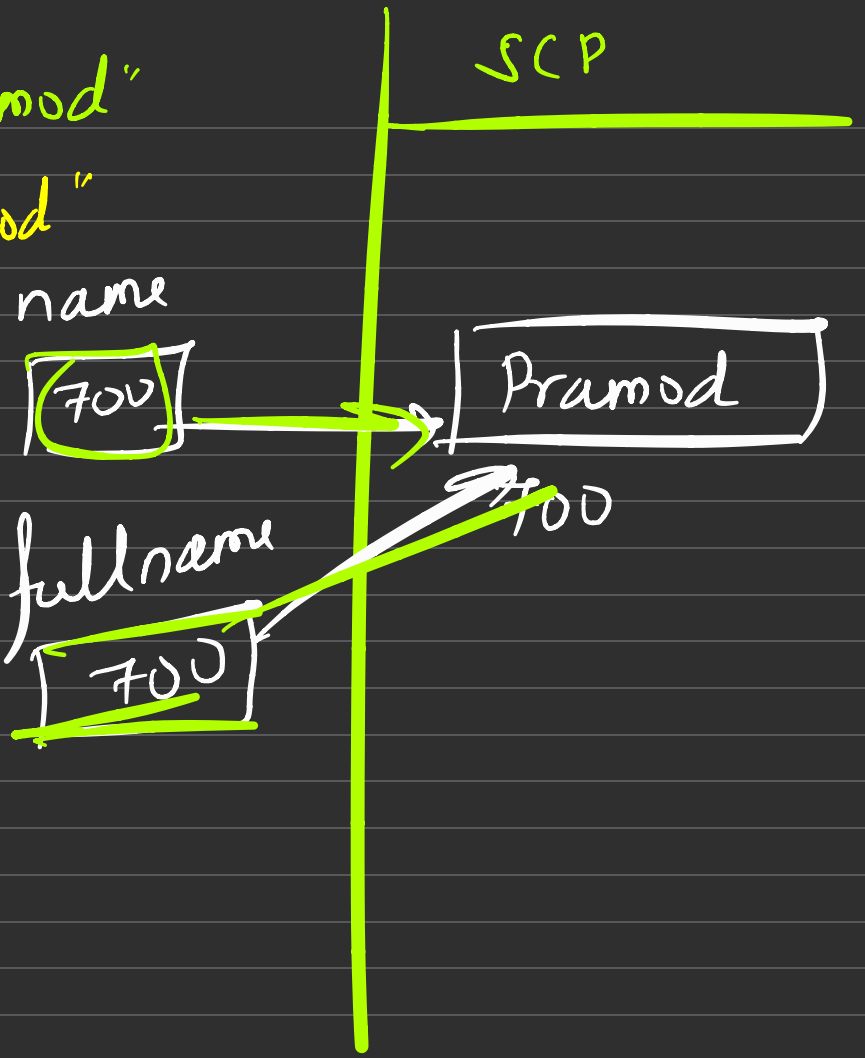

Made with Goodnotes

String s = Pramodbhosale

ram → Substring

Pod → Subsequence

Made with Goodnotes

Functions of Mutable Strings - StringBuidler & StringBuffer

It mainly supports all the functions of string along with its additional functions given below.

append(char/string)

insert(index, char)

delete(to, from)

deleteCharAt(index)

setCharAt(index, char)

reverse()

toString()

Made with Goodnotes

Problems on String

- Reverse a String
- Check if String is palindrome or not
- [redacted]
- Delete the char of a given index.

Nana

nayyan

Made with Goodnotes

- Thinking 30/40 min
- Typing
- Typing Master
- MonkeyTyping / Keybr

Made with Goodnotes