




API Development – Postman

www.codehafeez.com

```
<?php
include("connection_db.php");
header('Access-Control-Allow-Origin: *');
header('Response: HTTP/1.1 200 OK');
$json = json_decode(file_get_contents('php://input'), true);
```

```
    $arr_data = array();
    $sql = "SELECT * FROM api_users";
    $fetchData = mysqli_query($con, $sql);
    while($row = mysqli_fetch_assoc($fetchData)){
        $arr_data[] = $row;
    }
    echo json_encode($arr_data);
```

?>

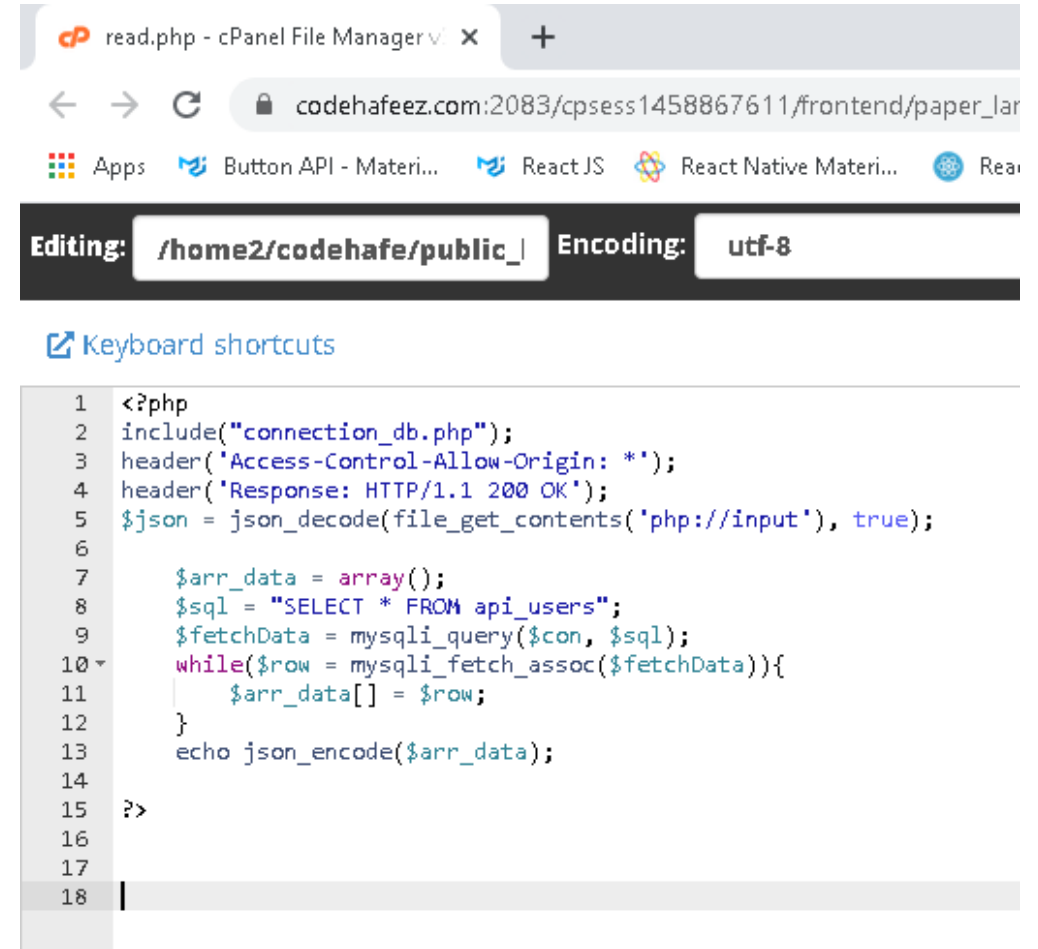

```
read.php - cPanel File Manager V x +
codehafeez.com:2083/cpsess1458867611/frontend/paper_lar
Apps Button API - Materi... React JS React Native Materi... Rea
Editing: /home2/codehafa/public_ Encoding: utf-8
Keyboard shortcuts
1 <?php
2 include("connection_db.php");
3 header('Access-Control-Allow-Origin: *');
4 header('Response: HTTP/1.1 200 OK');
5 $json = json_decode(file_get_contents('php://input'), true);
6
7     $arr_data = array();
8     $sql = "SELECT * FROM api_users";
9     $fetchData = mysqli_query($con, $sql);
10 while($row = mysqli_fetch_assoc($fetchData)){
11     $arr_data[] = $row;
12 }
13 echo json_encode($arr_data);
14
15 ?>
16
17
18
```

Postman

File Edit View Help

HomeWorkspacesReportsExplore

Search Postman

My Workspace

NewImport

GET http://codehafeez...

CodeHafeez

+

...

No Environment

ForkSaveShare

Persist AllReset All

Collections

APIs

Environments

Mock Servers

Monitors

History

No APIs yet

APIs define related collections and environments under a consistent schema.

Create an API

VARIABLE	INITIAL VALUE	CURRENT VALUE		Persist All	Reset All
<input checked="" type="checkbox"/> baseUrl	http://codehafeez.com/api/	http://codehafeez.com/api/			
Add a new variable					

Create Environment Variable

Activate Windows
Go to Settings to activate Windows.

Find and Replace

Console

BootcampRunnerTrash

4:01 AM
4/10/2021

Postman

File Edit View Help

HomeWorkspacesReportsExplore

Search Postman

Upgrade

My Workspace

NewImport

Collections

APIs

Environments

Mock Servers

Monitors

History

No APIs yet

APIs define related collections and environments under a consistent schema.

Create an API

CodeHafeezGET {{baseUrl}}/read.p...

CodeHafeez

Save

</>

GET{{baseUrl}}/read.php

Send

ParamsAuthorizationHeaders(7)BodyPre-request ScriptTestsSettings

Cookies

Query Params

KEY	VALUE	DESCRIPTION		Bulk Edit
Key	Value	Description		

BodyCookiesHeaders(9)Test Results

Status: 200 OKTime: 568 msSize: 336 BSave Response

PrettyRawPreviewVisualizeHTML

1[{"id": "1", "name": "hafeez", "email": "codehafeez@gmail.com"}]

Activate Windows

Go to Settings to activate Windows.

Find and ReplaceConsole

BootcampRunnerTrash

4:05 AM4/10/2021



No APIs yet

APIs define related collections and environments under a consistent schema.

Create an API

	KEY	VALUE	DESCRIPTION	...	Bulk Edit
<input checked="" type="checkbox"/>	name	Abdul Hafeez			
<input checked="" type="checkbox"/>	email	hafeez-test@gmail.com			
	Key	Value	Description		

```
1 [{"message": "Success"}]
```

Activate Windows
Go to Settings to activate Windows.

```

<?php
include("connection_db.php");
header('Access-Control-Allow-Origin: *');
header('Response: HTTP/1.1 200 OK');
$json = json_decode(file_get_contents('php://input'), true);

$name = $json['name'];
$email = $json['email'];

$sql = "INSERT INTO api_users (name, email) VALUES ('$name', '$email')";
if ($con->query($sql) === TRUE) {
    $arr_data[] = array('message' => 'Success');
}
else {
    $arr_data[] = array('message' => 'Database insert error.'.$con->error);
}

echo json_encode($arr_data);


?>

```

```

1 <?php
2 include("connection_db.php");
3 header('Access-Control-Allow-Origin: *');
4 header('Response: HTTP/1.1 200 OK');
5 $json = json_decode(file_get_contents('php://input'), true);
6
7     $name = $json['name'];
8     $email = $json['email'];
9
10    $sql = "INSERT INTO api_users (name, email) VALUES ('$name', '$email')";
11    if ($con->query($sql) === TRUE) {
12        $arr_data[] = array('message' => 'Success');
13    }
14    else {
15        $arr_data[] = array('message' => 'Database insert error.'.$con->error);
16    }
17
18    echo json_encode($arr_data);
19
20    ?>
21

```

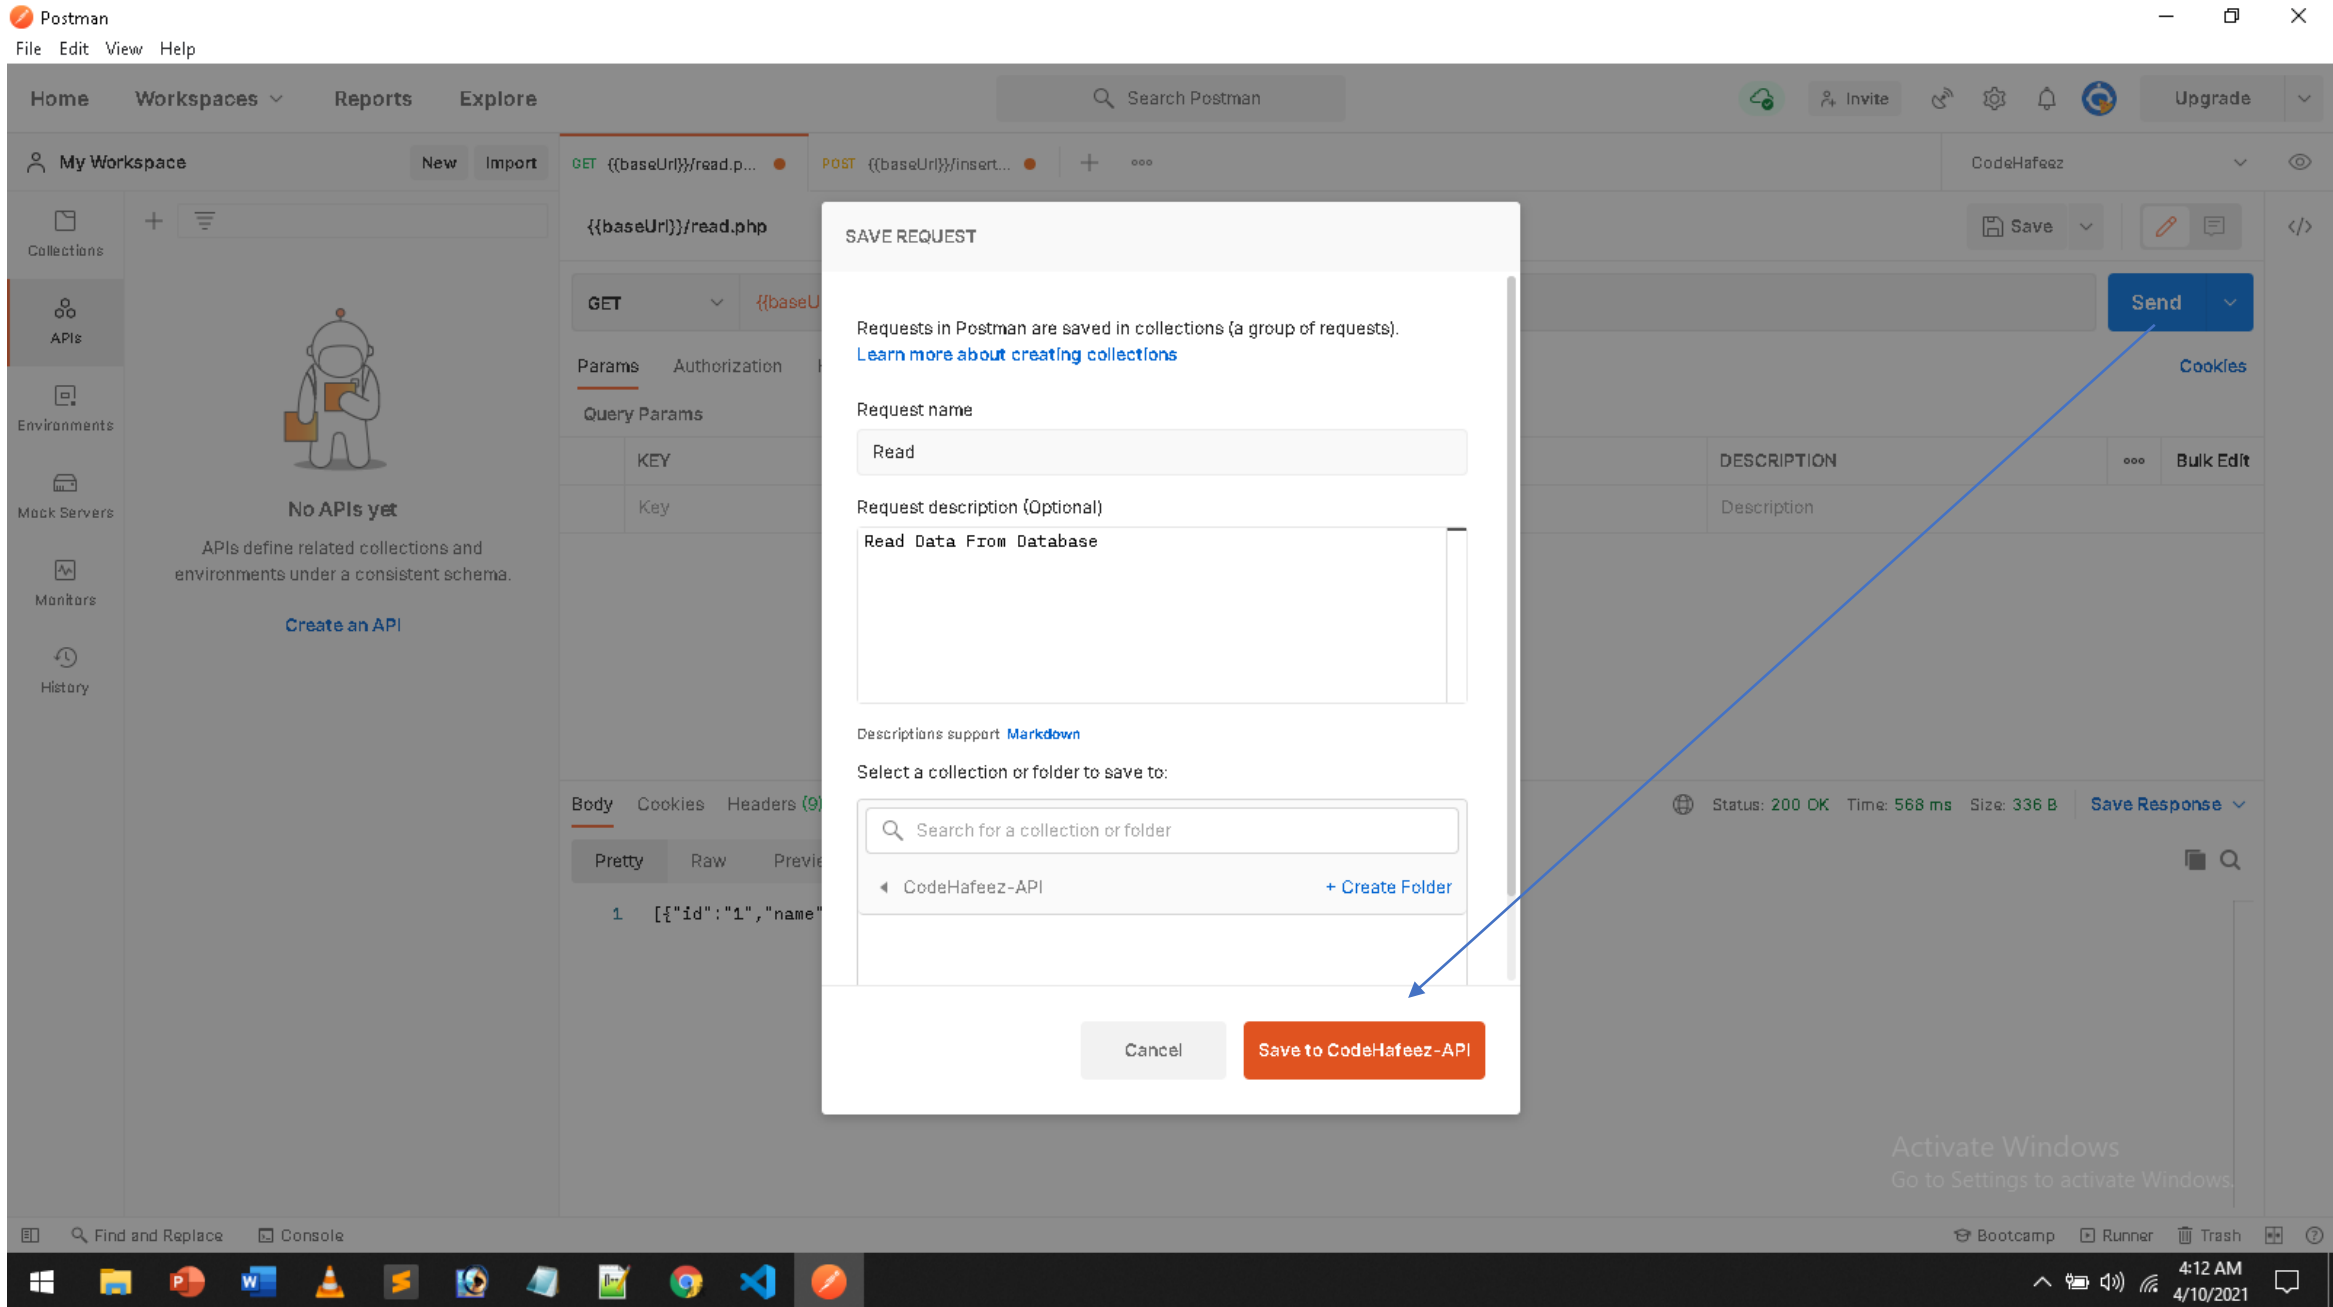

HomeWorkspacesReportsExplore

My WorkspaceNewImport

GET ReadPOST {{baseUrl}}/insert...

CodeHafeez

SaveSend

APIsEnvironmentsMock ServersMonitorsHistory

No APIs yet
APIs define related collections and environments under a consistent schema.
Create an API

ParamsAuthorizationQuery Params

KEY

☒ name☒ email

Key

BodyCookiesHeaders

PrettyRawPreview

1 [{"message": "Success"}]

Search Postman

Upgrade

SAVE REQUEST

Requests in Postman are saved in collections (a group of requests).
[Learn more about creating collections](#)

Request name

Insert Data

Request description (Optional)

Insert data into database

Descriptions support [Markdown](#)

Select a collection or folder to save to:

Search for a collection or folder

CodeHafeez-API+ Create Folder

CancelSave to CodeHafeez-API

DESCRIPTION

Bulk Edit

Description

Status: 200 OKTime: 584 msSize: 306 BSave Response

Activate Windows
Go to Settings to activate Windows.

Find and ReplaceConsole

BootcampRunnerTrash

4:13 AM
4/10/2021

