

LESSON - 10

CSS Fonts




CSS me kisi text element me font property use kar ke text ka font change kr sakte hai.

- Font Family
- Font Style
- Font Size
- Font Weight
- Google Fonts
- @font-face

Font Family -

Generic font families CSS mein ek group hota hai jisme similar type ke fonts aate hain. Agar specific font available nahi hota, toh browser in generic font families ka use karta hai. Yaani fallback fonts ke liye helpful hote hain.

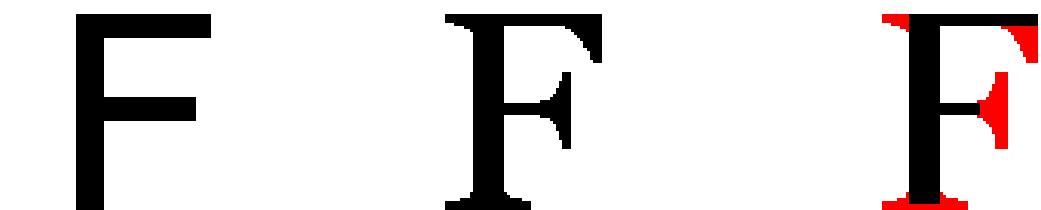

F F F

Sans-serif

Serif

Serif
(red serifs)

- **Serif** - (Times New Roman, Georgia)

Font jinke characters ke ends par chhoti lines ya design hote hain. Formal documents, newspapers

Example : font-family: "Times New Roman", serif;

- **Sans-Serif - (Arial, Helvetica, Verdana)**

Plain aur clean fonts without decorative lines.

Websites, modern UI

Example : font-family: Arial, sans-serif;

- **Monospace - (Courier New, Consolas)**

Sab characters same width ke hote hain.

Coding editors, terminal outputs

Example : font-family: "Courier New", monospace;

- **Cursive - (Brush Script MT)**

Handwriting-style fonts, letters generally connected together. Creative headings, informal design

Example : font-family: "Brush Script MT", cursive;

- **Fantasy - (Papyrus, Impact)**

Decorative and fancy fonts for special effects.

Titles, posters

Example : font-family: Impact, fantasy;

Font Style -

- normal - Text normally style me show karne ke liye.
- italic - Text italics style me show karne ke liye.

Font Size -

Agar font size define nhi kiya hai to browser default 16px set kr dega. Hum units(px, em, rem, percent and vw) ke according bhi font ki size define kr sakte hai.

Font Weight -

- normal - Text ka thikness normal me show karne ke liye.
- bold - Text ka thikness badhane me use kiya jata.

Google Font -

Generic font ke alawa standard aur specific font ka use karne ke liye hum google fonts ka use karte hai

@font-face -

Eska use hum custom fonts ko website par load karne ke liye karte hain.

```
@font-face {  
    font-family: 'MeriFont';  
    src: url('myfont.woff2') format('woff2'),  
         url('myfont.woff') format('woff'),  
}
```