
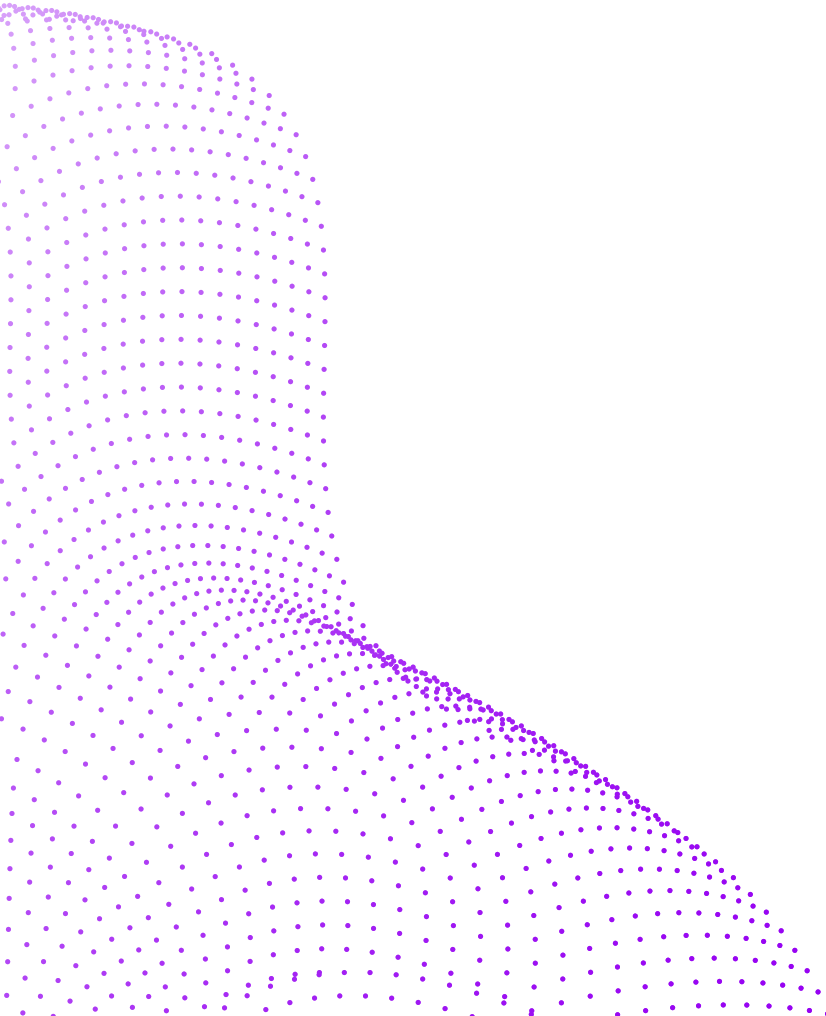


LESSON - 02

Hoisting in Javascript

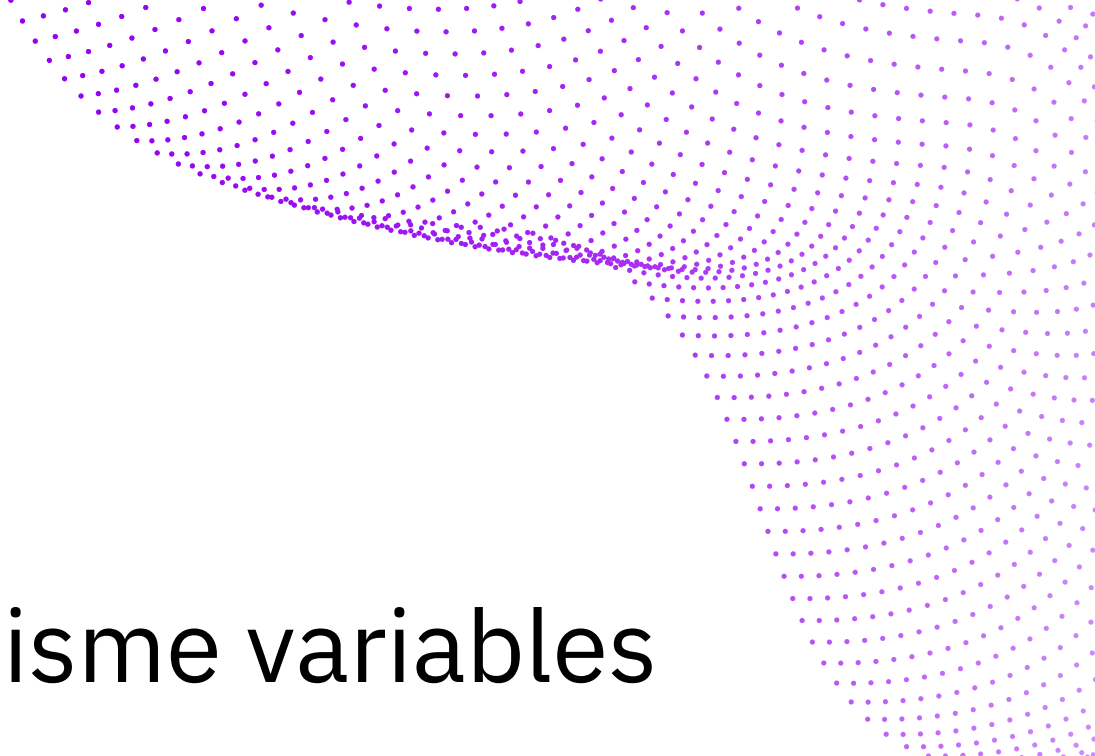

Hoisting JavaScript ka ek default behaviour hai jisme variables aur functions execution se pehle memory me reserve ho jaate hain. Yaani ki sirf declaration hoist hoti hai, initialization nahi.

1. Example: (var)

```
console.log(a); // undefined (error nahi aayega)
```

```
var a = 10;
```

2. Example : (let & const - TDZ(temporal dead zone))

```
console.log(b); // ReferenceError
```

```
let b = 20;
```

```
console.log(c); // ReferenceError
```

```
const c = 30;
```

3. Example: (function)

`greet(); // No Error`

```
function greet() {  
    console.log("Hello World");  
}
```

`sayHi(); // Error aayega`

```
var sayHi = function() {  
    console.log("Hi");  
}
```