


# Taste of Andhra

High-Level System Flow & Feature Overview

Version: 1.0    Date: July 2026    Stack: React + Supabase + Vercel

## 1. System Architecture Overview

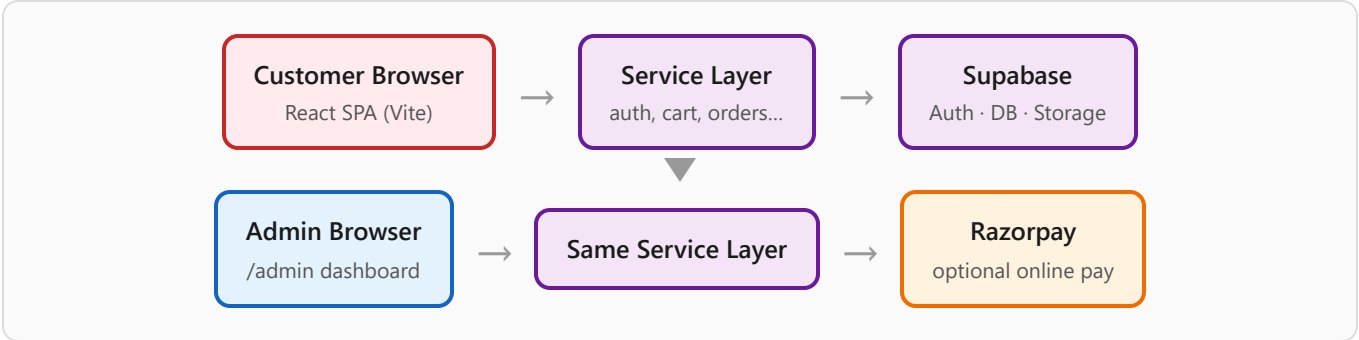

### Architecture details

#### Frontend

React 19, TypeScript, Vite, Tailwind CSS v4, React Router. Single-page app deployed on Vercel.

#### Authentication

Customers: mobile + SMS OTP. Admins: email + password. Roles stored in profiles table (customer, admin, delivery).

#### Backend

Supabase PostgreSQL with Row Level Security. No custom Express server — all data access goes through typed service functions in `src/services/`.

#### Storage


Dish and category images uploaded to Supabase Storage bucket `restaurant-images`. Static marketing images served from `/public/images`.

## 2. User Roles

| Role     | Access                                              | Auth method |
|----------|-----------------------------------------------------|-------------|
| Guest    | Home, menu, about, gallery, contact, party enquiry  | None        |
| Customer | Cart, checkout, orders, addresses, profile, reviews | Mobile OTP  |

| Role  | Access                                                      | Auth method      |
|-------|-------------------------------------------------------------|------------------|
| Admin | Full dashboard — menu, orders, customers, delivery, reports | Email + password |

### 3. Customer Ordering Flow

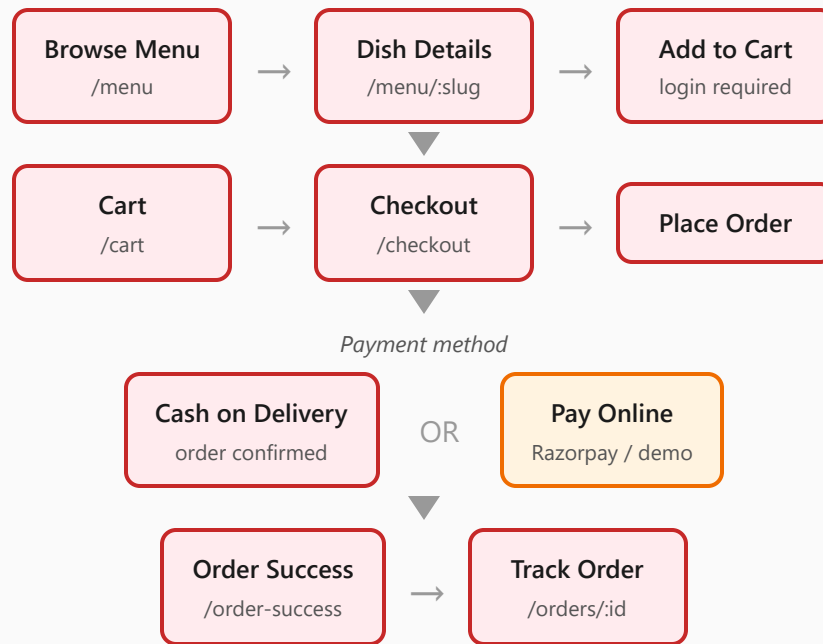

#### Checkout details


- **Address:** Select saved address or add new one at checkout.
- **Coupon:** Apply active offer code — discount validated against minimum order value.
- **Pricing:** Subtotal + 5% tax + delivery (₹49, free above ₹399) – discount = total.
- **COD:** Order created with payment\_status: pending, cart cleared on success.
- **Online:** Order created first, then Razorpay modal (or demo auto-pay if no API key). Cart kept until payment succeeds.
- **Cancel:** Customer can cancel while status is pending or confirmed.

#### Order status lifecycle

pending → confirmed → preparing → ready → out\_for\_delivery → delivered | cancelled

Status stepper shown on order details page. Admin updates status from Orders or Delivery pages.


## 4. Customer Authentication (Mobile OTP)

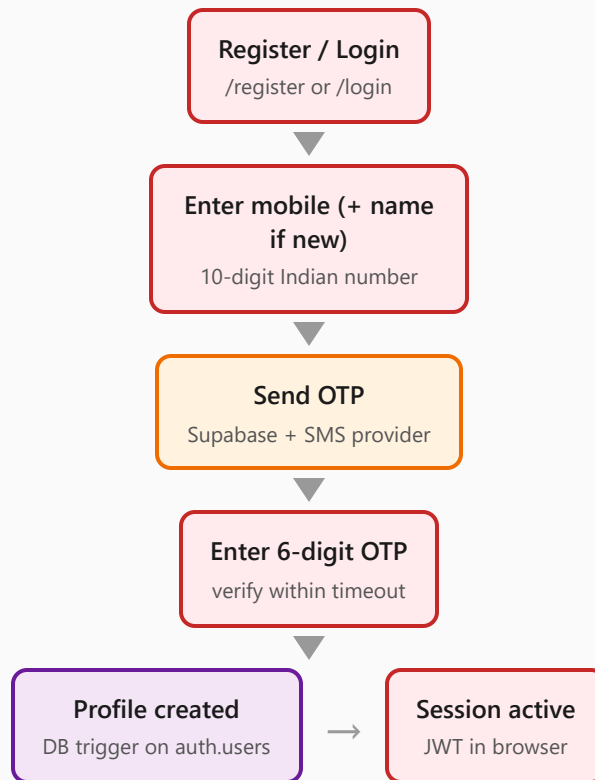

### Auth details


- Phone numbers stored as E.164 format (+91XXXXXXXXXX) in Supabase Auth.
- Registration collects full name + phone; login uses phone only.
- On first verify, `handle_new_user` trigger inserts row into profiles.
- Deactivated accounts (`is_active = false`) are signed out automatically.
- Cart, addresses, and orders are tied to authenticated user via RLS policies.

### Admin authentication (separate flow)

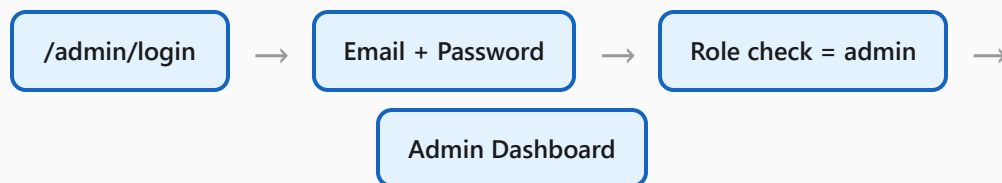


Admin users are created in Supabase Dashboard, then promoted via SQL: `UPDATE profiles SET role = 'admin'.`

## 5. Party Order Enquiry Flow



Public form (no login required). Captures guest count, meal preference, event date, venue address, and notes. Admin updates inquiry status: new → contacted → quoted → closed.


## 6. Admin Dashboard Flow

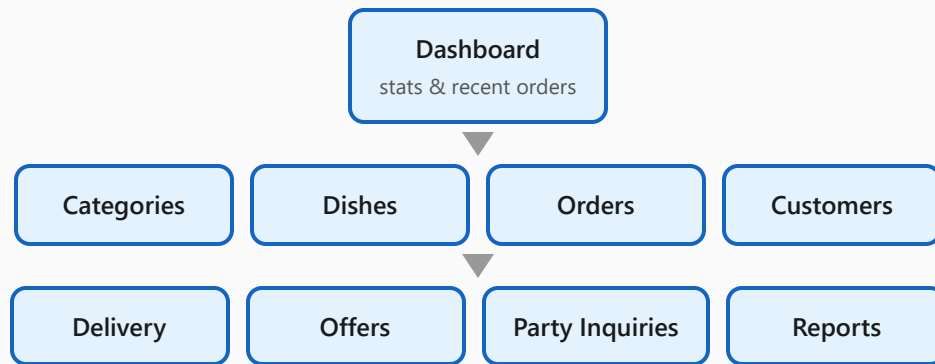

### Admin module details

| Module          | Route                  | Capabilities                                              |
|-----------------|------------------------|-----------------------------------------------------------|
| Categories      | /admin/categories      | CRUD, image upload, display order, active/inactive        |
| Dishes          | /admin/dishes          | CRUD, pricing, spice level, veg/non-veg, featured, images |
| Orders          | /admin/orders          | Search, filter by status, view details, update status     |
| Customers       | /admin/customers       | Search, view profiles, activate/deactivate accounts       |
| Delivery        | /admin/delivery        | Assign partner to order, track delivery status            |
| Offers          | /admin/offers          | Create coupons with % discount, date range, min order     |
| Party Inquiries | /admin/party-inquiries | View and update enquiry status                            |
| Reports         | /admin/reports         | Daily/weekly/monthly sales, revenue, popular dishes       |
| Settings        | /admin/settings        | Restaurant info, pricing rules, integration status        |


## 7. Delivery Assignment Flow

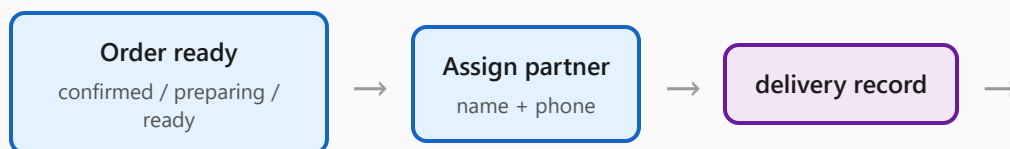

out\_for\_delivery →  
delivered

Creates a row in `delivery` table and sets order status to `out_for_delivery`. Admin can mark delivery as `delivered`, which syncs order status.

## 8. Data Model (Core Tables)

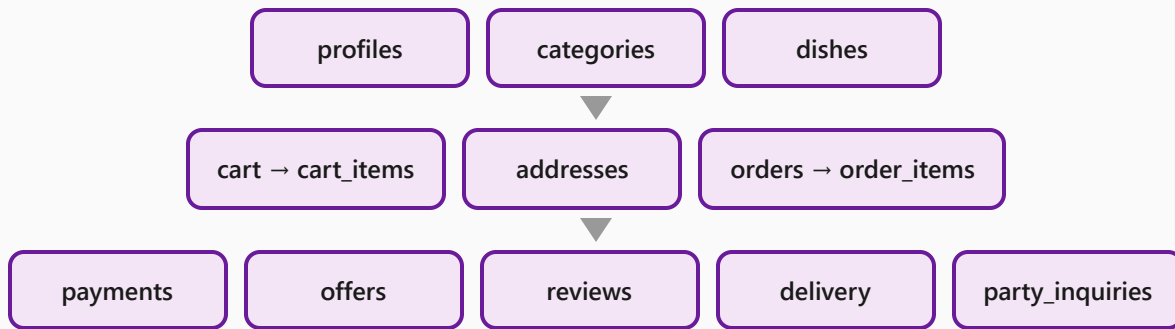

### Service layer (API)

All Supabase calls are encapsulated in services — UI components never query the database directly.


`authService · categoryService · dishService · cartService · orderService ·  
paymentService · addressService · offerService · reviewService · deliveryService ·  
partyInquiryService · reportService`

## 9. Feature Status Summary

| Area                                    | Status | Notes                                             |
|-----------------------------------------|--------|---------------------------------------------------|
| Public website & menu                   | Built  | Home, menu, dish details, gallery, about, contact |
| Mobile OTP auth                         | Built  | Requires Supabase phone provider setup            |
| Cart & checkout                         | Built  | COD + Razorpay (demo without key), coupons        |
| Order tracking                          | Built  | Status-based stepper (not live GPS)               |
| Admin dashboard                         | Built  | Full CRUD for menu, orders, customers, reports    |
| Dish reviews                            | Built  | Customers rate dishes on detail page              |
| Live GPS tracking                       | Future | Planned enhancement                               |
| Email / SMS notifications               | Future | Order confirmations, status updates               |
| Loyalty, GST invoice, kitchen dashboard | Future | See PROJECT_REQUIREMENTS.md §26                   |

## 10. Deployment Flow





- Environment variables: VITE\_SUPABASE\_URL, VITE\_SUPABASE\_ANON\_KEY, optional VITE\_RAZORPAY\_KEY\_ID.
- Database migrations run manually in Supabase SQL Editor (see [supabase/migrations/](#)).
- SPA routing handled via `vercel.json` rewrite to `index.html`.