



Dr Anh's Request for help:

- maybe implement some basic data clean up algorithm to remove obvious erroneous mask for full prostate annotation (I'll send some screenshot)
- generate the 3 maximal dimensions & true volume in mm³ from the contoured prostate gland.

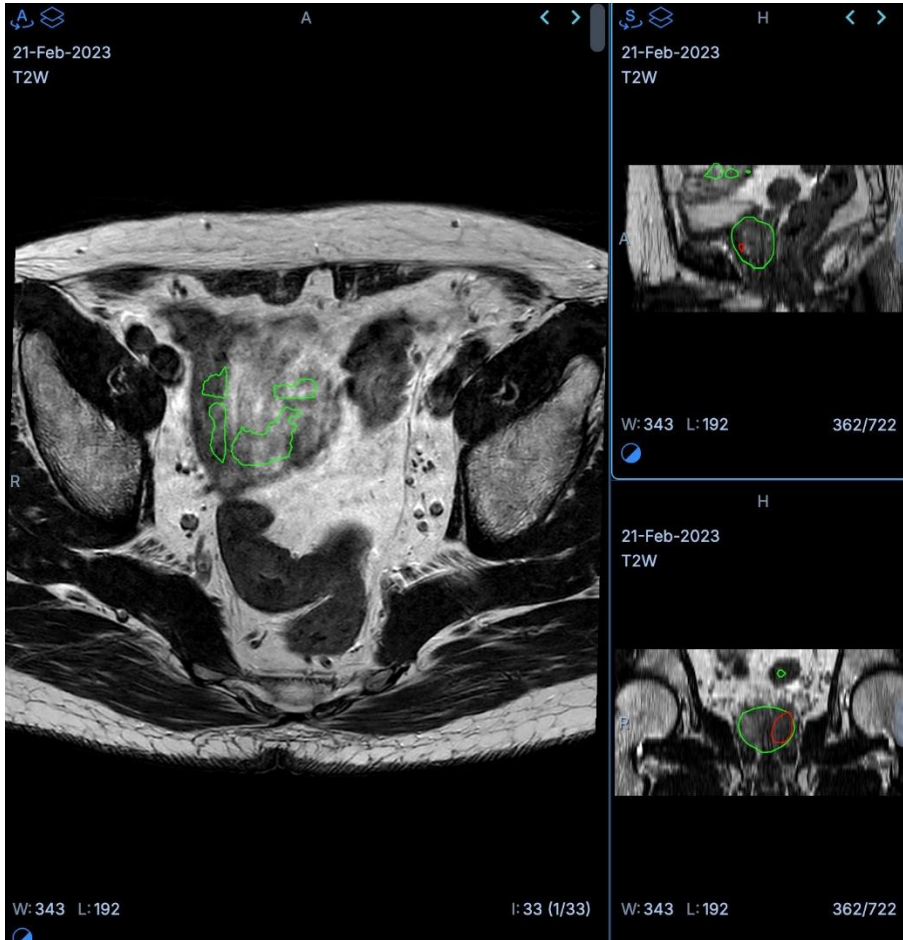

These “islands” that doesn’t connect to the prostate (the largest volume). i think there should be a simple way to clean them up automatically. that would increase our numbers of cases with good contour for training

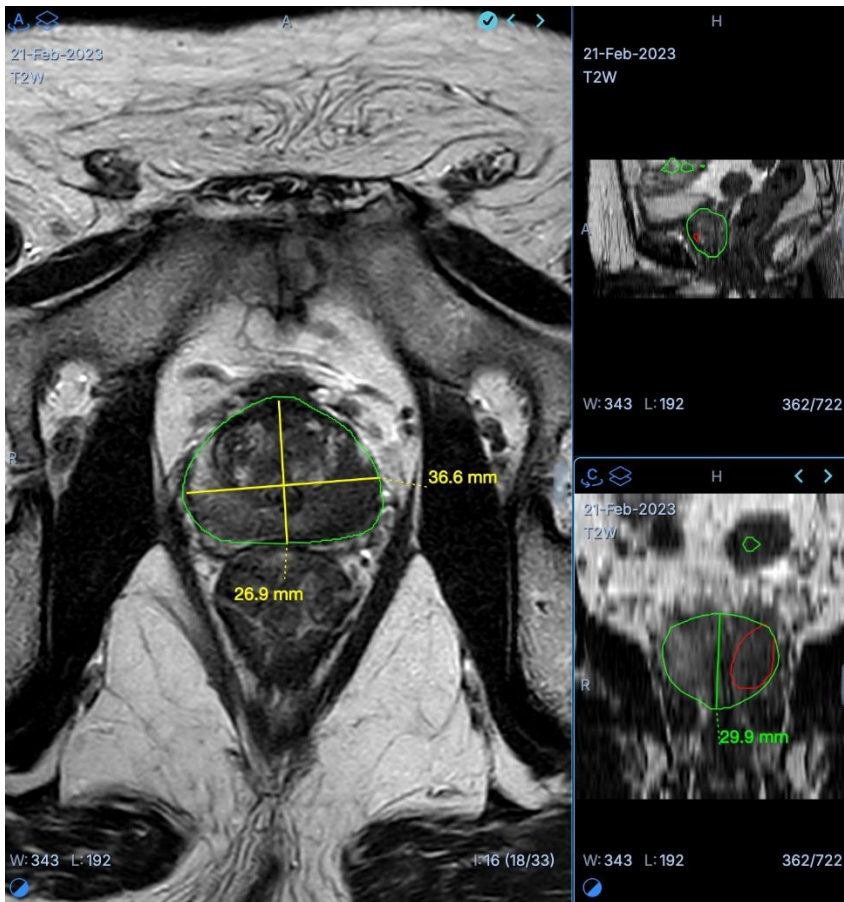


3 dimensions like this, should be easy to generate from NIFTI.

can put them as DICOM SR - structured report, CARPL later.

IMPORTANT NOTE:


PLEASE REFER TO `Dr Anh's gemini ai prompt to investigate and consider implementing if feasible.pdf` PDF File which IS WHAT DR ANH HAS PROMPTED GEMINI AI FOR YOU TO CONSIDER THE VIABILITY OF IMPLEMENTING ON OUR CURRENT PIPELINE

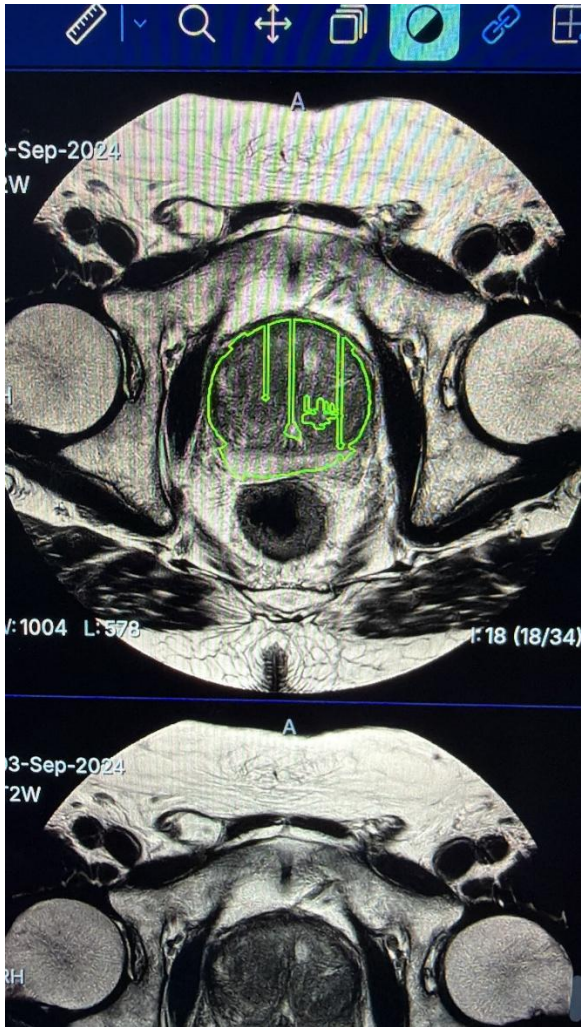

Hi Anson,

Can you help me check this case? Seem like there is an error in the nifti conversion. See if we can fix the generalized case for this sort of thing

20240903_45fd973241d1ff6efe2e

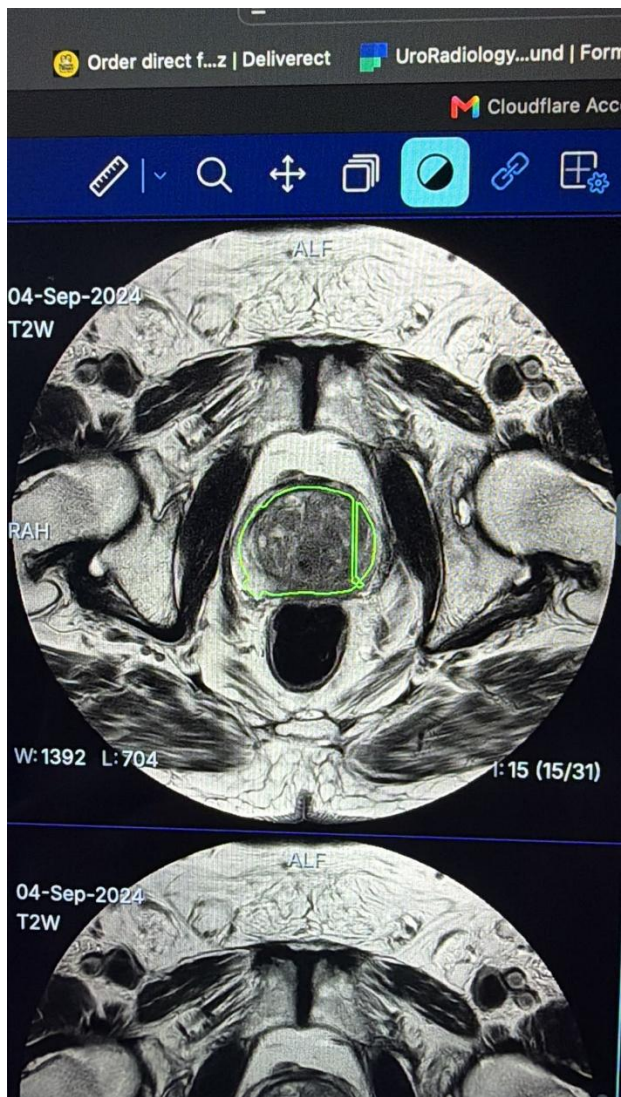

20240904_f2dd2744c5965cdfaf0e

I suspect using the largest island filter before converting to rtstruct would fix this issue.

Or the "fill the empty holes in the largest island"