

Phạm Như Quốc Triều 23IT.B231


1.pnpm init tạo package.json

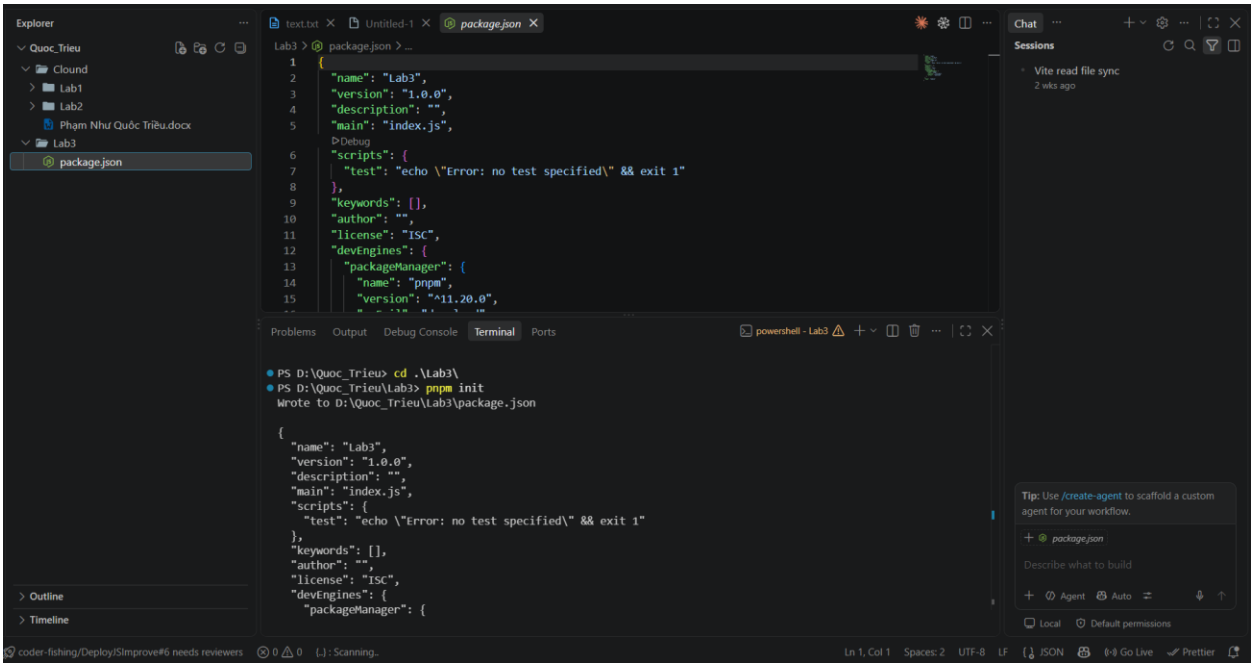


2.Tạo file app.js

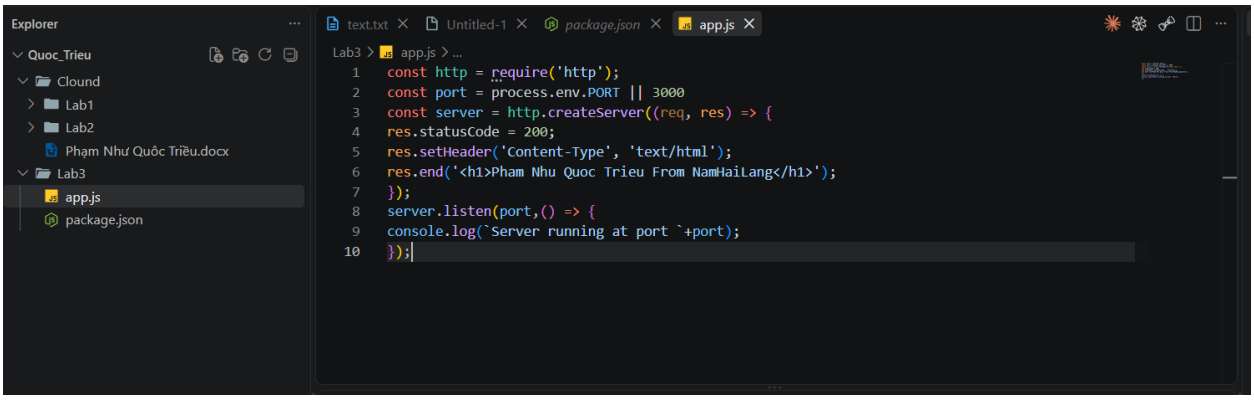

3.Chạy bằng node app.js

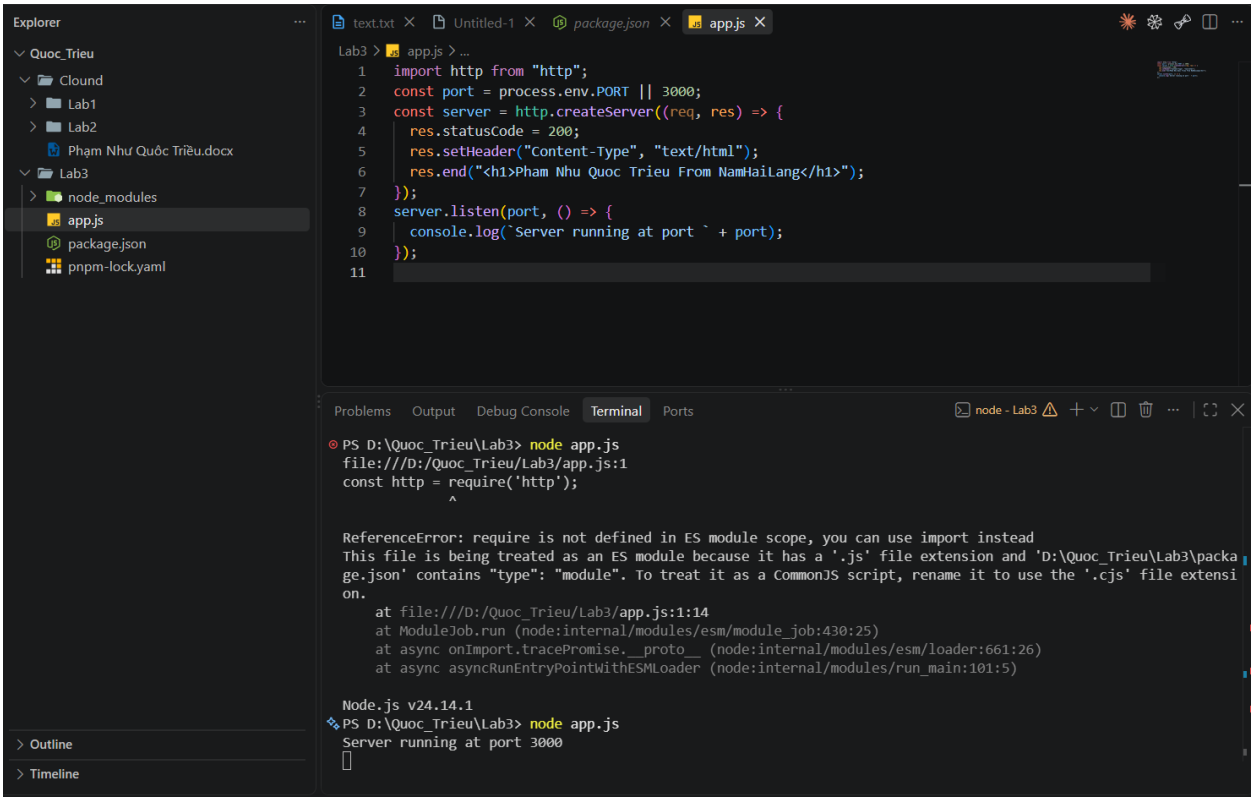


Kết quả sau khi chạy thì nó hiển thị ra với localhost và port của node js default là 3000 nên ta lên localhost:3000 thì thấy phần vừa tạo




Up code lên github

Kiểm tra status của repo


Add các file ignore node moudle trnash upload nặng lên trên đó khi cần thì chỉ cần chạy lệnh pnpm install để nó tự tạo lại node module

Rồi tiến hành upload code

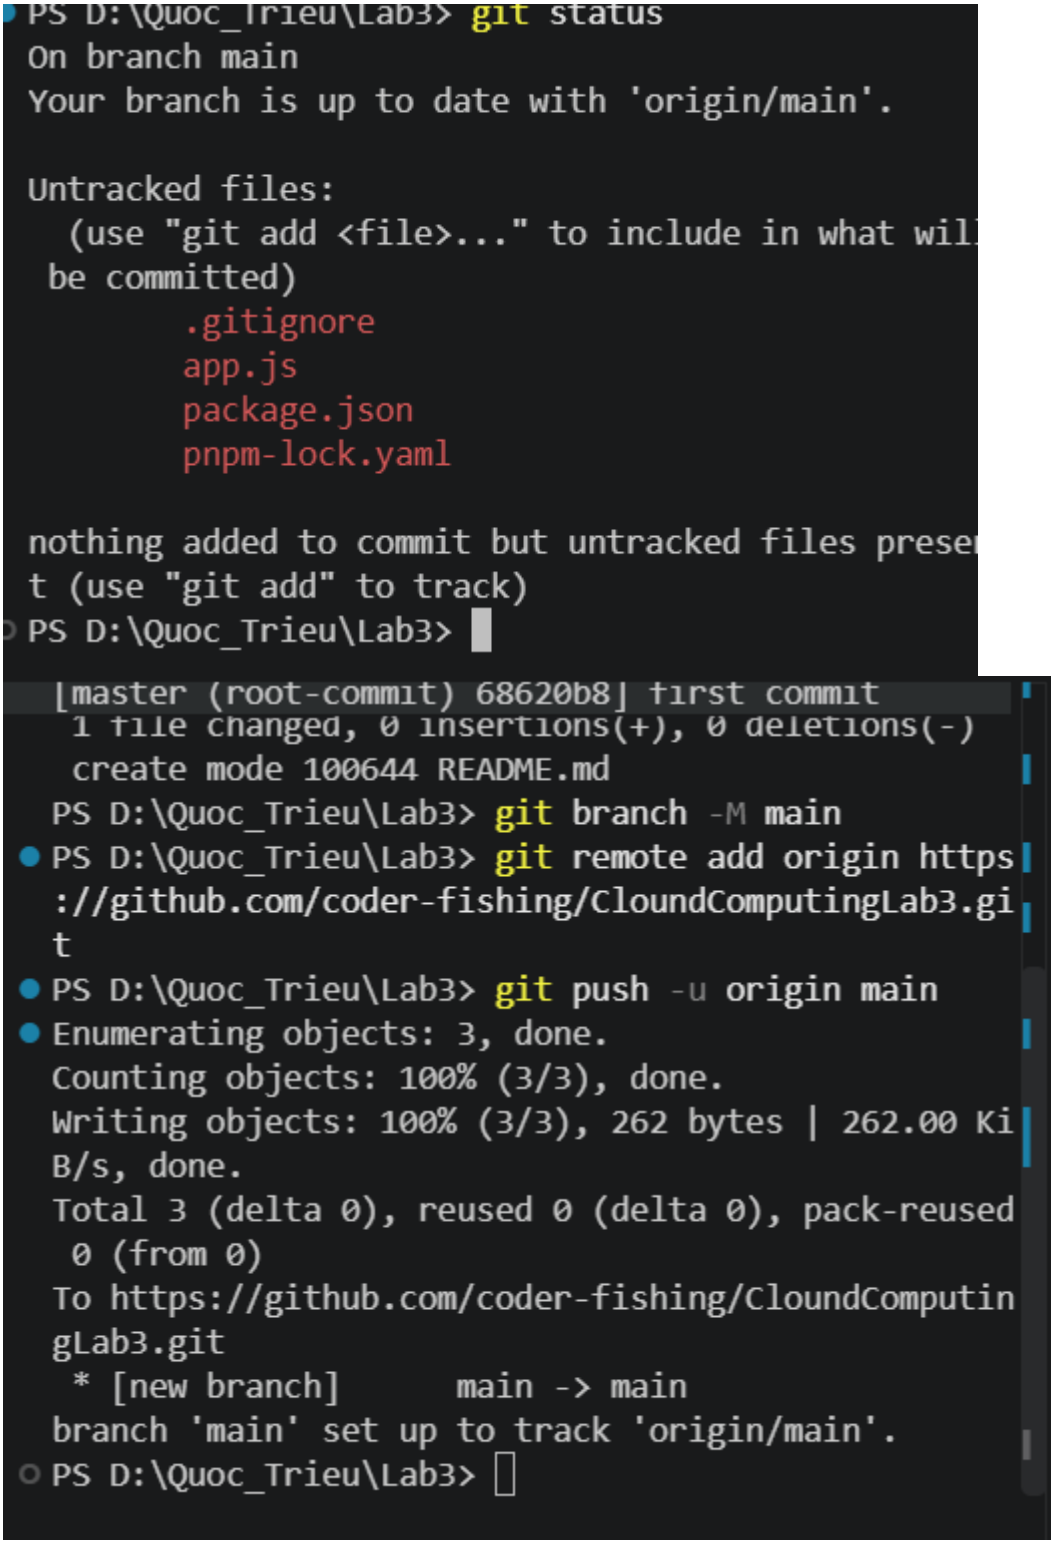
PS D:\Quoc_Trieu\Lab3> git status
On branch main
Your branch is up to date with 'origin/main'.
Untracked files:
(use "git add <file>..." to include in what will be committed)
.gitignore
app.js
package.json
pnpm-lock.yaml
nothing added to commit but untracked files present (use "git add" to track)
PS D:\Quoc_Trieu\Lab3>
[master (root-commit) 68620b8] first commit
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 README.md
PS D:\Quoc_Trieu\Lab3> git branch -M main
PS D:\Quoc_Trieu\Lab3> git remote add origin https://github.com/coder-fishing/CloundComputingLab3.git
PS D:\Quoc_Trieu\Lab3> git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 262 bytes | 262.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/coder-fishing/CloundComputingLab3.git
* [new branch] main -> main
branch 'main' set up to track 'origin/main'.
PS D:\Quoc_Trieu\Lab3>

```
PS D:\Quoc_Trieu\Lab3> git status
 next time Git touches it
warning: in the working copy of 'pnpm-lock.yaml', LF will be replaced by CRLF t
he next time Git touches it
PS D:\Quoc_Trieu\Lab3> git commit -m "up code for exrise by QuocTrieu"
[main cc4b7c5] up code for exrise by QuocTrieu
 4 files changed, 239 insertions(+)
 create mode 100644 .gitignore
 create mode 100644 app.js
 create mode 100644 package.json
 create mode 100644 pnpm-lock.yaml
PS D:\Quoc_Trieu\Lab3> git push
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 16 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (6/6), 2.84 KiB | 2.84 MiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/coder-fishing/CloundComputingLab3.git
   68620b8..cc4b7c5  main -> main
```

Sau khi ta upload code lên github thì tiến hành deploy với render

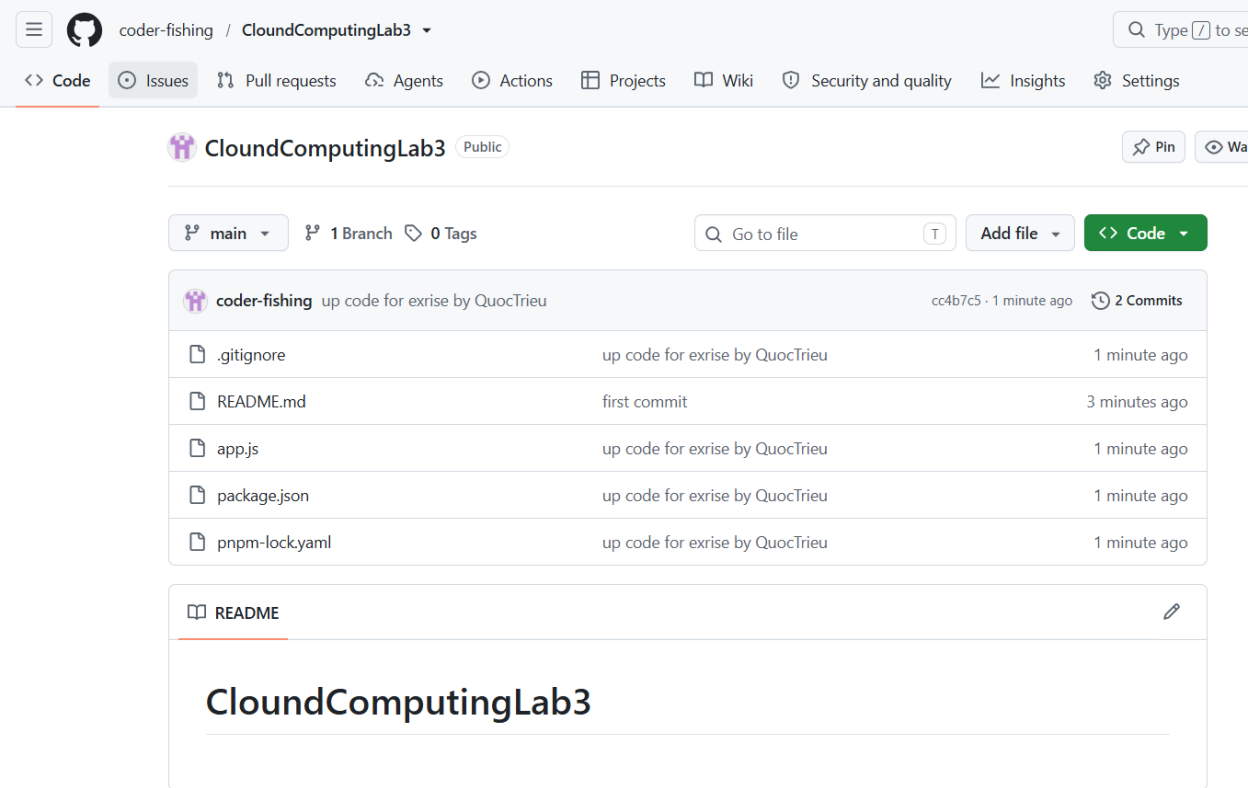


https://github.com/coder-fishing/CloundComputingLab3/issues


Tại render thì tạo liên kết với account github vừa rồi để nó lấy cái repo đó để chuẩn bị cho quá trình deploy


Tại render thì ta tiến hành đặt tên cho dự án

Và tiến hành  tạo build command và start command

Vì phía dưới code ta chọn pnpm nên đây chọn pnpm install để nó tiến hành cài các thư viện của code nằm trong packeage.json

Và start command là lệnh chạy bài với đây thì là node app.js

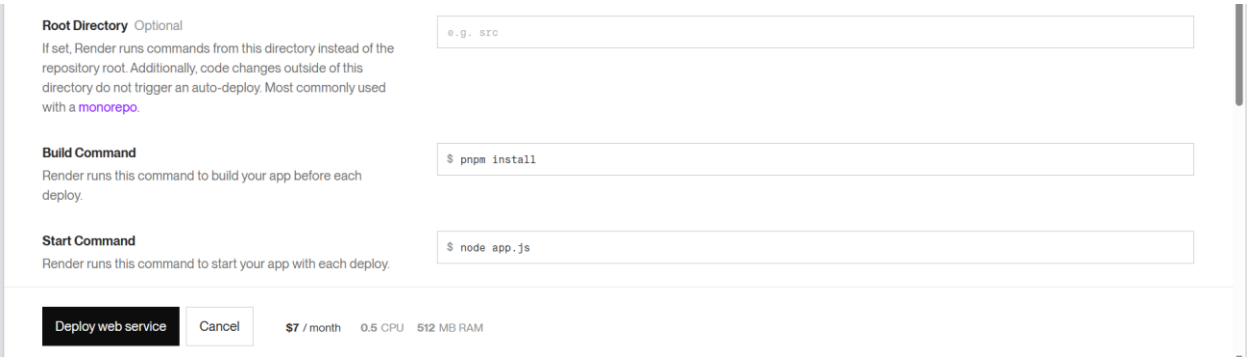

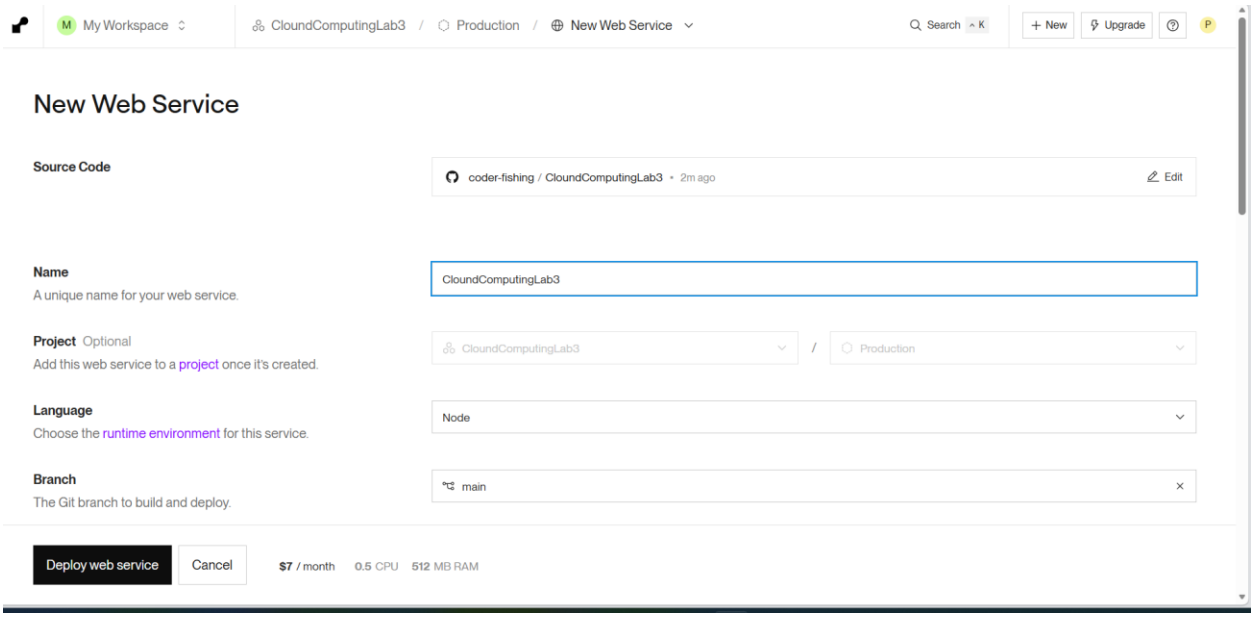


Sau đó ta bấm deploy web service để nó tiến hành deploy




Sau khi deploy thành công thì nó cho ta link sau khi deploy lên




cloundcomputinglab3-1.onrender.com