

Recurring Document

SSLCOMMERZ

Version 2.02

(Date: 19 March 2025)

(Old Date: 20 August 2020)

There are few steps to setup and integration the recurring payment against a user,

1. Configure a recurring/schedule payment method in SSLCOMMERZ Admin Panel
2. Request to enable the recurring payment at the time of transaction (If the transaction is success, then only it will be enable)
3. Check the recurring status by API query
4. Disable any Individual Recurring by API
5. Enable any Individual Recurring by API
6. Cancel any Individual Recurring by API
7. Bill Query API (provided by the merchant)
8. IPN Listener (provided by the merchant)

Merchant Development Scope to Integrate with SSLCOMMERZ Recurring System

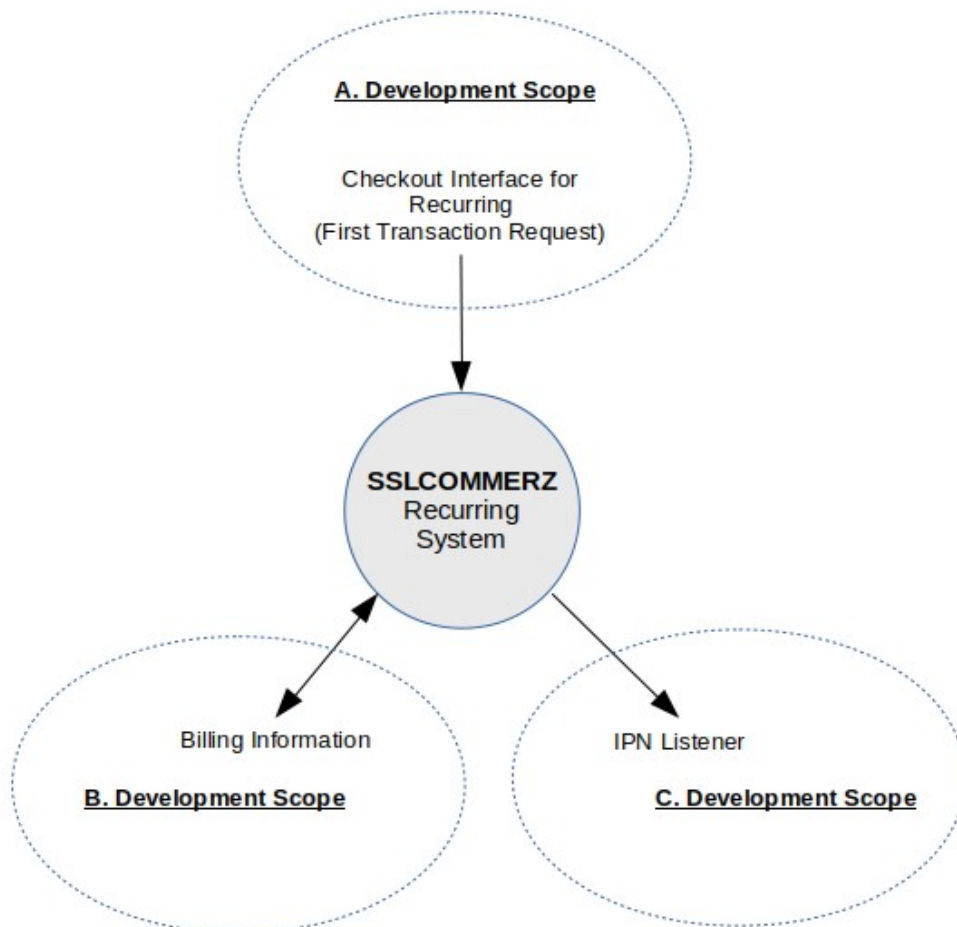


Diagram 1: Development scope

1. Configure a recurring/schedule payment method in SSLCOMMERZ Admin Panel

Sandbox Configuration:

refer : 5B90BA91AA3F2

SALT Key: 898c8b19e6cef9fe954b7a557458715e

store_id and store_passwd : Please register in <https://developer.sslcommerz.com/registration/>

Live Configuration:

First you have to create a recurring payment method in SSLCOMMERZ Admin Panel. Here, you also get other payment method, such as QR payment or Invoice payment.

Go to merchant Panel - <https://merchant.sslcommerz.com/> and login by your merchant's Administrator User (there are two more user categories (Support & View Only), but you cannot get this option).

Click the menu My Stores > Manage QR.

View Store

Store Groups View Gateways

Search Options

Store ID: demotest Store Name: demotest Base URL: Enter ... Group: Select one

Status: Select one Search

Fill up all the fields above to search between transactions.

Store List

#	Store ID	Store Name	Base URL	Group	Status	View	View	Action	Action	Action	Action
1	demotestv6live	demotestv6	demo.sslwireless.com	Not Assigned	Active	Bank Charge	Details	Store Discount	Manage QR	IPN Settings	EMI Settings
2	demotesttestlive	demotest	demo.sslwireless.com	Not Assigned	Active	Bank Charge	Details	Store Discount	Manage QR	IPN Settings	EMI Settings
3	demotestnewlive	demotestnew	demo.sslwireless.com	azx	Active	Bank Charge	Details	Store Discount	Manage QR	IPN Settings	EMI Settings
4	demotest003live	demotest003	demo.sslwireless.com	Not Assigned	cancelled	Bank Charge	Details	Store Discount	Manage QR	IPN Settings	EMI Settings
5	demotest002live	demotest002	demo.sslwireless.com	Not Assigned	Active	Bank Charge	Details	Store Discount	Manage QR	IPN Settings	EMI Settings
6	demotest	demotest	demo.sslwireless.com	Not Assigned	Active	Bank Charge	Details	Store Discount	Manage QR	IPN Settings	EMI Settings

[1 of 1] [Results 6]

Now, the Manage QR page will display the list of existing QR. Click on the Add New QR button (top middle side in red color).

Manage QR

Home > Payment Option

Add New QR

Q Search Options

Payment Name

Enter ...

Refer Id

Enter ...

Pay Type

Select one

Created On

Enter ...

Payment URL

Enter ...

Search

Fill up all the fields above to search between transactions.

No record

Payment Option

#	Payment Name	Refer Id	Pay Type	Created On	Action	Payment URL	View
1	Online Test Payment	5AD89E9264AF7	Invoice - Generete QR to Collect Fixed Amount	2018-04-19 19:50:10	Edit	Pay URL	Get QR, Button & Other
2	Shop Payment	5AFEC7C187CF9	Invoice - Generete QR to Collect Fixed Amount	2018-05-18 18:32:01	Edit	Pay URL	Get QR, Button & Other
3	Shop Payment	5B1F9DE4D82B6	Once - QR to Pay any Amount by ZPay App	2018-06-12 16:18:43	Edit	Pay URL	Get QR, Button & Other

[1 of 1] [Results 3]

Input the necessary data to create a recurring QR Reference,

Pay or Subscription

Name of the Payment

Shop Payment

(A brief description of this QR)

Alias of Transaction Reference

Order Id

It is alias display name of the primary reference key. Example: Mobile number, Account Number, Invoice Numbr, Role Number, etc. Keep empty, if you do not want this field.

Pay Button

Pay Now

Customize Field

Click Here, To add/delete some Addition Fields to take input from customer.

Transaction Info

Amount (BDT)

Enter Amount

(Keep it unchanged, if you dont wnat to collect same amount from all customers)

Amount List

Enter Amount List

(Comma separated amount list to display)

QR Type

Select One

Amount Type

Select One

Pre QR Query API

Enter IPN URL

Bill Query API

Enter IPN URL

IPN URL

Enter IPN URL

Mobile Number (SMS Notification)

Enter IPN URL

Here, you have to input the data very carefully to configure a recurring/schedule payment method.

Label of QR	Data Type	Description
Store Name	Fixed	Display the name of store whether the QR is adding
Store ID	Fixed	Display the id of store whether the QR is adding
Name of the Payment	String (100)	Reason of the QR

Alias of Transaction Reference	String (100)	What will be the display name of the parameter “acct”. It will be used a transaction id in reporting panel. This name could be as “Order Id”, “Application Id”, etc.
Pay Button	String (30)	Name of dynamic pay bottom
Add/Delete additional fields	Set of Parameters	You can choose/set the parameter(s) as much toy required. Here, every parameter has number of attributes, Field Type: select,text,fixed Display Name: Label to display the customer Placeholder: Placeholder description Default Value: Other Value: For select type, you can provide the value(s) by comma separate. Example -Male,Female Whether it is Mandatory: Whether the value must be provided Whether to Display: Whether to display the parameter
Amount (BDT)	Decimal (10,2)	If you want to take a static amount for every schedule
Amount List	String(256)	You can provide the comma separate amount to display as a list
QR Type	String(30)	There are three type of QR payment, 1) Once – Static QR - Send the payment link to the customer for payment 2) Recurring – This QR will be activated after a successful transaction, after then it will auto debit the cardholder’s account for VISA and Mastercard 3) Invoice - Dynamic QR – Merchant will use this QR to generate the invoice and print the QR in online or their physical copy to collect the payment
Amount Type	String(30)	There are two types of QR 1) Dynamic – For recurring QR type, it will connect with your Bill Query API to update the Bill amount and this amount will be used for transaction amount. 2) Fixed – It will not communicate with your Bill Query API. The transaction amount always will be the amount which is mentioned in the field Amount (BDT).
Pre QR Query API	String(256)	While the QR is scanned, then it will communicate with this API to check the status of further process.
Bill Query API	String(256)	This API is called to get the update of transaction amount and transaction id.
IPN URL	String(256)	After a successful transaction, you will receive a HTTP POST notification to this URL.
Mobile Number (SMS Notification)	String(20)	After a successful transaction, a SMS will be shoot to this number.
Terms and Agreement URL	String(256)	Any URL if you want to display the terms and condition.
Enable Term & COnd	String(256)	If you want to display the above terms and condition
Messsage on Top	String(256)	If you want to keep few message.
Messsage on Footer	String(256)	If you want to keep few message.

2. Request to enable the recurring payment at the time of transaction

Request: HTTP POST Method

Parameter	Data type	Description
store_id	string (30)	Your SSLCOMMERZ Store ID is the integration credential which can be collected through our managers
store_passwd	string (30)	Your SSLCOMMERZ Store Password is the integration credential which can be collected through our managers
total_amount	decimal (10,2)	The amount which will process by SSLCOMMERZ. It shall be decimal value (10,2). Example : 55.40. The transaction amount must be from 10.00 BDT to 500000.00 BDT
currency	string (3)	The currency type must be mentioned. It shall be three characters. Example : BDT, USD, EUR, SGD, INR, MYR, etc. If the transaction currency is not BDT, then it will be converted to BDT based on the current convert rate. Example : 1 USD = 82.22 BDT.
tran_id	string (30)	Unique transaction ID to identify your order in both your end and SSLCOMMERZ
success_url	string (255)	It is the callback URL of your website where user will redirect after successful payment (Length: 255)
fail_url	string (255)	It is the callback URL of your website where user will redirect after any failure occur during payment (Length: 255)
cancel_url	string (255)	It is the callback URL of your website where user will redirect if user canceled the transaction (Length: 255)
ipn_url	string (255)	It is the Instant Payment Notification (IPN) URL of your website where SSLCOMMERZ will send the transaction's status (Length: 255). The data will be communicated as SSLCOMMERZ Server to your Server. So, customer session will not work. IPN is very important feature to integrate with your site(s). Some transaction could be pending or customer lost his/her session, in such cases back-end IPN plays a very important role to update your backend office.
cus_name	string (50)	Your customer name to address the customer in payment receipt email
cus_email	string (50)	Valid email address of your customer to send payment receipt from SSLCOMMERZ end
schedule	JSON and Encrypted by Sha256 with Salt Key	refer: The ID has been generated for subscription in SSLCOMMERZ Admin Panel acct_no: this number/id will be share for each bill query. Note, this value must display the customer. type: yearly,monthly,weekly,daily dayofmonth: 1-30 (if schedule for a month, then please provide the day) month: 1-12 (If empty, then every month, will recurring) week: sun,mon,tue,wed,thu,fri,sat Note: A customer can do for multiple subscribe. However, the refer_id must be unique. Here, refer_id acts as individual

		subscription plan for a merchant. So, if you want to create multiple plan, then you need to generate multiple refer id in SSLCOMMERZ Admin Panel JSON Sample: Example 1 - {"refer":"REF1234","acct_no":"01730671731","type":"daily"} Example 2 - {"refer":"REF1234","acct_no":"01730671731","type":"weekly","week":"sun"} Example 3 - {"refer":"REF1234","acct_no":"01730671731","type":"monthly","month":"8","dayofmonth":"24"} How to encrypt is explained in section, Encrypt the Value of “token_key” and “schedule” parameters by AES 256
multi_card_name	string (30)	visacard,mastercard Note: Currently, only Visa and Mastercard support recurring payments.
login_req	string (1)	1 / 0: If set to 1, the user must log in and save the card at the time of payment. Note: If the customer does not log in and save the card or wallet number, recurring payments will not be activated.

Response: JSON Format

Param	Data Type	Description
status	string (10)	API connectivity status. If all the required data is provided, then it will return as SUCCESS, neither it will be FAILED
failedreason	string (255)	If API connectivity is failed then it returns the reason.
sessionkey	string (50)	A unique session key which must be saved at your system to query the transaction status any time (if required).
gw	string	It will list all active gateways. If you add this key with the parameter of redirectGatewayURL, then it will be redirected to that gateway directly. All these gateway keys are classified into six major categories. Such as visa, master, amex, othercards, internetbanking and mobilebanking.
GatewayPageURL	string (255)	The URL to where you will redirect the customer to pay.
storeBanner	string (255)	It will return the image URL if any banner is uploaded against the store.

storeLogo	string (255)	It will return the image URL if any logo is uploaded against the store.
desc	string	All gateways' brief description. If you want to know about the individual gateway key, then this parameter will help you. Example: search visacard in the element gw of this parameter, then you will get the gateway name, type and logo.
subscription_statuscancel	string (30)	Whether the schedule info is successful received. If the transaction is success then only the schedule will be executed. Status will be, initiated – Request has been received successful failed – Invalid request for recurring. Here, no subscription_id will be generated processing – waiting for successful transaction declined – Subscription request has been declined active - Subscription is accepted and waiting for next action deactivated – The schedule has been deactivated by the merchant cancelled – Customer has cancelled the scheduler paused - Customer has paused the scheduler
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for checking the status. Note: If this ID is not generated, there is an issue with the request parameters of the schedule. However, the transaction will still be processed successfully as a normal transaction.

Encrypt Process

Encrypt the Value of “token_key” and “schedule” parameters by AES 256

- Generate “vi”, a random value with standard of AES 256 CBC.
- Example: VI = Random value of AES 256 CBC
- Now, encrypt the plain json value of “schedule” with a SALT Key which is provided by SSLCOMMERZ Team.
- Example: encrypt (Plain Text, AES-256-CBC, SALT Key, 0, VI);
- This encrypted text is called ciphertext,
- Add the vi with ciphertext by dividing the fixed value “|||”.
- Now, encode the complete text by base64.
- Example: = base64_encode (vi value + ‘|||’ + ‘ciphertext’)

Example in PHP function

How to encrypt -

```
function AppInfoEncryptUpDate($data="", $key="") {  
  
    # Generate “vi”, a random value with standard of AES 256 CBC.  
    $iv = openssl_random_pseudo_bytes(openssl_cipher_iv_length("aes-256-cbc"));  
  
    # encrypt the plain data with a SALT Key which is predefined  
    $encrypted = openssl_encrypt($data, "aes-256-cbc", $key, 0, $iv);  
  
    # Add the vi with ciphertext by dividing the fixed value “|||”  
    # Encode the complete text by base64  
    return base64_encode($iv . '|||' . $encrypted);  
}
```

How to decrypt -

```
function AppInfoDecryptUpDate( $data="", $key="") {  
  
    # Decode the complete text by base64  
    # Divided the vi value based on ‘|||’  
    list($iv, $encrypted_data) = explode('|||', base64_decode($data), 2);  
  
    # Decrypt the encrypted value by same predefined salt key  
    return openssl_decrypt($encrypted_data, "aes-256-cbc", $key, 0, $iv);  
}
```

There are two steps to integrate recurring API. Here, we have attached two diagrams to understand the full process,

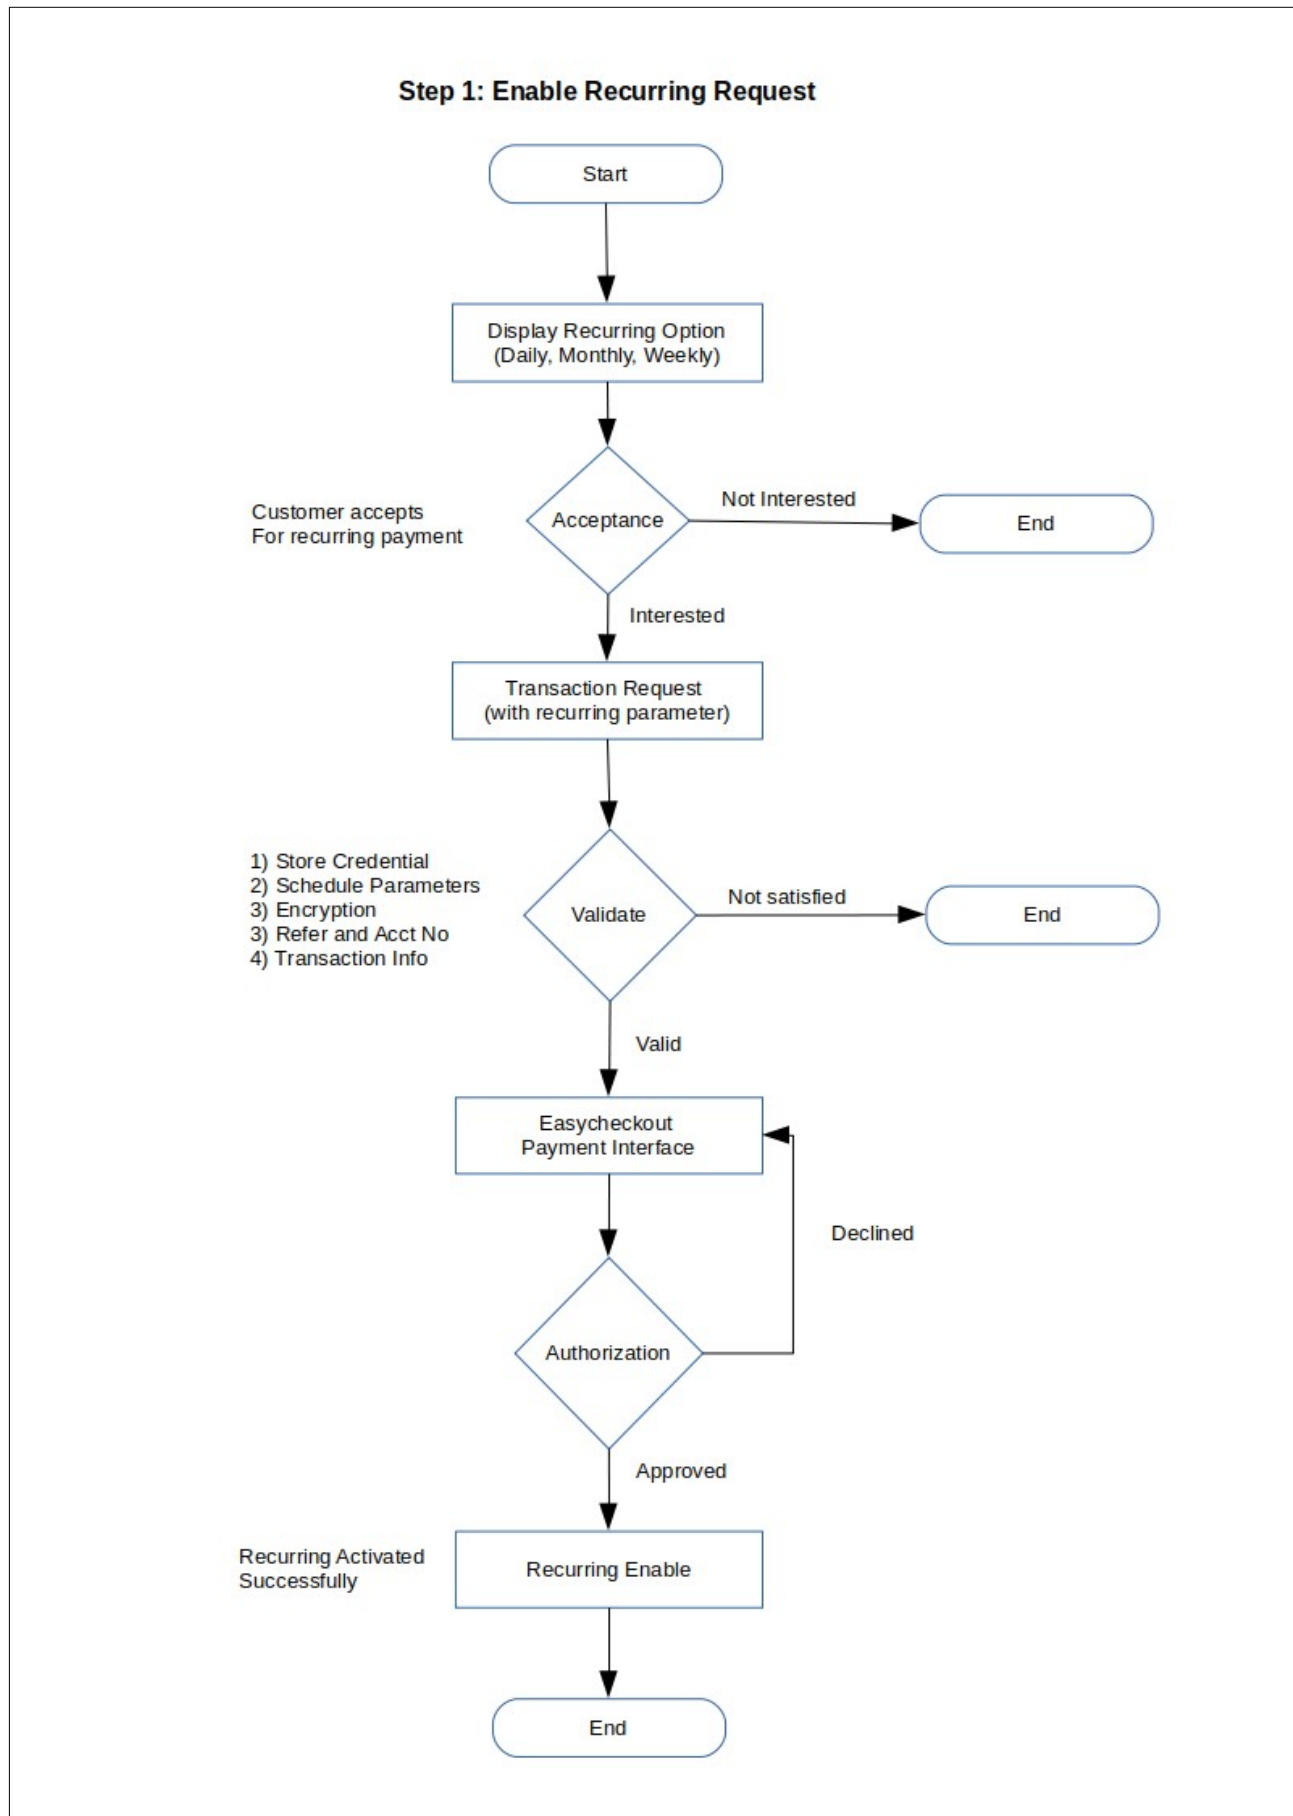


Diagram 2.1: Enable Recurring Request

Billing API Provided by Merchant
To gather info based on acct_no

Bill Amount
Transaction ID
Other Information (if need)

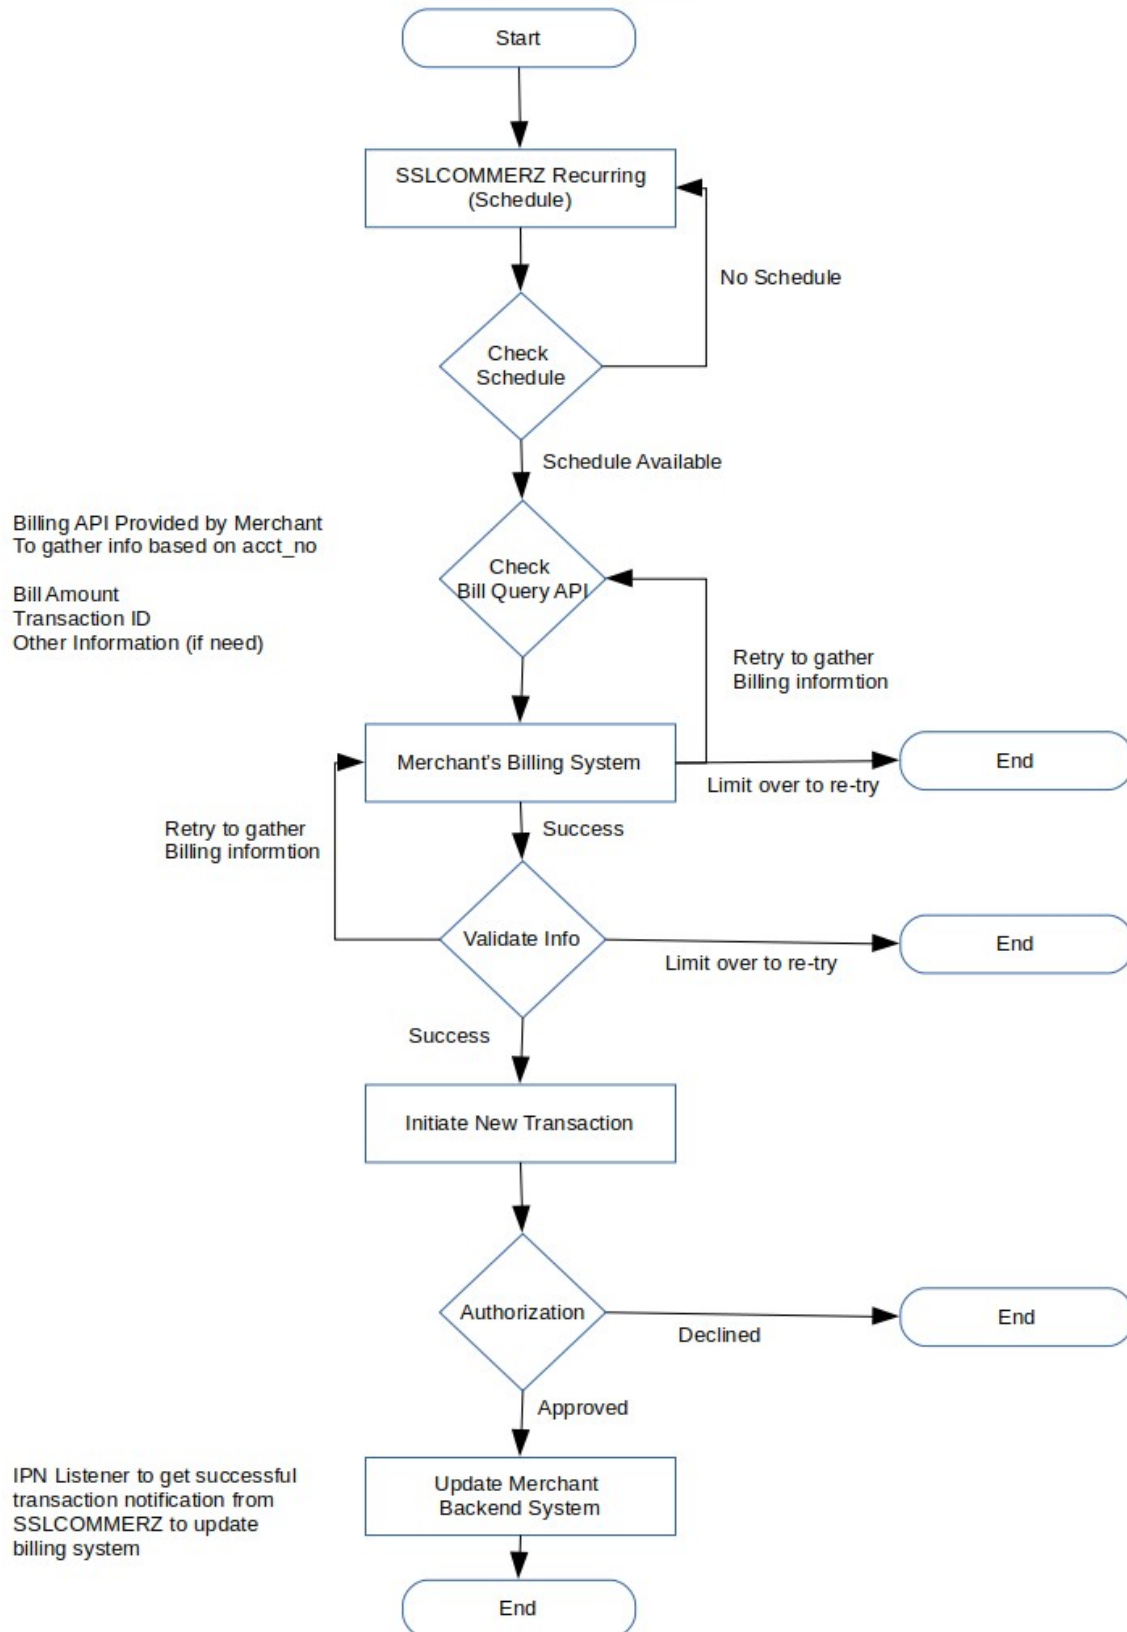


Diagram 2.2: Handling Schedule/Recurring Transaction Initiated by SSLCOMMERZ

3. Check the recurring status by API query

This API will return the status of the subscription_id. If the transaction is successful, then the recurring will be enabled.

You will get the information, such as, last five recurring payment, status and etc

You need to call this API by HTTP Post method,

Request : HTTP POST method

API Endpoint (Live): <https://securepay.sslcommerz.com/validator/api/v4/>

API Endpoint (Sandbox): <https://sandbox.sslcommerz.com/validator/api/v4/>

Parameter	Data type	Description
store_id	string (30)	Your SSLCOMMERZ Store ID is the integration credential which can be collected through our managers
store_passwd	string (30)	Your SSLCOMMERZ Store Password is the integration credential which can be collected through our managers
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
action	String(30)	getSubscriptionStatus

Response : in JSON Format

Parameter	Data type	Description
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
acct_no	string (50)	this number/id will be share for each bill query. Note, this value must display the customer.
subscription_status	string (30)	Whether the schedule info is successful received. If the transaction is success then only the schedule will be executed. Status will be, initiated – Request has been received successful failed – Invalid request for recurring. Here, no subscription_id will be generated processing – waiting for successful transaction declined – Subscription request has been declined active - Subscription is accepted and waiting for next action deactivated – The schedule has been deactivated by the merchant cancelled – Customer has cancelled the scheduler paused - Customer has paused the scheduler
lastTransaction	JSON	status tran_date tran_id amount store_amount card_type

		card_no currency bank_tran_id card_issuer card_brand card_issuer_country card_issuer_country_code currency_type currency_amount value_a value_b value_c value_d risk_level risk_level To know more about these above parameters, please visit - https://developer.sslcommerz.com/doc/v4/ (Step 1) Grab the notification)
type	string (30)	yearly,monthly,weekly,daily
APIConnect	string (30)	INVALID_REQUEST, FAILED, INACTIVE, DONE
failedreason	string (256)	Reason of declining

4. Disable any Individual Recurring by API

This API will disable recurring payments, which can be enabled later (temporarily disabled).

Request : HTTP POST method

API Endpoint (Live): <https://securepay.sslcommerz.com/validator/api/v4/>

API Endpoint (Sandbox): <https://sandbox.sslcommerz.com/validator/api/v4/>

Parameter	Data type	Description
store_id	string (30)	Your SSLCOMMERZ Store ID is the integration credential which can be collected through our managers
store_passwd	string (30)	Your SSLCOMMERZ Store Password is the integration credential which can be collected through our managers
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
action	String(30)	disableSubscription

Response : in JSON Format

Parameter	Data type	Description
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
acct_no	string (50)	this number/id will be share for each bill query. Note, this value must display the customer.
subscription_status	string (30)	Whether the schedule info is successful received. If the transaction is success then only the schedule will be executed. Status will be, initiated – Request has been received successful failed – Invalid request for recurring. Here, no subscription_id will be generated processing – waiting for successful transaction declined – Subscription request has been declined active - Subscription is accepted and waiting for next action deactivated – The schedule has been deactivated by the merchant cancelled – Customer has cancelled the scheduler paused - Customer has paused the scheduler
type	string (30)	yearly,monthly,weekly,daily
APIConnect	string (30)	INVALID_REQUEST, FAILED, INACTIVE, DONE
failedreason	string (256)	Reason of declining

5. Enable any Individual Recurring by API

This API will enable the recurring from disable status (temporarily disabled early)

Request : HTTP POST method

API Endpoint (Live): <https://securepay.sslcommerz.com/validator/api/v4/>

API Endpoint (Sandbox): <https://sandbox.sslcommerz.com/validator/api/v4/>

Parameter	Data type	Description
store_id	string (30)	Your SSLCOMMERZ Store ID is the integration credential which can be collected through our managers
store_passwd	string (30)	Your SSLCOMMERZ Store Password is the integration credential which can be collected through our managers
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
action	String(30)	enableSubscription

Response : in JSON Format

Parameter	Data type	Description
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
acct_no	string (50)	this number/id will be share for each bill query. Note, this value must display the customer.
subscription_status	string (30)	Whether the schedule info is successful received. If the transaction is success then only the schedule will be executed. Status will be, initiated – Request has been received successful failed – Invalid request for recuring. Here, no subscription_id will be generated processing – waiting for successful transaction declined – Subscription request has been declined active - Subscription is accepted and waiting for next action deactivated – The schedule has been deactivated by the merchant cancelled – Customer has cancelled the scheduler paused - Customer has paused the scheduler
type	string (30)	yearly,monthly,weekly,daily
APIConnect	string (30)	INVALID_REQUEST, FAILED, INACTIVE, DONE
failedreason	string (256)	Reason of declining

6. Cancel any Individual Recurring by API

This API will permanently cancel recurring payments.

Request : HTTP POST method

API Endpoint (Live): <https://securepay.sslcommerz.com/validator/api/v4/>

API Endpoint (Sandbox): <https://sandbox.sslcommerz.com/validator/api/v4/>

Parameter	Data type	Description
store_id	string (30)	Your SSLCOMMERZ Store ID is the integration credential which can be collected through our managers
store_passwd	string (30)	Your SSLCOMMERZ Store Password is the integration credential which can be collected through our managers
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
action	String(30)	cancelSubscription

Response : in JSON Format

Parameter	Data type	Description
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
acct_no	string (50)	this number/id will be share for each bill query. Note, this value must display the customer.
subscription_status	string (30)	Whether the schedule info is successful received. If the transaction is success then only the schedule will be executed. Status will be, initiated – Request has been received successful failed – Invalid request for recuring. Here, no subscription_id will be generated processing – waiting for successful transaction declined – Subscription request has been declined active - Subscription is accepted and waiting for next action deactivated – The schedule has been deactivated by the merchant cancelled – Customer has cancelled the scheduler paused - Customer has paused the scheduler
type	string (30)	yearly,monthly,weekly,daily
APIConnect	string (30)	INVALID_REQUEST, FAILED, INACTIVE, DONE
failedreason	string (256)	Reason of declining

7. Bill Query API (provided by the merchant)

This API is provided by your system. Before, the recurring payment this API is called to get the updated bill information.

Request: HTTP Post method

API Endpoint: http(s)://<YOUR-DOMAIN>/bill-query

(This API Endpoint will be configured in SSLCOMMERZ System and will be called when it needs the bill information)

Response – JSON Response

Here, you can replace the value of these parameters which will be effect in transaction data,

Example of CURL request:

```
curl --location 'http(s)://<YOUR-DOMAIN>/bill-query' \  
--form 'refer="<Refer ID>" \  
--form 'subscription_id="<Subscription ID>" \  
--form 'acct_no="<Account Number for User Identification>" \  
--form 'tran_id="<System generate unique transaction id>" \  
--form 'amount="10.00" \  
--form 'currency="BDT" \  
--form 'cus_name="Customer Name" \  
--form 'cus_email="cust@email.com" \  
--form 'cus_add1="Dhaka" \  
--form 'cus_add2="" \  
--form 'cus_city="Dhaka" \  
--form 'cus_state="Bangladesh" \  
--form 'cus_postcode="1206" \  
--form 'cus_country="Bangladesh" \  
--form 'cus_phone="017XXXXXXXXX"
```

Sample billing response from your system (in JSON format):

```
{  
  "status": "success",  
  "failedreason": "Information okay",  
  "error_msg_to_display": "Please wait ..",  
  "tran_id": "67d9c69540d51beb9900f55c",  
  "currency": "BDT",  
  "total_amount": "10",  
  "refer": "<Refer ID>",  
  "subscription_id": "<Subscription ID>"  
}
```

Note: The yellow marked parameters are mandatory.

The **mandatory parameters** listed below must be provided in billing response to successfully initiate a subsequent payment.

Parameter	Data type	Description
status	string (20)	Will be success / failed If success, then SSLCOMMERZ will initiate the payment.
failedreason	string (255)	System-related message to share the reason for status=failed. Example: The customer has temporarily disabled the subscription, or other reasons
error_msg_to_display	string (255)	Optional: The error message may be displayed to the customer if needed.

The **optional parameters** listed below can be provided in the billing response if you want to change the default or first payment of this subscription ID as per your requirement.

Parameter	Data type	Description
refer	string (30)	The ID has been generated for subscription in SSLCOMMERZ Admin Panel
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
acct_no	string (50)	Account number of the customer
amount	decimal (10,2)	If the recurring is configured as fixed amount
currency	string (3)	BDT
cus_name	string (50)	Your customer name to address the customer in payment receipt email
cus_email	String (50)	Valid email address of your customer to send payment receipt from SSLCOMMERZ end
cus_add1	String (50)	Address of your customer. Not mandatory but useful if provided
cus_add2	string (50)	Address line 2 of your customer. Not mandatory but useful if provided
cus_city	string (50)	City of your customer. Not mandatory but useful if provided
cus_state	string (50)	State of your customer. Not mandatory but useful if provided
cus_postcode	String (30)	Postcode of your customer. Not mandatory but useful if provided
cus_country	String (50)	Country of your customer. Not mandatory but useful if provided
cus_phone	string (20)	The phone/mobile number of your customer to contact if any issue arises
ipn_url	string (255)	It is the Instant Payment Notification (IPN) listener URL of your system, where SSLCOMMERZ will send the transaction status.

8. IPN Listener (provided by the merchant).

This API is provided by your system. After the transaction, SSLCOMMERZ will provide the instant payment notification to this listener.

Request: HTTP Post method

API Endpoint: http(s)://<YOUR-DOMAIN>/ipn-listener

(This API Endpoint will be configured in SSLCOMMERZ System and will be called to provide the transaction status to update your bank-end application)

Parameter	Data type	Description
status	string (20)	Transaction Status - as VALID / FAILED . This parameter needs to be checked before update your database VALID : A successful transaction. FAILED : Transaction is declined by customer's Issuer Bank.
subscription_id	string (50)	This id will be used to query the schedule status. You can use the schedule query API for this reason.
tran_date	datetime	Transaction date - Payment completion date as 2016-05-08 15:53:49 (PHP date('Y-m-d H:i:s'))
tran_id	string (30)	Transaction ID (Unique) that was sent by you during initiation. This parameter needs to be validated with your system database for security
val_id	string (50)	A Validation ID against the Transaction which is provided by SSLCOMMERZ.
amount	decimal (10,2)	The total amount sent by you. However, it could be changed based on currency type. This parameter needs to be validated with your system database for security
store_amount	decimal (10,2)	The amount what you will get in your account after bank charge (Example: 100 BDT will be your store amount of 96 BDT after 4% Bank Commission)
card_type	string (50)	The Bank Gateway Name that customer selected
card_no	string (80)	Customer's Card number. However, for Mobile Banking and Internet Banking, it will return customer's reference id.
currency	string (3)	Currency Type which will be settled with your merchant account after deducting the Gateway charges. This parameter is the currency type of the parameter amount
bank_tran_id	string (80)	The transaction ID at Banks End
card_issuer	string (50)	Issuer Bank Name
card_brand	string (30)	VISA, MASTER, AMEX, IB or MOBILE BANKING
card_issuer_country	string (50)	Country of Card Issuer Bank
card_issuer_country_code	string (2)	2 digits short code of Country of Card Issuer Bank
currency_type	string (3)	The currency you have sent during initiation of this transaction. If the currency is different than BDT, then it will be converted to BDT by the current conversion rate. This parameter needs to be validated with your system database for security
currency_amount	decimal (10,2)	The currency amount you have sent during initiation of this transaction. If the amount is not mentioned in BDT, then it will be converted to BDT by the current conversion rate and return by the above field amount. This parameter needs to be validated with your system database for security
value_a	string (255)	Same Value will be returned as Passed during initiation
value_b	string (255)	Same Value will be returned as Passed during initiation
value_c	string (255)	Same Value will be returned as Passed during initiation
value_d	string (255)	Same Value will be returned as Passed during initiation
verify_sign	string (255)	Data Validation Key
verify_key	string	Data Validation Key
risk_level	integer (1)	Transaction's Risk Level - High (1) for most risky transactions and Low (0) for safe transactions. Please hold the service and proceed to collect customer verification

Parameter	Data type	Description
		documents
risk_title	string (50)	Transaction's Risk Level Description

Please check the link <https://developer.sslcommerz.com/doc/v4/> (Step 1) Grab the notification.

Example: Sample dataset to be sent to your IPN listener after a successful payment.

```
curl -X POST "<YOUR_IPN_LISTENER_URL>" \
  -d "tran_id=5a16c68b23783" \
  -d "subscription_id=SUVB0000011110003" \
  -d "val_id=1711231900331kHP17lnrr9T8Gt" \
  -d "amount=100" \
  -d "card_type=VISA-Dutch Bangla" \
  -d "store_amount=97" \
  -d "card_no=425272XXXXXX3456" \
  -d "bank_tran_id=1711231900331S0R8atkhAZksmM" \
  -d "status=VALID" \
  -d "tran_date=2017-11-23 18:59:55" \
  -d "currency=BDT" \
  -d "card_issuer=Standard Chartered Bank" \
  -d "card_brand=VISA" \
  -d "card_issuer_country=Bangladesh" \
  -d "card_issuer_country_code=BD" \
  -d "store_id=testbox" \
  -d "verify_sign=8070c0cefed9e629b01100d8a92afda2" \
  -d
"verify_key=amount,bank_tran_id,base_fair,card_brand,card_issuer,card_issuer_country,card_issuer_country_code,card_no,card_type,currency,currency_amount,currency_rate,currency_type,risk_level,risk_title,status,store_amount,store_id,tran_date,tran_id,val_id,value_a,value_b,value_c,value_d" \
  -d "cus_fax=0171111111" \
  -d "currency_type=BDT" \
  -d "currency_amount=100.00" \
  -d "currency_rate=1.0000" \
  -d "base_fair=0.00" \
  -d "value_a=ref001_A" \
  -d "value_b=ref002_B" \
  -d "value_c=ref003_C" \
  -d "value_d=ref004_D" \
  -d "risk_level=0" \
  -d "risk_title=Safe"
```