

# TITLE

Daniela Verratti Souto

## 1 Introduction

### 1.1 Collostructional analysis and learner corpora

"For studies that aim to contribute to SLA scholarship by providing insights into the progress of L2 acquisition, it will be important to analyze and compare data from learners at different proficiency levels, ideally following a longitudinal design and using corpora that capture data collected from the same learners at different points in time." (Römer-Barron, 2026)

### 1.2 Formulaicity in learner language

- RQ1. How are type II conditionals dispersed across learner writing tasks present in our analyzed data?
- RQ2. Do learners at higher proficiency levels favor different verbs in the protasis of type II conditionals than beginner learners?
- RQ3. Does the verbal slot in the protasis of type II conditionals provide evidence for a transition from more formulaic to more productive use of the construction?

## 2 Methods

### 2.1 Data: The EFCAMDAT

The EF-Cambridge Open Language Database (EFCAMDAT), first presented by Geertzen et al. (2013), is a large-scale learner corpus containing writings from the online English school *Englishtown*. In their courses, each level corresponds to eight pedagogical units, after each of which students receive a prompt for a writing task that they must complete in order to advance. The corpus comprises responses to these tasks in their original and corrected forms,

along with metainformation about the text and the author (learner ID, country of origin, grade given by a teacher, etc.). An advantage of the EFCAMDAT, beyond being generally available for researchers at all stages, is the fact that *Englishtown* levels are aligned with the CEFR, making it possible to do a broad range of descriptive analyses of L2 English at globally understood proficiency levels.<sup>1</sup>

This study used the version of EFCAMDAT cleaned and post-processed by (Öksüz et al., 2025), which contains 620,206 learner writings. However, it was unlikely for second conditionals to be elicited by most prompts; therefore, after qualitatively inspecting the task prompts, I decided on a subset of 20 tasks whose responses were most likely to contain the construction. The selected units and corresponding writing topics are outlined in Table 1, totaling 33,496 student writings and 4,402,652 words.

TODO splitting into two levels

| CEFR level | EF level:Unit | Topic ID | Words   | Topic                                   |
|------------|---------------|----------|---------|-----------------------------------------|
| A2         | 6:6           | 46       | 290,594 | Writing an email of advice              |
| B1         | 8:3           | 59       | 474,441 | Making a ‘to do’ list of your dreams    |
| B1         | 9:3           | 67       | 354,123 | Making a business proposal              |
| B1         | 9:4           | 68       | 284,752 | Signing a waiver to go skydiving        |
| B2         | 10:1          | 73       | 797,218 | Helping a friend find a job             |
| B2         | 10:2          | 74       | 492,941 | Doing a survey about discrimination     |
| B2         | 10:3          | 75       | 438,282 | Requesting a bank loan                  |
| B2         | 10:5          | 77       | 313,135 | Finding a home for a wealthy client     |
| B2         | 11:2          | 82       | 291,016 | Helping a coworker deal with a phobia   |
| B2         | 11:8          | 88       | 24,119  | Improving your study skills             |
| C1         | 13:1          | 97       | 244,337 | Writing a campaign speech               |
| C1         | 13:4          | 100      | 115,523 | Giving advice about budgeting           |
| C1         | 13:8          | 104      | 21,223  | Reaching your potential                 |
| C1         | 14:2          | 106      | 41,642  | Choosing a renewable energy source      |
| C1         | 14:3          | 107      | 61,155  | Writing a rejection letter              |
| C1         | 14:4          | 108      | 55,637  | Attending a seminar on stress reduction |
| C1         | 14:5          | 109      | 52,968  | Talking a friend out of a risky action  |
| C1         | 14:6          | 110      | 39,465  | Applying for sponsorship                |
| C1         | 15:7          | 119      | 5,182   | Writing about future lifestyles         |
| C1         | 15:8          | 120      | 4,899   | Interpreting a prophecy                 |

Table 1: Topics by Level and CEFR

<sup>1</sup>The availability of large-scale, CEFR-aligned corpora is more limited than one might expect. The most well-known English learner corpus is the Cambridge Learner Corpus (CLC), whose access is highly restricted.

## 2.2 Extracting conditionals

All corrected learner writings in the subcorpus were automatically parsed using Stanza (Qi et al., 2020). Using the corrected texts instead of the original ones is justified by the fact that accuracy does not factor into this study: the goal is not to assess the grammatical proficiency of students, but rather to explore their lexical preferences in a specific slot in different levels. This gives us the ability to use the corrected texts that are present in the corpus, ensuring more robust results of automatic Natural Language Processing (NLP) tools.<sup>2</sup>

The parsed documents were scanned for type II conditionals using both Universal Dependency (UD) relations and part-of-speech (POS) information. Only sentences containing the word "if" as a conditional marker (headed by an *advcl* UD tag) and not as an interrogative marker headed by a *ccomp* UD tag, as in Figure 1. Then, the script ensures that the verb in the protasis is in the past tense and the apodosis contains a valid modal verb, thus filtering out other types of conditionals. For this study, I excluded sentences that expressed their conditional value through means other than the grammatical marker "if" (e.g. subject-auxiliary inversion) and sentences containing a modal verb in the protasis (e.g. *If I could go anywhere in the world, I'd go to China.*).




Figure 1: UD parse of a sentence with a non-conditional *if*

Finally, all conditionals that fit all requirements were compiled into a CSV file with the full sentence, the lemma filling the verbal slot in the protasis and metadata about the writing prompt and response, such as the *Englishtown* level the task stemmed from and the topic ID.

## 2.3 Calculating dispersion across tasks and levels

As a task-based corpus, the texts from EFCAMDAT are subject to task effects (Alexopoulou et al., 2017). That is, the educational environment in which the texts are embedded shapes the grammar and lexis found in the corpus. When we draw conclusions from this kind of corpora, it is possible to run into some issues if the effect of task prompts is not taken into account and we instead assume all texts to be representative of the general production of

<sup>2</sup>However, given previous robustness studies of NLP tools on L2 English (Geertzen et al., 2013), similar results would be expected when running the analysis on the original learner texts.

learners at their corresponding proficiency, regardless of the task. To observe the effect of task on the frequency of type II conditionals, I applied Gries's (2008) *DP* (deviation of proportions) measure and its normalized version  $DP_{norm}$  for corpus parts of unequal size as presented in the correction by Lijffijt and Gries (2012). The same process was also applied using the binary levels "upper" and "lower" as the corpus parts to ensure that the Distinctive Collexeme Analysis was carried out in comparable parts of the analyzed subcorpus.

## 2.4 Distinctive Collexeme Analysis

Distinctive Collexeme Analysis

## 2.5 Lexical variability

# 3 Results

In this section, I outline the results for each of the analyses in the study.

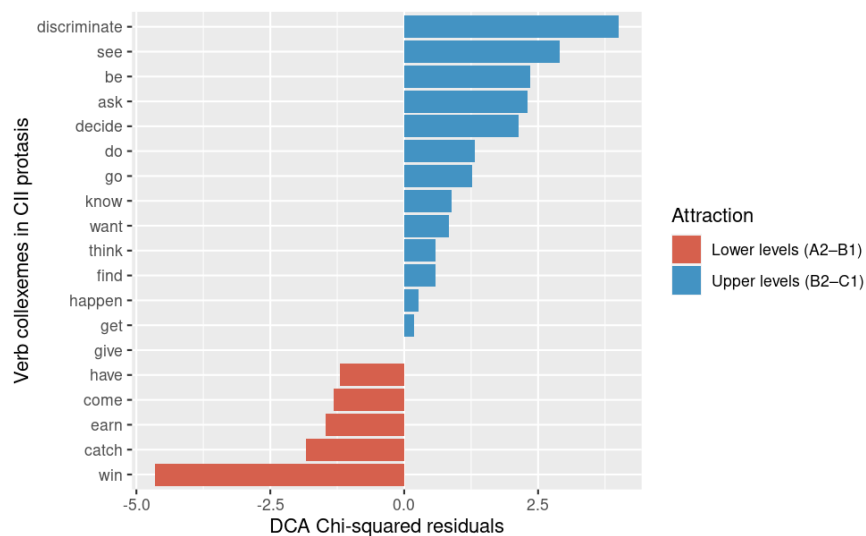


Figure 2: Residuals of the  $\chi^2$ -test

## 4 Discussion

## 5 Conclusion

---

## References

- Theodora Alexopoulou, Marije Michel, Akira Murakami, and Detmar Meurers. Task effects on linguistic complexity and accuracy: A large-scale learner corpus analysis employing natural language processing techniques. *Language Learning*, 67(S1):180–208, 2017. doi: <https://doi.org/10.1111/lang.12232>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1111/lang.12232>.
- Jeroen Geertzen, Theodora Alexopoulou, Anna Korhonen, et al. Automatic linguistic annotation of large scale L2 databases: The EF-Cambridge Open Language Database (EF-CAMDAT). In *Proceedings of the 31st Second Language Research Forum. Somerville, MA: Cascadilla Proceedings Project*, pages 240–254, 2013.
- Stefan Th. Gries. Dispersions and adjusted frequencies in corpora. *International Journal of Corpus Linguistics*, 13(4):403–437, December 2008. ISSN 1384-6655, 1569-9811. doi: 10.1075/ijcl.13.4.02gri.
- Jefrey Lijffijt and Stefan Th. Gries. Correction to stefan th. gries’ “dispersions and adjusted frequencies in corpora”. *International Journal of Corpus Linguistics*, 17(1):147–149, 2012.
- Peng Qi, Yuhao Zhang, Yuhui Zhang, Jason Bolton, and Christopher D Manning. Stanza: A Python natural language processing toolkit for many human languages. In *Proceedings of the 58th annual meeting of the association for computational linguistics: system demonstrations*, pages 101–108, 2020.
- Ute Römer-Barron. Learner corpus research in applied linguistics. *TESOL Quarterly*, 60(2):887–902, 2026. doi: <https://doi.org/10.1002/tesq.70140>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/tesq.70140>.
- Doğuş Öksüz, Theodora Alexopoulou, Kateryna Derkach, and Ianthi Maria Tsimpli. The influence of L1 typology on the acquisition of the L2 English article: A large-scale corpus study. 2025. doi: 10.17863/CAM.122590. URL <https://www.repository.cam.ac.uk/handle/1810/391460>.