

Lab 7 (12 Mar 2018)

Problem 1 : Implement the greedy algorithm for interval scheduling. Given a list of intervals you need to print a subset of non-overlapping intervals whose size is maximal. You can take the start/finish times of the intervals to be positive integers. A sample i/o is given below:

Input:

Enter the number of intervals: 8

1 3
2 8
2 5
3 7
4 8
4 6
6 12
7 10

Output:


[1, 3] [4, 6] [7, 10]

Problem 2: Implement the greedy interval *partitioning* algorithm. Given a list of jobs (intervals) you need to find the minimum number of resources needed to schedule **all** the jobs such that each resource schedules only non-overlapping jobs. (The example/picture below is taken from KT.)

Input:

Enter the number of intervals: 10

1 3
1 6
1 3
4 6
4 10
8 12
8 12
11 15
13 15
13 15

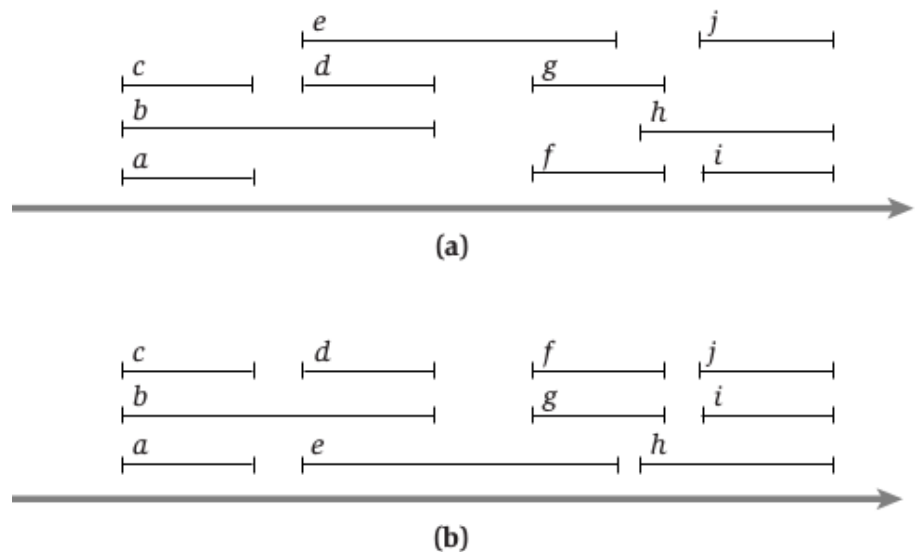

Output:

Minimum number of resources: 3

Resource 1 jobs: [1,3] [4,10] [11,15]

Resource 2 jobs: [1,6] [8,12] [13,15]

Resource 3 jobs: [1,3] [4,6] [8,12] [13,15]