

**Index.jsp**

```
<%@page contentType="text/html" pageEncoding="UTF-8"%>

<%@taglib uri="/struts-tags" prefix="s" %>

<!DOCTYPE html>

<html>

  <head>

    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

    <title>JSP Page</title>

  </head>

  <body>

    <s:form action="Login">

      <s:textfield name="id" label="Login Id" ></s:textfield>

      <s:textfield name="pass" label="Password"></s:textfield>

      <s:submit value="submit"></s:submit>

    </s:form>

  </body>

</html>
```

**Welcome.jsp**

```
<%@page contentType="text/html" pageEncoding="UTF-8"%>

<%@taglib uri="/struts-tags" prefix="s" %>

<!DOCTYPE html>

<html>

  <head>

    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

    <title>JSP Page</title>

  </head>

  <body>

    <h1>

      Welcome <s:property value="id"/> <br/>

    </h1>

  </body>

</html>
```

**Error.jsp**

```
<%@page contentType="text/html" pageEncoding="UTF-8"%>

<!DOCTYPE html>

<html>

  <head>

    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

    <title>JSP Page</title>

  </head>

  <body>

    <h1> Incorrect Username /Password</h1>

  </body>

</html>
```

**Login.java**

```
package p9;
```

```
import com.opensymphony.xwork2.ActionSupport;
```

```
public class Login extends ActionSupport {
```

```
    private String id;
```

```
    private String pass;
```

```
    public String getPass() {
```

```
        return pass;
```

```
    }
```

```
    public void setPass(String pass) {
```

```
        this.pass = pass;
```

```
    }
```

```
    public String getId() {
```

```
        return id;
```

```
    }
```

```
public void setId(String id) {  
    this.id = id;  
}  
  
public String execute(){  
    if ((id.equals("nick"))&&(pass.equals("nick"))){  
        return "success";  
    }  
    else{  
        return "failure";  
    }  
}  
}
```

**Struts.xml**

```
<!DOCTYPE struts PUBLIC  
"-//Apache Software Foundation//DTD Struts Configuration 2.0//EN"  
"http://struts.apache.org/dtds/struts-2.0.dtd">  
  
<struts>  
    <!-- Configuration for the default package. -->  
    <package name="default" extends="struts-default">  
        <action name="Login" class="p9.Login">  
            <result name="success">welcome.jsp</result>  
            <result name="failure">error.jsp</result>  
        </action>  
    </package>  
</struts>
```

```
</action>
```

```
</package>
```

```
</struts>
```

### **Web.xml**

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<web-app version="3.1" xmlns="http://xmlns.jcp.org/xml/ns/javaee"
```

```
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
```

```
xsi:schemaLocation="http://xmlns.jcp.org/xml/ns/javaee http://xmlns.jcp.org/xml/ns/javaee/web-  
app_3_1.xsd">
```

```
<filter>
```

```
<filter-name>struts2</filter-name>
```

```
<filter-class>org.apache.struts2.dispatcher.FilterDispatcher</filter-class>
```

```
</filter>
```

```
<filter-mapping>
```

```
<filter-name>struts2</filter-name>
```

```
<url-pattern>/*</url-pattern>
```

```
</filter-mapping>
```

```
<session-config>
```

```
<session-timeout>
```

```
30
```

```
</session-timeout>
```

```
</session-config>
```

```
<welcome-file-list>
```


```
<welcome-file>index.jsp</welcome-file>
```

```
</welcome-file-list>
```

```
</web-app>
```


**Output**

Activate Windows  
Go to Settings to activate Windows.

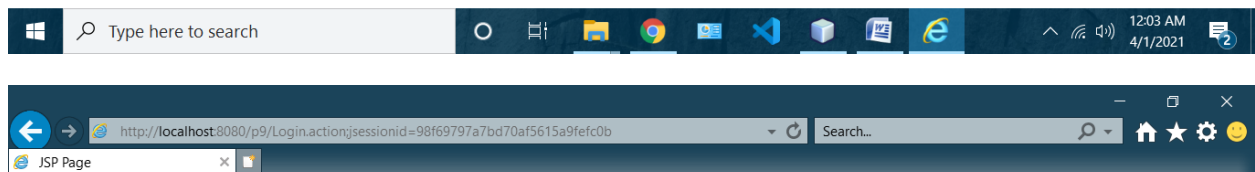**Welcome nick**

Activate Windows  
Go to Settings to activate Windows.



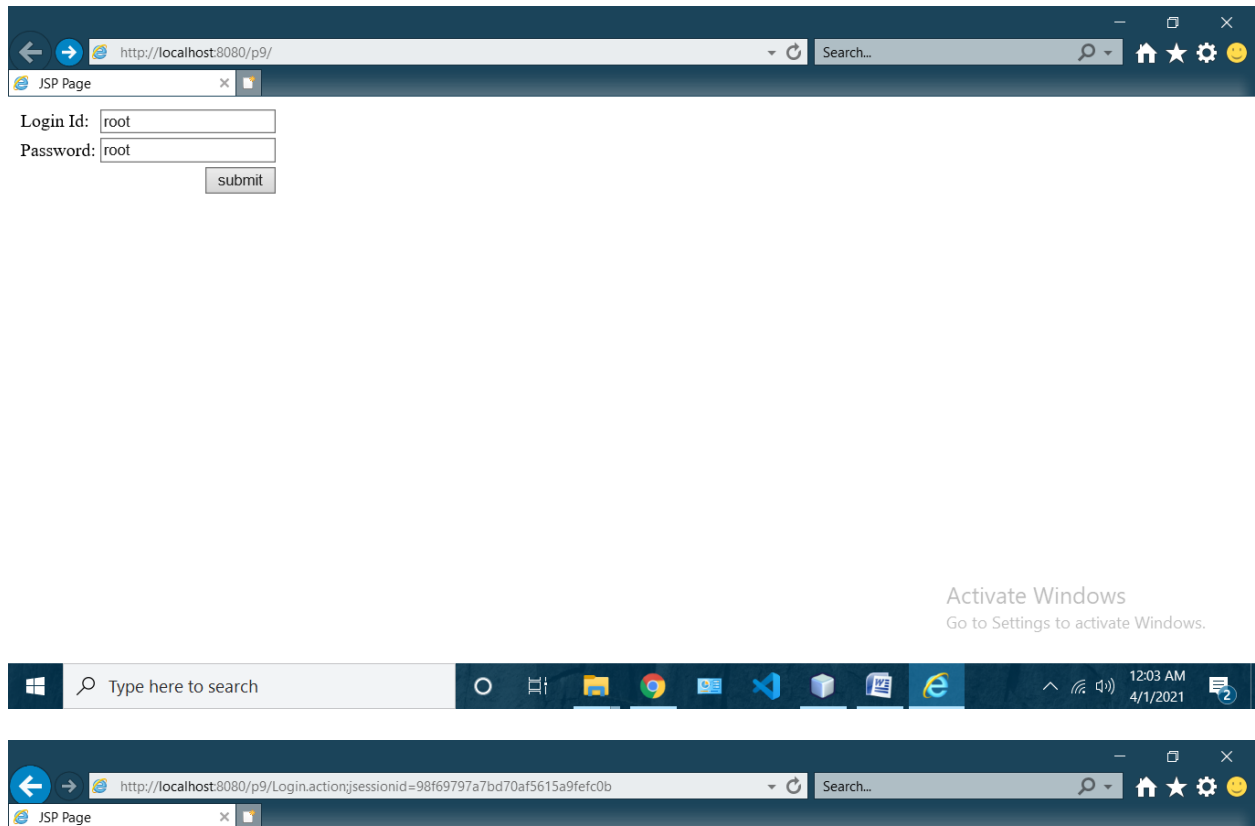

## Incorrect Username /Password

