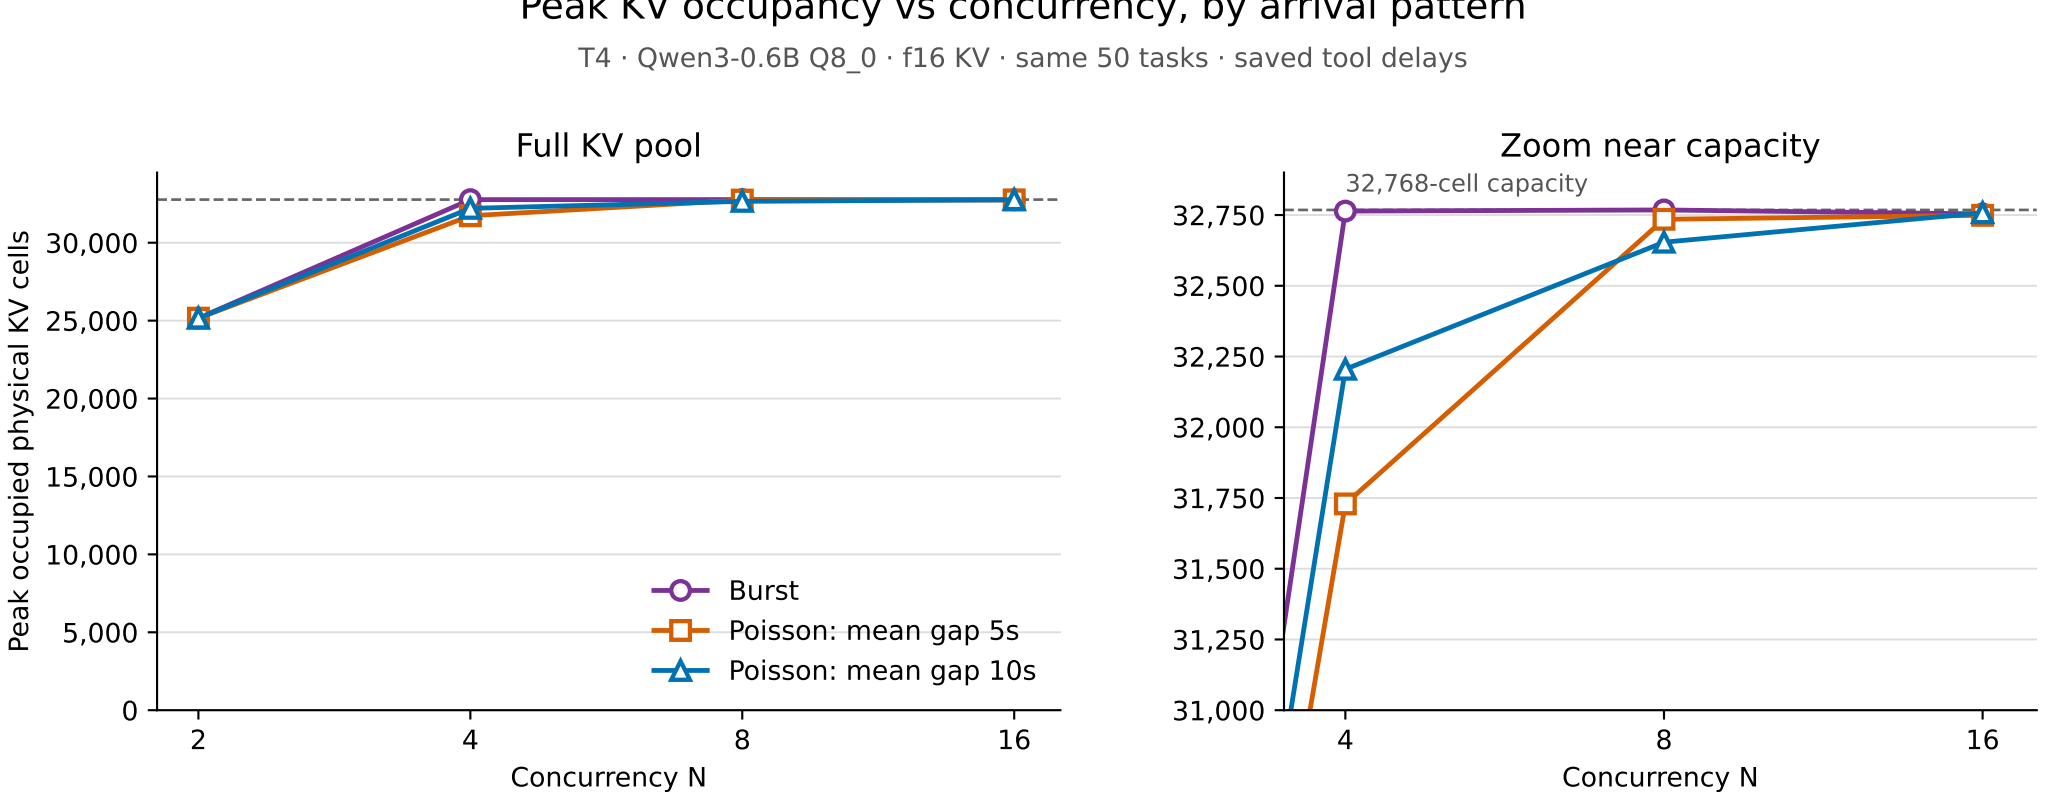

Sampled peaks (~1s intervals), including retained idle cache and periods with failed requests.
One run per point; occupied cells are distinct from allocated GPU memory.