


VS code extensions & theme

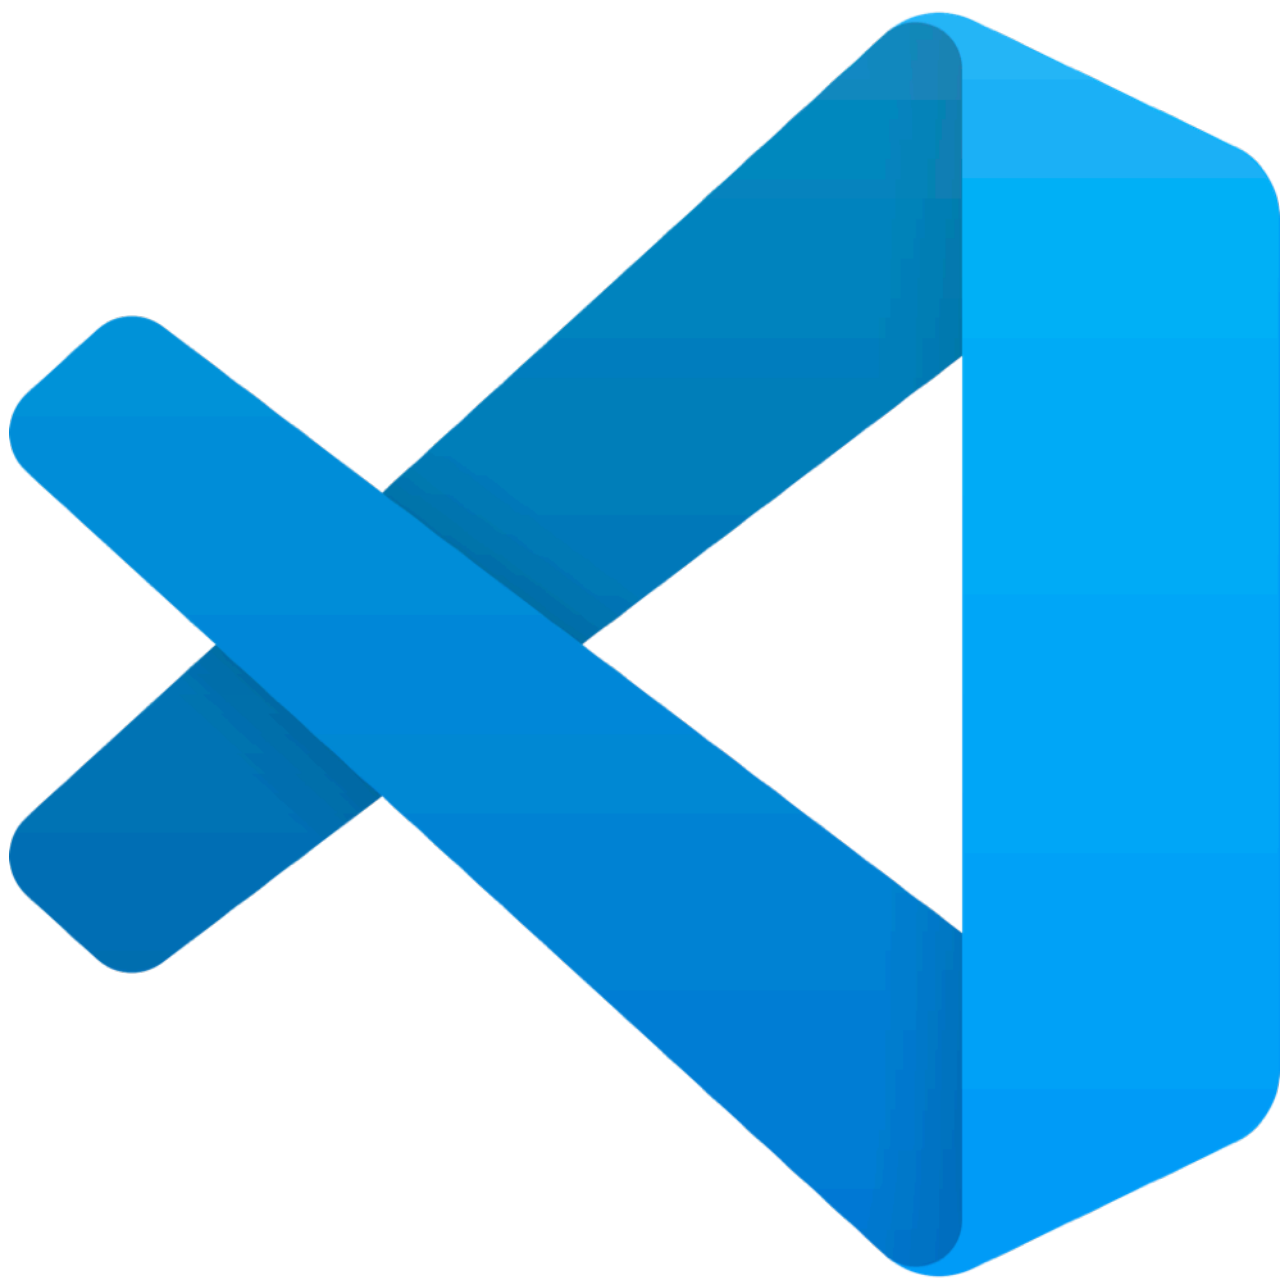


File explorer with icons



1 - Install the vscode-icons extension

<https://marketplace.visualstudio.com/items?itemName=vscode-icons-team.vscode-icons>

2 - Enable vscode-icons in preference and select vscodeIcons

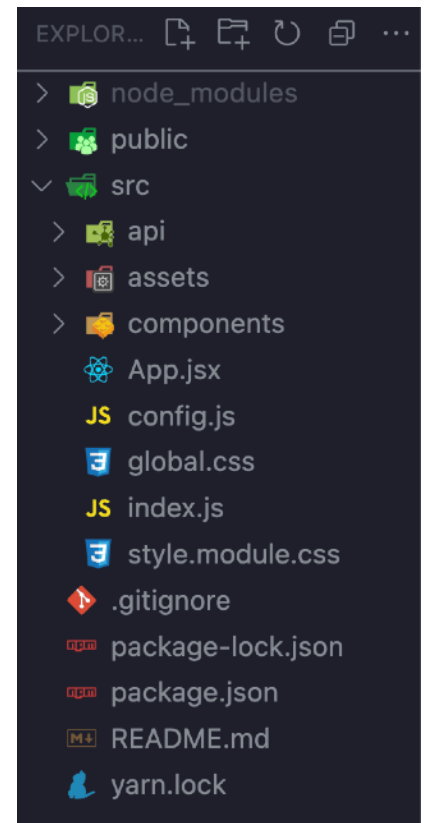

vscode-icons

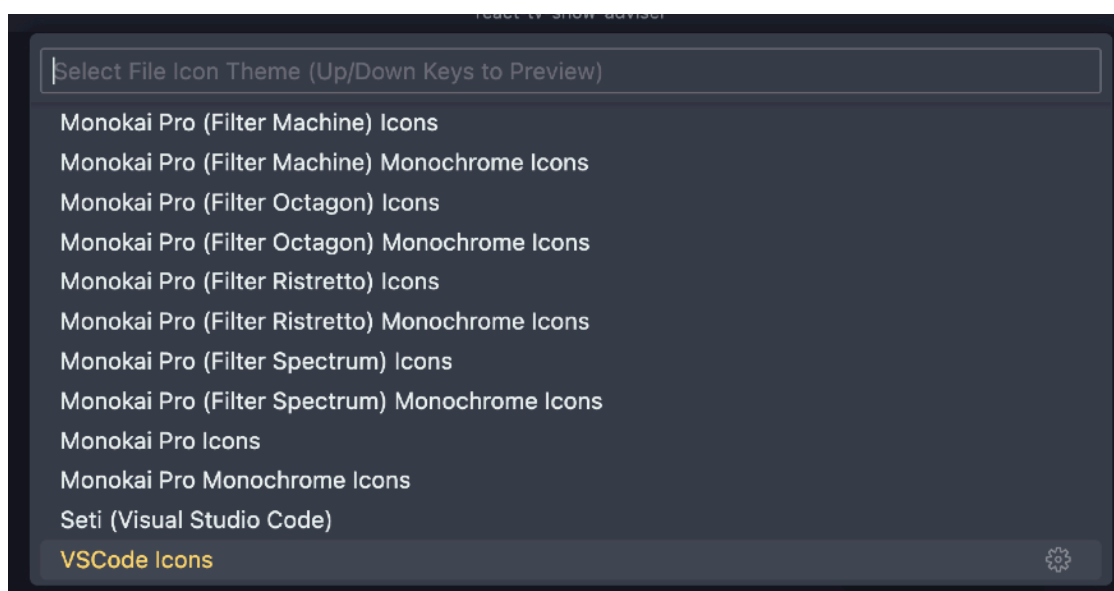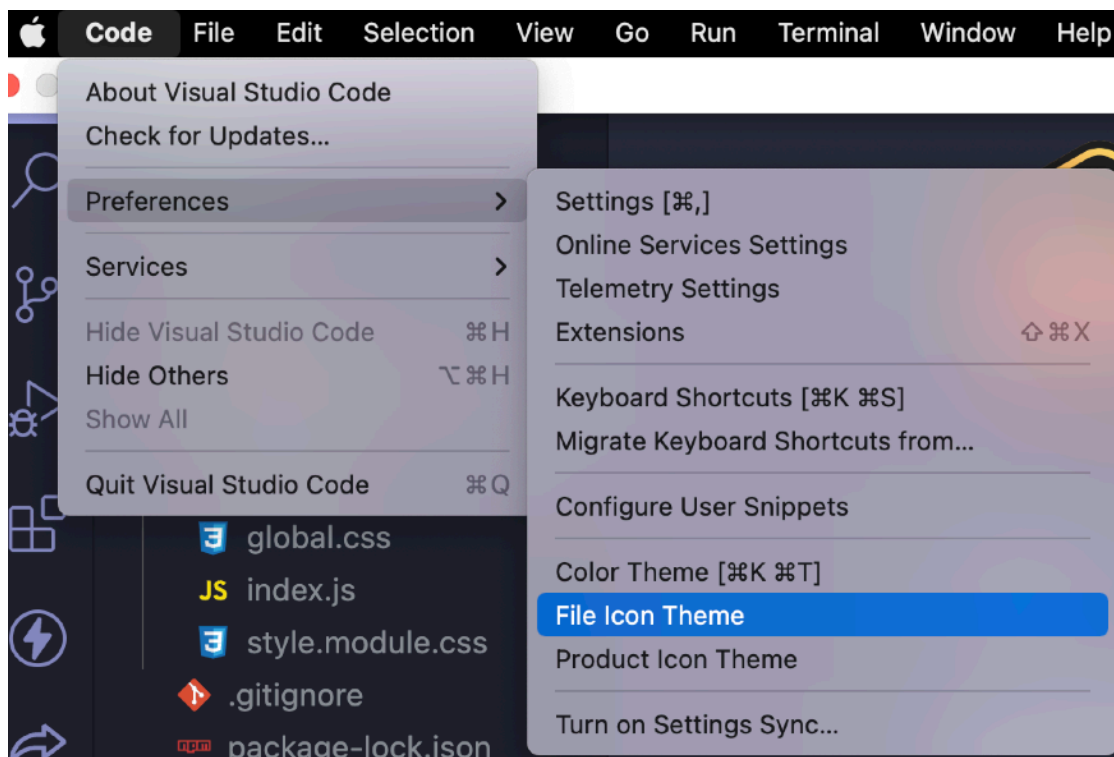

Theme

I use Monokai pro, but just know that it sends a popup asking you to buy the pro version regularly.


Installation :

<https://marketplace.visualstudio.com/items?itemName=monokai.theme-monokai-pro-vscode>

Configuration file

I did a bit of customization for the cursor style , the fonts etc ... You can copy my whole configuration.

Type command+shift+P on **MAC** or CTRL + P on **windows**
Search for “**user settings (json)**”

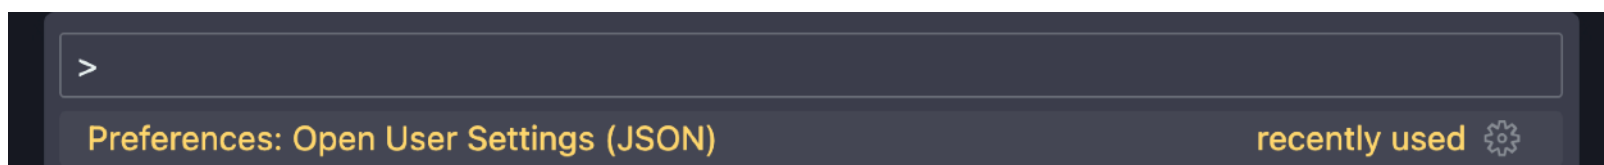

Here is my settings.json, you can copy it if you want the exact same config as I have

```
{
  //TERMINAL
  "terminal.integrated.fontSize": 18,
  //EDITOR
  "editor.formatOnSave": true,
  "editor.codeActionsOnSave": {
    "source.fixAll.eslint": true
  },
  "editor.guides.bracketPairs": "active",
  "editor.cursorBlinking": "expand",
  "editor.minimap.enabled": false,
  "editor.fontWeight": "normal",
  "editor.renderWhitespace": "none",
  "editor.renderControlCharacters": false,
  "scm.inputFontFamily": "Jetbrains Mono",
  "editor.inlayHints.fontFamily": "default",
  "editor.glyphMargin": false,


  "editor.lineNumbers": "on",
  "editor.tokenColorCustomizations": {
    "[Monokai Pro (Filter Octagon)]": {
```

```


"textMateRules": [
  {
    "name": "JAX tags",
    "scope": ["entity.name.tag.js.jsx support.class.component.js.jsx"],
    "settings": {
      "foreground": "#3fe265"
    }
  }
]
},
"editor.fontLigatures": true,
"editor.hideCursorInOverviewRuler": true,
"editor.overviewRulerBorder": false,
// WORKBENCH
"workbench.iconTheme": "vscode-icons",
"workbench.layoutControl.enabled": false,
"workbench.colorTheme": "Monokai Pro (Filter Octagon)",
"workbench.startupEditor": "none",
"workbench.colorCustomizations": {
  "activityBar.background": "#1E1F2C",
  "activityBar.inactiveForeground": "#8589be",
  "activityBar.activeBackground": "#b1b5ff",
  "activityBar.foreground": "#1E1F2C",
  "activityBar.activeBorder": "#ffd102",
  "editorCursor.foreground": "#eaff00",
  "terminalCursor.foreground": "#eefb02",
  "editorOverviewRuler.addedForeground": "#0000",
  "editorOverviewRuler.modifiedForeground": "#0000",
  "editorOverviewRuler.deletedForeground": "#0000",
  "editorGutter.addedBackground": "#0000",
  "editorGutter.modifiedBackground": "#0000",
  "editorGutter.deletedBackground": "#0000"
},
"[javascript]": {
  "editor.defaultFormatter": "esbenp.prettier-vscode"
},
//GIT
"git.autofetch": true,
"git.enableSmartCommit": true,
//FILES
"files.associations": {
  "*.env": "shellscript"
},
//VSICONS
"vsicons.dontShowNewVersionMessage": true,
"[javascriptreact]": {
  "editor.defaultFormatter": "esbenp.prettier-vscode"
},
>window.zoomLevel": 1
}

```


Extensions

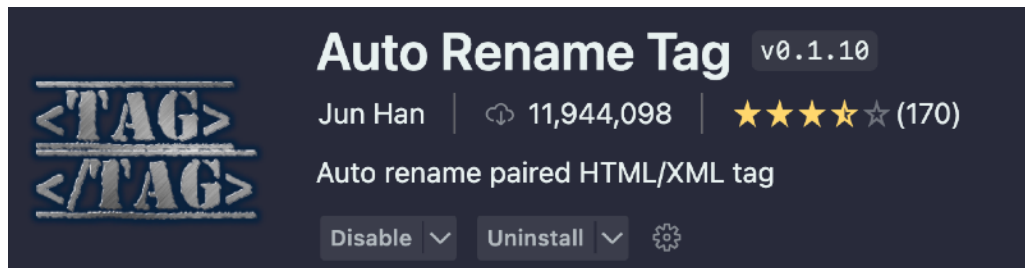

<https://marketplace.visualstudio.com/items?itemName=formulahendry.auto-rename-tag>

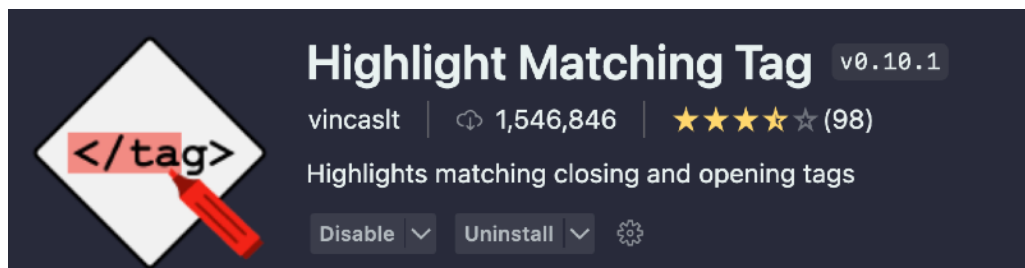


<https://marketplace.visualstudio.com/items?itemName=vincaslt.highlight-matching-tag>

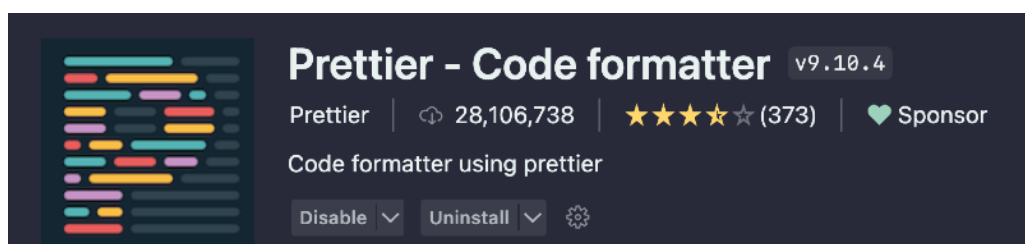

<https://marketplace.visualstudio.com/items?itemName=esbenp.prettier-vscode>

1 - Open a jsx file in vs code

2 - command+shift+P on MAC or CTRL + P on windows / **format document with /
configure default formatter / Prettier**

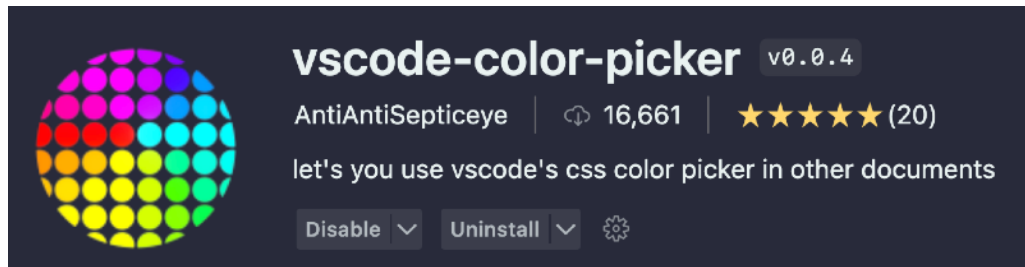

<https://marketplace.visualstudio.com/items?itemName=AntiAntiSepticeye.vscode-color-picker>