

1236. Web Crawler

Medium
[52](#)
[78](#)
[Add to List](#)
[Share](#)

Given a url `startUrl` and an interface `HtmlParser`, implement a web crawler to crawl all links that are under the **same hostname** as `startUrl`.

Return all urls obtained by your web crawler in **any** order.

Your crawler should:

- Start from the page: `startUrl`
- Call `HtmlParser.getUrls(url)` to get all urls from a webpage of given url.
- Do not crawl the same link twice.
- Explore only the links that are under the **same hostname** as `startUrl`.



As shown in the example url above, the hostname is `example.org`. For simplicity sake, you may assume all urls use **http protocol** without any **port** specified. For example, the urls `http://leetcode.com/problems` and `http://leetcode.com/contest` are under the same hostname, while urls `http://example.org/test` and `http://example.com/abc` are not under the same hostname.

The `HtmlParser` interface is defined as such:

```
interface HtmlParser {
    // Return a list of all urls from a webpage of given url.
    public List<String> getUrls(String url);
}
```


Below are two examples explaining the functionality of the problem, for custom testing purposes you'll have three variables `urls`, `edges` and `startUrl`. Notice that you will only have access to `startUrl` in your code, while `urls` and `edges` are not directly accessible to you in code.

Example 1:



```
Input:
urls = [
    "http://news.yahoo.com",
    "http://news.yahoo.com/news",
    "http://news.yahoo.com/news/topics/",
    "http://news.google.com",
    "http://news.yahoo.com/us"
]
edges = [[2,0],[2,1],[3,2],[3,1],[0,4]]
startUrl = "http://news.yahoo.com/news/topics/"
Output: [
    "http://news.yahoo.com",
    "http://news.yahoo.com/news",
    "http://news.yahoo.com/news/topics/",
    "http://news.yahoo.com/us"
]
```

Example 2:

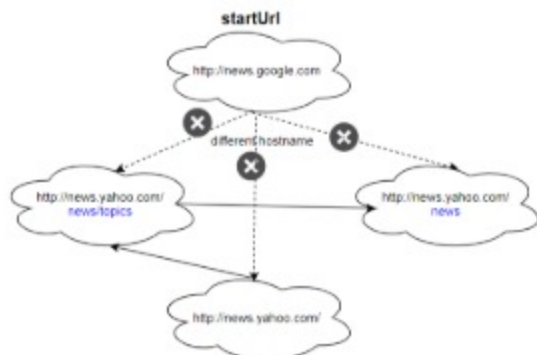

```
Input:
urls = [
    "http://news.yahoo.com",
    "http://news.yahoo.com/news",
    "http://news.yahoo.com/news/topics/",
    "http://news.google.com"
]
edges = [[0,2],[2,1],[3,2],[3,1],[3,0]]
startUrl = "http://news.google.com"
Output: ["http://news.google.com"]
Explanation: The startUrl links to all other pages that do not share the same hostname.
```

Constraints:

- $1 \leq \text{urls.length} \leq 1000$
- $1 \leq \text{urls}[i].\text{length} \leq 300$
- `startUrl` is one of the `urls`.
- Hostname label must be from 1 to 63 characters long, including the dots, may contain only the ASCII letters from 'a' to 'z', digits from '0' to '9' and the hyphen minus character ('-').
- The hostname may not start or end with the hyphen minus character ('-').
- See: https://en.wikipedia.org/wiki/Hostname#Restrictions_on_valid_hostnames
- You may assume there're no duplicates in url library.

Accepted 5,849 | Submissions 9,104

Seen this question in a real interview before? [Yes](#) [No](#)

Contributor [LeetCode](#)

Companies [Google](#) [Facebook](#) [Amazon](#) [Microsoft](#) [Apple](#) [LinkedIn](#) [Uber](#) [Twitter](#) [Netflix](#) [Airbnb](#) [Instagram](#) [Dropbox](#) [Paycom](#) [eBay](#) [Salesforce](#) [Oracle](#) [Cisco](#) [IBM](#) [Hulu](#) [Alibaba](#) [Baidu](#) [Tencent](#) [Klarna](#) [Zillow](#) [eBay](#) [Salesforce](#) [Oracle](#) [Cisco](#) [IBM](#) [Hulu](#) [Alibaba](#) [Baidu](#) [Tencent](#) [Klarna](#) [Zillow](#)

Related Topics [Depth-First Search](#) [Breadth-First Search](#) [Hash Table](#) [String](#)