

The Scientific Contribution Graph: Automated Literature-based Technological Roadmapping at Scale

Peter A. Jansen^{1,2}

¹University of Arizona, ²Allen Institute for Artificial Intelligence
pajansen@arizona.edu

Abstract

Scientific contributions rarely develop in isolation, but instead build upon prior discoveries. We formulate the task of automated technological roadmapping as extracting scientific contributions from scholarly articles and linking them to their prerequisites. We present the SCIENTIFIC CONTRIBUTION GRAPH, a large-scale AI/NLP-domain resource containing 2 million detailed scientific contributions extracted from 230k open-access papers and connected by 12.5 million prerequisite edges. We further introduce scientific prerequisite prediction, a scientific discovery task in which models predict which existing technologies can enable future discoveries, and show that contemporary models are rapidly improving on this task, reaching 0.48 MAP when evaluated using temporally filtered backtesting. We anticipate technological roadmapping resources such as this will support scientific impact assessment and automated scientific discovery.¹

1 Introduction

Sir Isaac Newton famously wrote, “If I have seen further, it is by standing on the shoulders of giants”. Scientific contributions are rarely developed in isolation, but build upon prior contributions, such as problem framings, experimental methods, and empirical findings. Understanding these prerequisite relationships is important for studying scientific progress, and for automated scientific discovery systems that must reason about which existing capabilities can be used to develop new ones (e.g. Lu et al., 2024; Jansen et al., 2025b; Baek et al., 2025).

Currently, the way scientific contributions build upon one another is typically represented using either paper-level citations or sentence-level triples extracted from papers. Citation analysis captures paper-level links (Wang et al., 2022; Zhang and

Wu, 2021; Ammar et al., 2018), but citations often provide background context (e.g. Li and Ouyang, 2024; Li et al., 2022), rather than indicating that one work was directly built upon another. Impactful-citation detection methods (e.g. Valenzuela et al., 2015; Nazir et al., 2020) partially control for this, but still operate at a coarse, whole-paper level: they cannot resolve, for example, that the *data* developed in Paper A depends specifically upon the *problem formulation* proposed in Paper B. Conversely, scientific information extraction (IE) systems often extract sentence-level entities or triples, such as <SPEECH ENHANCEMENT, USES, SPECTRAL RESTORATION METHOD> (a triple from CS-KG; Dessí et al., 2025). These triples are often decontextualized: it is unclear what specific technique is being discussed, or whether, and how, one contribution builds upon another. This leaves a representational utility gap between paper-level citation graphs and sentence-level triples.

This work addresses this gap with the SCIENTIFIC CONTRIBUTION GRAPH, a large-scale resource that represents scientific progress at an intermediate granularity: finer than papers, but richer than triples. Nodes represent individual scientific contributions, while edges represent how one contribution builds upon precursor contributions. The graph contains 2M contributions from 230k open-access papers seeded from the ACL ANTHOLOGY, and linked by 12.5M prerequisite edges, with an average of 9 extracted contributions per paper.

Rather than representing nodes and edges as short entity mentions or triples, contribution nodes contain generated names and detailed summary descriptions, while edges explain how the source text describes one contribution as building upon another. Where nodes in existing graphs such as CS-KG average approximately 3 tokens, nodes and edges in the SCIENTIFIC CONTRIBUTION GRAPH contain an average of 130 and 71 tokens, respectively. Building this graph requires model-

¹<https://github.com/cognitiveailab/scientific-contribution-graph>

System	Input	Extraction Task	Dependency Model	Scale
SCIERC (Luan et al., 2018)	500 abstracts	Span/relation labeling	Typed triples	4.7k triples
SCIEX (Jain et al., 2020)	438 papers	Span/relation labeling	N-ary tuples	2.2k tuples
NLPCONT. (D’Souza et al., 2021)	442 papers	Span/relation labeling	General SPO triples	30k triples
SCINLP-KG (Mondal et al., 2021)	30k papers	Span/relation labeling	Typed triples	8.1k triples
SCICLAIM (Magnusson et al., 2021)	901 sentences	Span/relation labeling	Sentence-level graphs	5.3k triples
CS-KG V2 (Dessí et al., 2025)	14.5M papers	Span/relation labeling	Typed triples	67.5M triples
SCI. CONT. GRAPH (This work)	230k papers	Seq2Seq contribution generation on full text	Prereq. extraction + cross-paper alignment	2M nodes / 12.5M edges

Table 1: A comparison of existing scientific knowledge graph efforts, including input source, extraction task framing, dependency model for edge construction, and scale. Prior systems primarily extract typed triples over short entity spans, where this work generates detailed scientific contribution nodes through seq2seq modeling, and edges through cross-paper contribution alignment.

ing knowledge graph construction as open-ended sequence-to-sequence extraction over paper full text, rather than span labeling or triple extraction over sentences or paragraphs (Dagdelen et al., 2024; Shamsabadi et al., 2024). This is computationally nontrivial: the pipeline requires an average of 43 LLM calls per paper to extract contributions, identify prerequisites, and align them to graph contributions. To demonstrate utility for automated scientific discovery, this work introduces a scientific prerequisite prediction task, where a model must identify existing technologies required to develop a novel target technology. Using temporally filtered backtesting (e.g. Luo et al., 2018; Jansen et al., 2025a), we empirically demonstrate contemporary language models have recently progressed from near-chance to moderate performance, suggesting near-term utility for scientific discovery.

The contributions of this work are:

1. The SCIENTIFIC CONTRIBUTION GRAPH, a resource for technological roadmapping containing 2M detailed scientific contributions from 230k open-access papers, linked by 12.5M prerequisite edges describing how technologies build upon precursor technologies.
2. The formulation of scientific prerequisite prediction as a technological requirement prediction task for automated scientific discovery, paired with an empirical demonstration showing that contemporary language models have rapidly improved on this task, progressing from chance performance to 0.48 MAP in the last two years.

2 Related Work

Extracting Scientific Contributions: Prior work has extracted scientific contributions from literature, most often as span-labeled named-entity recognition (NER) or structured information extraction. NER systems typically pre-define 3 to 10

entity classes, such as DATASETS, MODELS, METHODS, TASKS, and METRICS (Das et al., 2025; Pramanick et al., 2025; Otto et al., 2023; D’Souza et al., 2021; Luan et al., 2018), then identify contributions in abstracts or full text using classification or span-labeling. Recent work models scientific IE as sequence-to-sequence (seq2seq) extraction: Shamsabadi et al. (2024) extract structured schemas for virology papers, including the virus studied, location, time, and reproduction rate, while Dagdelen et al. (2024) extract material data using structured schemas. This seq2seq IE framing is used at scale here to build the knowledge graph.

Scientific Knowledge Graphs: Existing scaled scientific knowledge graphs are primarily represented as triples or N-ary relations, as shown in Table 1. The largest resource, CS-KG V2 (Dessí et al., 2025), is extracted using the SCICERO (Dessí et al., 2022) model, which maps entities to a standard ontology. Mondal et al. (2021) extract two evaluation-centered relations, EVALUATEDON/BY, from 30k NLP-domain papers; SciClaim (Magnusson and Friedman, 2021) extracts sentence-level claim graphs; and D’Souza et al. (2021) extract open-ended triples from 442 papers, labeling them with 12 broad contribution types. In contrast, this work models extraction as open-ended sequence-to-sequence generation, extracting contribution names and detailed descriptions from full-text, rather than entity labels or triples from sentences using a pre-defined schema. These contributions are then linked to prerequisite contributions mentioned in the source text using an alignment procedure, yielding a large and detailed graph of 2M contributions and 12M edges extracted from 230k papers.

Automated Scientific Discovery: Literature-based discovery is often framed as identifying “undiscovered public knowledge”, or plausible relations not explicitly stated in the literature, but inferred

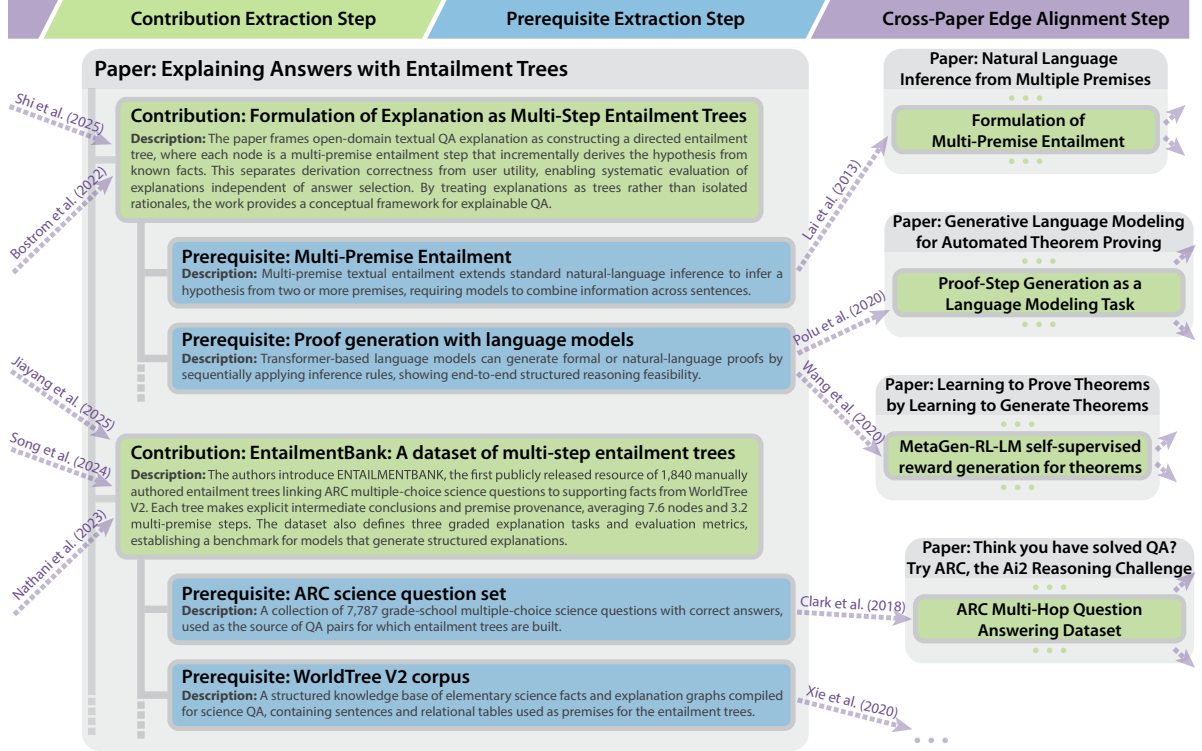


Figure 1: Illustration of the graph construction pipeline, including (1) extracting contributions from papers, (2) extracting prerequisites for each contribution, and (3) creating contribution dependency edges by aligning prerequisites to contributions from cited papers. Due to space limitations, only a small subset of contributions, prerequisites, edges, and content are shown. An average of 9 contributions are extracted from each paper, each containing an average of 6 prerequisite edges.

by combining published relations (Swanson, 1986, 1988). Modern work often formulates discovery as link prediction over graphs of scientific concepts (Cesario et al., 2024; Pu et al., 2023; Crichton et al., 2020), or uses literature to generate research directions through iterative refinement (Si et al., 2025), literature-generated idea facets (Radensky et al., 2024), or extrapolation from literature chains (Vasu et al., 2025; Li et al., 2025). Most related, GIANTS (He-Yueya et al., 2026) tests whether LLMs can ideate future insights from two component technologies, while CODESCIENTIST (Jansen et al., 2025b) ideates and tests literature-derived technologies through code-based experimentation. This work instead focuses on technological roadmapping – representing how scientific contributions build upon prerequisite contributions – and evaluating the reverse prediction problem of predicting which existing scientific contributions are required to develop a novel target technology.

3 Problem Formulation

We formulate technological roadmapping as an automatic knowledge graph construction problem. Let D denote the input document corpus, instantiated here as scientific papers. The synthesis process maps D to a contribution graph (G): $D \rightarrow G$. The

graph G consists of a set of nodes $c_i \in C$, each representing an individual scientific contribution, and a set of edges $e_j \in E$ that link scientific contributions to their prerequisite technologies.

Each contribution c_i is represented as a $\langle \text{NAME}, \text{DESCRIPTION}, \text{METADATA} \rangle$ tuple, $\langle n_i, d_i, m_i \rangle$, where n_i is the name of the scientific contribution, d_i is a natural-language description of the contribution, and m_i is an optional set of associated metadata, such as the title of the source paper and sections of the source paper that mention the contribution. Each edge e_j is represented as a $\langle \text{PRECURSOR NODE}, \text{DEPENDENT NODE}, \text{ATTRIBUTES} \rangle$ tuple, $\langle c_{\text{pre}}, c_{\text{dep}}, a_j \rangle$, where c_{pre} and c_{dep} are the precursor and dependent contribution nodes, respectively, and a_j is an optional set of edge attributes generated during extraction, such as a natural-language explanation of why c_{pre} is described as a prerequisite technology for c_{dep} .

3.1 Edge Alignment

Papers typically describe how new scientific contributions build on existing contributions using a combination of references and prose. For example, the toy sentence “*Our Contrastive-RLHF model modifies the preference-weighted RL training loss of Smith et al. (2025) with a contrastive objective...*”

describes the dependent contribution (“*Contrastive-RLHF model*”), a candidate prerequisite technology (“*preference-weighted RL training loss*”), and its source (“*Smith et al. 2025*”). We model edge construction as a two-step process. First, for each dependent contribution c_{dep} , we extract a list of candidate prerequisite technologies $P(c_{\text{dep}})$. Each candidate prerequisite $p_k \in P(c_{\text{dep}})$ is represented as a $\langle \text{NAME}, \text{DESCRIPTION}, \text{EXPLANATION}, \text{REFERENCE} \rangle$ tuple, $\langle pn_k, pd_k, pe_k, pr_k \rangle$, where pn_k , pd_k , and pe_k describe the prerequisite technology name, description, and a short natural-language explanation of why it is a prerequisite. The reference pr_k typically identifies a source paper, including its title, year, and first author, but may also be an internal reference, when a later contribution in a paper depends upon an earlier contribution in the same paper, or an external artifact reference, such as a tool or software package referenced by a URL.

Second, we align each candidate prerequisite p_k to a concrete precursor contribution node c_{pre} . To generate an edge e_j linking a dependent contribution c_{dep} to a precursor contribution, an aligner A takes as input the dependent contribution c_{dep} , the candidate prerequisite p_k , and the paper introducing the prerequisite, d_{pre} , and produces an edge e_j as output: $e_j = A(c_{\text{dep}}, p_k, d_{\text{pre}})$. The alignment algorithm used in this work is described below.

4 Knowledge Graph Construction

Figure 1 summarizes the construction pipeline. Starting from an initial corpus of papers, the pipeline iteratively expands the contribution graph by extracting contribution nodes, identifying prerequisite technologies, and aligning those prerequisites to source contributions. After each batch, the next papers are selected from cited papers not yet in the graph, prioritized by citation frequency within the graph to minimize edge sparsity.

4.1 Corpus of Open Access Papers

The SCIENTIFIC CONTRIBUTION GRAPH currently contains contributions extracted from 230K open-access papers drawn from two permissively licensed sources. The seed corpus is a crawl of the ACL ANTHOLOGY², containing approximately 120K papers licensed under Creative Commons CC-BY or CC-BY-SA licenses. Additional papers are drawn from the Semantic Scholar Open Research Corpus (S2ORC) (Lo et al., 2020), which

provides full text for open-access scientific papers.

4.2 Extraction Pipeline

The extraction pipeline proceeds in four stages:

Step 1: Paper Selection: At each iteration, the crawler selects source papers d_{pre} needed by the aligner to convert currently unresolved prerequisite references into graph edges. It creates a histogram over unresolved d_{pre} references: source papers cited by existing candidate prerequisites, but not yet included in the graph. The most frequently cited open-access papers are selected for the next batch. For ACL ANTHOLOGY papers, or when full text is unavailable in S2ORC, paper text is extracted from the PDF using MARKER³.

Step 2: Extracting Contributions (Nodes): Contribution extraction is modeled as a sequence-to-sequence task (Sutskever et al., 2014), taking paper full text as input and returning JSON-formatted contribution nodes. For each paper, an instruction-formatted prompt extracts a set of contributions, specifying task desiderata, the desired level of extraction detail, and 17 high-level contribution categories, including *new problem formulations*, *theoretical insights*, *conceptual frameworks*, *resources*, *analyses*, *tools*, *metrics*, *models*, and *algorithms*, with the full list shown in Table 4 in the APPENDIX. Each extracted contribution includes its name, description, contribution type(s), and the paper sections where the information is found. On average, each paper includes 8.9 scientific contributions.

Step 3: Extracting Candidate Prerequisites: For each contribution extracted in Step 2, an instruction-formatted prompt extracts candidate prerequisite contributions from the paper full text, using both reference context and prose descriptions of how the contribution builds on prior work. Each candidate prerequisite is represented as a $\langle \text{NAME}, \text{DESCRIPTION}, \text{EXPLANATION}, \text{REFERENCE} \rangle$ tuple, where the reference identifies the source needed for later edge alignment. References may be *paper references* to contributions from other papers, *internal references* to earlier contributions in the same paper, or *artifact references*, typically software or tools cited through URLs rather than paper citations.

Step 4: Edge Alignment Across Contributions: After Step 3, each extracted contribution c_{dep} is paired with candidate prerequisites p_k , but these are not yet graph edges: each p_k must first be

²<https://aclanthology.org/>

³<https://github.com/datalab-to/marker>

Alignment Category	Interpretation	Symbol	Count	Prop.
Direct Matches	Reference set and model identify same contribution	$R \rightarrow M$	99	38%
Additional Valid Contributions	Valid model contribution not in reference set	$M \rightarrow \text{unmatched}$	64	25%
High-Resolution Decomp.	Model refines one reference contribution into multiple contributions	$R \rightarrow (M_1, \dots, M_n)$	50	19%
Coarser Decomposition	Model combines multiple reference contributions into one contribution	$(R_1, \dots, R_n) \rightarrow M$	24	9%
Missed Contributions	Reference-set contribution missed by model	$R \rightarrow \text{unmatched}$	22	9%
Total			258	100%

Table 2: Alignment between reference-set (R) and model-based (M) scientific contribution extraction, broken down into 5 alignment categories. The model achieves 91% recall of reference-set contributions, while also identifying 25% additional valid contributions not captured in the manual reference set. In many cases (19%), the model produces higher-resolution decompositions, breaking coarser reference contributions into finer-grained contributions.

aligned to one or more concrete precursor contribution nodes c_{pre} from its referenced source paper d_{pre} . For example, if a paper contributes “formalizing multi-step entailment trees” and cites “multi-premise entailment” from *Natural Language Inference from Multiple Premises* as a prerequisite, the aligner searches the contributions extracted from that source paper and identifies the best-matching precursor contribution, such as “multi-premise entailment task” (see Figure 1). The aligner then creates an edge from the precursor contribution to the dependent contribution, indicating that *entailment trees* build on *multi-premise entailment*. As in earlier steps, alignment is implemented as an instruction-formatted language-model call. The prompt includes task desiderata, the dependent contribution c_{dep} , the candidate prerequisite p_k , and all extracted contributions from d_{pre} , where the model selects the contribution(s) that best align. Alignment is modeled as one-to-many because a single prerequisite reference may correspond to multiple concrete contributions in the source paper.

Extraction Model and Cost: All extraction stages use GPT-OSS-120B, chosen for its long-context performance and permissive open weights. To maximize quality, batch processing is not used; contributions and alignments are processed individually where possible. Each paper therefore requires many LLM calls: one for contribution extraction, 8.9 on average for prerequisite extraction, and one per prerequisite edge for alignment, with 6.1 prerequisites per contribution on average (61% from other papers; 33% internal, and 6% artifacts). In practice, this can exceed 40 calls per paper, at an estimated cost of \$0.10 per paper at current rates.

Search Embeddings: To support fast search, the API includes QWEN3-EMBEDDING-0.6B embeddings for all 2M contribution nodes, generated from concatenated contribution names and descriptions.

4.3 Evaluation

A targeted validation was conducted to measure adherence to contribution and prerequisite extraction desiderata. Reference sets were constructed according to these desiderata and compared to model-generated extractions. Results, detailed below, show high overall precision and recall for both scientific contribution and prerequisite extraction.

4.3.1 Contribution Extraction

Contribution extraction was evaluated using a manual reference set constructed according to the same desiderata in the extraction prompt, including granularity and specificity requirements. Across 25 papers, a domain expert identified 163 contributions, while the extraction pipeline identified 226 contributions. As extracted contributions may differ in specificity – a single coarse contribution may correspond to several more atomic contributions, and vice versa – evaluation is modeled as a many-to-many alignment problem. The five alignment classes and their proportions are shown in Table 2.

For each paper, model-extracted contributions were aligned to the manually identified contributions and assigned one of five alignment classes: direct match, higher-resolution decomposition, coarser decomposition, additional valid contribution, or missed contribution. Model contributions without a corresponding manual contribution were reviewed and counted as additional valid contributions when they satisfied the extraction desiderata. Manually identified contributions with no aligned model contribution were counted as missed contributions. Proportions are calculated over the union of valid model and manual contributions.

The results in Table 2 show overall strong performance: 91% of manually identified contributions were successfully extracted by the model, while 9% were missed. The model also identified many

additional valid contributions (25%), most often secondary contributions such as follow-on experiments or analyses missed during manual labeling, and frequently produced higher-resolution decompositions of coarser manual annotations (19%). Taken together, these results indicate high overall performance at extracting scientific contributions.

4.4 Prerequisite Identification

Prerequisite identification quality was evaluated manually using the same desiderata specified in the extraction prompt. For 25 scientific contributions, the domain expert identified 91 prerequisite contributions by examining the source paper text, then compared these manually identified prerequisites to the 149 prerequisites generated by the extraction pipeline. To avoid missing prerequisites, the prompt encourages high recall while also distinguishing between *core* or direct prerequisites and valid but less direct *peripheral* prerequisites. Of the 149 prerequisites identified by the extraction pipeline, 96 were labeled by the pipeline as core prerequisites and 53 as peripheral prerequisites.

Each model-extracted prerequisite was manually labeled as *core*, *peripheral*, or *incorrect* by the domain expert. Manual evaluation labeled 93% of prerequisites labeled *core* by the pipeline as *core*, increasing to 97% when *peripheral* prerequisites are also counted as valid. Prerequisites labeled *peripheral* by the pipeline were most often also judged peripheral: 58% were labeled *peripheral*, and 87% were labeled either *core* or *peripheral*. Only 7% of extracted prerequisites (10 of 149) were labeled *incorrect*, primarily cases where the candidate prerequisite was only weakly related or where the dependency direction was reversed. The manual evaluation identified 9 additional missed prerequisites not recovered by the pipeline, suggesting high recall (94%) for prerequisite extraction.

5 Task: Predicting Technological Requirements

New scientific advances frequently build upon existing advances: for example, transformers (Vaswani et al., 2017) were built upon precursors such as sequence-to-sequence models, attention mechanisms, and word embeddings. The SCIENTIFIC CONTRIBUTION GRAPH maps such prerequisite relationships, and using these we can build a task to evaluate how well literature-backed automated scientific discovery systems could predict

which existing technologies would be needed to develop a new target technology.

Task Framing: We operationalize the technological requirement identification task as a ranking task, which mirrors likely deployment scenarios: given a desired new technology, and a list of current technological capabilities, the model must rank candidates such that the most relevant prerequisites for developing the target technology appear highest. Evaluation is operationalized as temporally filtered backtesting (e.g. Jansen et al., 2025a; Luo et al., 2018), where we measure a model’s task performance primarily on unseen problems (from papers published after its advertised knowledge cut-off date), which effectively allows evaluating “new” technologies unknown to the model. This form of backtesting is typically used in high-cost domains (such as scientific discovery) where evaluating hundreds or thousands of new discoveries would be prohibitively expensive or infeasible at scale.

Data: We construct 2,000 technological requirement problems by randomly sampling target scientific contributions from each year in 2021–2025. Each problem consists of a *target technology* and a ranked list of 100 *candidate prerequisite technologies*. Both targets and candidates are scientific contributions from the graph, represented using their *name* and *description* fields. For each sampled target technology, gold prerequisites are drawn from its incoming prerequisite edges in the graph. The remaining candidates are close distractors selected to mirror likely search scenarios: the target name and description are used as an embedding search query over the graph, and the highest-scoring scientific contributions by cosine similarity are returned. Distractors are temporally filtered so that no candidate postdates the target technology; for example, a target from 2024 cannot include distractors from 2025. To reduce false positives, we also remove candidate distractors from papers that contain direct graph edges to other scientific contributions in the same source paper as the target.

Models: We evaluate a suite of high-performing LLMs using a shared instruction-formatted prompt containing the task description, target technology, and 100 candidate technologies in random order. Each model returns a ranked list in which the most relevant prerequisites appear highest. Because candidates may include both direct prerequisites and more distant related technologies, models are instructed to prefer more immediate precursors; for

Base Model	Knowledge Cutoff	Performance (pre-cutoff)	Performance (post-cutoff)	Perf. Δ	# Samples (pre/post)	Perf. (entire set)	Cost (per 1k)
RANDOM BASELINE	–	–	–	–	–/–	0.12	\$0
GPT-4O-MINI	Oct 2023	0.16	0.14	0.02	617 / 1279	0.15	\$16
GPT-OSS-120B	Jun 2024	0.25	0.22	0.03	845 / 1076	0.23	\$20
GPT-5-NANO	May 2024	0.25	0.22	0.03	817 / 1090	0.23	\$5
GPT-5.4-MINI	Aug 2025	0.37	0.33	0.04	1364 / 205	0.36	\$29
GPT-5-MINI	May 2024	0.42	0.36	0.06	817 / 1090	0.38	\$22
GPT-5.4	Aug 2025	0.40	0.37	0.03	1364 / 205	0.39	\$106
CLAUDE HAIKU 4.5	Jun 2025	0.41	0.38	0.03	1337 / 272	0.40	\$45
CLAUDE SONNET 4.5	Jul 2025	0.45	0.40	0.05	1337 / 272	0.43	\$160
CLAUDE OPUS 4.6	Aug 2025	0.53	0.48	0.05	1364 / 205	0.51	\$235

Table 3: Model performance on the technological requirement identification task, reported using temporally-filtered backtesting, where model performance pre- and post- each model’s advertised knowledge cutoff is evaluated. Performance is measured using Mean Average Precision (MAP). Cost is reported in USD per 1,000 problems. Sums of samples (pre/post) may not add to 2000, as problems where only publication years are available (and not specific dates) are discarded when they have the same year as the model’s knowledge cutoff to prevent contamination.

example, for a “transformers” target, *attention mechanisms* should rank above *Markov models*.

Results: Table 3 reports model performance on the technological requirement identification task, using mean average precision (MAP; Manning et al., 2008), both overall, and split by a dynamic temporal filter (i.e. backtesting) based on whether each problem’s source paper was published before or after the model’s advertised knowledge cutoff.

The results suggest that recent models are rapidly gaining performance on the technological requirement identification task. While models released approximately two years ago, such as GPT-4O-MINI, perform only slightly above a random baseline (0.14 vs. 0.12 MAP), the best-performing recent model, CLAUDE OPUS 4.6, achieves 0.48 MAP on unseen problems, indicating moderate overall task performance. This performance comes at substantial cost, and the model suite reveals large cost/performance tradeoffs: GPT-5-MINI achieves 1% MAP per \$0.61, while CLAUDE OPUS 4.6 costs \$4.90 per 1% MAP. Backtesting reveals models generally perform somewhat better on prediction problems generated from papers published before the model’s advertised knowledge cutoff. Performance typically increases by 0.02–0.06 MAP on pre-cutoff problems, suggesting that some overall performance may reflect prior exposure to the relevant literature during model pretraining, rather than purely prospective technological reasoning, though this increase is generally modest across models.

6 Discussion

As a resource, the SCIENTIFIC CONTRIBUTION GRAPH enables technologies to be traced backward through successive precursor contributions.

We expect that the scale and granularity will support downstream investigations challenging to perform with paper-level citation graphs or triple-level graphs alone, including technological roadmapping, impact assessment, and novelty detection.

Technological Roadmapping: The SCIENTIFIC CONTRIBUTION GRAPH provides a large-scale technological roadmap, showing how component technologies and findings are combined, extended, and reused in later scientific contributions. This makes it possible to study how technologies emerge from prior work, and visualize local trajectories of scientific development. For example, Figure 2 shows how the Bidirectional Encoder Representations from Transformers (BERT) architecture (Devlin et al., 2019) was built from precursor contributions, and how those precursors themselves depend on earlier scientific contributions.

Impact Assessment: Assessing the impact of a scientific contribution is challenging and costly, and often approximated using inexpensive but noisy paper-level citation counts – a citing paper may use a contribution directly, cite it as background, or reflect broader citation biases (Balzer and Benlahlou, 2025; Teplitskiy et al., 2022; Larivière and Gingras, 2010). The SCIENTIFIC CONTRIBUTION GRAPH enables a more direct contribution-level view by tracing downstream contributions that build on it, or new subfields that emerge. For example, APPENDIX B includes large impact assessments of Retrieval-Augmented Generation (RAG) (Lewis et al., 2020) and SELF-INSTRUCT PROMPTING (Wang et al., 2023), illustrating how these create novel subfields in *internet-augmented prompts* and *fusion-in-decoder QA models* for RAG, or *self-rewarding language models* and *automatic data-*

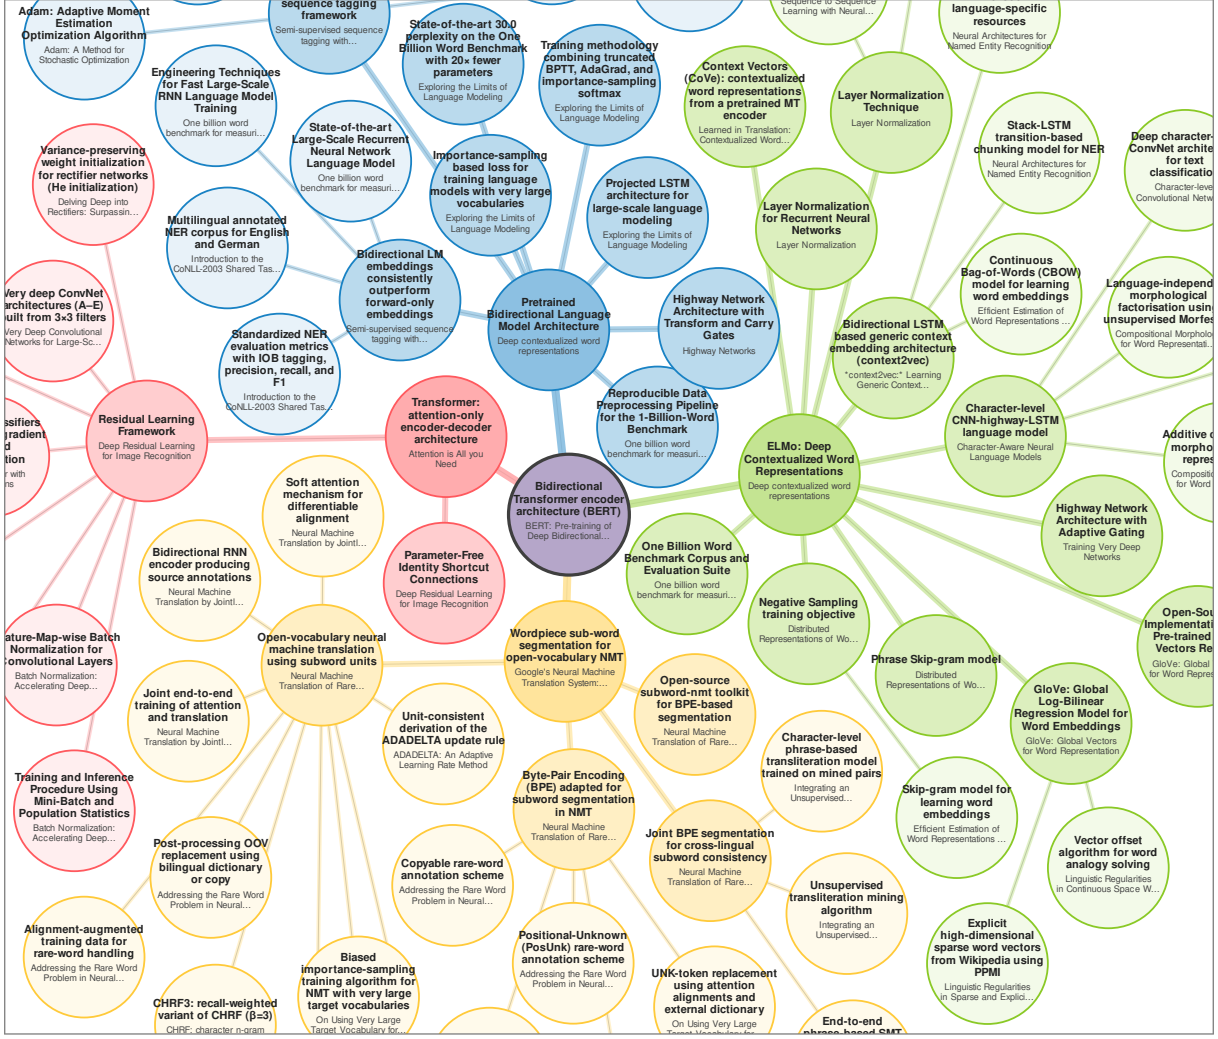


Figure 2: A simplified visualization of the technological roadmap showing precursor technologies that led to the development of the “*Bidirectional Transformer Encoder Architecture (BERT)*” contribution, one of 12 fine-grained contributions extracted from Devlin et al. (2019). Here, nodes represent contributions, while edges represent precursor relations. All content has been simplified for space: nodes show only contribution names and source paper titles, and not detailed contribution descriptions or metadata; edges do not show precursor descriptions or explanations, and cross-edges between nodes other than the root have been pruned to form a tree for visualization purposes. Precursor relations are shown up to 3 edges away from the root contribution.

poisoning pipelines for SELF-INSTRUCT. Such analyses may support automated scientific discovery by identifying contribution types that enable high-impact downstream work. They may also help researchers document specific technologies or findings developed from their work, but obscured across citation layers, for example in promotion and tenure cases. This may be through direct textual narratives enabled through these automated impact analyses, or by reporting counts of *new scientific contributions* enabled, directly or indirectly, from one’s own scientific contributions.

7 Conclusion

This work presents the SCIENTIFIC CONTRIBUTION GRAPH, a large-scale resource for techno-

logical roadmapping that represents over 2 million scientific contributions extracted from 230k source papers, together with 12 million prerequisite relationships that define how each technology builds upon prior contributions. We also formulate technological prerequisite prediction as a downstream evaluation task, and empirically demonstrate that when evaluated using temporally-filtered backtesting, current language models are increasingly able to identify precursor technologies needed to develop new target technologies, suggesting near-term applications in automated scientific discovery. More broadly, we anticipate that the SCIENTIFIC CONTRIBUTION GRAPH will support applications in technological roadmapping, impact assessment, novelty detection, and the study of scientific development. This work is released as open source.

Limitations

Cost vs Performance: The scientific contribution extraction system for knowledge graph construction described in this work has a cost/performance tradeoff that is visible at scale. While the current GPT-OSS-120B extraction pipeline obtains very strong performance, it is possible that higher performance could be obtained by using more expensive models, though this is limited by scaling. The current scale of the graph (230k source papers) represents approximately \$20,000 in compute costs, though these costs are likely to be mitigated as future open source models return increased performance with lower compute costs.

Open Access Articles: While the extraction system described in this work can be used on any scientific articles that an organization has access to, the official release includes only open access articles for licensing reasons. While this is not a significant limitation in the current release domain (natural language processing and artificial intelligence), as much of this domains literature is open access, many high-impact domains such as biology, materials science, and others, have a large proportion of closed-access literature that limit downstream applications including automated scientific discovery. While this limitation is mitigated by users bringing their own licensed articles, the move towards open-access publishing will help share publicly funded knowledge more freely, and enable further societal benefit by making it easier and more accessible to build further contributions upon those discoveries.

Acknowledgments

This research was developed with funding from the Defense Advanced Research Projects Agency’s (DARPA) SciFy program (Agreement No. HR00112520300) to PJ at the University of Arizona. The views expressed are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government. PJ has an outside interest in the Allen Institute for Artificial Intelligence. This interest has been disclosed to the University of Arizona and reviewed in accordance with its conflict of interest policies. We thank the members of the DARPA Scientific Feasibility (SciFy) program and the Asta group at Ai2 for thoughtful discussions.

References

- Waleed Ammar, Dirk Groeneveld, Chandra Bhagavatula, Iz Beltagy, Miles Crawford, Doug Downey, Jason Dunkelberger, Ahmed Elgohary, Sergey Feldman, Vu Ha, Rodney Kinney, Sebastian Kohlmeier, Kyle Lo, Tyler Murray, Hsu-Han Ooi, Matthew Peters, Joanna Power, Sam Skjonsberg, Lucy Lu Wang, and 4 others. 2018. [Construction of the literature graph in semantic scholar](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 3 (Industry Papers)*, pages 84–91, New Orleans - Louisiana. Association for Computational Linguistics.
- Jinheon Baek, Sujay Kumar Jauhar, Silviu Cucerzan, and Sung Ju Hwang. 2025. [ResearchAgent: Iterative research idea generation over scientific literature with large language models](#). In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 6709–6738, Albuquerque, New Mexico. Association for Computational Linguistics.
- Michael Balzer and Adhen Benlahlou. 2025. Mitigating consequences of prestige in citations of publications. *Scientometrics*, pages 1–28.
- Eugenio Cesario, Carmela Comito, and Ester Zumpano. 2024. A survey of the recent trends in deep learning for literature based discovery in the biomedical domain. *Neurocomputing*, 568:127079.
- Gamal Crichton, Simon Baker, Yufan Guo, and Anna Korhonen. 2020. Neural networks for open and closed literature-based discovery. *PloS one*, 15(5):e0232891.
- John Dagdelen, Alexander Dunn, Sanghoon Lee, Nicholas Walker, Andrew S Rosen, Gerbrand Ceder, Kristin A Persson, and Anubhav Jain. 2024. Structured information extraction from scientific text with large language models. *Nature communications*, 15(1):1418.
- Abhipsha Das, Nicholas Lourie, Siavash Golkar, and Mariel Pettee. 2025. [What’s in your field? mapping scientific research with knowledge graphs and large language models](#). *ArXiv*, abs/2503.09894.
- D. Dessí, Francesco Osborne, D. Recupero, D. Buscaldi, and E. Motta. 2022. [Scicero: A deep learning and nlp approach for generating scientific knowledge graphs in the computer science domain](#). *Knowl. Based Syst.*, 258:109945.
- Danilo Dessí, Francesco Osborne, Davide Buscaldi, Diego Reforgiato Recupero, and Enrico Motta. 2025. Cs-kg 2.0: A large-scale knowledge graph of computer science. *Scientific Data*, 12(1):964.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of](#)

- deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Jennifer D’Souza, Sören Auer, and Ted Pedersen. 2021. [SemEval-2021 task 11: NLPContributionGraph - structuring scholarly NLP contributions for a research knowledge graph](#). In *Proceedings of the 15th International Workshop on Semantic Evaluation (SemEval-2021)*, pages 364–376, Online. Association for Computational Linguistics.
- Joy He-Yueya, Anikait Singh, Ge Gao, Michael Y Li, Sherry Yang, Chelsea Finn, Emma Brunskill, and Noah D Goodman. 2026. Giants: Generative insight anticipation from scientific literature. *arXiv preprint arXiv:2604.09793*.
- Sarthak Jain, Madeleine van Zuylen, Hannaneh Hajishirzi, and Iz Beltagy. 2020. [SciREX: A challenge dataset for document-level information extraction](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7506–7516, Online. Association for Computational Linguistics.
- Peter Jansen, Samiah Hassan, and Ruoyao Wang. 2025a. [Matter-of-fact: A benchmark for verifying the feasibility of literature-supported claims in materials science](#). In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 4090–4102, Suzhou, China. Association for Computational Linguistics.
- Peter Jansen, Oyvind Taffjord, Marissa Radensky, Pao Siangliulue, Tom Hope, Bhavana Dalvi Mishra, Bodhisattwa Prasad Majumder, Daniel S Weld, and Peter Clark. 2025b. [CodeScientist: End-to-end semi-automated scientific discovery with code-based experimentation](#). In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 13370–13467, Vienna, Austria. Association for Computational Linguistics.
- Vincent Larivière and Yves Gingras. 2010. The impact factor’s matthew effect: A natural experiment in bibliometrics. *Journal of the American society for information science and technology*, 61(2):424–427.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. In *NeurIPS*.
- Long Li, Weiwen Xu, Jiayan Guo, Ruochen Zhao, Xingxuan Li, Yuqian Yuan, Boqiang Zhang, Yuming Jiang, Yifei Xin, Ronghao Dang, Yu Rong, Deli Zhao, Tian Feng, and Lidong Bing. 2025. [Chain of ideas: Revolutionizing research via novel idea development with LLM agents](#). In *Findings of the Association for Computational Linguistics: EMNLP 2025*, pages 8971–9004, Suzhou, China. Association for Computational Linguistics.
- Xiangci Li, Biswadip Mandal, and Jessica Ouyang. 2022. [CORWA: A citation-oriented related work annotation dataset](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5426–5440, Seattle, United States. Association for Computational Linguistics.
- Xiangci Li and Jessica Ouyang. 2024. [Related work and citation text generation: A survey](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 13846–13864, Miami, Florida, USA. Association for Computational Linguistics.
- Kyle Lo, Lucy Lu Wang, Mark Neumann, Rodney Kinney, and Daniel Weld. 2020. [S2ORC: The semantic scholar open research corpus](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4969–4983, Online. Association for Computational Linguistics.
- Chris Lu, Cong Lu, Robert Tjarko Lange, Jakob Foerster, Jeff Clune, and David Ha. 2024. [The ai scientist: Towards fully automated open-ended scientific discovery](#). *Preprint*, arXiv:2408.06292.
- Yi Luan, Luheng He, Mari Ostendorf, and Hannaneh Hajishirzi. 2018. [Multi-task identification of entities, relations, and coreference for scientific knowledge graph construction](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3219–3232, Brussels, Belgium. Association for Computational Linguistics.
- Fan Luo, Marco A. Valenzuela-Escárcega, Gus Hahn-Powell, and Mihai Surdeanu. 2018. [Scientific discovery as link prediction in influence and citation graphs](#). In *Proceedings of the Twelfth Workshop on Graph-Based Methods for Natural Language Processing (TextGraphs-12)*, pages 1–6, New Orleans, Louisiana, USA. Association for Computational Linguistics.
- Ian Magnusson and Scott Friedman. 2021. [Extracting fine-grained knowledge graphs of scientific claims: Dataset and transformer-based results](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 4651–4658, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Christopher D. Manning, Prabhakar Raghavan, and Hinrich Schütze. 2008. *Introduction to Information Retrieval*. Cambridge University Press.
- Ishani Mondal, Yufang Hou, and Charles Jochim. 2021. [End-to-end construction of NLP knowledge graph](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 1885–1895, Online. Association for Computational Linguistics.

- Shahzad Nazir, Muhammad Asif, Shahbaz Ahmad, Faisal Bukhari, M. Afzal, and Hanan Aljuaid. 2020. [Important citation identification by exploiting content and section-wise in-text citation count](#). *PLoS ONE*, 15.
- Wolfgang Otto, Matthäus Zloch, Lu Gan, Saurav Karmakar, and Stefan Dietze. 2023. [GSAP-NER: A novel task, corpus, and baseline for scholarly entity extraction focused on machine learning models and datasets](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 8166–8176, Singapore. Association for Computational Linguistics.
- Aniket Pramanick, Yufang Hou, Saif M. Mohammad, and Iryna Gurevych. 2025. [The nature of NLP: Analyzing contributions in NLP papers](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 25169–25191, Vienna, Austria. Association for Computational Linguistics.
- Yiyuan Pu, Daniel Beck, and Karin Verspoor. 2023. Graph embedding-based link prediction for literature-based discovery in alzheimer’s disease. *Journal of Biomedical Informatics*, 145:104464.
- Marissa Radensky, Simra Shahid, Raymond Fok, Pao Siangliulue, Tom Hope, and Daniel S Weld. 2024. Scideator: Human-llm scientific idea generation grounded in research-paper facet recombination. *arXiv preprint arXiv:2409.14634*.
- Mahsa Shamsabadi, Jennifer D’Souza, and Sören Auer. 2024. [Large language models for scientific information extraction: An empirical study for virology](#). In *Findings of the Association for Computational Linguistics: EACL 2024*, pages 374–392, St. Julian’s, Malta. Association for Computational Linguistics.
- Chenglei Si, Diyi Yang, and Tatsunori Hashimoto. 2025. [Can LLMs generate novel research ideas? a large-scale human study with 100+ NLP researchers](#). In *The Thirteenth International Conference on Learning Representations*.
- Ilya Sutskever, Oriol Vinyals, and Quoc V. Le. 2014. Sequence to sequence learning with neural networks. In *Advances in Neural Information Processing Systems*, volume 27.
- Don R. Swanson. 1986. [Fish oil, raynaud’s syndrome, and undiscovered public knowledge](#). *Perspectives in Biology and Medicine*, 30(1):7–18.
- Don R Swanson. 1988. Migraine and magnesium: eleven neglected connections. *Perspectives in biology and medicine*, 31(4):526–557.
- Misha Teplitskiy, Eamon Duede, Michael Menietti, and Karim R Lakhani. 2022. How status of research papers affects the way they are read and cited. *Research policy*, 51(4):104484.
- Marco Valenzuela, Vu A. Ha, and Oren Etzioni. 2015. [Identifying meaningful citations](#). In *AAAI Workshop: Scholarly Big Data*.
- Rosni Vasu, Chandrayee Basu, Bhavana Dalvi Mishra, Cristina Sarasua, Peter Clark, and Abraham Bernstein. 2025. [HypER: Literature-grounded hypothesis generation and distillation with provenance](#). In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 25424–25449, Suzhou, China. Association for Computational Linguistics.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in Neural Information Processing Systems*, volume 30.
- Yifan Wang, Yiping Song, Shuai Li, Chaoran Cheng, Wei Ju, Ming Zhang, and Sheng Wang. 2022. [Disencite: Graph-based disentangled representation learning for context-specific citation generation](#). In *AAAI Conference on Artificial Intelligence*.
- Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A. Smith, Daniel Khashabi, and Hannaneh Hajishirzi. 2023. [Self-instruct: Aligning language models with self-generated instructions](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 13484–13508, Toronto, Canada. Association for Computational Linguistics.
- Fang Zhang and Shengli Wu. 2021. [Measuring academic entities’ impact by content-based citation analysis in a heterogeneous academic network](#). *Scientometrics*, 126:7197 – 7222.

A Contribution Categories

The list of contribution categories used in the extraction is shown in Table 4.

B Impact Graphs

Example impact assessment graphs are shown for *Retrieval Augmented Generation (RAG)* in Figure 3, and *Self-Instruct Bootstrapping* in Figure 4.

Category	Description
problem_formulation	Reconceiving a task in a novel way, or identifying new angles or perspectives on long-standing problems. Can also be used to propose a new kind of task.
theoretical_insight	Proposing new theories, either from deriving theoretical results or directly from empirical or analysis results.
conceptual_framework	Developing high-level conceptual frameworks that help guide future research.
resource_benchmark	Creating a new benchmark that evaluates model performance on a task.
resource_dataset	Creating new datasets that are primarily generic resources, without the intention of being used as a benchmark (i.e., without training/evaluation sets).
tool_system_software	Software, tools, systems, code, or other artifacts whose primary purpose is to be used by other researchers.
empirical_evaluation	Presenting novel empirical results discovered through experimentation, such as by running a model on a benchmark.
analysis	Presenting novel analyses of data that yield new insights.
models_or_architectures	Proposing completely novel model designs, or modifications to existing models or architectures.
techniques_algorithms	Introducing new learning algorithms, optimization techniques, or other algorithmic contributions.
representational	Novel ways to represent or encode data.
research_methods_procedures	Establishing novel experimental protocols, methods, or procedures for conducting aspects of research.
metrics_instruments	Developing novel evaluation metrics or protocols for assessment.
position_statement	Articulating a clear position on a debated topic, supported by evidence or argumentation.
real_world_application	Demonstrations that a research idea works in a practical, real-world setting.
society_ethics_policy	Addressing ethical, societal, and/or policy-related issues.
other	Any other type of scientific contribution or claim not covered here.

Table 4: While scientific contribution extraction categories are unrestricted, the above categories of scientific contributions are provided in the extraction schema as examples to ground the fine-grained granularity of the contribution extraction step.

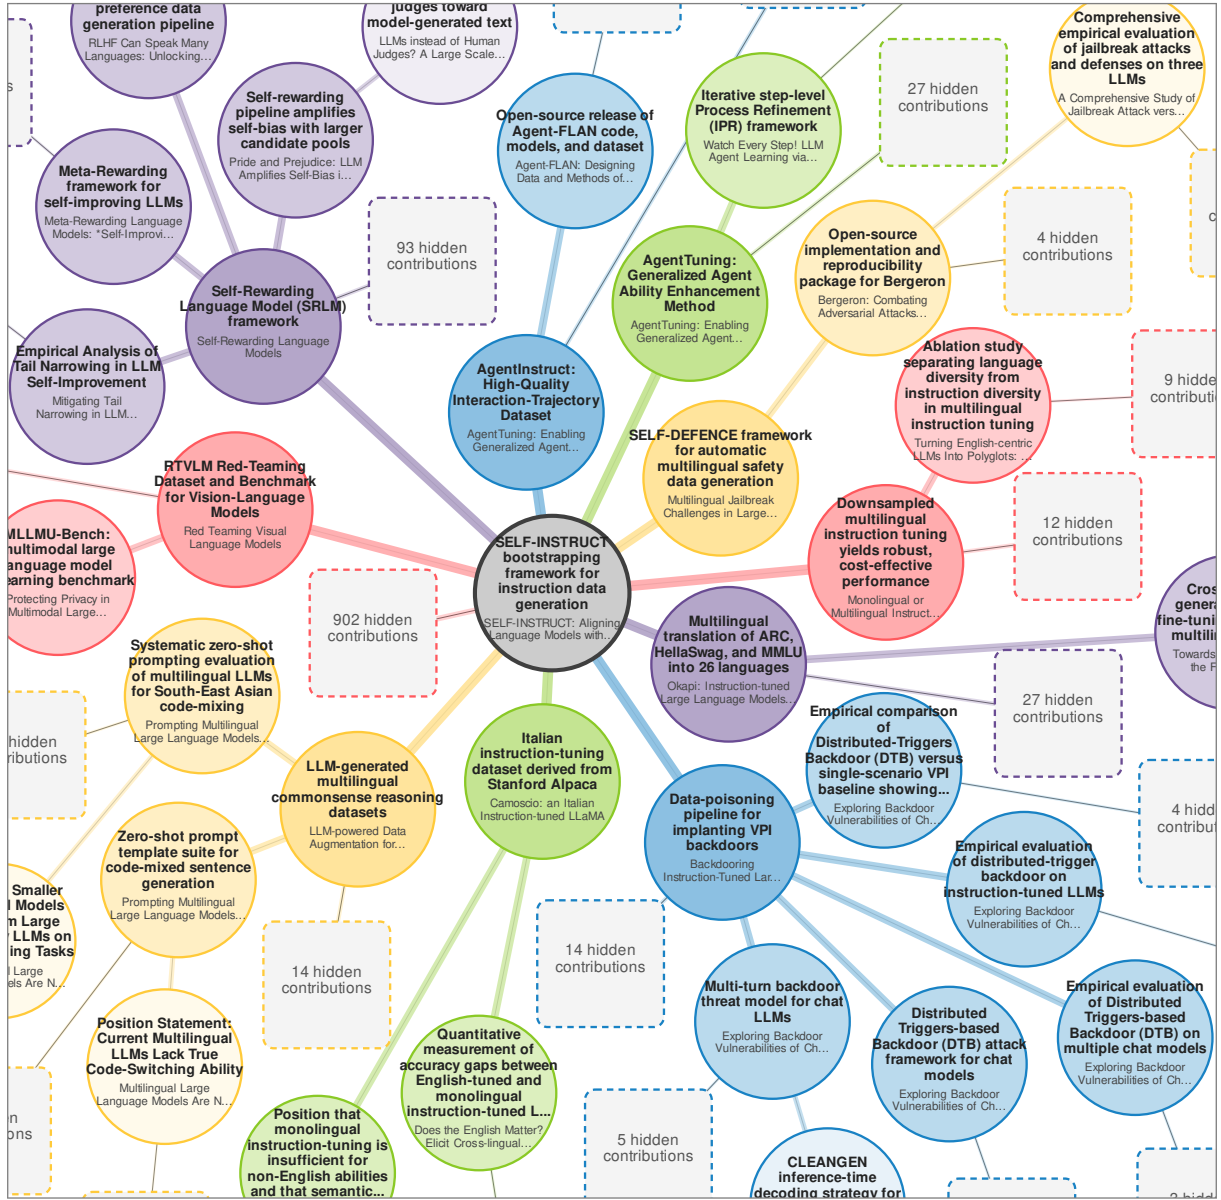


Figure 4: A simplified impact assessment for the “SELF-INSTRUCT bootstrapping framework for instruction data generation” contribution from (Wang et al., 2023). Here, nodes represent contributions, while edges represent precursor relations in the opposite direction – i.e. that the displayed technologies were built upon the root node. All content has been simplified for space: nodes show only contribution names and source paper titles, and not detailed contribution descriptions or metadata; edges do not show precursor descriptions or explanations, and cross-edges between nodes other than the root have been pruned to form a tree for visualization purposes. Similarly, only the highest linked contributions are shown, while total numbers of hidden contributions are shown in the square nodes.