

# Coherence Spring Reference Documentation

Gunnar Hillert, Ryan Lubke, Vaso Putica, Jonathan Knight

Version 5.0.0-SNAPSHOT

# Table of Contents


Legal . . . 1
1. Coherence Spring Documentation . . . 2
1.1. About the Documentation . . . 2
1.2. Getting Help . . . 2
1.3. What is new? . . . 3
1.4. First Steps . . . 3
2. Upgrading from Coherence Spring 4.x to 5.x . . . 4
2.1. Baseline changes . . . 4
2.2. Recommended migration sequence . . . 5
2.3. Update dependency management . . . 5
2.4. Review feature-specific changes . . . 6
2.4.1. Metrics . . . 6
2.4.2. Spring Session . . . 7
2.4.2.1. POF registrations . . . 9
2.4.2.2. Serialization compatibility and cut-over . . . 10
2.4.2.3. Hardened Coherence serialization . . . 10
2.4.3. Resilience4j . . . 11
2.4.4. Hibernate second-level cache . . . 11
2.5. Review application source and tests . . . 12
2.6. Validate the upgraded application . . . 13
3. Quickstart . . . 14
3.1. How to Run the Demo . . . 14
3.2. Interacting with the Cache . . . 15
3.3. Behind the Scenes . . . 18
4. Coherence Spring Core . . . 20
4.1. Getting Started . . . 20
4.2. Bootstrapping Coherence . . . 21
4.3. Using the Default Session . . . 21
4.4. Configure Multiple Sessions . . . 21
4.5. Session Configuration Bean Properties . . . 22
4.6. Dependency Injection . . . 22
4.6.1. Injecting NamedMap and NamedCache . . . 23
4.6.1.1. Type Conversion of NamedMap and NamedCache . . . 24
4.6.1.2. Specify the Map/Cache Name . . . 25
4.6.1.3. Specify the Owning Session Name . . . 25
4.6.2. Injecting AsyncNamedMap & AsyncNamedCache . . . 26
4.6.3. Injecting Views (CQC) . . . 27
4.6.3.1. Specify a View Filter . . . 27

4.6.3.2. Specify a View Transformer . . . 28
4.6.4. Injecting a Session . . . 29
4.6.4.1. Specify a Session Name . . . 29
4.6.5. Injecting NamedTopic . . . 30
4.6.5.1. Injecting NamedTopic . . . 30
4.6.5.2. Injecting a NamedTopic Publisher . . . 32
4.6.5.3. Injecting a NamedTopic Subscriber . . . 33
4.7. Injecting Spring Beans into Coherence-Managed Objects . . . 34
4.8. Events . . . 36
4.8.1. MapEvent Listeners . . . 37
4.8.1.1. MapEvent Observer Methods . . . 37
4.8.1.2. Receive Specific Event Types . . . 41
4.8.1.3. Filtering Events . . . 42
4.8.1.4. Transforming Events . . . 42
4.8.2. Coherence Event Interceptors . . . 44
4.8.2.1. Event Types . . . 44
4.8.2.2. Coherence Lifecycle Events . . . 45
4.8.2.3. Session Lifecycle Events . . . 46
4.8.2.4. ConfigurableCacheFactory Lifecycle Events . . . 47
4.8.2.5. Cache Lifecycle Events . . . 49
4.8.2.6. Entry Events . . . 50
4.8.2.7. EntryProcessor Events . . . 52
4.8.2.8. Partition Level Transaction Events . . . 54
4.8.2.9. Partition Transfer Events . . . 55
4.8.2.10. Unsolicited Commit Events . . . 57
4.9. Filter Binding Annotations . . . 58
4.9.1. Create the filter binding annotation . . . 58
4.9.2. Create the `FilterFactory` . . . 59
4.9.3. Annotate the Injection Point . . . 60
4.10. Extractor Binding Annotations . . . 61
4.10.1. Create the extractor binding annotation . . . 61
4.10.2. Create the `ExtractorFactory` . . . 62
4.10.3. Annotate the Injection Point . . . 62
4.11. Messaging with Coherence Topics . . . 63
4.11.1. Define Publishers - @CoherencePublisher . . . 63
4.11.2. Reactive and Non-Blocking Method Definitions . . . 64
4.11.2.1. Mono Value and Return Type . . . 64
4.11.2.2. Reactor Flux Value and Return Type . . . 64
4.11.2.3. Future Return Type . . . 64
4.11.3. Define Subscribers - @CoherenceTopicListener . . . 65
4.11.4. Method Parameter Bindings . . . 65

4.11.5. Committing Messages . . . 66
4.11.5.1. Default Commit Behaviour . . . 66
4.11.5.2. Setting Commit Strategy . . . 66
4.11.5.3. Forwarding Messages with @SendTo . . . 67
4.12. Cache Store . . . 68
4.12.1. JPA Repository CacheStore Demo . . . 69
4.12.1.1. Data Model . . . 69
4.12.1.2. Writing a JPA Repository CacheStore . . . 70
4.12.1.3. Embedded Coherence . . . 71
4.12.1.4. Running the Embedded Sample . . . 73
4.12.1.5. Using Coherence*Extend . . . 75
4.12.1.6. Inspecting the Database . . . 76
5. Coherence Spring Cache . . . 77
5.1. Introduction . . . 77
5.2. Configuring Coherence Cache for Spring . . . 77
5.3. Coherence Caches and Locking . . . 80
6. Coherence Spring Session . . . 81
6.1. Getting Started . . . 81
6.2. POF Serialization . . . 82
6.2.1. Supported types and operations . . . 83
6.2.2. Application POF configuration . . . 84
6.2.3. Hardened serialization and execution . . . 87
6.3. Spring Session Samples . . . 87
6.3.1. Spring Session with Spring Boot . . . 88
6.3.1.1. Start Spring Session with Embedded Coherence Instances . . . 88
6.3.1.2. Spring Session with Remote Coherence Instances . . . 89
6.3.1.3. Accessing the REST Endpoints . . . 89
6.3.1.4. Spring Session Actuator . . . 90
6.3.1.5. Generate Docker Image . . . 90
6.3.2. Spring Session with plain Spring Framework . . . 90
6.4. Session Expiration Strategies . . . 94
6.4.1. Setting the Expiration Time for Each Put Operation . . . 94
6.4.2. Configuring the Expiration Time in `coherence-cache-config.xml` . . . 94
6.5. Using HttpSessionListener . . . 95
7. Coherence Spring Data . . . 96
7.1. Introduction . . . 96
7.2. Features . . . 96
7.3. Getting Started . . . 96
7.4. Defining Repositories . . . 96
7.4.1. Identifying the Coherence NamedMap . . . 98
7.5. Mapping Entities . . . 98

7.6. Using the Repository . . . 98
7.6.1. Finder Queries . . . 99
7.7. Projections . . . 100
7.7.1. Interface-based Projections . . . 100
7.7.2. Closed Projections . . . 101
7.7.3. Open Projections . . . 101
7.7.4. Nullable Wrappers . . . 103
7.7.5. Class-based Projections (DTOs) . . . 103
7.7.6. Dynamic Projections . . . 104
8. Coherence Spring Boot . . . 105
8.1. Getting Started . . . 105
8.2. Auto-configuration . . . 105
8.2.1. Testing without starting Coherence . . . 106
8.3. Configuration Properties . . . 109
8.4. Coherence Cluster Setup . . . 111
8.4.1. Co-located Coherence Clusters . . . 111
8.4.2. Access Coherence Clusters as a Client . . . 112
8.4.2.1. gRPC . . . 113
8.4.2.2. Coherence*Extend . . . 114
8.5. Support of the Spring Boot ConfigData API . . . 115
8.6. Caching with Spring Boot . . . 116
8.6.1. Configure Circuit Breakers with Resilience4j . . . 116
8.6.1.1. Running the Example . . . 117
8.6.1.2. Monitoring the Circuit Breaker . . . 120
8.6.1.3. Add Resilience4j Dependencies . . . 121
8.6.1.4. Resilience4j Annotations . . . 121
8.7. Configure Hibernate Second-Level Caching . . . 122
8.7.1. Hibernate Second Level Cache Example . . . 123
8.7.1.1. Run the Hibernate Application . . . 123
8.8. Spring Session Support . . . 125
8.9. Coherence Messaging Support . . . 127
8.10. Coherence Metrics . . . 127
8.10.1. Use Spring Boot Actuator . . . 127
8.10.2. Use Boot metrics without Actuator . . . 128
8.10.3. Supply an application-owned registry . . . 129
8.11. Spring Data Support . . . 130
9. Coherence Spring Cloud Config . . . 132
9.1. Overview . . . 132
9.2. Demo . . . 132
9.2.1. Configure the Demo Application . . . 133
9.2.2. Run the Demo Application . . . 135

9.3. Use Spring Cloud Config Server to Configure Coherence . . . . . 135
10. Appendices . . . . . 137
Appendix A: Coherence Spring Example Applications . . . . . 137

# Legal

Oracle licenses the Oracle Coherence Spring project under the The Universal Permissive License (UPL), Version 1.0.

**The Universal Permissive License (UPL), Version 1.0**

Subject to the condition set forth below, permission is hereby granted to any person obtaining a copy of this software, associated documentation and/or data (collectively the "Software"), free of charge and under any and all copyright rights in the Software, and any and all patent rights owned or freely licensable by each licensor hereunder covering either (i) the unmodified Software as contributed to or provided by such licensor, or (ii) the Larger Works (as defined below), to deal in both

(a) the Software, and (b) any piece of software and/or hardware listed in the lrgrwrks.txt file if one is included with the Software (each a "Larger Work" to which the Software is contributed by such licensors),

without restriction, including without limitation the rights to copy, create derivative works of, display, perform, and distribute the Software and make, use, sell, offer for sale, import, export, have made, and have sold the Software and the Larger Work(s), and to sublicense the foregoing rights on either these or other terms.

This license is subject to the following condition: The above copyright notice and either this complete permission notice or at a minimum a reference to the UPL must be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

# Chapter 1. Coherence Spring Documentation

Welcome to the reference documentation of Coherence Spring, a collection of libraries that will help you to integrate Oracle Coherence with the wider Spring ecosystem.

Oracle Coherence is a scalable, fault-tolerant, cloud-ready, distributed platform for building grid-based applications and reliably storing data. The product is used at scale, for both compute and raw storage, in a vast array of industries such as critical financial trading systems, high performance telecommunication products and e-commerce applications.

Coherence Spring features dedicated support to bootstrap Oracle Coherence and to inject Coherence resources into Spring beans as well as to inject Spring beans into Coherence resources. Spring's dependency injection (DI) support simplifies application code as Oracle Coherence *maps*, *caches* and *topics* are just injected instead of being obtained explicitly via Coherence APIs. Furthermore, using annotated *event listener* methods simplifies building reactive code that responds to Coherence cache events.

Before diving into the technical aspects of the reference documentation let's provide a brief overview of the Coherence Spring reference documentation, where to start, how to obtain further helper and more.

## 1.1. About the Documentation

The Coherence Spring reference guide is available as:

- Multi-page HTML
- Single page HTML
- PDF

## 1.2. Getting Help

If you run into issues with Spring Coherence, we are here to help.

- *Try the Quickstart.* The Quickstart will give you an overview of Coherence Spring's capabilities and provides a sample application to get you started.
- *Learn the Coherence basics.* Please have at least some basic understanding of Oracle Coherence since all Spring Coherence modules depend on it. Check out the Coherence CE web-site for general Coherence targeted reference documentation.
- *Learn the Spring basics.* The reference guide assumes that you have a basic understanding of Spring Framework and Spring Boot. Coherence Spring utilizes several other Spring projects. Check the spring.io web-site for general reference documentation. If you are starting out with Spring, try one of the guides or generate a starter project using start.spring.io/.
- *Ask a question.* Chat with us directly on Slack. We also monitor stackoverflow.com for questions tagged with oracle-coherence.
- *Contribute.* Report bugs with Spring Coherence via GitHub Issues. Both, Coherence CE and

Coherence Spring are Open Source Software (OSS) under the liberal Universal Permissive License (UPL). Contributing back is a great way to attain a deeper understanding of our projects.



All of *Coherence Spring* is open source, including the documentation. If you find problems with the docs or if you want to improve them, please get involved.

## 1.3. What is new?

In order to see what changes were made from earlier versions of Coherence Spring, see the Change History as well as the GitHub Releases page.

## 1.4. First Steps

If you are getting started with Coherence Spring, start with the Quickstart. It is a great way to see a working solution quickly. Particularly if you are relatively new to Spring, continue with the Coherence Spring Boot chapter next.



Another great example application is the Spring Boot implementation of the To-do List application.

The reference documentation makes a distinction between Spring Framework and Spring Boot. At its very core, Spring Framework provides Dependency Injection (DI) or Inversion Of Control (IOC) to Java applications. Furthermore, Spring Framework gives developers comprehensive infrastructure support for developing Java applications.

Spring Boot on the other hand, is an opinionated extension to the Spring Framework by:

- Eliminating boilerplate configurations
- Providing Auto-Configuration for other Spring modules and third-party integrations
- Metrics + health checks

The vast majority of new Spring projects will utilize Spring Boot. Nonetheless, please also study the Spring Framework targeted chapters as Spring Frameworks is the foundation for everything related to Spring Boot.

# Chapter 2. Upgrading from Coherence Spring 4.x to 5.x

Coherence Spring 5.x moves the project to Spring Framework 7 and Spring Boot 4. It is a major-version upgrade because the surrounding Spring, Jakarta EE, persistence, JSON, security, and test ecosystems also move to new major versions. The Coherence Spring artifact names and configuration-property prefixes remain unchanged, but applications may need dependency and source changes according to the features they use.

This guide covers Coherence Spring-specific work. Also review the Spring Boot 4 migration guide and Spring Framework 7 release notes for the complete upstream changes.

## 2.1. Baseline changes

| Component | Coherence Spring 4.x | Coherence Spring 5.x |
|---|---|---|
| Java | 17 or 21 | 17 or 21 |
| Coherence Spring | 4.x | 5.0.0-SNAPSHOT |
| Spring Framework | 6.x | 7.0.9 |
| Spring Boot | 3.x | 4.0.8 |
| Spring Cloud | 2025.0.x | 2025.1.3 |
| Spring Data BOM | 2025.0.x | 2025.1.7 |
| Spring Session | 3.x | 4.0.5 |
| Spring Security | 6.x | 7.0.7 |
| Jakarta EE | 10 | 11.0.0 |
| Hibernate ORM (explicit project selection) | 6.6.x | 7.4.5.Final |
| Coherence Hibernate | 3.x | 4.1.0 |
| Resilience4j | 2.3.x | 2.4.0 |
| JUnit | 5.x | 6.0.3 |
| Coherence CE | 25.03 | 26.04 |
| Commercial Coherence | Unverified | Unverified |

The Java baseline does not change: Coherence Spring tests and supports Java 17 and Java 21. Coherence Spring 5.x continues to use the `jakarta.*` namespace, but its Jakarta EE baseline advances from 10 to 11. Applications using Servlet, Persistence, Validation, or other Jakarta APIs must use EE 11-compatible providers.

The Hibernate row is the project's explicit selection, not Spring Boot's managed default. See Hibernate version selection for the combinations used by the tests and samples. Commercial Coherence compatibility has not been established for either line. Coherence 15.1.1.0.0's move to

Jakarta EE 9.1 does not by itself qualify a Spring 6 or Spring 7 application; see the repository README's compatibility note.



Upgrade a Spring Boot application to the latest 3.5.x maintenance release and remove use of APIs deprecated in Boot 3 before moving to Boot 4, as recommended by the Spring Boot migration guide.

## 2.2. Recommended migration sequence

1. On Coherence Spring 4.x, first move to its current Spring Boot 3.5 and Spring Framework 6.2 baseline and resolve all deprecation warnings that affect application code.
2. Update the Spring Boot parent or BOM, Coherence Spring artifacts, and the explicitly declared Coherence CE dependency together. Do not mix Coherence Spring 4.x and 5.x modules in one application.
3. Replace feature-specific integrations: Boot metrics and session modules, the Resilience4j Boot adapter, and the Coherence Hibernate adapter where applicable.
4. Compile application and test source, then address the package and SPI changes listed below.
5. Start the packaged application and exercise each enabled integration on the supported Java versions. Compilation alone does not prove that Boot 4 optional auto-configuration is active.

## 2.3. Update dependency management

Use one source of Spring dependency management. Spring Boot applications should normally use the Boot 4 parent or BOM and should not independently override the versions of Spring Framework, Spring Data, Spring Session, or Spring Security.

*Spring Boot parent and Coherence Spring dependencies*

```
<parent>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-parent</artifactId>
    <version>4.0.8</version>
</parent>

<dependencies>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-boot-starter</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence</artifactId>
        <version>26.04</version>
    </dependency>
</dependencies>
```

Plain Spring Framework applications should align Spring dependencies with its BOM and update the Coherence Spring module version without adding the Boot starter.

*Plain Spring Framework dependency management*

```
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>org.springframework</groupId>
            <artifactId>spring-framework-bom</artifactId>
            <version>7.0.9</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>

<dependencies>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-core</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence</artifactId>
        <version>26.04</version>
    </dependency>
</dependencies>
```

Review exclusions and direct dependencies that compensated for Boot 3's larger modules. Boot 4 uses smaller, feature-specific modules. Prefer Boot starters rather than depending directly on Boot's auto-configuration modules. In particular, direct Boot integrations may now require `spring-boot-cache`, `spring-boot-session`, `spring-boot-web-server`, or `spring-boot-micrometer-metrics` instead of relying on a larger Boot 3 module to provide their classes transitively. The general `coherence-spring-boot-starter` makes `coherence-spring-session` and `spring-boot-session` optional. Applications opt into Boot Session integration with the dedicated `coherence-spring-session-boot-starter` or the manual composition described in Spring Session. Metrics remain an application-level choice.

# 2.4. Review feature-specific changes

## 2.4.1. Metrics

Boot 4 moved registry auto-configuration out of `spring-boot-actuator-autoconfigure` and into `spring-boot-micrometer-metrics`. Under Coherence Spring 4.x, adding `coherence-micrometer` could be sufficient to activate a Boot-created registry. Under 5.x, the Coherence starter and `coherence-micrometer` still allow the application to start, but no registry is created automatically and Coherence metrics are not bound.

Choose one of the following:

- Add `spring-boot-starter-actuator` if the application uses Actuator.
- Add `spring-boot-starter-micrometer-metrics` for Boot-managed metrics without Actuator.
- Supply an application-owned `MeterRegistry` bean.

See Coherence Metrics for complete Maven and Gradle examples and meter-filter behavior.

### 2.4.2. Spring Session

Boot 4 moved session auto-configuration into `spring-boot-session`. Coherence Spring 5.x makes that module and `coherence-spring-session` optional dependencies of the general `coherence-spring-boot-starter`. Applications using only the general starter no longer receive Spring Session through it. The standalone session library remains independent of Spring Boot.

Replace the previous two-artifact Boot session recipe:

```
<dependency>
    <groupId>com.oracle.coherence.spring</groupId>
    <artifactId>coherence-spring-boot-starter</artifactId>
    <version>${previous-coherence-spring.version}</version>
</dependency>
<dependency>
    <groupId>com.oracle.coherence.spring</groupId>
    <artifactId>coherence-spring-session</artifactId>
    <version>${previous-coherence-spring.version}</version>
</dependency>
```

with the dedicated starter. Retain an explicit Coherence runtime and the application's servlet web dependencies; the following assumes the Boot parent or BOM manages Boot versions:

*Example 1. Boot servlet session dependencies for 5.x*

*Maven*

```
<dependencies>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-session-boot-starter</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence</artifactId>
        <version>26.04</version>
    </dependency>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-webmvc</artifactId>
```

```
    </dependency>
</dependencies>
```

*Gradle*

```
dependencies {
    implementation("com.oracle.coherence.spring:coherence-spring-session-boot-
starter:5.0.0-SNAPSHOT")
    implementation("com.oracle.coherence.ce:coherence:26.04")
    implementation("org.springframework.boot:spring-boot-starter-webmvc")
}
```

The supported manual alternative is to declare all three integration artifacts instead of the new starter, alongside the same Coherence and servlet prerequisites:

*Example 2. Manual Boot session integration*

*Maven*

```
<dependency>
    <groupId>com.oracle.coherence.spring</groupId>
    <artifactId>coherence-spring-boot-starter</artifactId>
    <version>5.0.0-SNAPSHOT</version>
</dependency>
<dependency>
    <groupId>com.oracle.coherence.spring</groupId>
    <artifactId>coherence-spring-session</artifactId>
    <version>5.0.0-SNAPSHOT</version>
</dependency>
<dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-session</artifactId>
</dependency>
```

*Gradle*

```
dependencies {
    implementation("com.oracle.coherence.spring:coherence-spring-boot-
starter:5.0.0-SNAPSHOT")
    implementation("com.oracle.coherence.spring:coherence-spring-session:5.0.0-
SNAPSHOT")
    implementation("org.springframework.boot:spring-boot-session")
}
```

The old general-starter plus session-library combination alone no longer guarantees Boot HTTP-session activation. It can start successfully without a Coherence session repository or HTTP filter. Setting `coherence.spring.session.enabled=true` does not supply missing dependencies. After

migration, verify the actual `CoherenceIndexedSessionRepository` and `springSessionRepositoryFilter`, and exercise successive HTTP requests using the same cookie with state stored in Coherence. Successful startup alone is insufficient.

Automatic integration supports servlet web applications, including Boot WARs; it does not provide reactive WebSession support or enable HTTP sessions in a non-web application. Standalone Spring applications and storage nodes can keep the session library without adding the new starter. See Spring Boot Session Support and standalone configuration and storage dependencies.

Coherence session timeouts use Boot's `SessionTimeout` provider, available since Boot 4.0.1. For embedded servlet applications, `spring.session.timeout` takes precedence over `server.servlet.session.timeout`. For WAR deployments in an external servlet container, set `spring.session.timeout`; the server property is not a fallback. If no session timeout is configured for a WAR deployment, the repository retains its default of 30 minutes. A `ServerProperties` bean is not required for WAR session auto-configuration.

The existing back-off controls remain valid:

- Set `coherence.spring.session.enabled=false` to disable Coherence Spring Session auto-configuration.
- Define `spring.session.store-type` to opt out of Coherence's auto-configuration. Any value, including `none` or an empty value, disables it; this does not install or configure another store.
- Supply an application-owned `SessionRepository`. Coherence backs off; the application owns the repository and HTTP-session enabling. A bare repository bean does not create the HTTP filter. For a supplied repository, configure that explicitly, for example with `@EnableSpringHttpSession`.

If the application excludes starter dependencies or assembles Boot modules directly, verify that all three integration artifacts and their required servlet/Session classes are present at runtime.

#### 2.4.2.1. POF registrations

Existing applications using POF for sessions must extend their application-owned POF configuration for the operations and authentication payloads they use:

- Register `com.oracle.coherence.spring.session.SessionResetEntryProcessor` when calling `CoherenceIndexedSessionRepository.resetMaxInactiveIntervalForActiveSessions()`. The method sends this processor to reset active sessions' inactivity intervals and cache expiry, independently of `use-entry-processor` / `useEntryProcessor`. Setting that option to `false` changes ordinary session updates; it does not avoid this registration.
- Register `org.springframework.security.core.authority.FactorGrantedAuthority` with `com.oracle.coherence.spring.session.serialization.pof.FactorGrantedAuthorityPofSerializer` when authentication graphs contain Spring Security 7 factor authorities. Without this mapping, saving or transporting such a graph with POF fails; this can affect login and subsequent session access. The serializer preserves both the authority and its issuance time.

See POF Serialization for the complete configuration and operation table. The example IDs `4001` (reset processor) and `3003` (factor authority) are illustrative, not reserved. Select unused IDs and preserve all existing type-ID mappings while stored or persisted data depends on them. Deploy

compatible mappings, registered classes and serializer implementations to every application client and Coherence server that serializes, deserializes or executes the affected objects. POF registration does not deploy those classes to remote endpoints. Applications using Java serialization do not need these POF registrations, but receiving endpoints still need compatible classes for their session graphs and repository operations.

#### 2.4.2.2. Serialization compatibility and cut-over

Mixed Coherence Spring 4.x/5.x access to a session cache has not been qualified. Compatibility depends on the serializer, the actual session attribute and authentication graph, and the classes and registrations available at each endpoint. One concrete incompatibility is a 5.x authentication graph containing `FactorGrantedAuthority`: a stock 4.x application using Spring Security 6 lacks that class and, for POF, its mapping and serializer. It cannot read that graph.

The 5.x `AuthenticationPofSerializer`, specific to `UsernamePasswordAuthenticationToken`, has regression coverage for reading the legacy POF token format with uniform `SimpleGrantedAuthority` values and no authentication-state field. Such legacy data retains its historical authenticated state because the old format did not record that state. This demonstrates new-reader support for that legacy format; it does not establish old-reader compatibility with new data, compatibility for arbitrary session graphs, or a safe mixed-version rolling upgrade or rollback.

Before reusing an existing session cache, validate the application's actual stored graphs, serializers and endpoint registrations, and coordinate a cut-over that stops 4.x access before 5.x writes sessions. If compatibility cannot be established, use an isolated session cache for 5.x (for example, set `coherence.spring.session.map-name` in Boot or the `cache` attribute of `@EnableCoherenceHttpSession` to a different name) and require users to authenticate again. Ensure requests and session cookies are routed to the intended deployment. Do not assume automatic data conversion or safe rollback after 5.x has written sessions. Plan and validate rollback separately, including what happens to those sessions.

#### 2.4.2.3. Hardened Coherence serialization

The project's default Coherence dependency remains 26.04; the hardened-serialization evidence described here concerns Coherence 26.10 snapshots. On versions enforcing that policy, the Session JAR's permissions do not cover arbitrary application-selected session attributes, principals or authentication details. Supply exact application-owned `META-INF/coherence/security-config.xml` metadata for the required classes on the relevant receiving endpoints. POF registrations and security permissions serve separate purposes; hardened POF deployments require both.

Follow Hardened serialization and execution for the supported library graph and policy limits. The Spring Session samples provide separate app and server policies in the `spring-session-demo-app` and `spring-session-demo-server` modules at `src/main/resources/META-INF/coherence/security-config.xml`. Each permits the chosen `org.springframework.security.core.userdetails.User`, its `User$AuthorityComparator` (needed for Java serialization), and `org.springframework.security.web.authentication.WebAuthenticationDetails`. These are examples for that concrete graph; applications must review their own graph and supply any additional POF serializers and registrations it requires.

### 2.4.3. Resilience4j

Replace the Boot 3 integration with its Boot 4 counterpart:

```
<dependency>
    <groupId>io.github.resilience4j</groupId>
    <artifactId>resilience4j-spring-boot4</artifactId>
    <version>2.4.0</version>
</dependency>
```

Retaining `resilience4j-spring-boot3` can leave health integration inactive because it references Boot 3 health APIs.

### 2.4.4. Hibernate second-level cache

Applications using Coherence as Hibernate's second-level cache must move to the Hibernate 7 adapter. Coherence Hibernate 4.1.0 is the required provider baseline. Its Hibernate 7 adapter supports Hibernate ORM 7.4.x and packages the processor and payload security declarations needed by hardened Coherence 26.10. Earlier provider versions are outside this project's current qualification scope. Declare both the adapter and a compatible ORM version; the adapter's Hibernate dependency is `provided` and does not select the application's ORM version:

```
<dependency>
    <groupId>com.oracle.coherence.hibernate</groupId>
    <artifactId>coherence-hibernate-cache-7</artifactId>
    <version>4.1.0</version>
</dependency>
<dependency>
    <groupId>org.hibernate.orm</groupId>
    <artifactId>hibernate-core</artifactId>
    <version>7.4.5.Final</version>
</dependency>
```

Update the region factory class:

```
spring:
  jpa:
    properties:
      hibernate.cache.region.factory_class:
        com.oracle.coherence.hibernate.cache.v7.CoherenceRegionFactory
```

The Spring Boot 4.0.8 BOM manages `hibernate-core` at `7.2.24.Final`. This project combines that managed default with explicit Hibernate ORM 7.4.5.Final declarations as follows:

| Usage | Hibernate ORM | Scope |
|---|---|---|
| Boot starter tests | 7.4.5.Final | Test dependency only; the general starter does not bring Hibernate into applications. |
| `hibernate-cache-demo` | 7.4.5.Final | Explicit runtime selection with `coherence-hibernate-cache-7` 4.1.0. |
| `coherence-spring-demo-core` and `coherence-spring-demo-classic` | 7.4.5.Final | Provided API dependency in core; explicit runtime dependency in the classic sample. These do not use the Hibernate cache adapter. |
| `coherence-spring-demo-boot`, CacheStore, circuit-breaker and Cloud Config samples | 7.2.24.Final | Boot-managed runtime selection, including `coherence-spring-demo-boot`; these do not use the Hibernate cache adapter. |

The project's `hibernate.version` property supplies explicit dependency declarations; it does not override the Hibernate version inside an imported Boot BOM. Boot's managed 7.2 line is outside the Coherence Hibernate 4.1.0 adapter's supported 7.4 line. Applications enabling that adapter must select a compatible ORM version explicitly.

The Hibernate cache sample's packaged integration test requires cross-member entity, query and timestamp cache hits with zero SQL on measured reads. Qualify the selected provider and runtime on Java 17 and Java 21; results for earlier provider artifacts do not qualify 4.1.0. These checks do not establish READ_WRITE concurrency or stale-cache correctness.

Applications using Hibernate-specific query hints or APIs must also follow the Hibernate 7 migration guidance. For example, replace the old `org.hibernate.annotations.QueryHints.CACHEABLE` constant with `org.hibernate.jpa.HibernateHints.HINT_CACHEABLE`.

## 2.5. Review application source and tests

Most Coherence Spring application code does not need source changes. Check the following when the corresponding technology is used directly:

- **Jackson 3:** Boot 4's preferred JSON library uses `tools.jackson.*` coordinates and packages. Update imports such as `com.fasterxml.jackson.databind.ObjectMapper` to `tools.jackson.databind.ObjectMapper` when using Boot's managed mapper. Jackson annotations remain in `com.fasterxml.jackson.annotation`.
- **Spring Security 7:** use the lambda security DSL and `PathPatternRequestMatcher` where code previously used removed chained DSL methods or `AntPathRequestMatcher`.
- **Spring MVC parameter names:** compile with `-parameters` or give controller parameters explicit names. This is required when request binding or expressions such as `#id` depend on Java parameter names.
- **Spring Data extensions:** code extending Spring Data internals may need `org.springframework.data.core.TypeInformation` and the `ValueExpressionDelegate`-based repository-factory SPI. Ordinary Coherence repositories are adapted by 5.x.
- **Boot test modules:** Boot 4 modularized its test support. MVC tests may need `spring-boot-`

`starter-webmvc-test`, and `@AutoConfigureMockMvc` is in `org.springframework.boot.webmvc.test.autoconfigure`.

- **Boot extension APIs:** custom Boot integrations may need `BootstrapRegistry` and `ConfigurableBootstrapContext` from `org.springframework.boot.bootstrap`, and must update imports for feature-specific auto-configuration packages.
- **JUnit:** the 5.x project baseline uses JUnit 6. Review custom extensions and test-engine dependencies even when ordinary Jupiter tests continue to compile unchanged.

Coherence Spring 5.x does not intentionally rename its `coherence.` or `coherence.spring.` configuration properties. Cache names, session properties, repository enablement, ConfigData locations, and resource-injection annotations retain their 4.x semantics unless an underlying Spring or Coherence feature imposes a change.

## 2.6. Validate the upgraded application

Perform the migration on one supported JDK at a time and then verify both Java 17 and Java 21 if the application supports both. At minimum:

1. Generate and compare the resolved runtime dependency tree before and after the upgrade.
2. Start the application with Boot's condition report enabled and confirm that the expected Coherence, cache, data, session, and metrics auto-configurations match.
3. Exercise real cache access and any Coherence client or cluster topology used in production.
4. Verify session creation, timeout, and back-off behavior when Spring Session is used.
5. Verify meter registration and Actuator endpoints when metrics are used.
6. Exercise HTTP parameter binding, Spring Security login/logout flows, serialization, persistence, and Hibernate second-level caching when those features are present.
7. Run the complete application test and packaging lifecycle on every supported Java version.

Do not treat a successful compilation alone as migration acceptance. Boot's modular classpath and several relocated APIs can allow startup while silently leaving an optional integration inactive.

# Chapter 3. Quickstart

In this getting started chapter we will look a demo to illustrate basic usage of Oracle Coherence when using it with Spring. This demo provides an example of using Coherence Spring's Cache Abstraction.

The demo application is basically a super-simple event manager. We can create `Events` and assign `People` to them using an exposed REST API. The data is saved in an embedded HSQL database. The caching is implemented at the service layer.

When an `Event` is created, it is not only persisted to the database but also *put* to the Coherence Cache. Therefore, whenever an `Event` is retrieved, it will be returned from the Coherence Cache. You can also delete `Events`, in which case the `Event` will be *evicted* from the cache. You can perform the same CRUD operations for people as well.

## 3.1. How to Run the Demo

In order to get started, please checkout the code from the coherence-community/coherence-spring[Coherence Spring Repository] GitHub repository.

*Clone GitHub Repository*

```
$ git clone https://github.com/coherence-community/coherence-spring.git
$ cd coherence-spring
$ git switch main
```

You now have checked out all the code for Coherence Spring. The relevant demo code for this Quickstart demo is under `samples/coherence-spring-demo/`.

There you will find 3 Maven sub-modules:

- coherence-spring-demo-classic
- coherence-spring-demo-boot
- coherence-spring-demo-core

The first two Maven modules are essentially variations of the same app. The third module contains shared code.

| | |
|---|---|
| **coherence-spring-demo-classic** | Provides a demo using **Spring Framework** without Spring Boot |
| **coherence-spring-demo-boot** | Provides a demo using **Spring Boot** |
| **coherence-spring-demo-core** | Contains common code shared between the two apps |

In this chapter we will focus on the **Spring Boot** version. Since we checked out the project, let's build it using Maven:

*Build the project*

```
 $ ./mvnw clean package -pl samples/coherence-spring-demo/coherence-spring-demo-boot
-am
```

The `-am` option also builds required modules, including `coherence-spring-demo-core`.

Now we are ready to run the application:

*Run the Spring Boot application*

```
 $ java -jar samples/coherence-spring-demo/coherence-spring-demo-
boot/target/coherence-spring-demo-boot-5.0.0-SNAPSHOT.jar
```

## 3.2. Interacting with the Cache

Once the application is started, the embedded database is empty. Let's create an event with 2 people added to them using curl:

*Create the first event*

```
 curl --request POST 'http://localhost:8080/api/events?title=First%20Event&date=2020-
11-30'
```

This call will create and persist an `Event` to the database. However, there is more going on. The created `Event` is also added to the Coherence Cache. The magic is happening in the Service layer, specifically in `DefaultEventService#createAndStoreEvent()`, which is annotated with `@CachePut(cacheNames="events", key="#result.id")`.

The `cacheNames` attribute of the `@CachePut` annotation indicates the name of the underlying cache to use. As caches are basically just a Map, we also need a key. In this case we use the expression `#result.id` to retrieve the primary key of the `Event` as it was persisted. Thus, the saved `Event` is added to the cache named `events` and ultimately also returned and printed to the console:

*Return result of the created event*

```
{
  "id" : 1,
  "title" : "First Event",
  "date" : "2020-11-30T00:00:00.000+00:00"
}
```

We see that an Event with the id `1` was successfully created. Let's verify that the *cache put* worked by inspecting the cache using the open-source tool VisualVM.

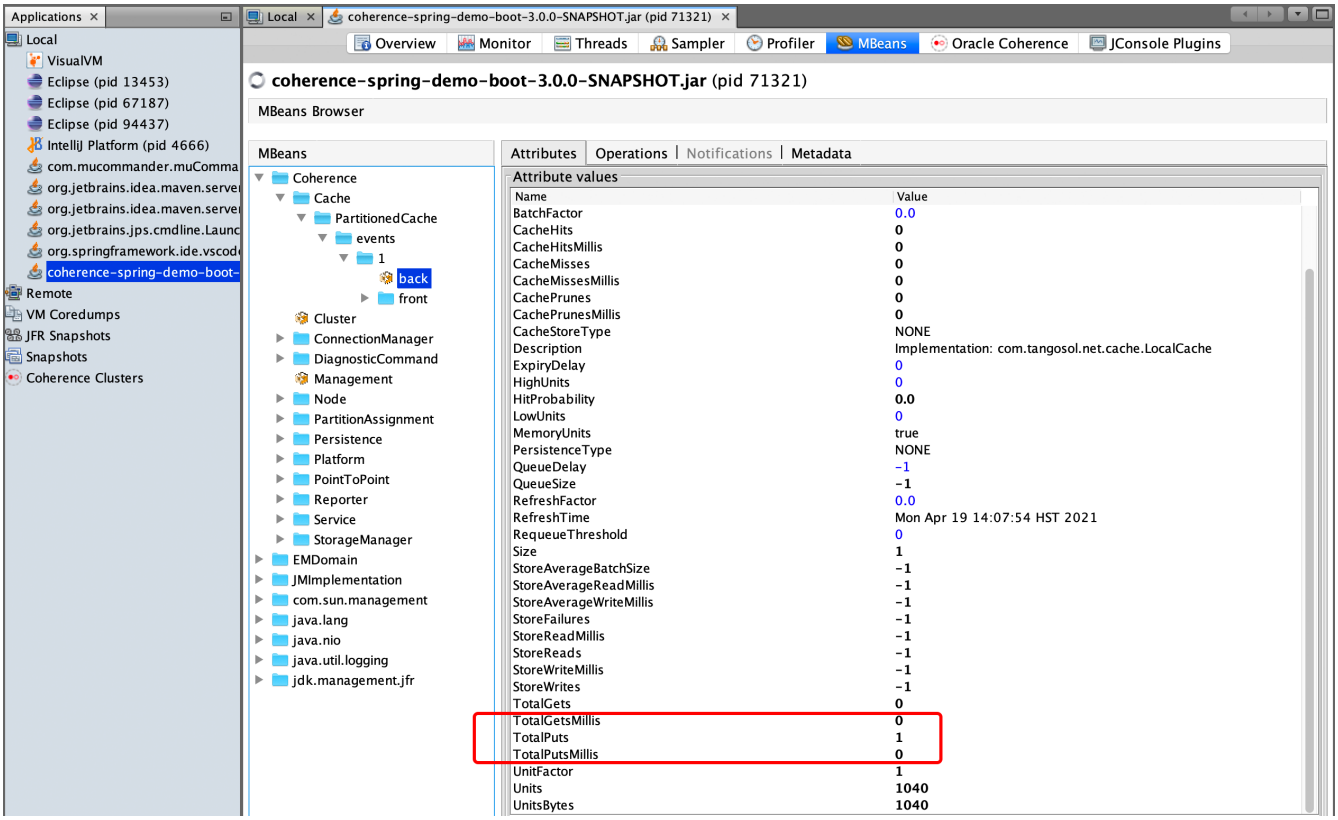



*Figure 1. VisualVM - Cache Put*

Under the `MBeans` tab you will find the Cache MBeans, including and entry for the `events` cache, providing numerous statistical information regarding the cache.

*Retrieving Cache Statistics*

```
$ curl --request GET 'http://localhost:8080/api/statistics/events'
```

You should see an entry for `TotalPuts` of `1`.



When using VisualVM consider installing the respective Coherence VisualVM Plugin as it provides some additional insights and visualizations.

Next, lets retrieve the Event using id 1:

*Retrieve Event*

```
curl --request GET 'http://localhost:8080/api/events/1'
```

The Event is returned. Did you notice? No SQL queries were executed as the value was directly retrieved from the Cache. Let's check the statistics again, this time via the Coherence VisualVM Plugin:

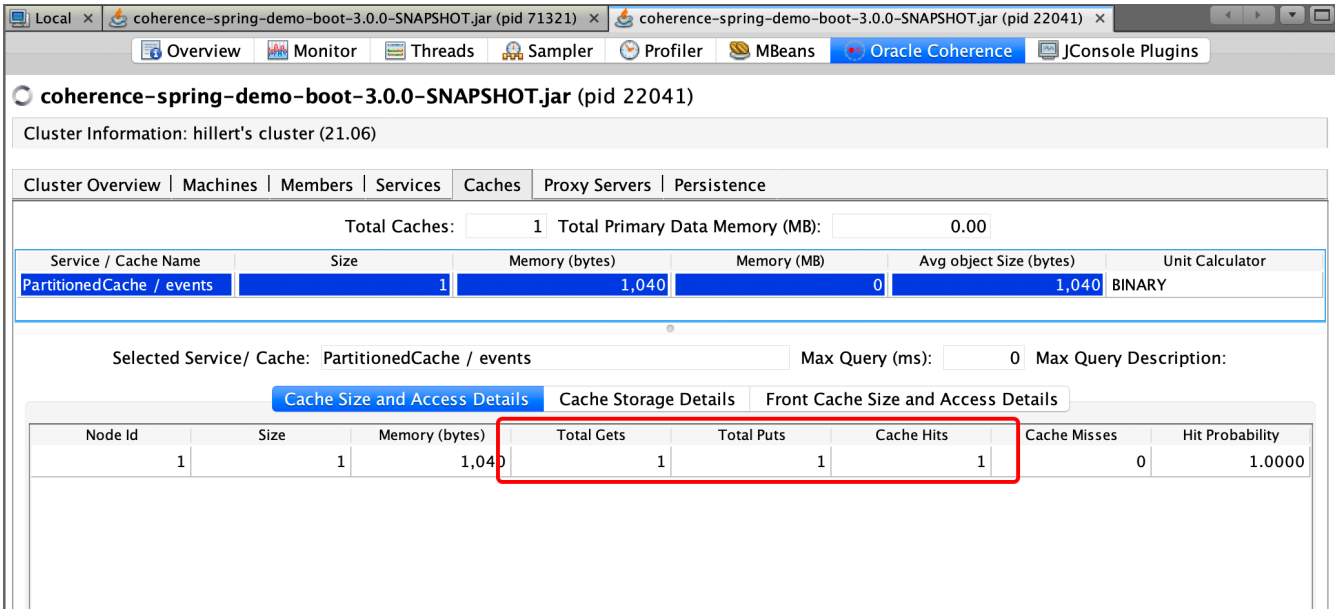



*Figure 2. Cache Statistics via Coherence VisualVM Plugin*

We will see now how values are being returned from the cache by seeing increasing cacheHits, e.g., `"cacheHits" : 1`. Let's evict our Event with id 1 from the cache named events:

*Evict Event*

```
curl --request DELETE 'http://localhost:8080/api/events/1'
```

If you now retrieve the event again using:

*Retrieve Event*

```
curl --request GET 'http://localhost:8080/api/events/1'
```

you will see an SQL query executed in the console, re-populating the cache. Feel free to play along with the Rest API. We can, for example, add people:

*Add people*

```
curl --request POST
'http://localhost:8080/api/people?firstName=Conrad&lastName=Zuse&age=85'
curl --request POST
'http://localhost:8080/api/people?firstName=Alan&lastName=Turing&age=41'
```

*List people*

```
curl --request GET 'http://localhost:8080/api/people'
```

Or assign people to events:

*Assign People to Events*

```
curl --request POST 'http://localhost:8080/api/people/2/add-to-event/1'
curl --request POST 'http://localhost:8080/api/people/3/add-to-event/1'
```

## 3.3. Behind the Scenes

What is involved to make this all work? Using Spring Boot, the setup is incredibly simple. We take advantage of Spring Boot's auto-configuration capabilities, and the sensible defaults provided by *Coherence Spring*.

In order to activate AutoConfiguration for Coherence Spring you need to add the `coherence-spring-boot-starter` dependency as well as the desired dependency for Coherence.

*POM configuration*

```
<dependency>
    <groupId>com.oracle.coherence.spring</groupId>
    <artifactId>coherence-spring-boot-starter</artifactId> ①
    <version>5.0.0-SNAPSHOT</version>
</dependency>
<dependency>
    <groupId>com.oracle.coherence.ce</groupId>
    <artifactId>coherence</artifactId>                     ②
    <version>26.04</version>
</dependency>
```

① Activate Autoconfiguration by adding the `coherence-spring-boot-starter` dependency

② Add the supported Coherence CE version

In this quickstart example we are using Spring's Caching abstraction and therefore, we use the `spring-boot-starter-cache` dependency as well:

*POM configuration for Spring Cache Abstraction*

```
<dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-cache</artifactId>
</dependency>
```

For caching you also must activate caching using the `@EnableCaching` annotation.

*Spring Boot App configuration*

```
@SpringBootApplication
@EnableCaching                                             ①
public class CoherenceSpringBootDemoApplication {

    public static void main(String[] args) {
```

```
        SpringApplication.run(CoherenceSpringBootDemoApplication.class, args);
    }

}
```

① Activate the Spring Cache Abstraction

Please see the relevant chapter on Caching in the Spring Boot reference guide.

With `@EnableCaching` in place, Coherence's autoconfiguration will also provide a `CoherenceCacheManager` bean to the application context.

# Chapter 4. Coherence Spring Core

This section dives into the Coherence Spring Core module. Coherence Spring Core provides the basic support for the Spring Framework.

## 4.1. Getting Started

To add support for Oracle Coherence to an existing Spring Framework project, you should first add the required Spring Coherence dependencies to your build configuration:

*Example 3. Coherence Spring Dependencies*

*Maven*

```
<dependency>
    <groupId>com.oracle.coherence.spring</groupId>
    <artifactId>coherence-spring-core</artifactId>
    <version>5.0.0-SNAPSHOT</version>
</dependency>
```

*Gradle*

```
implementation("com.oracle.coherence.spring:coherence-spring-core:5.0.0-SNAPSHOT")
```

Next you also need to add the version of Coherence that your application will use. Coherence Spring does not bring in Oracle Coherence as a transitive dependency. Coherence Spring 5.x supports Coherence CE 26.04; there is currently no compatible commercial edition. Add Coherence CE explicitly:

*Example 4. Oracle Coherence CE Dependency*

*Maven*

```
<dependency>
    <groupId>com.oracle.coherence.ce</groupId>
    <artifactId>coherence</artifactId>
    <version>26.04</version>
</dependency>
```

*Gradle*

```
implementation("com.oracle.coherence.ce:coherence:26.04")
```



Coherence CE is available from Maven Central. See Upgrading from 4.x to 5.x before moving an existing application to Coherence Spring 5.x, especially if it

currently uses a commercial Coherence dependency.

## 4.2. Bootstrapping Coherence

Coherence Spring uses the Coherence Bootstrap API to configure and create Coherence instances. This means that Coherence resources in a Spring application are typically part of a Coherence Session.

By default, Coherence will start a single Session configured to use the default Coherence configuration file. This behavior can easily be configured using traditional Coherence using system properties or using dedicated configuration.

## 4.3. Using the Default Session

The main building block for setting up Coherence for Spring is the `@EnableCoherence` annotation. This annotation will import the `CoherenceSpringConfiguration` class under the covers. Therefore, you can alternatively also declare `@Import(CoherenceSpringConfiguration.class)` instead.

In most use-cases, only a single Coherence Session is expected to be used. Therefore, without providing any further configuration the default session is configured using the embedded default configuration file. This results in the application joining Coherence as a *cluster* member (Session type `SERVER`). This is of course not the only way. Coherence Spring support the following 2 session types:

- **SERVER** - Join as Coherence cluster member. This is the default session type.
- **CLIENT** - Connect to Coherence as a Coherence*Extend or gRPC client

In order to configure the type of your Session, you may declare a `SessionConfigurationBean` that allows to you to not only to set the session type but also to specify a custom Coherence configuration file or a custom session name.

*SessionConfigurationBean*

```
@Bean
SessionConfigurationBean sessionConfigurationBeanDefault() {
    final SessionConfigurationBean sessionConfigurationBean =
            new SessionConfigurationBean();
    sessionConfigurationBean.setType(SessionType.SERVER);
    sessionConfigurationBean.setConfig("test-coherence-config.xml");
    return sessionConfigurationBean;
}
```

## 4.4. Configure Multiple Sessions

If you need to configure multiple Coherence sessions, simply define multiple `SessionConfigurationBeans`. The auto-configuration will pick those up automatically to configure the required sessions.



The `default` session will only exist when zero sessions are specifically configured, or the default session is specifically configured with the default session name.

## 4.5. Session Configuration Bean Properties

Depending on the session type the available properties change a bit. The following properties all to ALL session types.

**name**

The name of the session. If not set, it will be set to the default session name which is an empty String.

**scopeName**

A scope name is typically used in an application where the Coherence cluster member has multiple sessions. The scope name is used to keep the sessions separate. The scope name will be applied to the session's underlying *ConfigurableCacheFactory* and used to scope Coherence services. In this way multiple session configurations may use identical service names, which will be kept separate using the scope. On a Coherence cluster member, each session should have a unique scope name.

**type**

The session type of this configuration. There are three different types of sessions that can be configured:

- **server** represents storage enabled cluster member session.
- **client** represents a storage disabled cluster member or Coherence*Extend client session.

The type of the session affects how the bootstrap API starts the session.

**priority**

The priority specifies the order to use, when starting the session. Sessions will be started with the lowest priority first. If this property is not specified, the property will default to `0`.

The following property applies to the `CLIENT` (Coherence*Extend) and `Server` mode, only:

**configUri**

The Coherence cache configuration URI for the session. As already mentioned, the most common configuration to set will be the Coherence configuration file name. If not specified, the default value will be `coherence-cache-config.xml`.

## 4.6. Dependency Injection

Coherence Spring provides comprehensive support for the injection Coherence objects into your Spring beans including: `Session`, `NamedMap`, `NamedCache`, `ContinuousQueryCache`, `ConfigurableCacheFactory`, `Cluster`.

For the most part, you can use the equivalent Coherence Spring annotation that match the annotations from Coherence's CDI or Micronaut support.



All Coherence resources that are used by Spring application code should be injected using Spring dependency injection, only. Applications should avoid calling Coherence APIs that create or initialize Coherence resources directly, especially static CacheFactory methods. If your Spring application code calls these Coherence APIs it may cause Coherence to be initialized too early in the start-up process, before Spring has initialized the Coherence extensions. A typical symptom of this would be that Coherence starts without picking up the correct configuration from Spring.

### 4.6.1. Injecting NamedMap and NamedCache

Coherence `NamedMap` and `NamedCache` instances can be injected as beans in Spring applications. The mechanics of injecting `NamedMap` or `NamedCache` beans is identical, so any use of `NamedCache` in the examples below can be replaced with `NamedMap`. Other more specialized forms of `NamedMap` and `NamedCache` can also be injected, for example the asynchronous forms of both classes and views.

In Spring one caveat exists regarding the injection of Map-based classes that directly inherit from `java.util.Map` including `NamedCache` and `NamedMap` when using the `@Autowired` annotation. Instead of injecting actual instances of Beans representing a `java.util.Collection` or `java.util.Map`, Spring will inject a collection of all the beans that represent the specified bean type instead. As a work-around, you can use the `@Resource` annotation, but it has its own limitations, for instance, not being usable for constructor injection.

*Example of using the @Resource annotation*

```
@Resource(name = COHERENCE_CACHE_BEAN_NAME)
private NamedCache numbers;                    ①

@Resource(name = COHERENCE_CACHE_BEAN_NAME)
@Name("numbers")                               ②
private NamedCache namedCache;
```

① If not specified, the name of the field will be used to determine the cache name

② Alternatively, you can specify the name of the cache using the `@Name` annotation



For more information, please see Fine-tuning Annotation-based Autowiring with Qualifiers in the Spring Framework reference guide.

In order to provide a better user-experience around the dependency injection of maps and caches, Coherence Spring introduces its own set of annotations. The following annotations are available:

- @CoherenceCache
- @CoherenceMap
- @CoherenceAsyncCache

- @CoherenceAsyncMap

Using these annotations, you can inject any Coherence NamedMap and NamedCache in any situation including constructors.

Furthermore, the annotations also give you some added conveniences such as the ability to specify the name of the cache, or the name of the Coherence session as part of the annotation. E.g., the above example can be simplified to:

*Example of using the @CoherenceCache annotation*

```
@CoherenceCache
private NamedCache numbers;                    ①

@CoherenceCache("numbers")                     ②
private NamedCache namedCache;
```

① If not specified, the name of the field will be used to determine the cache name

② Alternatively, you can specify the name of the cache using the `@Name` annotation



To avoid deadlocks where a cache bean requires another bean to be injected in its configuration, which will happen on a different thread to the main Spring thread, all cache beans injected by `@CoherenceCache`, `@CoherenceMap`, `@CoherenceAsyncCache`, and `@CoherenceAsyncMap` annotations will be Spring lazy dynamic proxies.

#### 4.6.1.1. Type Conversion of NamedMap and NamedCache

As mentioned previously, Spring a has a special relationship with Map implementations. In order to work around this limitation, we provide the meta-annotations `@CoherenceCache`, `@CoherenceMap` etc. We apply a little trick using the `@Value` annotation and referencing the injection candidate via a `SpEL` expression. This in turn, however, triggers type conversion in Spring's `DefaultListableBeanFactory`, and we must provide a no-op converter for Map-based Coherence objects using the `CoherenceGenericConverter`.

Without it, you may see Spring's `MapToMapConverter` being used, which in turn will call `Map#entrySet()`, a potentially very expensive operation for large datasets in a Coherence cluster.



When defining your own `ConversionService` bean, please make sure that the `CoherenceGenericConverter` is added to it.

If the `BeanFactory` already contains a `ConfigurableConversionService`, we will add the `CoherenceGenericConverter` automatically using the `CoherenceConversionServicePostProcessor`. This should be typically the case with Spring Boot, which provides the `ApplicationConversionService`. If you provide your own `ConversionService` bean, we will back-off and a message to add the `CoherenceGenericConverter` manually will be logged.

*Manually adding the `CoherenceGenericConverter`*

```
@Bean
```

```
    public ConversionService conversionService() {
        DefaultFormattingConversionService conversionService =
            new DefaultFormattingConversionService();
        conversionService.addConverter(new CoherenceGenericConverter());    ①
        return conversionService;
    }
```

① Adding a new instance of the CoherenceGenericConverter

In case no `ConversionService` is defined in your application context, PropertyEditors are being used, and that chain does not seem to trigger the same expensive operation, nonetheless using the `ConversionService` route is advised.

#### 4.6.1.2. Specify the Map/Cache Name

As already mentioned above, you specify the name of the map/cache using the value-property of the annotation. Of course, the same applies when injecting a constructor or method parameter:

*Example of constructor injection of a NamedMap*

```
@Service
public class SomeService {

    public SomeService(@CoherenceMap("people") NamedMap<String, Person> map) {
        // TODO: initialize the service...
    }
}
```



If injecting a cache/map via the constructor, AND you do not specify a cache/map name, then Coherence Spring will try to derive the name of the cache/map from the parameter name. However, this only works if either the compiler flag `-parameters` (Java 8+) is enabled, or if the JVM generates debugging info. For more information see the article Method Parameter Reflection in Java.

If you prefer, you can also specify the name of the map/cache using the `@Name` annotation. The example below will inject a `NamedMap` that uses an underlying cache named people:

*Example of using the @Name annotation*

```
@CoherenceMap
@Name("people")
private NamedMap<String, Person> map;
```

#### 4.6.1.3. Specify the Owning Session Name

Whilst most applications probably use a single Coherence Session, there are uses-cases where an application may have multiple sessions. In this case, when injecting for example a `NamedMap`, the specific session can be specified by annotating the injection point with either `@SessionName` or more concise with the `session` parameter available for the following annotations:

- @CoherenceCache
- @CoherenceMap
- @CoherenceAsyncCache
- @CoherenceAsyncMap

In the previous examples where no separate `Session` name was specified, Coherence will use the default session to obtain the caches/maps. Assuming that the application has multiple sessions configured, one of which is named *Catalog*, the following example injects a `NamedMap` from an underlying cache named *products* in the *Catalog* session.

*Example of using the @SessionName annotation*

```
@CoherenceMap
@SessionName("Catalog")
@Name("products")
private NamedMap<String, Product> map;
```

This can be further streamlined to:

*Example of using the @CoherenceMap annotation with the session parameter*

```
@CoherenceMap(name="products", session="Catalog")
private NamedMap<String, Product> map;
```

The same annotation can be used on method parameter injection points as well:

*Example of using @CoherenceMap with session parameter in a constructor*

```
@Controller
public class CatalogController {

    public CatalogController(@CoherenceMap(name="products", session="Catalog")
                             NamedMap<String, Product> products) {
        // TODO: initialize the bean...
    }
}
```

### 4.6.2. Injecting AsyncNamedMap & AsyncNamedCache

It is possible to inject the asynchronous classes `AsyncNamedMap` and `AsyncNamedCache` as beans in exactly the same way as described above. Just change the type of the injection point to be `AsyncNamedMap` or `AsyncNamedCache` using one of the following annotations:

- @CoherenceAsyncCache
- @CoherenceAsyncMap

*Injecting an AsyncNamedMap*

```
@CoherenceAsyncMap("people")
private AsyncNamedMap<String, Person> map;
```

### 4.6.3. Injecting Views (CQC)

View (or ContinuousQueryCache) beans can be injected by specifying the @View annotation at the injection point. A view is a sub-set of the data in an underlying cache, controlled by a Filter.

*Injecting an AsyncNamedMap*

```
@CoherenceMap("people")
@View                                                    ①
private NamedMap<String, Person> map;
```

① The injection point has been annotated with `@View`, so the injected `NamedMap` will actually be an implementation of a `ContinuousQueryCache`.

In the above example, no `Filter` has been specified, so the default behaviour is to use an AlwaysFilter. This means that the view will contain all the entries from the underlying cache (typically a distributed cache). As a `ContinuousQueryCache` will hold keys and values locally in deserialized form, this can often be a better approach than using a replicated cache.

#### 4.6.3.1. Specify a View Filter

Filters are specified for views using a special filter binding annotation. These are annotations that are themselves annotated with the meta-annotation @FilterBinding. Coherence Spring comes with some built in implementations, for example @AlwaysFilter and @WhereFilter. It is simple to implement custom Filters as required by applications (see the Filter Binding Annotation section for more details).

For example, if there was a cache named "people", containing `Person` instances, and the application required a view of that cache to just contain `People` where the "lastName" attribute is equal to "Simpson", then the `@WhereFilter` filter binding annotation could be used to specify the `Filter`. The `@WhereFilter` annotation produces a `Filter` created from a Coherence CohQL where-clause, in this case `lastName == 'Simpson'`.

*Injecting a @CoherenceMap with @WhereFilter*

```
    @CoherenceMap("people")                              ①
    @View                                                ②
    @WhereFilter("lastName = 'Simpson'")                 ③
    private NamedMap<String, Person> allSimpsons;        ④
```

① The name of the underlying map for the view is "people".

② The `@View` annotation specifies that a view will be injected rather than a raw `NamedMap`.

③ The `@WhereFilter` annotation specifies the CohQL expression.

④ The `NamedMap` contains only people with the last name `Simpson`.

The above CohQL expression is still rather simple. Let's further restrict the results:

*@WhereFilter with a more complex CohQL expression*

```
@CoherenceMap("people")
@View
@WhereFilter("lastName = 'Simpson' and age > 10")        ①
private NamedMap<String, Person> simpsons;
```

① The @WhereFilter also filters on the `age` property.

The view injected above will be all People with a `lastName` attribute equal to `Simpson` and an `age` attribute greater than `10`.



The Coherence reference guide has an in-depth chapter on CohQL and more details on the *WHERE* clause under Filtering Entries in a Result Set

Other built-in or custom filter binding annotations can be combined as well and multiple filter-binding annotations can be added to the same injection point to build up more complex views. The Filter instances produced from each filter binding annotation will all be collected together in an AllFilter, which will logically combine them together.

#### 4.6.3.2. Specify a View Transformer

The values in a view map do not have to be the same as the values in the underlying cache. Instead, a ValueExtractor can be used to transform the actual cache value into a different value in the view. ValueExtractors are specified for views using a special extractor binding annotation. These are annotations that are themselves annotated with the meta-annotation @ExtractorBinding. The Coherence Spring framework comes with some built in implementations, for example @PropertyExtractor, and it is simple to implement other as required by applications (see the Extractor Binding Annotation section for more details).

For example, if there was a cache named "people", containing Person instances, and the application required a view where the value was just the age attribute of each Person rather than the whole cache value. A @PropertyExtractor annotation could be used to specify that the values should be transformed using a property extractor.

*Injecting a @CoherenceMap with multiple @WhereFilter*

```
@CoherenceMap("people")                                  ①
@View                                                    ②
@PropertyExtractor("age")                                ③
private NamedMap<String, Integer> ages;                  ④
```

① The name of the underlying map for the view is "people".

② The `@View` annotation specifies that a view will be injected rather than a raw `NamedMap`.

③ The `@PropertyExtractor` annotation specifies that a `ValueExtractor` should be used to transform

the underlying cache values into different values in the view. In this case the `@PropertyExtractor` annotation will produce a value extractor to extract the `age` property.

④ Note that the map injected is now a `NamedMap<String, Integer>` with generic types of `String` and `Integer` because the values have been transformed from `Person` to `Integer`.

Multiple extractor bindings can be applied to the injection point, in which case the view value will be a `List` of the extracted attributes.

### 4.6.4. Injecting a Session

Sometimes it might not be possible to inject a Coherence resource, such as `NamedMap` or `NamedCache` directly because the name of the resource to be injected is not known until runtime. In this case it makes sense to inject a `Session` instance which can then be used to obtain other resources.

The simplest way to inject a `Session` is to annotate a field, method parameter, or other injection point with your preferred Spring-supported injection annotation such as `@Autowired` or `@Inject`:

*Injecting a Coherence Session instance*

```
@RestController
public class MyBean {
    @Inject                                    ①
    private Session session;
```

① Other injection annotations such as `@Autowired` can be used as well

*Injecting a Coherence Session using constructor injection*

```
@RestController
public class MyBean {
    @Autowired                                 ①
    public MyBean(Session session) {
        // TODO...
    }
}
```

① If your class has only a single constructor, you can even omit the `@Autowired` annotation

Both examples above will inject the default `Session` instance into the injection point.

#### 4.6.4.1. Specify a Session Name

For most applications that only use a single `Session` the simple examples above will be all that is required. Some applications though may use multiple named Session instances, in which case the `Session` name need to be specified. This can be done by adding the @Name annotation to the injection point.

*Injecting a specific (named) Coherence Session*

```
@RestController
```

```
public class MyBean {
    @Autowired                                  ①
    @Name("Catalog")
    private Session session;
}
```

① Other injection annotations such as `@Inject` can be used as well

or into a constructor:

*Injecting a specific (named) Coherence Session via constructor*

```
@RestController
public class MyBean {
    @Autowired                                  ①
    public MyBean(@Name("Catalog") Session session) {
        // TODO...
    }
}
```

① If your class has only a single constructor, you can even omit the `@Autowired` annotation

### 4.6.5. Injecting NamedTopic

Coherence NamedTopic instances can be injected as beans in Spring applications.

An alternative way to write message driven applications instead of directly injecting `NamedTopic`, `Publisher` or `Subscriber` beans is to use Messaging with Coherence Topics.

#### 4.6.5.1. Injecting NamedTopic

The simplest way to inject a `NamedTopic` is to just annotate the injection point with `@jakarta.inject.Inject`.

*Inject NamedTopic*

```
@Inject
private NamedTopic<Person> people;
```

In this example the injection point field name is used to determine the topic name to inject, so a `NamedTopic` bean with an underlying topic name of `people` will be injected.

As an alternative to using a `NamedTopic` directly in code, Coherence Spring also supports annotating methods directly as publishers and subscribers. See the Messaging with Coherence Topics section of the documentation.

##### Specify the Topic Name

Sometimes the name of the topic being injected needs to be different to the injection point name. This is always the case when injecting into method parameters as the parameter names are lost by

the time the injection point is processed. In this case we can use the @Name annotation to specify the underlying cache name.

The example below will inject a NamedTopic that uses an underlying topic named orders.

*Use @Name to specify topic name*

```
@Inject
@Name("people")
private NamedTopic<Order> orders;
```

The same applies when injecting a constructor or method parameter:

*Use @Name to specify topic name on a parameter*

```
@Singleton
public class SomeBean {
    @Inject
    public SomeBean(@Name("orders") NamedTopic<Order> topic) {
    // ToDo:
    }
}
```

#### Specify the Session Name

Whilst most applications probably use a single Coherence Session there are uses-cases where an application may have multiple sessions. In this case, when injecting a NamedTopic the specific session can be specified by annotating the injection point with @SessionName.

In the previous examples where no @SessionName was specified Coherence will use the default session to obtain the caches.

For example, assume the application has multiple sessions configured, one of which is named Customers. The following code snippet injects a NamedTopic using an underlying topic named orders in the Customers session.

*Use @SessionName to specify session*

```
@Inject
@SessionName("Customers")
@Name("orders")
private NamedTopic<Order> topic;
```

Again, the same annotation can be used on method parameter injection points.

*Use @SessionName to specify session on a method parameter*

```
@Controller
public class OrderProcessor {
    @Inject
```

```
    public OrderProcessor(@SessionName("Customers") @Name("orders")
                          NamedTopic<Order> orders) {
        // ToDo:
    }
}
```

#### 4.6.5.2. Injecting a NamedTopic Publisher

If application code only needs to publish messages to a Coherence `NamedTopic` then instead of injecting a `NamedTopic` bean, a `Publisher` bean can be injected.

The simplest way to inject a `Publisher` is just to annotate the injection point of type `Publisher` with `@Inject`, for example:

*Inject a Publisher*

```
@Inject
private Publisher<Order> orders;
```

The example above will inject a `Publisher` bean, the name of the underlying `NamedTopic` will be taken from the name of the injection point, in this case `orders`.

##### Specify the Topic Name

If the name of the injection point cannot be used as the `NamedTopic` name, which is always the case with injection points that are method or constructor parameters, then the `@Name` annotation can be used to specify the topic name.

For example, both of the code snippets below inject a `Publisher` that published to the `orders` topic:

*Inject a Publisher that publishes on the `orders` topic*

```
@Inject
@Name("orders")
private Publisher<Order> orders;
```

*Inject a Publisher that publishes on the `orders` topic*

```
@Controller
public class OrderController {
    @Inject
    public OrderController(@Name("orders") Publisher<Order> topic) {
        // ToDo:
    }
}
```

##### Specify the Owning Session

As with injection of `NamedTopics`, in applications using multiple `Session` instances, the name of the

`Session` that owns the underlying `NamedTopic` can be specified when injecting a `Publisher` by adding the `@SessionName` annotation.

*Inject a Publisher while specifying the owning session*

```
@Inject
@Name("orders")
@SessionName("Customers")
private Publisher<Order> orders;
```

#### 4.6.5.3. Injecting a NamedTopic Subscriber

If application code only needs to subscribe to messages from a Coherence `NamedTopic` then instead of injecting a `NamedTopic` bean, a `Subscriber` bean can be injected.

The simplest way to inject a `Subscriber` is just to annotate the injection point of type `Subscriber` with `@Inject`, for example:

*Inject Subscriber*

```
@Inject
private Subscriber<Order> orders;
```

The example above will inject a `Subscriber` bean, the name of the underlying `NamedTopic` will be taken from the name of the injection point, in this case `orders`.

##### Specify the Topic Name

If the name of the injection point cannot be used as the `NamedTopic` name, which is always the case with injection points that are method or constructor parameters, then the `@Name` annotation can be used to specify the topic name.

For example, both of the code snippets below inject a `Subscriber` that subscribe to the `orders` topic:

*Inject subscriber into field*

```
@Inject
@Name("orders")
private Subscriber<Order> orders;
```

*Inject subscriber into method parameter*

```
@Controller
public class OrderController {
    @Inject
    public OrderController(@Name("orders") Subscriber<Order> topic) {
        // ToDo:
    }
}
```

#### Specify the Owning Session

As with injection of `NamedTopics`, in applications using multiple `Session` instances, the name of the `Session` that owns the underlying `NamedTopic` can be specified when injecting a `Subscriber` by adding the `@SessionName` annotation.

```
@Inject
@Name("orders")
@SessionName("Customers")
private Subscriber<Order> orders;
```

## 4.7. Injecting Spring Beans into Coherence-Managed Objects

Coherence has many server-side extension points, which enable you to customize application behavior in different ways, typically by configuring their extensions within various sections of the cache configuration file. For example, you can implement event interceptors and cache stores to handle server-side events and integrate with external data stores and other services. In the previous chapter, you learned how you can inject Coherence-managed objects into your Spring-managed beans. However, the reverse is possible as well. Coherence Spring also provides the ability to inject Spring beans into these Coherence-managed extension points using the custom configuration namespace handler.

*coherence-cache-config.xml with Spring NamespaceHandler*

```
<cache-config xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
              xmlns="http://xmlns.oracle.com/coherence/coherence-cache-config"
              xmlns:spring=
"class://com.oracle.coherence.spring.namespace.NamespaceHandler"
              xsi:schemaLocation="http://xmlns.oracle.com/coherence/coherence-cache-
config coherence-cache-config.xsd">
```

After you have declared the handler for the Spring namespace above, you can specify the `<spring:bean>` element in any place where you would normally use the `<class-name>` or `<class-factory-name>` elements:

*Using Spring bean references in coherence-cache-config.xml*

```
<?xml version="1.0"?>
<cache-config xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xmlns="http://xmlns.oracle.com/coherence/coherence-cache-config"
        xmlns:spring="class://com.oracle.coherence.spring.namespace.NamespaceHandler"
        xsi:schemaLocation="http://xmlns.oracle.com/coherence/coherence-cache-config
coherence-cache-config.xsd">

    <interceptors>
        <interceptor>
            <instance>
```

```
                <spring:bean>registrationListener</spring:bean> ①
            </instance>
        </interceptor>
        <interceptor>
            <instance>
                <spring:bean>activationListener</spring:bean>
            </instance>
        </interceptor>
    </interceptors>

    <caching-scheme-mapping>
        <cache-mapping>
            <cache-name>*</cache-name>
            <scheme-name>distributed-scheme</scheme-name>
            <init-params>
                <init-param>
                    <param-name>partitionListener-bean</param-name> ②
                    <param-value>partitionListener</param-value>
                </init-param>
            </init-params>
            <interceptors>
                <interceptor>
                    <instance>
                        <spring:bean>cacheListener</spring:bean>
                    </instance>
                </interceptor>
            </interceptors>
        </cache-mapping>
    </caching-scheme-mapping>

    <caching-schemes>
        <distributed-scheme>
            <scheme-name>distributed-scheme</scheme-name>
            <service-name>PartitionedCache</service-name>
            <local-storage system-property="coherence.distributed.localstorage">
true</local-storage>
            <partition-listener>
                <spring:bean>{partitionListener-bean}</spring:bean> ③
            </partition-listener>
            <member-listener>
                <spring:bean>memberListener</spring:bean>
            </member-listener>
            <backing-map-scheme>
                <local-scheme/>
            </backing-map-scheme>
            <autostart>true</autostart>
            <interceptors>
                <interceptor>
                    <instance>
                        <spring:bean>storageListener</spring:bean>
                    </instance>
```

```
                </interceptor>
            </interceptors>
        </distributed-scheme>
    </caching-schemes>
</cache-config>
```

① Specifying the name of the Spring bean that you want to reference.

② The name of Spring beans can also be parameterized. Let's create a parameter named `partitionListener-bean` with the name of the Spring bean as its value.

③ Here we reference the parameter named `partitionListener-bean` and its value will be used.



Please also take a look at the chapter discussing the Coherence Spring Cachestore Demo as it uses Spring-managed beans.

## 4.8. Events

Event driven patterns are a common way to build scalable applications and microservices. Coherence produces a number of events that can be used by applications to respond to data changes and other actions in Coherence.

There are two types of events in Coherence:

- MapEvents which are subscribed to using a MapListener
- Events, which are subscribed to using an EventInterceptor

Spring makes subscribing to both of these event-types much simpler using observer methods annotated with @CoherenceEventListener.

*Example of using a Coherence Event Listener*

```
@CoherenceEventListener
void onEvent(CoherenceLifecycleEvent event) {
    // TODO: process event...
}
```

The method above receives all events of type `CoherenceLifecycleEvent` emitted during the lifetime of the application. The actual events received can be controlled further by annotating the method or the method arguments.



Spring `4.2` introduced Annotation-driven event listeners as part of its event support.

Coherence Spring does **NOT** directly use Spring's `ApplicationEvent` class and the corresponding `ApplicationListener` interface. However, Coherence Spring follows that pattern conceptually in order to provide a similar user experience.



By default, the handling of Coherence events is asynchronous. Use the `@Synchronous`

annotation to make the event handler execution synchronous.

*Example of making a Coherence Event Listener synchronous*

```
@CoherenceEventListener
@Synchronous
void onEvent(CoherenceLifecycleEvent event) {
    // TODO: process event...
}
```

### 4.8.1. MapEvent Listeners

Listening for changes to data in Coherence is a common use case in applications. Typically, this involves creating an implementation of a MapListener and adding that listener to a `NamedMap` or `NamedCache`. Using Coherence Spring makes this much simpler by just using Spring beans with suitably annotated observer methods that will receive the respective events.

#### 4.8.1.1. MapEvent Observer Methods

A MapEvent observer method is a method on a Spring bean that is annotated with @CoherenceEventListener. The annotated method must have a `void` return type and must take a single method parameter of type `MapEvent`, typically this has the generic types of the underlying map/cache key and value.

For example, assuming that there is a map/cache named `people`, with keys of type `String` and values of type `Plant`, and the application has logic that should be executed each time a new `Plant` is inserted into the map:

*Example of listening to Inserted events*

```
import com.oracle.coherence.spring.annotation.event.Inserted;
import com.oracle.coherence.spring.annotation.event.MapName;
import com.oracle.coherence.spring.event.CoherenceEventListener;
import com.tangosol.util.MapEvent;
import org.springframework.stereotype.Component;

@Component                                          ①
public class PersonEventHandler {

    @CoherenceEventListener                         ②
    public void onNewPerson(@MapName("people")      ③
                            @Inserted               ④
                            MapEvent<String, Person> event) {
        // TODO: process the event
    }
}
```

① The `PersonController` is a simple Spring bean, in this case a `Controller`.

② The `onNewPerson` method is annotated with `@CoherenceEventListener` making it a Coherence event

listener.

③ The `@MapName("people")` annotation specifies the name of the map to receive events from, in this case `people`.

④ The `@Inserted` annotation specified that only `Inserted` events should be sent to this method.

The above example is still rather simple. There are a number of other annotations that provide much finer-grained control over what events are received from where.

#### Specify the Map/Cache name

By default, a `MapEvent` observer method would receive events for all maps/caches. In practice though, this would not be a very common use case, and typically you would want an observer method to listen to events that are for specific caches. The Coherence Spring API contains two annotations for specifying the map name:

- @MapName
- @CacheName

Both annotations take a single `String` value that represents the name of the map or cache that events should be received from.

*Listening to events for all caches*

```
    @CoherenceEventListener
    public void onEvent(MapEvent<String, String> event) {
        // TODO: process the event
    }
```

The above method receives events for *all* caches.

*Listening to events for the map named "foo"*

```
    @CoherenceEventListener
    public void onFooEvent(@MapName("foo")       ①
                           MapEvent<String, String> event) {
        // TODO: process the event
    }
```

① The above method receives events for the map named `foo`.

*Listening to events for the cache named "bar"*

```
    @CoherenceEventListener
    public void onBarEvent(@CacheName("bar")     ①
                           MapEvent<String, String> event) {
        // TODO: process the event
    }
```

① The above method receives events for the cache named `bar`.

#### Specify the Cache Service name

In the previous section we showed to restrict received events to a specific map or cache name. Events can also be restricted to only events from a specific cache service. In Coherence all caches are owned by a cache service, which has a unique name. By default, a `MapEvent` observer method would receive events for a matching cache name on *all* services. If an applications Coherence configuration has multiple services, the events can be restricted to just specific services using the `@ServiceName` annotation.

*Listening to events for the "foo" map on all services*

```
@CoherenceEventListener
public void onEventFromAllServices(@MapName("foo")  ①
                           MapEvent<String, String> event) {
    // TODO: process the event
}
```

① The above method receives events for the map named `foo` on *all* cache services.

*Listening to events for the "foo" map on the "Storage" service only*

```
@CoherenceEventListener
public void onEventOnStorageService(@MapName("foo")
                    @ServiceName("Storage")  ①
                    MapEvent<String, String> event) {
    // TODO: process the event
}
```

① The above method receives events for the map named `foo` owned by the cache service named `Storage`.

*Listening to events for ALL caches on the "Storage" service*

```
@CoherenceEventListener
public void onEventFromAllCachesOnStorageService(@ServiceName("Storage")  ①
                    MapEvent<String, String> event) {
    // TODO: process the event
}
```

① The above method receives events for *all* caches owned by the cache service named `Storage` as there is no `@MapName` or `@CacheName` annotation.

#### Specify the Owning Session Name

In applications that use multiple `Sessions`, there may be a situation where more than one session has a map with the same name. In those cases an observer method may need to restrict the events it receives to a specific session. The events can be restricted to `maps` and/or `caches` in specific sessions using the `@SessionName` annotation.

*Listening to events for the "orders" map in ALL sessions*

```
@CoherenceEventListener
public void onOrdersEventAllSessions(@MapName("orders")  ①
                    MapEvent<String, String> event) {
    // TODO: process the event
}
```

① The above method receives events for the map named `orders` in *all* sessions.

*Listening to events for the "orders" map in the "Customer" session only*

```
@CoherenceEventListener
public void onOrdersEventInCustomerSession(@MapName("orders")
                    @SessionName("Customer")             ①
                    MapEvent<String, String> event) {
    // TODO: process the event
}
```

① The above method receives events for the map named `orders` owned by the `Session` named `Customer`.

*Listening to events for ALL caches in the "Customer" session*

```
@CoherenceEventListener
public void onEventInAllCachesInCustomerSession(@SessionName("Customer") ①
                            MapEvent<String, String> event) {
    // TODO: process the event
}
```

① The above method receives events for the *all* caches owned by the `Session` named `Customer` as there is no `@MapName` or `@CacheName` annotation.

Therefore, in application with multiple sessions, events with the same name can be routed by session.

*Route events with the cache name by the name of the session*

```
@CoherenceEventListener
public void onCustomerOrders(@SessionName("Customer")    ①
                             @MapName("orders")
                             MapEvent<String, Order> event) {
    // TODO: process the event
}

@CoherenceEventListener
public void onCatalogOrders(@SessionName("Catalog")      ②
                            @MapName("orders")
                            MapEvent<String, Order> event) {
    // TODO: process the event
```

```
    }
```

① The `onCustomerOrders` method will receive events for the `orders` map owned by the `Session` named `Customer`.

② The `onCatalogOrders` method will receive events for the `orders` map owned by the `Session` named `Catalog`.

#### 4.8.1.2. Receive Specific Event Types

There are three types of event that a `MapEvent` observer method can receive:

- `Insert`
- `Update`
- `Delete`

By default, an observer method will receive all events for the map (or maps) it applies to. This can be controlled using the following annotations:

- `@Inserted` - to receive `Insert` events.
- `@Updated` - to receive `Update` events.
- `@Deleted` - to receive `Delete` events.

Zero or more of the above annotations can be used to annotate the `MapEvent` parameter of the observer method.

*Listen to "Insert" event for the "test" map only*

```
    @CoherenceEventListener
    public void onInsertEvent(@MapName("test")
                              @Inserted                          ①
                              MapEvent<String, String> event) {
        // TODO: process the event
    }
```

① Only `Insert` events for the map `test` will be received.

*Listen to "Insert" and "Delete" events for the "test" map only*

```
    @CoherenceEventListener
    public void onInsertAndDeleteEvent(@MapName("test")
                              @Inserted @Deleted                 ①
                              MapEvent<String, String> event) {
        // TODO: process the event
    }
```

① Only `Insert` and `Delete` events for the map `test` will be received.

*Listen to ALL map events for the "test" map*

```
    @CoherenceEventListener
    public void onMapEvent(@MapName("test") MapEvent<String, String> event) {
        // TODO: process the event
    }
```

All events for the map `test` will be received.

#### 4.8.1.3. Filtering Events

The `MapEvents` received by an observer method can be further restricted by applying a filter. Filters are applied by annotating the method with a filter binding annotation, which is a link to a factory that creates a specific instance of a Filter. Event filters applied in this way are executed on the server, which can make receiving events more efficient for clients, as the event will not be sent from the server at all.

Coherence Spring comes with some built in implementations, for example:

- @AlwaysFilter,
- @WhereFilter,

It is simple to implement custom filters as required by applications. Please refer to the Filter Binding Annotation section for more details.

For example, let's assume there is a map named `people` with keys of type `String` and values of type `People`, and an observer method needs to receive events for all values where the `age` property is `18` or over. A custom filter binding annotation could be written to create the required `Filter`. However, as the condition is very simple, the built-in `@WhereFilter` filter binding annotation will be used in this example with a where-clause of `age >= 18`.

*Example of a Where Filter*

```
    @WhereFilter("age >= 18")                    ①
    @CoherenceEventListener
    @MapName("people")
    public void onAdult(MapEvent<String, Person> people) {
        // TODO: process event...
    }
```

① The `@WhereFilter` annotation is applied to the method.

The `onAdult` method above will receive all events emitted from the `people` map, but only for entries where the value of the `age` property of the entry value is `>= 18`.

#### 4.8.1.4. Transforming Events

In some use-cases the `MapEvent` observer method does not require the whole map or cache value to process, it might only require one, or a few, properties of the value, or it might require some calculated value. This can be achieved by using an event transformer to convert the values that will

be received by the observer method. The transformation takes place on the server before the event is emitted to the method. This can improve efficiency on a client in cases where the cache value is large, but the client only requires a small part of that value because only the required values are sent over the wire to the client.

In Coherence Spring, event values are transformed using a ValueExtractor. A `ValueExtractor` is a simple interface that takes in one value and transforms it into another value. The `ValueExtractor` is applied to the event value. As events contain both a new and old values, the extractor is applied to both as applicable. For `Insert` events there is only a new value, for `Update` events there will be both, a new and an old value, and for `Delete` events, there will only be an old value. The extractor is not applied to the event key.

The `ValueExtractor` to use for a `MapEvent` observer method is indicated by annotating the method with an extractor binding annotation. An extractor binding is an annotation that is itself annotated with the meta-annotation @ExtractorBinding. The extractor binding annotation is a link to a corresponding ExtractorFactory that will build an instance of a `ValueExtractor`.

For example, assuming that there is a `NamedMap` with the name `orders` that has keys of type `String` and values of type `Order`. The `Order` class has a `customerId` property of type `String`. A `MapEvent` observer method is only interested in the `customerId` for an order, so the built-in extractor binding annotation @PropertyExtractor can be used to just extract the `customerId` from the event:

*Example of a Property Extractor*

```
@CoherenceEventListener
@PropertyExtractor("customerId")                          ①
public void onOrder(@MapName("orders")                    ②
                    MapEvent<String, String> event) {     ③
    // TODO: process event...
}
```

① The method is annotated with `@PropertyExtractor` to indicate that a `ValueExtractor` that just extracts the `customerId` property should be used to transform the event.

② The map name to receive events from is set to `orders`

③ Note that the generic types of the `MapEvent` parameter are now `MapEvent<String, String>` instead of `MapEvent<String, Order>` because the event values will have been transformed from an `Order` into just the `String customerId`.

It is possible to apply multiple filter binding annotations to a method. In this case the extractors are combined into a Coherence ChainedExtractor, which will return the extracted values as a `java.util.List`.

Expanding on the example above, if the `Order` class also has an `orderId` property of type `Long`, and an observer method, only interested in `Insert` events needs both the `customerId` and `orderId`, then the method can be annotated with a two `@PropertyExtractor` annotations:

*Example of using multiple Property Extractors*

```
@CoherenceEventListener
```

```
    @PropertyExtractor("customerId")                                    ①
    @PropertyExtractor("orderId")
    public void onOrderWithMultiplePropertyExtractors(
                        @Inserted                                       ②
                        @MapName("orders")
                        MapEvent<String, List<Object>> event) {         ③
        List list = event.getNewValue();
        String customerId = (String) list.get(0);                       ④
        Long orderId = (Long) list.get(1);
        // ...
    }
```

① The method is annotated with two `@PropertyExtractor` annotations, one to extract `customerId` and one to extract `orderId`.

② The method parameter is annotated with `@Inserted` so that the method only receives `Insert` events.

③ The `MapEvent` parameter not has a key of type `String` and a value of type `List<Object>`, because the values from the multiple extractors will be returned in a `List`. We cannot use a generic value narrower than `Object` for the list because it will contain a `String` and a `Long`.

④ The extracted values can be obtained from the list, they will be in the same order that the annotations were applied to the method.

### 4.8.2. Coherence Event Interceptors

Coherence produces many events in response to various server-side and client-side actions. For example, *Lifecycle events* for Coherence itself, maps and cache, *Entry events* when data in maps and caches changes, *Partition events* for partition lifecycle and distribution, *EntryProcessor events* when invoked on a map or cache, etc. In a stand-alone Coherence application these events are subscribed to using a EventInterceptor implementation registered to listen to specific event types.

The Coherence Spring API makes subscribing to these events simple, by using the same approach used for Spring Application events, namely annotated event observer methods. A Coherence event observer method is a method annotated with @CoherenceEventListener that has a `void` return type, and a single parameter of the type of event to be received. The exact events received can be further controlled by applying other annotations to the method or event parameter. The annotations applied will vary depending on the type of the event.

#### 4.8.2.1. Event Types

The different types of event that can be observed are listed below:

- CoherenceLifecycleEvent - lifecycle events for Coherence instances
- SessionLifecycleEvent - lifecycle events for Session instances
- LifecycleEvent - lifecycle events for ConfigurableCacheFactory instances
- CacheLifecycleEvent - lifecycle events for NamedMap and NamedCache instances
- EntryEvent - events emitted by the mutation of entries in a NamedMap or NamedCache

- EntryProcessorEvent - events emitted by the invocation of an EntryProcessor on entries in a NamedMap or NamedCache
- TransactionEvent - events pertaining to all mutations performed within the context of a single request in a partition of a NamedMap or NamedCache, also referred to as "partition level transactions".
- TransferEvent - captures information concerning the transfer of a partition for a storage enabled member.
- UnsolicitedCommitEvent - captures changes pertaining to all observed mutations performed against caches that were not directly caused (solicited) by the partitioned service. These events may be due to changes made internally by the backing map, such as eviction, or referrers of the backing map causing changes.
- Coherence editions that provide federation also emit events associated with data federation between clusters. There is currently no commercial Coherence edition compatible with Coherence Spring 5.x.

Most of the events above only apply to storage enabled cluster members. For example, an `EntryEvent` will only be emitted for mutations of an entry on the storage enabled cluster member that owns that entry. Lifecycle events on the other hand, may be emitted on all members, such as `CacheLifecycle` event that may be emitted on any member when a cache is created, truncated, or destroyed.

#### 4.8.2.2. Coherence Lifecycle Events

LifecycleEvent are emitted to indicate the lifecycle of a ConfigurableCacheFactory instance.

To subscribe to `LifecycleEvent` simply create a Spring bean with a listener method that is annotated with @CoherenceEventListener. The method should have a single parameter of type `LifecycleEvent`.

`LifecycleEvent` are emitted by `ConfigurableCacheFactory` instances and will only be received in the same JVM, which could be a cluster member or a client.

For example, the `onEvent` method below will receive lifecycle events for all `ConfigurableCacheFactory` instances in the current application:

```
@CoherenceEventListener
public void onEvent(LifecycleEvent event) {
    // TODO: process the event
}
```

##### Receive Specific LifecycleEvent Types

There are four different types of `LifecycleEvent`. By adding the corresponding annotation to the method parameter the method will only receive the specified events.

- **Activating** - a `ConfigurableCacheFactory` instance is about to be activated, use the @Activating annotation
- **Activated** - a `ConfigurableCacheFactory` instance has been activated, use the @Activated

annotation

- **Disposing** - a `ConfigurableCacheFactory` instance is about to be disposed, use the `@Disposing` annotation

For example, the method below will only receive `Activated` and `Disposing` events.

```
@CoherenceEventListener
public void onEvent(@Activated @Disposing LifecycleEvent event) {
    // TODO: process the event
}
```

#### Receive CoherenceLifecycleEvents for a Specific Coherence Instance

Each `Coherence` instance in an application has a unique name. The observer method can be annotated to only receive events associated with a specific `Coherence` instance by using the `@Name` annotation.

For example, the method below will only receive events for the `Coherence` instance named `customers`:

```
@CoherenceEventListener
public void onEvent(@Name("customers") CoherenceLifecycleEvent event) {
    // TODO: process the event
}
```

The method in this example will receive events for the default `Coherence` instance:

```
@CoherenceEventListener
public void onEvent(@Name(Coherence.DEFAULT_NAME) CoherenceLifecycleEvent event) {
    // TODO: process the event
}
```

### 4.8.2.3. Session Lifecycle Events

SessionLifecycleEvents are emitted to indicate the lifecycle event of a Session instance.

To subscribe to `SessionLifecycleEvents` simply create a Spring bean with a listener method annotated with `@CoherenceEventListener`. The method should have a single parameter of type `SessionLifecycleEvent`.

`SessionLifecycleEvents` are emitted by `Session` instances and will only be received in the same JVM, which could be a cluster member or a client.

For example, the `onEvent` method below will receive lifecycle events for all `Session` instances in the current application:

```
@CoherenceEventListener
public void onEvent(SessionLifecycleEvent event) {
    // TODO: process the event
}
```

#### Receive Specific SessionLifecycleEvent Types

There are four different types of `SessionLifecycleEvent`. By adding the corresponding annotation to the method parameter the method will only receive the specified events.

- **Starting** - a `Coherence` instance is about to start, use the `@Starting` annotation
- **Started** - a `Coherence` instance has started, use the `@Started` annotation
- **Stopping** - a `Coherence` instance is about to stop, use the `@Stopping` annotation
- **Stopped** - a `Coherence` instance has stopped, use the `@Stopped` annotation

For example, the method below will only receive `Started` and `Stopped` events.

```
@CoherenceEventListener
public void onEvent(@Started @Stopped SessionLifecycleEvent event) {
    // TODO: process the event
}
```

#### Receive SessionLifecycleEvents for a Specific Session Instance

Each `Session` instance in an application has a name. The observer method can be annotated to only receive events associated with a specific `Session` instance by using the `@Name` annotation.

For example, the method below will only receive events for the `Session` instance named `customers`:

```
@CoherenceEventListener
public void onEvent(@Name("customers") SessionLifecycleEvent event) {
    // TODO: process the event
}
```

The method in this example will receive events for the default `Coherence` instance:

```
@CoherenceEventListener
public void onEvent(@Name(Coherence.DEFAULT_NAME) SessionLifecycleEvent event) {
    // TODO: process the event
}
```

### 4.8.2.4. ConfigurableCacheFactory Lifecycle Events

CoherenceLifecycleEvents are emitted to indicate the lifecycle of a Coherence instance.

To subscribe to `CoherenceLifecycleEvent` simply create a Spring bean with a listener method annotated with `@CoherenceEventListener`. The method should have a single parameter of type `CoherenceLifecycleEvent`.

`CoherenceLifecycleEvent` are emitted by `Coherence` instances and will only be received in the same JVM, which could be a cluster member or a client.

For example, the `onEvent` method below will receive lifecycle events for all `Coherence` instances in the current application:

```
@CoherenceEventListener
public void onEvent(CoherenceLifecycleEvent event) {
    // TODO: process the event
}
```

#### Receive Specific CoherenceLifecycleEvent Types

There are four different types of `CoherenceLifecycleEvent`. By adding the corresponding annotation to the method parameter the method will only receive the specified events.

- **Starting** - a `Coherence` instance is about to start, use the `@Starting` annotation
- **Started** - a `Coherence` instance has started, use the `@Started` annotation
- **Stopping** - a `Coherence` instance is about to stop, use the `@Stopping` annotation
- **Stopped** - a `Coherence` instance has stopped, use the `@Stopped` annotation

For example, the method below will only receive `Started` and `Stopped` events.

```
@CoherenceEventListener
public void onEvent(@Started @Stopped CoherenceLifecycleEvent event) {
    // TODO: process the event
}
```

#### Receive CoherenceLifecycleEvents for a Specific Coherence Instance

Each `Coherence` instance in an application has a unique name. The observer method can be annotated to only receive events associated with a specific `Coherence` instance by using the `@Name` annotation.

For example, the method below will only receive events for the `Coherence` instance named `customers`:

```
@CoherenceEventListener
public void onEvent(@Name("customers") CoherenceLifecycleEvent event) {
    // TODO: process the event
}
```

The method in this example will receive events for the default `Coherence` instance:

```
@CoherenceEventListener
public void onEvent(@Name(Coherence.DEFAULT_NAME) CoherenceLifecycleEvent event) {
    // TODO: process the event
}
```

#### 4.8.2.5. Cache Lifecycle Events

CacheLifecycleEvent are emitted to indicate the lifecycle of a cache instance.

To subscribe to `CacheLifecycleEvent` simply create a Spring bean with a listener method annotated with @CoherenceEventListener. The method should have a single parameter of type `CacheLifecycleEvent`.

For example, the `onEvent` method below will receive lifecycle events for all caches.

```
@CoherenceEventListener
public void onEvent(CacheLifecycleEvent event) {
    // TODO: process the event
}
```

##### Receive Specific CacheLifecycleEvent Types

There are three types of `CacheLifecycleEvent:

- **Created** - a cache instance has been created, use the @Created annotation
- **Truncated** - a cache instance has been truncated (all data was removed), use the @Truncated annotation
- **Destroyed** - a cache has been destroyed (destroy is a cluster wide operation, so the cache is destroyed on all members of the cluster and clients) use the @Destroyed annotation

For example, the method below will only receive `Created` and `Destroyed` events for all caches.

```
@CoherenceEventListener
public void onEvent(@Created @Destroyed CacheLifecycleEvent event) {
    // TODO: process the event
}
```

##### Receive CacheLifecycleEvents for a Specific NamedMap or NamedCache

To only receive events for a specific `NamedMap` annotate the method parameter with the @MapName annotation. To only receive events for a specific `NamedCache` annotate the method parameter with the @CacheName annotation.

The `@MapName` and `@CacheName` annotations are actually interchangeable so use whichever reads better for your application code, i.e. if your code is dealing with `NamedMap` used `@MapName`. At the

storage level, where the events are generated a `NamedMap` and `NamedCache` are the same.

The method below will only receive events for the map named `orders`:

```
@CoherenceEventListener
public void onEvent(@MapName("orders") CacheLifecycleEvent event) {
    // TODO: process the event
}
```

**Receive CacheLifecycleEvents from a Specific Cache Service**

Caches are owned by a Cache Service, it is possible to restrict events received by a method to only those related to caches owned by a specific service by annotating the method parameter with the @ServiceName annotation.

The method below will only receive events for the caches owned by the service named `StorageService`:

```
@CoherenceEventListener
public void onEvent(@ServiceName("StorageService") CacheLifecycleEvent event) {
    // TODO: process the event
}
```

**Receive CacheLifecycleEvents from a Specific Session**

A typical use case is to obtain `NamedCache` and `NamedMap` instances from a `Session`. It is possible to restrict events received by a method to only those related to caches owned by a specific `Session` by annotating the method parameter with the @SessionName annotation.

The method below will only receive events for the caches owned by the `Session` named `BackEnd`:

```
@CoherenceEventListener
public void onEvent(@SessionName("BackEnd") CacheLifecycleEvent event) {
    // TODO: process the event
}
```

#### 4.8.2.6. Entry Events

Entry Events represent operations for inserting, removing, and updating entries in a cache.



The event types fall into two categories, pre-events (those named **ing*) and post-events, those named **ed*). Pre-events are emitted synchronously before the entry is mutated. Post-events are emitted asynchronously after the entry has been mutated.

As pre-events are synchronous the listener method should not take a long time to execute as it is blocking the cache mutation and could obviously be a performance

> impact. It is also important that developers understand Coherence reentrancy as the pre-events are executing on the Cache Service thread so cannot call into caches owned by the same service.

Precommit entry events (INSERTING, REMOVING, and UPDATING) are raised before the operation is performed to allow modification to an entry. The following holds true when modifying entries:

- Event interceptors that are registered for precommit entry events are synchronously called.
- A lock is held for each entry during the processing of the event to prevent concurrent updates.
- Throwing an exception prevents the operation from being committed.

Postcommit entry events (INSERTED, REMOVED, and UPDATED) are raised after an operation is performed and in the same order as the events occurred. Postcommit events indicate that an entry is no longer able to be modified. Event interceptors for postcommit entry events are asynchronously processed.

To subscribe to `EntryEvent` simply create a Spring bean with a listener method annotated with @CoherenceEventListener. The method should have a single parameter of type `EntryEvent`.

For example, the `onEvent` method below will receive entry events for all caches.

```
@CoherenceEventListener
public void onEvent(EntryEvent event) {
    // TODO: process the event
}
```

#### Receive Specific EntryEvent Types

There are a number of different `EntryEvent` types.

- **Inserting** - an entry is being inserted into a cache, use the @Inserting annotation
- **Inserted** - an entry has been inserted into a cache, use the @Inserted annotation
- **Updating** - an entry is being updated in a cache, use the @Updating annotation
- **Updated** - an entry has been updated in a cache, use the @Updated annotation
- **Removing** - an entry is being deleted from a cache, use the @Removing annotation
- **Removed** - an entry has been deleted from a cache, use the @Removed annotation

To restrict the `EntryEvent` types received by a method apply one or more of the annotations above to the method parameter. For example, the method below will receive `Inserted` and `Removed` events.

```
@CoherenceEventListener
public void onEvent(@Inserted @Removed EntryEvent event) {
    // TODO: process the event
}
```

#### Receive EntryProcessorEvents for a Specific NamedMap or NamedCache

To only receive events for a specific `NamedMap` annotate the method parameter with the `@MapName` annotation. To only receive events for a specific `NamedCache` annotate the method parameter with the `@CacheName` annotation.

The `@MapName` and `@CacheName` annotations are actually interchangeable so use whichever reads better for your application code, i.e. if your code is dealing with `NamedMap` used `@MapName`. At the storage level, where the events are generated a `NamedMap` and `NamedCache` are the same.

The method below will only receive events for the map named `orders`:

```
@CoherenceEventListener
public void onEvent(@MapName("orders") EntryProcessorEvent event) {
    // TODO: process the event
}
```

#### Receive EntryProcessorEvents from a Specific Cache Service

Caches are owned by a Cache Service, it is possible to restrict events received by a method to only those related to caches owned by a specific service by annotating the method parameter with the `@ServiceName` annotation.

The method below will only receive events for the caches owned by the service named `StorageService`:

```
@CoherenceEventListener
public void onEvent(@ServiceName("StorageService") EntryProcessorEvents event) {
    // TODO: process the event
}
```

#### Receive EntryProcessorEvents from a Specific Session

A typical use case is to obtain `NamedCache` and `NamedMap` instances from a `Session`. It is possible to restrict events received by a method to only those related to caches owned by a specific `Session` by annotating the method parameter with the `@SessionName` annotation.

The method below will only receive events for the caches owned by the `Session` named `BackEnd`:

```
@CoherenceEventListener
public void onEvent(@SessionName("BackEnd") EntryProcessorEvents event) {
    // TODO: process the event
}
```

### 4.8.2.7. EntryProcessor Events

An `EntryProcessorEvent` is emitted when a mutation occurs on an entry in a cache. These events are only emitted on the storage enabled member that is the primary owner of the entry.

To subscribe to `EntryProcessorEvent` simply create a Spring bean with a listener method annotated with `@CoherenceEventListener`. The method should have a single parameter of type `EntryProcessorEvent`.

For example, the `onEvent` method below will receive entry events for all caches.

```
@CoherenceEventListener
public void onEvent(EntryProcessorEvent event) {
    // TODO: process the event
}
```

#### Receive Specific EntryProcessorEvent Types

There are a number of different `EntryProcessorEvent` types.

- Executing - an `EntryProcessor` is being invoked on a cache, use the `@Executing` annotation
- Executed - an `EntryProcessor` has been invoked on a cache, use the `@Executed` annotation

To restrict the `EntryProcessorEvent` types received by a method apply one or more of the annotations above to the method parameter. For example, the method below will receive `Executed` events.

```
@CoherenceEventListener
public void onEvent(@Executed EntryProcessorEvent event) {
    // TODO: process the event
}
```



The event types fall into two categories, pre-event ('Executing') and post-event (`Executed`). Pre-events are emitted synchronously before the `EntryProcessor` is invoked. Post-events are emitted asynchronously after the `EntryProcessor` has been invoked.

As pre-events are synchronous the listener method should not take a long time to execute as it is blocking the `EntryProcessor` invocation and could obviously be a performance impact. It is also important that developers understand Coherence reentrancy as the pre-events are executing on the Cache Service thread so cannot call into caches owned by the same service.

#### Receive EntryProcessorEvents for a Specific NamedMap or NamedCache

To only receive events for a specific `NamedMap` annotate the method parameter with the `@MapName` annotation. To only receive events for a specific `NamedCache` annotate the method parameter with the `@CacheName` annotation.

The `@MapName` and `@CacheName` annotations are actually interchangeable so use whichever reads better for your application code, i.e. if your code is dealing with `NamedMap` used `@MapName`. At the storage level, where the events are generated a `NamedMap` and `NamedCache` are the same.

The method below will only receive events for the map named `orders`:

```
@CoherenceEventListener
public void onEvent(@MapName("orders") EntryProcessorEvent event) {
    // TODO: process the event
}
```

#### Receive EntryProcessorEvents from a Specific Cache Service

Caches are owned by a Cache Service, it is possible to restrict events received by a method to only those related to caches owned by a specific service by annotating the method parameter with the @ServiceName annotation.

The method below will only receive events for the caches owned by the service named `StorageService`:

```
@CoherenceEventListener
public void onEvent(@ServiceName("StorageService") EntryProcessorEvents event) {
    // TODO: process the event
}
```

#### Receive EntryProcessorEvents from a Specific Session

A typical use case is to obtain `NamedCache` and `NamedMap` instances from a `Session`. It is possible to restrict events received by a method to only those related to caches owned by a specific `Session` by annotating the method parameter with the @SessionName annotation.

The method below will only receive events for the caches owned by the `Session` named `BackEnd`:

```
@CoherenceEventListener
public void onEvent(@SessionName("BackEnd") EntryProcessorEvents event) {
    // TODO: process the event
}
```

### 4.8.2.8. Partition Level Transaction Events

A TransactionEvent is emitted in relation to all mutations in a single partition in response to executing a single request. These are commonly referred to as partition level transactions. For example, an `EntryProcessor` that mutates more than one entry (which could be in multiple caches) as part of a single invocation will cause a partition level transaction to occur encompassing all of those cache entries.

Transaction events are emitted by storage enabled cache services, they will only e received on the same member that the partition level transaction occurred.

To subscribe to `TransactionEvent` simply create a Spring bean with a listener method annotated with @CoherenceEventListener. The method should have a single parameter of type `TransactionEvent`.

For example, the `onEvent` method below will receive all transaction events emitted by storage enabled cache services in the same JVM.

```
@CoherenceEventListener
public void onEvent(TransactionEvent event) {
    // TODO: process the event
}
```

#### Receive Specific TransactionEvent Types

There are a number of different `TransactionEvent` types.

- **Committing** - A COMMITTING event is raised prior to any updates to the underlying backing map. This event will contain all modified entries which may span multiple backing maps. Use the @Committing annotation
- **Committed** - A COMMITTED event is raised after any mutations have been committed to the underlying backing maps. This event will contain all modified entries which may span multiple backing maps. Use the @Committed annotation

To restrict the `TransactionEvent` types received by a method apply one or more of the annotations above to the method parameter. For example, the method below will receive `Committed` events.

```
@CoherenceEventListener
public void onEvent(@Committed TransactionEvent event) {
    // TODO: process the event
}
```

#### Receive TransactionEvent from a Specific Cache Service

Caches are owned by a Cache Service, it is possible to restrict events received by a method to only those related to caches owned by a specific service by annotating the method parameter with the @ServiceName annotation.

The method below will only receive events for the caches owned by the service named `StorageService`:

```
@CoherenceEventListener
public void onEvent(@ServiceName("StorageService") TransactionEvent event) {
    // TODO: process the event
}
```

### 4.8.2.9. Partition Transfer Events

A TransferEvent captures information concerning the transfer of a partition for a storage enabled member. Transfer events are raised against the set of BinaryEntry instances that are being transferred.



TransferEvents are dispatched to interceptors while holding a lock on the partition being transferred, blocking any operations for the partition. Event observer methods should therefore execute as quickly as possible of hand-off execution to another thread.

To subscribe to `TransferEvent` simply create a Spring bean with a listener method annotated with @CoherenceEventListener. The method should have a single parameter of type `TransferEvent`.

For example, the `onEvent` method below will receive all transaction events emitted by storage enabled cache services in the same JVM.

```
@CoherenceEventListener
public void onEvent(TransferEvent event) {
    // TODO: process the event
}
```

#### Receive Specific TransferEvent Types

There are a number of different `TransferEvent` types.

- **Arrived** - This `TransferEvent` is dispatched when a set of `BinaryEntry` instances have been transferred to the local member or restored from backup.The reason for the event (primary transfer from another member or restore from backup) can be derived as follows:

```
TransferEvent event;
boolean restored = event.getRemoteMember() == event.getLocalMember();
```

Use the @Arrived annotation to restrict the received events to arrived type.

- **Assigned** - This `TransferEvent` is dispatched when a partition has been assigned to the local member. This event will only be emitted by the ownership senior during the initial partition assignment. Use the @Assigned annotation to restrict received events.
- **Departing** - This `TransferEvent` is dispatched when a set of `BinaryEntry` are being transferred from the local member. This event is followed by either a `Departed` or `Rollback` event to indicate the success or failure of the transfer. Use the @Departing annotation to restrict received events.
- **Departed** - This `TransferEvent` is dispatched when a partition has been successfully transferred from the local member. To derive the `BinaryEntry` instances associated with the transfer, consumers should subscribe to the `Departing` event that would precede this event. Use the @Departed annotation to restrict received events.
- **Lost** - This `TransferEvent` is dispatched when a partition has been orphaned (data loss *may* have occurred), and the ownership is assumed by the local member. This event is only be emitted by the ownership senior. Use the @Lost annotation to restrict received events.
- **Recovered** - This `TransferEvent` is dispatched when a set of `BinaryEntry` instances have been recovered from a persistent storage by the local member. Use the @Recovered annotation to restrict received events.

- **Rollback** - This `TransferEvent` is dispatched when partition transfer has failed and was therefore rolled back. To derive the `BinaryEntry` instances associated with the failed transfer, consumers should subscribe to the `Departing` event that would precede this event. Use the `@Rollback` annotation to restrict received events.

To restrict the `TransferEvent` types received by a method apply one or more of the annotations above to the method parameter. For example, the method below will receive `Lost` events.

```
@CoherenceEventListener
public void onEvent(@Lost TransferEvent event) {
    // TODO: process the event
}
```

Multiple type annotations may be used to receive multiple types of `TransferEvent`.

#### Receive TransferEvent from a Specific Cache Service

Caches are owned by a Cache Service, it is possible to restrict events received by a method to only those related to caches owned by a specific service by annotating the method parameter with the `@ServiceName` annotation.

The method below will only receive events for the caches owned by the service named `StorageService`:

```
@CoherenceEventListener
public void onEvent(@ServiceName("StorageService") TransferEvent event) {
    // TODO: process the event
}
```

### 4.8.2.10. Unsolicited Commit Events

An `UnsolicitedCommitEvent` captures changes pertaining to all observed mutations performed against caches that were not directly caused (solicited) by the partitioned service. These events may be due to changes made internally by the backing map, such as eviction, or referrers of the backing map causing changes.

Unsolicited commit events are emitted by storage enabled cache services, they will only e received on the same member.

To subscribe to `UnsolicitedCommitEvent` simply create a Spring bean with a listener method annotated with `@CoherenceEventListener`. The method should have a single parameter of type `UnsolicitedCommitEvent`.

For example, the `onEvent` method below will receive all Unsolicited commit events emitted by storage enabled cache services in the same JVM.

```
@CoherenceEventListener
public void onEvent(UnsolicitedCommitEvent event) {
```

```
    // TODO: process the event
}
```

## 4.9. Filter Binding Annotations

Filter binding annotations are normal annotations that are themselves annotated with the @FilterBinding meta-annotation. A filter binding annotation represents a Coherence Filter and is used to specify a `Filter` in certain injection points, for example a View (CQC), `NamedTopic Subscriber` beans, event listeners, etc.

There are three parts to using a filter binding:

- The filter binding annotation
- An implementation of a FilterFactory that is annotated with the filter binding annotation. This is a factory that produces the required `Filter`.
- Injection points annotated with the filter binding annotation.

We will put all three parts together in an example. Let's use a Coherence `NamedMap` named `plants` that contains plants represented by instances of the `Plant` class as map values. Among the various properties on the `Plant` class there is a property called `plantType` and a property called `height`. In this example, we want to inject a view that only shows large palm trees (any palm tree larger than 20 meters). We would need a `Filter` that has a condition like the following: `plantType == PlantType.PALM && height >= 20`.

### 4.9.1. Create the filter binding annotation

First create a simple annotation, it could be called something like `PlantNameExtractor`

```
import java.lang.annotation.Documented;
import java.lang.annotation.Retention;
import java.lang.annotation.RetentionPolicy;

import com.oracle.coherence.spring.annotation.FilterBinding;

@FilterBinding                                  ①
@Documented
@Retention(RetentionPolicy.RUNTIME)
public @interface LargePalmTrees {              ②
}
```

① The annotation class is annotated with `@FilterBinding`

② The annotation name is `PlantNameExtractor`

In this case the annotation does not need any other attributes.

### 4.9.2. Create the `FilterFactory`

Now create the FilterFactory implementation that will produce instances of the required `Filter`.

```
import com.oracle.coherence.spring.annotation.FilterFactory;
import com.tangosol.util.Extractors;
import com.tangosol.util.Filter;
import com.tangosol.util.Filters;
import org.springframework.stereotype.Component;

@LargePalmTrees                                                    ①
@Component                                                         ②
public class LargePalmTreesFilterFactory<Plant>
        implements FilterFactory<LargePalmTrees, Plant> {
    @Override
    public Filter<Plant> create(LargePalmTrees annotation) { ③
        Filter<Plant> palm = Filters.equal("plantType", PlantType.PALM);
        Filter<Plant> height = Filters.greaterEqual(
                Extractors.extract("height"), 20);
        return Filters.all(palm, height);
    }
}
```

① The class is annotated with the `PlantNameExtractor` filter binding annotation

② The class must be a Spring bean, let's annotate it with `@Component` so that component scanning will pick this class up as a Spring bean

③ The `create` method uses the Coherence `filters` API to create the required `filter`.

The parameter to the `create` method is the annotation used on the injection point. In this case the annotation has no values, but if it did we could access those values to customize how the filter is created.

For example, we can make the filter more general purpose by calling the annotation `@PalmTrees` and by adding a value parameter representing the height like this:

```
@FilterBinding
@Documented
@Retention(RetentionPolicy.RUNTIME)
public @interface PalmTrees {
    String value();
}
@FilterBinding
@Documented
@Retention(RetentionPolicy.RUNTIME)
public @interface PalmTrees {
    int value() default 0;
}
```

We then need to modify our filter factory to use the height value:

```
import com.oracle.coherence.spring.annotation.FilterFactory;
import com.tangosol.util.Extractors;
import com.tangosol.util.Filter;
import com.tangosol.util.Filters;
import org.springframework.stereotype.Component;

@PalmTrees                                                          ①
@Component                                                          ②
public class PalmTreesFilterFactory<Plant>
        implements FilterFactory<PalmTrees, Plant> {
    @Override
    public Filter<Plant> create(PalmTrees annotation) {             ③
        Filter<Plant> palm = Filters.equal("plantType", PlantType.PALM);
        Filter<Plant> height = Filters.greaterEqual(
                Extractors.extract("height"), annotation.value());  ④
        return Filters.all(palm, height);
    }
}
```

① The class is annotated with the more flexible `PalmTrees` filter binding annotation accepting a height parameter

② The class must be a Spring bean, let's annotate it with `@Component` so that component scanning will pick this class up as a Spring bean

③ The `create` method uses the Coherence `filters` API to create the required `filter`

④ Instead of hard-coding the height, we use the value from the `@PalmTrees` annotation

### 4.9.3. Annotate the Injection Point

Now the application code where the view is to be injected can use the custom filter binding annotation.

```
    @View                                                           ①
    @PalmTrees(1)                                                   ②
    @CoherenceCache("plants")                                       ③
    private NamedMap<Long, Plant> palmTrees;
```

① The `@View` annotation indicates that this is a view rather than a plain `NamedMap`

② The `@PalmTrees` annotation links to the custom filter factory which is used to create the filter for the view. The annotation value of `1` indicates that we are interested in all palm trees of at least 1 meter in height.

③ Due to Spring limitations regarding the injection of Maps, we use the `@CoherenceMap` annotation to inject the `NamedMap`, which also has takes an optional value to specify the name of the cache.

# 4.10. Extractor Binding Annotations

ValueExtractor binding annotations are normal annotations that are themselves annotated with the @ExtractorBinding meta-annotation. An extractor binding annotation represents a Coherence ValueExtractor and is used to specify a `ValueExtractor` in certain injection points, for example a View (CQC), `NamedTopic Subscriber` beans, `MapEvent` listeners, etc.

There are three parts to using an extractor binding:

- The extractor binding annotation
- An implementation of a ExtractorFactory that is annotated with the extractor binding annotation. This is a factory that produces the required `ValueExtractor`.
- Injection points annotated with the extractor binding annotation.

As an example, let's continue with our previous example, where we have a Coherence `NamedMap` named `plants` that contains `Plant` instances as values. In this example we are interested in inject a map of plant names instead of the actual plant instances. Each plant has a `name` property that we will use for that purpose. We will need a `ValueExtractor` that extracts the `name` property and the resulting map of plant names can be injected into our Spring beans.

## 4.10.1. Create the extractor binding annotation

First create a simple annotation called `PlantName`

```
@ExtractorBinding                                   ①
@Documented
@Retention(RetentionPolicy.RUNTIME)
public @interface PersonAge {                       ②
}

import com.oracle.coherence.spring.annotation.ExtractorBinding;
import com.oracle.coherence.spring.annotation.FilterBinding;

import java.lang.annotation.Documented;
import java.lang.annotation.Retention;
import java.lang.annotation.RetentionPolicy;

@ExtractorBinding                                   ①
@Documented
@Retention(RetentionPolicy.RUNTIME)
public @interface PlantNameExtractor {              ②
}
```

① The annotation class is annotated with `@ExtractorBinding`

② The annotation name is `PlantNameExtractor`

In this case the annotation does not need any other attributes.

### 4.10.2. Create the ExtractorFactory

Now create the ExtractorFactory implementation that will produce instances of the required ValueExtractor.

```
import com.oracle.coherence.spring.annotation.ExtractorFactory;
import com.tangosol.util.Extractors;
import com.tangosol.util.ValueExtractor;
import org.springframework.stereotype.Component;

@PlantNameExtractor                                          ①
@Component                                                   ②
public class PlantNameExtractorFactory<Plant>
        implements ExtractorFactory<PlantNameExtractor, Plant, String> {
    @Override
    public ValueExtractor<Plant, String> create(PlantNameExtractor annotation) {  ③
        return Extractors.extract("name");
    }
}
```

① The class is annotated with the PlantNameExtractor extractor binding annotation

② The class must be a Spring bean, let's annotate it with @Component so that component scanning will pick this class up as a Spring bean

③ The create method uses the Coherence Extractors API to create the required extractor, in this case a trivial property extractor.

The parameter to the create method is the annotation used on the injection point. In this case the annotation has no values, but if it did we could access those values to customize how the ValueExtractor is created.

### 4.10.3. Annotate the Injection Point

Now the application code where the view is to be injected can use the custom extractor binding annotation.

```
@View                                        ①
@PersonAge                                   ②
@Name("people")                              ③
private NamedMap<String, Integer> ages;      ④
    @View                                    ①
    @PlantNameExtractor                      ②
    @CoherenceMap("plants")                  ③
    private NamedMap<Long, String> plants;   ④
```

① The @View annotation indicates that this is a view rather than a plain NamedMap

② The @PlantNameExtractor annotation links to the custom extractor factory used to create the ValueExtractor for the view

③ Due to Spring limitations regarding the injection of Maps, we use the `@CoherenceMap` annotation to inject the `NamedMap`, which also has takes an optional value to specify the underlying cache/map name to use for the view.

④ Note that the `NamedMap` generics are now `Long` and `String` instead of `Long` and `Plant` as the `Plant` values from the underlying cache are transformed into `String` values by extracting just the name property.

## 4.11. Messaging with Coherence Topics

Spring Coherence integration provides support for message driven applications by virtue of Coherence topics.

A Coherence NamedTopic is analogous to a queue or pub/sub topic, depending on the configuration and application code. Messages published to the topic are stored in Coherence caches, so topics are scalable and performant.

A typical stand-alone Coherence application would create a `NamedTopic` along with `Publisher` or `Subscriber` instances to publish to or subscribe to topics. Injection of topics into Spring applications is already covered in Injecting NamedTopics. With Spring messaging this becomes much simpler.

With Spring Coherence Messaging publishers and subscribers beans are created by writing suitably annotated interfaces.

### 4.11.1. Define Publishers - @CoherencePublisher

To create a topic Publisher that sends messages, you can simply define an interface that is annotated with @CoherencePublisher. Also, your configuration class has to be annotated with the @CoherencePublisherScan annotation. This is needed to specify the base package from which we recursively scan for `@CoherencePublisher` annotated interfaces.

*Config.java*

```
@Configuration
@CoherencePublisherScan("com.example.app.services")
public class Config {
}
```

For example the following is a trivial `@CoherencePublisher` interface:

*ProductClient.java*

```
import com.oracle.coherence.spring.annotation.CoherencePublisher;
import com.oracle.coherence.spring.annotation.Topic;

@CoherencePublisher                                  ①
public interface ProductClient {

    @Topic("my-products")                            ②
    void sendProduct(String message);                ③
```

```
    void sendProduct(@Topic String topic, String message); ④
}
```

① The `@CoherencePublisher` annotation is used to designate this interface as a message publisher.

② The `@Topic` annotation indicates which topics the message should be published to

③ The method defines a single parameter, which is the message value. In this case the values being published are String instances but they could be any type that can be serialized by Coherence.

④ It is also possible for the topic to be dynamic by making it a method argument annotated with `@Topic`.

At run time Spring will produce an implementation of the above interface. You can retrieve an instance of `ProductClient` either by looking up the bean from the `ApplicationContext` or by injecting the bean with `@Inject`:

*Using ProductClient*

```
ProductClient client = applicationContext.getBean(ProductClient.class);
client.sendProduct("Blue Trainers");
```

### 4.11.2. Reactive and Non-Blocking Method Definitions

The `@CoherencePublisher` annotation supports the definition of reactive return types (such as Reactor `Flux`) as well as Futures.

The following sections cover possible method signatures and behaviour:

#### 4.11.2.1. Mono Value and Return Type

```
Mono<Publisher.Status> sendBook(Mono<Book> book);
```

The implementation will return a Mono that when subscribed to will subscribe to the passed Mono and send a message emitting the resulting Publisher.Status.

#### 4.11.2.2. Reactor Flux Value and Return Type

```
Flux<Publisher.Status> sendBooks(Flux<Book> book);
```

The implementation will return a Reactor Flux that when subscribed to will subscribe to the passed `Flux` and for each emitted item will send a message emitting the resulting Publisher.Status.

#### 4.11.2.3. Future Return Type

```
Future<Publisher.Status> sendBooks(Mono<Book> book);
```

The implementation will return a Future with publisher's status.

### 4.11.3. Define Subscribers - @CoherenceTopicListener

To listen to Coherence topic messages you can use the @CoherenceTopicListener annotation to define a message listener.

The following example will listen for messages published by the `ProductClient` in the previous section:

*ProductListener.java*

```
import com.oracle.coherence.spring.annotation.CoherenceTopicListener;
import com.oracle.coherence.spring.annotation.Topic;

@CoherenceTopicListener                          ①
public class ProductListener {

    @Topic("my-products")                        ②
    public void receive(String product) {        ③
        System.out.println("Got Product - " + product);
    }
}
```

① The @CoherenceTopicListener annotation to indicate that this bean is a Coherence topic listener.

② The @Topic annotation is again used to indicate which topic to subscribe to.

③ The receive method defines single arguments that will receive the message value, in this case the message is of type `String`.

### 4.11.4. Method Parameter Bindings

When using a Coherence topic Subscriber directly in application code, the `receive` method returns an Element, which contains the message value and metadata. The annotated subscriber method can take various parameter types that will bind to the element itself or to the message.

For example

```
@CoherenceTopicListener
@Topic("my-products")
public void receive(Element<Product> product) {
    // ... process message ...
}
```

The method above will be passed the Element received from the topic. By receiving the element, the method has access to the message value and all the metadata stored with the message.

### 4.11.5. Committing Messages

An important part of Coherence topic subscribers is committing messages to notify the server that they have been processed and guaranteeing at least once delivery. When using Micronaut Coherence messaging every message will be committed after the handler method has successfully processed the message. This behaviour can be controlled by adding a commit strategy to the @CoherenceTopicListener annotation.

#### 4.11.5.1. Default Commit Behaviour

If no `commitStrategy` field has been provided to the `@CoherenceTopicListener` annotation the default behaviour is to synchronously call `Element.commit()` for every message received.

```
@CoherenceTopicListener
@Topic("my-products")
public void receive(Element<Product> product) {
    // ... process message ...
}
```

No `commitStrategy` field has been supplied to the `@CoherenceTopicListener` annotation.

#### 4.11.5.2. Setting Commit Strategy

The @CoherenceTopicListener `commitStrategy` field is an enumeration of type CommitStrategy with three values, `SYNC`, `ASYNC` and `MANUAL`.

- CommitStrategy.SYNC - This strategy is the default, and will synchronously commit every message upon successful completion of the handler method, by calling `Element.commit()`.

```
@CoherenceTopicListener(commitStrategy = CommitStrategy.SYNC)
@Topic("my-products")
public void receive(Product product) {
    // ... process message ...
}
```

- CommitStrategy.ASYNC - This strategy will asynchronously commit every message upon successful completion of the handler method, by calling `Element.commitAsync()`.

```
@CoherenceTopicListener(commitStrategy = CommitStrategy.ASYNC)
@Topic("my-products")
public void receive(Product product) {
    // ... process message ...
}
```

- CommitStrategy.MANUAL - This strategy will not automatically commit messages, all handling of commits must be done as part of the handler method or by some external process.

```
@CoherenceTopicListener(commitStrategy = CommitStrategy.MANUAL)
@Topic("my-products")
public void receive(Element<Product> product) {
    // ... process message ...

    // manually commit the element
    element.commit();
}
```

In the example above a `MANUAL` commit strategy has used. The element will be committed by the application code at the end of the handler method. To be able to manually commit a message the method must take the `Element` as a parameter so that application code can access the commit methods.

#### 4.11.5.3. Forwarding Messages with @SendTo

On any `@CoherenceTopicListener` method that returns a value, you can use the @SendTo annotation to forward the return value to the topic or topics specified by the @SendTo annotation.

The key of the original ConsumerRecord will be used as the key when forwarding the message.

*ProductListener.java*

```
import com.oracle.coherence.spring.*;
import org.springframework.messaging.handler.annotation.SendTo;

@CoherenceTopicListener
public class ProductListener {

    @Topic("awesome-products")                    ①
    @SendTo("product-quantities")                 ②
    public int receive(Product product) {
        System.out.println("Got Product - " + product.getName() + " by " + product
.getBrand());
        return product.getQuantity();             ③
    }
}
```

① The topic subscribed to is `awesome-products`

② The topic to send the result to is `product-quantities`

③ The return value is used to indicate the value to forward

You can also do the same using Reactive programming:

*ProductListener.java*

```
import com.oracle.coherence.spring.*;
import org.springframework.messaging.handler.annotation.SendTo;
import reactor.core.publisher.Mono;
```

```
@CoherenceTopicListener
public class ProductListener {

    @Topic("awesome-products")                    ①
    @SendTo("product-quantities")                 ②
    public Mono<Integer> receiveProduct(Mono<Product> productSingle) {
        return productSingle.map(product -> {
            System.out.println("Got Product - " + product.getName() + " by " +
product.getBrand());
            return product.getQuantity();         ③
        });
    }
}
```

① The topic subscribed to is `awesome-products`

② The topic to send the result to is `product-quantities`

③ The return is mapped from the single to the value of the quantity

## 4.12. Cache Store

Coherence Spring provides dedicated support for database-backed caches using JPA. Spring Data's JPA Repositories make basic CRUD database access very simple. An application developer can just provide an interface that extends `JpaRepository` with the required generic parameters and Spring will do the rest.

Coherence caches that are backed by a database have two options for how the database integration is provided:

- CacheLoader - an application developer writes an implementation of a `CacheLoader` to read data from a database for a given key (or keys), convert it to entities that are then loaded into a cache for the given keys.
- CacheStore - whilst a `CacheLoader` only loads from a database into a cache, a `CacheStore` (which extends `CacheLoader`) also stores cached entities back to the database, or for entries deleted from the cache, erases the corresponding values from the database. The parallels between a `CacheLoader` or `CacheStore` and a `JpaRepository` should be pretty obvious.

The Coherence Spring core module provides two interfaces:

- JpaRepositoryCacheLoader, which extends both `JpaRepository` and `CacheLoader`
- JpaRepositoryCacheStore, which extends both `JpaRepository` and `CacheStore`.

To create a JPA repository cache loader or cache store, all a developer needs to do is extend the relevant interface `JpaRepositoryCacheLoader` or `JpaRepositoryCacheStore` with the correct generic parameters. We will illustrate the use of Cache Stores using the following example.



Please also look at the reference documentation chapter Injecting Spring Beans into Coherence-Managed Objects.

### 4.12.1. JPA Repository CacheStore Demo

In this demo we are show-casing how to use Spring Data JPA repository beans as Coherence CacheStores in applications using the Coherence Spring project.

The demo is split into multiple Maven modules in order to show-case 2 use-cases:

- Embedded Coherence
- Connect to a remote Coherence instance cache using Coherence*Extend

The Maven Project is structured into the following modules:

- **coherence-cachestore-demo-app** Main entry point for the demo using an embedded Coherence instance
- **coherence-cachestore-demo-server** Remote Coherence server we will connect to using Coherence*Extend
- **coherence-cachestore-demo-core** Contains common code shared between the local app and the remote Coherence server version

#### 4.12.1.1. Data Model

At its core (and in the `coherence-cachestore-demo-core` module), the application has a simple class called `Person` that is annotated with basic JPA annotations:

```
@Entity
@Table(name = "PEOPLE")
public class Person implements Serializable {

    /**
     * The unique identifier for this person.
     */
    @Id
    private Long id;

    /**
     * The age of this person.
     */
    private int age;

    /**
     * The person's first name.
     */
    private String firstname;

    /**
     * The person's last name.
     */
    private String lastname;
```

```
    public Long getId() {
        return id;
    }

    public void setId(Long id) {
        this.id = id;
    }

    public int getAge() {
        return age;
    }

    public void setAge(int age) {
        this.age = age;
    }

    public String getFirstname() {
        return firstname;
    }

    public void setFirstname(String firstname) {
        this.firstname = firstname;
    }

    public String getLastname() {
        return lastname;
    }

    public void setLastname(String lastname) {
        this.lastname = lastname;
    }

}
```

The identifier of a `Person` is defined as `Long`, so in our Coherence-based application we would put these `Person` instances into a Coherence `NamedMap<Long, Person>`.

#### 4.12.1.2. Writing a JPA Repository CacheStore

To write a JPA repository `CacheStore` that can be used by our people cache we need to create a simple Spring Data repository interface:

```
import com.oracle.coherence.spring.cachestore.JpaRepositoryCacheStore;
import org.springframework.stereotype.Repository;

@Repository
public interface PersonRepository extends JpaRepositoryCacheStore<Person, Long> {

}
```

That is all the code required to write a `CacheStore` that can be plugged into Coherence. Spring Data will take care of actually generating the implementation of the interface, and supplying that implementation as a bean.

#### 4.12.1.3. Embedded Coherence

In the embedded Coherence CacheStore demo we use a co-located Coherence instance that will start as part of the application itself.

To use a `CacheStore` in Coherence, it needs to be configured in the Coherence cache configuration file, which in the embedded use-case is `coherence-cache-config.xml`. In order to use the repository bean as a `CacheStore`, we will make use of the Coherence Spring feature that allows injection of Spring beans into the cache configuration file.

To use Spring bean injection in the configuration file we need to declare a custom namespace in the root XML element that references the Coherence Spring `NamespaceHandler`.

*coherence-cache-config.xml*

```
<cache-config xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
              xmlns="http://xmlns.oracle.com/coherence/coherence-cache-config"
              xmlns:spring=
"class://com.oracle.coherence.spring.namespace.NamespaceHandler"
              xsi:schemaLocation="http://xmlns.oracle.com/coherence/coherence-cache-
config coherence-cache-config.xsd">
```

The `xmlns:spring="class://com.oracle.coherence.spring.namespace.NamespaceHandler"` line declares the custom namespace, so elements with a prefix `spring` will be handled by the `com.oracle.coherence.spring.namespace.NamespaceHandler` class. The custom namespace handler allows us to use elements of the form `<spring:bean>bean-name</spring:bean>` anywhere in the configuration that Coherence normally allows an `<instance>` element or a `<class-scheme>` element.

Thus, we can add a scheme to the `<cache-schemes>` section of the configuration that uses the repository bean.

*coherence-cache-config.xml*

```
    <caching-schemes>
        <distributed-scheme>
            <scheme-name>db-scheme</scheme-name>
            <service-name>StorageService</service-name>
            <backing-map-scheme>
                <read-write-backing-map-scheme>
                    <internal-cache-scheme>
                        <local-scheme/>
                    </internal-cache-scheme>
                    <cachestore-scheme>
                        <spring:bean>{repository-bean}</spring:bean>
                    </cachestore-scheme>
                </read-write-backing-map-scheme>
```

```
            </backing-map-scheme>
            <autostart>true</autostart>
        </distributed-scheme>
```

In the snippet above you can see the `<spring:bean>{repository-bean}</spring:bean>` element used as the cache store. In this case we have not used the name of the repository bean directly, we have used a parameter named `repository-bean` (XML values in curly-brackets in the `<spring:bean>` element are treated as parameter macros). This allows us to map multiple caches to the same scheme each with a different cache store - this is quite a common approach in Coherence for a number of elements that may be configured in a scheme per-cache. We can now also add the cache mapping for our `people` cache that will use the scheme above.

*coherence-cache-config.xml*

```
        <cache-mapping>
            <cache-name>people</cache-name>
            <scheme-name>db-scheme</scheme-name>
            <init-params>
                <init-param>
                    <param-name>repository-bean</param-name>
                    <param-value>personRepository</param-value>
                </init-param>
            </init-params>
        </cache-mapping>
        <cache-mapping>
            <cache-name>customers</cache-name>
            <scheme-name>db-scheme</scheme-name>
            <init-params>
                <init-param>
                    <param-name>repository-bean</param-name>
                    <param-value>personRepository</param-value>
                </init-param>
            </init-params>
        </cache-mapping>
```

In the mapping above, the cache name `people` maps to the scheme `db-scheme` that we created above. As we mentioned above, we need to pass the actual bean name in the `repository-bean` parameter, which we do by using the `<init-params>` element in the mapping. We set the `<param-value>` element to the bean name, in this case `personRepository`.



The bean name used here is `personRepository`. This is the default name generated by Spring for the `PersonRepository` class, which is the simple class name with the first letter lowercase. If we did not want to rely on Spring generating a bean name we could specify a name in the `@Repository` annotation on the `PersonRepository` class.

If we had another cache with a different cache store, for example if we had an entity called `Location` with a repository cache store class called `LocationRepository`, the bean name would default

to `locationRepository`, and we could add the following mapping:

```
<cache-mapping>
    <cache-name>locations</cache-name>
    <scheme-name>db-scheme</scheme-name>
    <init-params>
        <init-param>
            <param-name>repository-bean</param-name>
            <param-value>locationRepository</param-value>
        </init-param>
    </init-params>
</cache-mapping>
```

#### 4.12.1.4. Running the Embedded Sample

This sample is just a simple Spring Boot application that exposes two endpoints to create/update people and get people by id. The controller class for the two endpoints is very simple:

*PersonController.java*

```
@RestController
@RequestMapping(path = "/api/people")
@Transactional()
public class PersonController {

    /**
     * The {@link NamedMap} to store {@link Person} entities.
     */
    @CoherenceMap
    private NamedMap<Long, Person> people;

    @Autowired
    private PersonRepository personRepository;

    /**
     * Create a {@link Person} in the cache.
     * @param id         the unique identifier for the person
     * @param firstName  the person's first name
     * @param lastName   the person's last name
     * @param age        the person's age
     * @return the identifier used to create the person
     */
    @PostMapping
    public Long createPerson(@RequestParam("id") long id, @RequestParam("firstName")
String firstName,
            @RequestParam("lastName") String lastName, @RequestParam("age") int age) {
        Person person = new Person();
        person.setFirstname(firstName);
        person.setLastname(lastName);
        person.setAge(age);
```

```
        person.setId(id);
        people.put(id, person);
        return id;
    }

    /**
     * Returns the {@link Person} with the specified identifier.
     *
     * @param personId  the unique identifier for the person
     * @return  the {@link Person} with the specified identifier
     */
    @GetMapping("/{personId}")
    public Person getPerson(@PathVariable("personId") Long personId) {
        Person person = people.get(personId);
        if (person == null) {
            throw new ResponseStatusException(HttpStatus.NOT_FOUND, "Person " +
personId + " does not exist");
        }
        return person;
    }

    @GetMapping("/db/{personId}")
    public Person getPersonFromDb(@PathVariable("personId") Long personId) {
        Person person = this.personRepository.findById(personId).orElseThrow(() -> {
            throw new ResponseStatusException(HttpStatus.NOT_FOUND, "Person " +
personId + " does not exist");
        });
        return person;
    }
}
```

We use the Coherence Spring integration to inject a `NamedMap` into the controller. This will be for the cache named `people`, which we configured to use the cache store in the configuration above.

In the `createPerson` method we use the request parameters to create a `Person` and put it into the cache. The `CacheStore` will write this to the database.

In the `getPerson` method we retrieve the `Person` from the cache using the id from the request path, loading from the database if there is no entry in the cache for the id.

We can build the example using Maven from the root directory of Coherence Spring:

```
./mvnw clean package -pl samples/cachestore-demo
```

This will build a Spring Boot jar that we can run the normal Spring Boot ways, for example:

```
java -jar samples/cachestore-demo/coherence-spring-cachestore-demo-
app/target/coherence-spring-cachestore-demo-5.0.0-SNAPSHOT.jar
```

After the application has started we can try to get a `Person` using `curl`

```
curl -i -X GET http://localhost:8080/api/people/100
```

This should return a 404 response because there is no person in the database or cache with the id 100.

We can create a `Person` using a `curl` POST request:

```
curl -i -X POST http://localhost:8080/api/people \
    -d 'firstName=Joe' -d 'lastName=Smith' \
    -d 'age=21' -d 'id=100'
```

This will create the `Person` named Joe Smith with the id 100. This should return with a 200 response to say the `Person` was successfully created and will be stored in the database.

If we re-run the GET request we should get Joe Smith.

```
curl -i -X GET http://localhost:8080/api/people/100
HTTP/1.1 200
Content-Type: application/json
Transfer-Encoding: chunked
Date: Thu, 19 Aug 2021 16:13:47 GMT

{"id":100,"age":21,"firstname":"Joe","lastname":"Smith"}%
```

#### 4.12.1.5. Using Coherence*Extend

This is the slightly more complex version of the CacheStore demo. Instead of using an embedded version Coherence, we will have a remote Coherence instance and the actual application will connect to Coherence via Coherence*Extend.

We can build the example using Maven from the root directory of Coherence Spring:

```
./mvnw clean install -pl :coherence-spring-cachestore-demo-server -am -DskipTests
./mvnw clean install -pl :coherence-spring-cachestore-demo-app -am -DskipTests
```

We now have to start the Coherence Server as well as the Coherence Client App. We run both apps using Spring Boot. Let's start with the Coherence Server:

```
java -jar samples/cachestore-demo/coherence-spring-cachestore-demo-
server/target/coherence-spring-cachestore-demo-server-5.0.0-SNAPSHOT.jar
```

Next we start the client app. It is actually the same app as used in the embedded Coherence use-case. However, we will specify an additional Spring Boot profile, instructing the app to connect to

the Coherence server in client mode via Coherence*Extend:

```
java -jar samples/cachestore-demo/coherence-spring-cachestore-demo-
app/target/coherence-spring-cachestore-demo-app-5.0.0-SNAPSHOT.jar \
--spring.profiles.active=remote
```

By activating the `remote` Spring Boot profile, we will configure Coherence for client mode and we reference a different Cache Configuration XML file called `remote-cache-config.xml`.

#### 4.12.1.6. Inspecting the Database

In the remote Coherence CacheStore demo, HSQL will be instantiated via the server module. This allow the app as well as the server to access the HSQL database instance. That way we can also inspect the data in the data more easily as we can inspect the database data via SQL tools such as the open-source DBeaver.

# Chapter 5. Coherence Spring Cache

This section dives into the Coherence Spring Cache module. It explains how to use Coherence's support for the Spring Framework's Cache Abstraction.

## 5.1. Introduction

Spring provides its own cache abstraction, allowing you to add caching to Java methods. Coherence Spring provides an implementation of this abstraction for Oracle Coherence.



Spring's Cache abstraction also supports JSR-107 which is also supported by Oracle Coherence. As such you have another alternative for setting up caching.



If you are using JPA/Hibernate you may also consider using the Coherence support for Hibernate's second-level cache SPI, which is provided by the Coherence Hibernate project.

## 5.2. Configuring Coherence Cache for Spring

As a start, please familiarize yourself with Spring's Cache Abstraction by reading the following resources:

- The Cache Abstraction chapter in the core Spring Framework reference guide
- Spring Boot's reference documentation's support regarding caching

Spring's cache abstraction for Coherence will be automatically enabled as soon as you specify `@EnableCaching` in your applications configuration classes. In that case a `CoherenceCacheManager` bean implementation is registered as `CacheManager`. Of course, you can define your own `CacheManager` as well, but in that case auto-configuration will back-off.



The autoconfiguration logic is defined in class EnableCoherenceImportBeanDefinitionRegistrar.

*Example 5. Defining your own CacheManager*

*Java*

```
@Configuration
@EnableCaching
public class CacheConfiguration {
    @Bean
    public CacheManager cacheManager(Coherence coherence) {
      return new CoherenceCacheManager(coherenceInstance);
    }
}
```

*XML*

```
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:cache="http://www.springframework.org/schema/cache"
  xsi:schemaLocation="
    http://www.springframework.org/schema/beans
https://www.springframework.org/schema/beans/spring-beans.xsd
    http://www.springframework.org/schema/cache
https://www.springframework.org/schema/cache/spring-cache.xsd">

  <cache:annotation-driven/>

  <bean id="cacheManager" class=
"com.oracle.coherence.spring.cache.CoherenceCacheManager">
    <constructor-arg ref="coherenceInstance"/>
  </bean>
</beans>
```

When the `CacheManager` gets instantiated it is configured with default settings that then get applied for all underlying caches being created and used. Those settings are defined using the `CoherenceCacheConfiguration` object. If not specified as a second (optional) constructor argument to the `CoherenceCacheManager`, a default instance is created.

Thus, you can customize certain cache properties when instantiating the `CoherenceCacheManager` by providing your own `CoherenceCacheConfiguration` instance as a second constructor argument. For example, you can set the `time-to-live` (ttl) property to specify that caches shall expire after a certain period.



By default, the underling `time-to-live` property for caches used for the Spring cache abstraction is `0`. This means that cache entries typically do not expire. **However**, you can also specify cache expiration settings via the `coherence-cache-config.xml`.

*Example 6. Defining a CacheManager with additional cache configuration*

*Java*

```
@Configuration
@EnableCaching
public class CacheConfiguration {
    @Bean
    public CacheManager cacheManager(Coherence coherence) {
        CoherenceCacheConfiguration cacheConfiguration =
                    new CoherenceCacheConfiguration(Duration.ofMillis(1234));
        return new CoherenceCacheManager(coherenceInstance, cacheConfiguration);
    }
```

```
}
```

*XML*

```
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:cache="http://www.springframework.org/schema/cache"
  xsi:schemaLocation="
    http://www.springframework.org/schema/beans
https://www.springframework.org/schema/beans/spring-beans.xsd
    http://www.springframework.org/schema/cache
https://www.springframework.org/schema/cache/spring-cache.xsd">

  <cache:annotation-driven/>

  <bean id="cacheManager" class=
"com.oracle.coherence.spring.cache.CoherenceCacheManager">
    <constructor-arg ref="coherenceInstance"/>
    <constructor-arg>
        <bean class="
com.oracle.coherence.spring.cache.CoherenceCacheConfiguration">
            <constructor-arg>
                <bean class="java.time.Duration" factory-method="ofMillis">
                    <constructor-arg value="1234"/>
                </bean>
            </constructor-arg>
        </bean>
    </constructor-arg>
  </bean>
</beans>
```



You don't need to define a `CoherenceCacheManager` to configure the default configuration. You can also just define a `CoherenceCacheConfiguration` bean in your Spring application context. As long as there is only a single bean of that type defined, the default `CoherenceCacheManager` that is being implicitly created will use that bean.

Please consult the Quickstart chapter to see an example using Spring's cache abstraction support with Spring Boot. Coherence Spring also provides an example of using Spring Framework (without Spring Boot). The source code for the samples is part of the Coherence Spring projects:

- coherence-spring-demo-classic
- coherence-spring-demo-boot

If you're using Spring Boot, please continue reading the Spring Boot specific chapter on caching.

## 5.3. Coherence Caches and Locking

Oracle Coherence supports the explicit concurrency control of cache entries using locks. The configuration class `CoherenceCacheConfiguration` provides 3 options to specify the relevant settings:

**useLocks**

This option lets you specify whether you want to use locks or not. This options defaults to `true`, meaning that locking is enabled by default.



When using caching via *Coherence*Extend* or *gRPC*, you should disable locking as it is not supported.

**lockTimeout**

When locking cache entries, you can set a cache timeout. The specified value in milliseconds, instructs Coherence how long it shall try to acquire a lock for the cache entry. If a timeout occurs, Coherence Spring will throw an exception. A value of `-1` will cause Coherence to block indefinitely. Specifying `0` will cause Oracle Coherence not to wait at all. By default, the value is set to `0`.

**lockEntireCache**

While generally not recommended, the option exists to also lock they entire cache (not just the specific cache entry). This option defaults to `false`.

For further information, please read the corresponding chapter Using Explicit Locking for Data Concurrency in the Oracle Coherence reference guide.

# Chapter 6. Coherence Spring Session

This section dives into the Coherence Spring Session module. It explains how to use Coherence's support for Spring Session.

## 6.1. Getting Started

In this chapter you will learn how to configure Coherence as an HTTP session store using Spring Session.

For a Spring Boot servlet application, use `coherence-spring-session-boot-starter` with an explicit Coherence runtime and your servlet web dependencies, as shown in Spring Boot Session Support. The starter supplies the general Coherence starter, this session library and Boot Session, and enables HTTP-session integration automatically when its conditions match. Non-web and reactive applications do not activate that integration.

For standalone Spring Framework applications, add the Boot-independent `coherence-spring-session` library and configure Spring Session explicitly. Keep your servlet API/container and Spring web dependencies available:

*Example 7. Adding the Coherence Spring Session Dependency*

*Maven*

```
<dependencies>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-session</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence</artifactId>
        <version>26.04</version>
    </dependency>
</dependencies>
```

*Gradle*

```
dependencies {
    implementation("com.oracle.coherence.spring:coherence-spring-session:5.0.0-
SNAPSHOT")
    implementation("com.oracle.coherence.ce:coherence:26.04")
}
```



Coherence Spring 5.x support for Spring Session uses Coherence Community Edition (CE) 26.04. Coherence Spring does not bring in the Coherence dependency

automatically; users must specify the supported Coherence CE dependency explicitly.

For standalone configuration, make sure Coherence is enabled and then enable Spring Session using the `@EnableCoherenceHttpSession` annotation. Also register the HTTP filter, for example through `AbstractHttpSessionApplicationInitializer`, as shown in the plain Spring WAR sample below.

*Enabling Coherence Spring Sessions*

```
@Configuration
@EnableCoherence
@EnableCoherenceHttpSession(                    ①
        session = "coherence_session",          ②
        cache = "spring:session:sessions",      ③
        flushMode = FlushMode.ON_SAVE,          ④
        sessionTimeoutInSeconds = 1800,         ⑤
        useEntryProcessor = true                ⑥
)
static class CoherenceSessionConfig {
}
```

① Enables Spring Session support for Coherence

② Specify the name of the Coherence Session. Optional. Defaults to Coherence' default session.

③ The name of the cache to use. Optional. Defaults to `spring:session:sessions`.

④ The FlushMode to use. Optional. Defaults to `FlushMode.ON_SAVE`.

⑤ The session timeout. Optional. Defaults to `1800` seconds (`30` minutes)

⑥ When doing HTTP session updates, shall we use a Coherence entry processor? The default is {@code true}.

Dedicated storage servers need the session processors, serializers and payload classes they receive. Use the standalone `coherence-spring-session` library there, with `spring-security-core` and `spring-security-web` when the stored authentication graph requires them. A Boot storage server can combine the general Coherence starter with this library; it does not need `coherence-spring-session-boot-starter` or `spring-boot-session` for storage. Keep client/server dependency versions aligned. The sample server retains `spring.session.store-type=none` to opt out of Coherence's HTTP-session auto-configuration even if integration dependencies are added later.

An alternative is to set `useEntryProcessor` to `false`. This is less efficient as the entire session has to be sent over the wire when updating session properties. The server still needs any classes and serializers required to deserialize session data or run repository operations such as principal lookup and resetting active sessions.

## 6.2. POF Serialization

When the Session cache uses POF serialization, the application must register the Session types and any session payload types with its POF context. Coherence Spring Session supplies the serializers

and `PortableObject` implementations listed below, but does not ship a POF registration XML file, assign type IDs through annotations, or register these types programmatically. Implementing `PortableObject` defines how a type is serialized; it does not automatically register or discover that type. Applications using Java serialization do not need these POF registrations.

### 6.2.1. Supported types and operations

All custom serializers in the table belong to Coherence Spring's `coherence-spring-session` module, in the package `com.oracle.coherence.spring.session.serialization.pof`. Their fully qualified class names appear in the complete configuration below. For a registered `PortableObject` without an explicit serializer, `ConfigurablePofContext` uses Coherence's `com.tangosol.io.pof.PortableObjectSerializer`.

| Type (fully qualified class name) | Owning project / module | POF mechanism | Example ID | When needed |
|---|---|---|---|---|
| `org.springframework.session.MapSession` | Spring Session / `spring-session-core` | `MapSessionPofSerializer` | 2001 | Session storage using POF. |
| `com.oracle.coherence.spring.session.SessionUpdateEntryProcessor` | Coherence Spring / `coherence-spring-session` | Implements `PortableObject` | 4000 | Updates to existing sessions with `useEntryProcessor=true` (the default). |
| `com.oracle.coherence.spring.session.SessionResetEntryProcessor` | Coherence Spring / `coherence-spring-session` | Implements `PortableObject` | 4001 | Calls to `resetMaxInactiveIntervalForActiveSessions()`, independently of `useEntryProcessor`. |
| `com.oracle.coherence.spring.session.support.PrincipalNameExtractor` | Coherence Spring / `coherence-spring-session` | Implements `PortableObject` | 4010 | Principal lookup through `findByPrincipalName()` or `findByIndexNameAndIndexValue()` for the principal-name index. |
| `org.springframework.security.authentication.UsernamePasswordAuthenticationToken` | Spring Security / `spring-security-core` | `AuthenticationPofSerializer` | 3000 | Sessions containing this authentication token, including inside a security context. |
| `org.springframework.security.core.context.SecurityContextImpl` | Spring Security / `spring-security-core` | `SecurityContextPofSerializer` | 3001 | Sessions containing this Spring Security context implementation. |
| `org.springframework.security.core.authority.SimpleGrantedAuthority` | Spring Security / `spring-security-core` | `GrantedAuthorityPofSerializer` | 3002 | Authentication tokens containing this authority type. |

| Type (fully qualified class name) | Owning project / module | POF mechanism | Example ID | When needed |
|---|---|---|---|---|
| `org.springframework.security.core.authority.FactorGrantedAuthority` | Spring Security / `spring-security-core` | `FactorGrantedAuthorityPofSerializer` | 3003 | Authentication tokens containing Spring Security 7 factor authorities; preserves the authority and issuance time. |

`PrincipalNameExtractor` is sent as part of a principal lookup query; repository initialization does not install it. Setting `useEntryProcessor=false` avoids the update processor, but does not disable the reset operation or principal lookup. `SessionResetEntryProcessor` carries only the interval in milliseconds: Java serialization uses serial version `1`; POF uses a long at index `0`.

### 6.2.2. Application POF configuration

Save the following complete configuration as `session-pof-config.xml` on the application and server classpaths. It includes Coherence's built-in types, the Session storage and operation types, and the supported Spring Security payload types. Applications that do not store Spring Security payloads can omit the four registrations in the Spring Security group. Operation registrations are needed when the corresponding operations in the table are used.



Every ID below is an illustrative application mapping. These numbers are not reserved IDs or reserved ranges for Coherence Spring, Spring Session, or Spring Security. Check for collisions with all included registries and your application types, and choose unused IDs consistently on clients and servers. Preserve existing mappings for as long as stored or persisted POF data needs them; changing or reusing an ID can make that data unreadable or resolve it to the wrong type. Coordinate a data migration before changing an existing mapping.

*session-pof-config.xml*

```
<?xml version="1.0" encoding="UTF-8"?>
<pof-config xmlns="http://xmlns.oracle.com/coherence/coherence-pof-config"
            xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
            xsi:schemaLocation="http://xmlns.oracle.com/coherence/coherence-pof-config
coherence-pof-config.xsd">
    <user-type-list>
        <include>coherence-pof-config.xml</include>

        <!-- Session storage and operations -->
        <user-type>
            <type-id>2001</type-id>
            <class-name>org.springframework.session.MapSession</class-name>
            <serializer>
                <class-
name>com.oracle.coherence.spring.session.serialization.pof.MapSessionPofSerializer</cl
ass-name>
```

```
            </serializer>
        </user-type>
        <user-type>
            <type-id>4000</type-id>
            <class-
name>com.oracle.coherence.spring.session.SessionUpdateEntryProcessor</class-name>
        </user-type>
        <user-type>
            <type-id>4001</type-id>
            <class-name>
com.oracle.coherence.spring.session.SessionResetEntryProcessor</class-name>
        </user-type>
        <user-type>
            <type-id>4010</type-id>
            <class-
name>com.oracle.coherence.spring.session.support.PrincipalNameExtractor</class-name>
        </user-type>

        <!-- Spring Security payloads: include when these types are stored -->
        <user-type>
            <type-id>3000</type-id>
            <class-
name>org.springframework.security.authentication.UsernamePasswordAuthenticationToken</
class-name>
            <serializer>
                <class-
name>com.oracle.coherence.spring.session.serialization.pof.AuthenticationPofSerializer
</class-name>
            </serializer>
        </user-type>
        <user-type>
            <type-id>3001</type-id>
            <class-name>
org.springframework.security.core.context.SecurityContextImpl</class-name>
            <serializer>
                <class-
name>com.oracle.coherence.spring.session.serialization.pof.SecurityContextPofSerialize
r</class-name>
            </serializer>
        </user-type>
        <user-type>
            <type-id>3002</type-id>
            <class-
name>org.springframework.security.core.authority.SimpleGrantedAuthority</class-name>
            <serializer>
                <class-
name>com.oracle.coherence.spring.session.serialization.pof.GrantedAuthorityPofSerializ
er</class-name>
            </serializer>
        </user-type>
        <user-type>
```

```
            <type-id>3003</type-id>
            <class-
name>org.springframework.security.core.authority.FactorGrantedAuthority</class-name>
            <serializer>
                <class-
name>com.oracle.coherence.spring.session.serialization.pof.FactorGrantedAuthorityPofSe
rializer</class-name>
            </serializer>
        </user-type>
    </user-type-list>
</pof-config>
```

Deploy matching type-ID, class and serializer mappings to every client and server that serializes or deserializes these objects. Each receiving process needs the registered classes and serializer implementations on its classpath: `coherence-spring-session` and its required dependencies, `spring-session-core`, and `spring-security-core` when using the security registrations. Keep client and server dependency versions aligned. POF registration does not supply the classes to a remote server.

Select POF and load this configuration before starting Coherence. With cache and client configurations that use the `coherence.serializer` property, set these JVM properties on both application clients and servers:

```
java -Dcoherence.serializer=pof \
     -Dcoherence.pof.config=session-pof-config.xml \
     -jar application.jar
```

The named `pof` serializer uses `ConfigurablePofContext`, which loads the file selected by `coherence.pof.config`. If your cache, Extend or gRPC client configuration explicitly selects a serializer, select `pof` there as well; setting the default property does not override an explicit serializer choice. For example, the cache configuration can select POF in its `<defaults>` element:

```
<defaults>
    <serializer>pof</serializer>
</defaults>
```

The configuration covers the listed library-supported types. Add registrations and suitable serializers for any additional application session attributes, principal or authentication details types that POF does not already support, including other types reachable from those objects. `MapSessionPofSerializer` writes attribute values as objects, and `AuthenticationPofSerializer` writes principal and details as objects. A Spring Security `User` principal or `WebAuthenticationDetails` is an application choice and has no serializer in the list above; the application must provide the corresponding POF support. Other authentication token, context or authority implementations also need their own serializers and registrations.

### 6.2.3. Hardened serialization and execution

POF registration and `META-INF/coherence/security-config.xml` permissions have different purposes. POF configuration maps wire type IDs to classes and serializers. The production Session JAR's security metadata grants exact serialization permissions and classifies permitted executables on Coherence versions that enforce that policy; it does not register POF types or select a serializer. Configure both for a hardened POF deployment, including the application-owned types required by your session data.

The Session JAR supplies exact security metadata for `MapSession`, its two named processors, `PrincipalNameExtractor`, `UsernamePasswordAuthenticationToken`, its serializable `AbstractAuthenticationToken` superclass, `SecurityContextImpl`, `SimpleGrantedAuthority`, and `FactorGrantedAuthority`. Only the processors and extractor are classified as executable. Deploy the Session JAR to every receiving server and client.

Application session attributes and principal/details classes need their own exact security metadata. `MapSessionPofSerializer` writes attribute values as objects; `AuthenticationPofSerializer` writes principal and details as objects. POF applications must also register these application types and their serializers. The supplied token serializer handles `UsernamePasswordAuthenticationToken` with string or erased/null credentials; it does not define a general authentication serializer. It preserves mixed registered authority types and authentication state. Legacy POF token data without the new authentication-state field keeps its historical authenticated state when read. A built-in Spring Security principal such as `User` is also an application choice and is not implicitly permitted by the Session policy. Applications choosing `User` and `WebAuthenticationDetails` must supply their own exact security metadata, including metadata for other serialized classes in that graph, such as `User's authority comparator for Java serialization.

An explicit POF registration also trusts its configured serializer. In the tested Coherence 26.10 snapshot, a registered `PortableObjectSerializer` can construct and read a type absent from the XML allowlist. Review application POF registrations and serializers independently; the Session XML does not prevent callbacks from arbitrary explicitly registered serializers. Review the complete application object graph for additional POF registrations before deployment.

Serialization permission, executable classification, and gRPC serializer approval are separate checks. Select matching serializers explicitly on clients and servers. POF requires matching registrations. A Java-format gRPC client requires server approval for the exact `java` format on Coherence versions that enforce serializer policy. Such approval is a server deployment decision; Session does not change the global policy. Configure the approved format on the gRPC server and select that same format on its clients.

The named reset operation does not require generated-lambda permission. This does not establish support for all application lambdas under dynamic-code deny. Security metadata does not configure endpoint authentication or TLS.

## 6.3. Spring Session Samples

This Coherence Spring source code repository provides 2 dedicated example applications, illustrating the usage of Spring Session with a Coherence-backed session repository. The first example application uses Spring Boot as well as Spring Security. The second example application

uses plain Spring Framework (without Spring Boot) and deploys as a WAR file to a Servlet container (e.g. Tomcat and Jetty).

### 6.3.1. Spring Session with Spring Boot

The example application show-cases 2 use-cases:

- Use Spring Session with embedded Coherence instances and Java serialization
- Use Spring Session with remote Coherence instances (Coherence*Extends) and Java serialization

`spring-session-demo-app` uses `coherence-spring-session-boot-starter`, an explicit Coherence runtime and its existing web, Security and Actuator dependencies. The separate `spring-session-demo-server` uses the general starter plus the standalone session library to store and process sessions, with HTTP-session auto-configuration disabled. The `spring-session-demo-war` application below uses explicit Spring configuration and the standalone library; it contains no Spring Boot runtime and is not a Boot WAR.

Even though this demo is targeting Spring Session, we use Spring Security as well, since the authentication details are stored in the session as well. In regard to authentication, users have 2 choices:

- A user can POST a JSON request containing the username and password in the body of the request.
- Use basic authentication

The username is `coherence`, and the password `rocks`.

*Example Authentication Request*

```
{ "username": "coherence", "password": "rocks" }
```

Once successfully authenticated, the application will return a `2xx` HTTP status with an empty body and a session cookie. An Authentication failure, on the other hand, produces a non-2xx HTTP status with an empty body. The application has an endpoint that responds to a `GET` request to the URL `/hello` that returns the string `Hello Coherence`. All endpoints require an authenticated user using the session cookie or the `username` and `password`.

#### 6.3.1.1. Start Spring Session with Embedded Coherence Instances

*Build the web application and its prerequisites*

```
$ ./mvnw -Pjdk17 -pl :spring-session-demo-app -am clean install
```

Now we are ready to run the application. Let's launch 2 instances, one listening on the pre-configured port `8090`, and the other one on port `8091`.

*Run the Spring Boot application*

```
 $ java -jar samples/spring-session-demo/spring-session-demo-app/target/spring-
session-demo-app-5.0.0-SNAPSHOT.jar
 $ java -jar samples/spring-session-demo/spring-session-demo-app/target/spring-
session-demo-app-5.0.0-SNAPSHOT.jar --server.port=8091
```

#### 6.3.1.2. Spring Session with Remote Coherence Instances

In this variation of the example, we will start 1 central Coherence Server and the application will access that remote Coherence instance as a Coherence*Extend client.

*Build the Coherence Server instance*

```
 $ ./mvnw -Pjdk17 -pl :spring-session-demo-server -am clean install
```

*Build the Application instance*

```
 $ ./mvnw -Pjdk17 -pl :spring-session-demo-app -am clean install
```

Now we are ready to run the application. We will activate the `coherence-client` Spring Boot profile as well:

*Run the Spring Boot application*

```
 $ java -jar samples/spring-session-demo/spring-session-demo-server/target/spring-
session-demo-server-5.0.0-SNAPSHOT.jar
 $ java -jar samples/spring-session-demo/spring-session-demo-app/target/spring-
session-demo-app-5.0.0-SNAPSHOT.jar --spring.profiles.active=coherence-client
```

By default, Coherence Spring Session uses a Coherence Entry Processor to perform updates to the persisted HTTP Session. This will prevent the entire session to be sent over the wire. A drawback of that approach is that the Coherence instance needs to be aware of Coherence Spring classes for serialization purposes.

Alternatively, set `coherence.spring.session.use-entry-processor=false` (the default is `true`) in `spring-session-demo-app` to send the entire session for ordinary updates. Keep the server's session library and payload dependencies: stored authentication graphs, deserialization, principal lookup and reset operations still require their classes and serializers. Disabling the update processor does not remove those requirements.

#### 6.3.1.3. Accessing the REST Endpoints

*Log into the application using CURL*

```
 $ curl -i -c cookie.txt \
 -H "Accept: application/json" \
 -H "Content-Type:application/json" \
```

```
-X POST --data '{"username": "coherence", "password": "rocks"}' \
"http://localhost:8090/login"
```

*Let's access the HelloController*

```
$ curl -i -b cookie.txt \
-H "Accept: application/json" \
-H "Content-Type:application/json" \
-X GET "http://localhost:8090/hello"
```

#### 6.3.1.4. Spring Session Actuator

Using Spring Boot's Actuator endpoints, we can introspect the session using the Sessions actuator at `localhost:8090/actuator/sessions?username=coherence`.

*Retrieving session information for user* `coherence`

```
$ curl -i -b cookie.txt \
-H "Accept: application/json" \
-H "Content-Type:application/json" \
-X GET "http://localhost:8090/actuator/sessions?username=coherence"
```

#### 6.3.1.5. Generate Docker Image

If you prefer to use Docker, you can create an image using:

*Generate a Docker image*

```
$ mvn spring-boot:build-image -pl samples/spring-session-demo/spring-session-demo-app
-Dspring-boot.build-image.imageName=coherence/spring_session_demo
```

### 6.3.2. Spring Session with plain Spring Framework

While most new Spring applications are written using Spring Boot, there are certainly many applications that use the Spring Framework, only. Therefore, the following example uses plain Spring Framework without any Spring Boot and deploys as a WAR file to a Servlet container such as Tomcat or Jetty. The application will expose one endpoint that displays a simple counter that is incremented with each request and stored in the HTTP Session that is in return backed by Coherence.



Coherence Spring `5.0.0-SNAPSHOT` is using the Jakarta EE namespace. For Java EE (`javax.*`), please use Coherence Spring `3.3.x`. Therefore, chose the appropriate version of the Servlet container accordingly.

This example uses a separate Coherence server instance to which the application will connect to using Coherence*Extend. Furthermore, Coherence POF is used for serialization. We will re-use the Coherence server from the `spring-session-demo-server` Maven module. This will start 1 central

Coherence server instance and the application will access that remote Coherence instance as a Coherence*Extend client. In order to build the server application, execute the following in the root directory of the Coherence Spring source code repository:

*Build the Coherence Server instance*

```
$ ./mvnw -Pjdk17 -pl :spring-session-demo-server -am clean install
```

Next, we will build the client application:

*Build the Client Application*

```
$ ./mvnw -Pjdk17 -pl :spring-session-demo-war -am clean install
```

The Coherence-specific configuration of the client is fairly straight-forward and mostly contained in the Spring configuration class `CoherenceSessionConfig`:

*CoherenceSessionConfig.java*

```
@Configuration
@EnableCoherence                                                    ①
@EnableCoherenceHttpSession(                                        ②
    cache = "spring:session:sessions",
    flushMode = FlushMode.ON_SAVE,
    sessionTimeoutInSeconds = 1800,
    useEntryProcessor = false
)
public class CoherenceSessionConfig
       extends AbstractHttpSessionApplicationInitializer {          ③
    @Bean
    public SessionConfigurationBean sessionConfigurationBeanDefault() { ④
        final SessionConfigurationBean sessionConfigurationBean =
            new SessionConfigurationBean();
        sessionConfigurationBean.setType(SessionType.CLIENT);       ⑤
        sessionConfigurationBean.setConfig("remote-cache-config.xml"); ⑥
        return sessionConfigurationBean;
    }
}
```

① Enable Coherence Spring

② Enable the Spring Session support for Coherence + you can specify several optional parameters

③ Extend `AbstractHttpSessionApplicationInitializer` to register the `springSessionRepositoryFilter`

④ Create a `SessionConfigurationBean` to configure the Coherence Session

⑤ Set the session type to `CLIENT`

⑥ Set the Coherence configuration file to `remote-cache-config.xml`

The Coherence-specific `remote-cache-config.xml` configures the `ExtendTcpCacheService` and creates a

cache mapping for the cache `spring:session:sessions` to the `remote-cache-scheme` that uses the `ExtendTcpCacheService`.

Now we are ready to run the application. First, we will start the server. The server application uses Spring Boot and by activating a custom Spring Boot profile, Coherence will be started with POF serialization enabled:

Keep the sample's application-owned `pof-config.xml` on both client and server classpaths. This WAR stores a simple counter; the Boot application's Java-serialized authentication graph is a separate sample path. Applications using POF for authentication must add the payload registrations described in POF Serialization.

*coherence-cache-config-pof.xml*

```
<cache-config xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
              xmlns="http://xmlns.oracle.com/coherence/coherence-cache-config"
              xsi:schemaLocation="http://xmlns.oracle.com/coherence/coherence-cache-
config coherence-cache-config.xsd">
   <defaults>
     <serializer>pof</serializer>
   </defaults>
...
```

*Run the Server application with the POF profile*

```
$ java -jar samples/spring-session-demo/spring-session-demo-server/target/spring-
session-demo-server-5.0.0-SNAPSHOT.jar --spring.profiles.active=pof
```

For the client application, deploy the generated `spring-session-demo.war` together with the sample's external Tomcat Context file. This sample forwards to a JSP after updating the session. On Tomcat 11.0.26, the default `suspendWrappedResponseAfterForward=true` finishes the response before Spring Session can send its initial cookie; successive requests then each show `Counter: 1`. The supplied Context sets this attribute to `false`, allowing the wrapped response to close and send the cookie after the forward. See Tomcat's Context attributes and context naming rules.

*samples/spring-session-demo/tomcat/spring-session-demo.xml*

```
<Context suspendWrappedResponseAfterForward="false" />
```

Use an initialized Tomcat 11 installation with the standard `Catalina` engine, `localhost` host and `webapps` appBase. Stop that instance before copying these files. Run from the repository root with Java 17 or 21 selected:

*Deploy WAR file to Tomcat 11.0.26*

```
export CATALINA_HOME=/path/to/apache-tomcat-11.0.26
export CATALINA_BASE="$CATALINA_HOME"
mkdir -p "$CATALINA_BASE/conf/Catalina/localhost" "$CATALINA_BASE/webapps"
cp samples/spring-session-demo/tomcat/spring-session-demo.xml \
```

```
    "$CATALINA_BASE/conf/Catalina/localhost/spring-session-demo.xml"
  cp samples/spring-session-demo/spring-session-demo-war/target/spring-session-demo.war
\
    "$CATALINA_BASE/webapps/spring-session-demo.war"
  "$CATALINA_HOME/bin/catalina.sh" run
```

If using a separate initialized Tomcat instance directory, set `CATALINA_BASE` to that directory instead. The matching `spring-session-demo.xml` and `spring-session-demo.war` base names select `/spring-session-demo`. The Context deliberately omits `path` and `docBase`: Tomcat derives them from the filenames and standard appBase. This setting applies only to this application. Keep it in the external Context file when redeploying the WAR.

The application starts and connects to the Coherence server. Access it at

`localhost:8080/spring-session-demo/hello`.

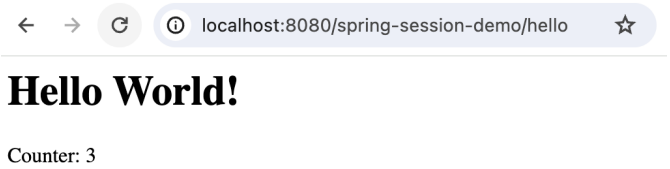



*Figure 3. Spring Session Demo*

The invoked `HelloController` will display a simple counter that is incremented with each request and whose value is stored in the HTTP Session.

Use a fresh cookie jar in another terminal to check normal cookie delivery and counter progression:

```
curl -i -c war-cookie.txt http://localhost:8080/spring-session-demo/hello
curl -i -b war-cookie.txt http://localhost:8080/spring-session-demo/hello
curl -i -b war-cookie.txt http://localhost:8080/spring-session-demo/hello
```

The first response must return `Set-Cookie: SESSION=⋯` with `Path=/spring-session-demo`; the three pages show `Counter: 1`, `Counter: 2` and `Counter: 3` under the same session. Use Ctrl-C in the Tomcat terminal to stop it.



This configured deployment is validated on Java 17/21 with Tomcat 11.0.26, Spring Session 4.0.5 and Coherence 26.04, using the real JSP WAR and a separate POF storage server. The default Tomcat deployment remains affected. The setting is specific to Tomcat's servlet-forward handling; it does not establish behavior on other servlet containers. The Boot application's Java-serialization login/session path above is validated separately.

## 6.4. Session Expiration Strategies

When dealing with the expiration of cache entries, you generally have 2 options in Coherence:

- Set the expiration time for each put operation explicitly
- Configure cache expiration on a per-cache-basis in your `coherence-cache-config.xml` file

### 6.4.1. Setting the Expiration Time for Each Put Operation

When you define a session timeout via the application, for example `@EnableCoherenceHttpSession(sessionTimeoutInSeconds = 1000)`, the session expiration will be set for each put-operation in `CoherenceIndexedSessionRepository`.



If not set in the application, Coherence Spring will expire HTTP session caches in `1800` seconds (`30` minutes).

As is the nature with Spring, you have multiple ways to set the session timeout:

- Using the `@EnableCoherenceHttpSession` annotation, e.g. `@EnableCoherenceHttpSession(sessionTimeoutInSeconds = 6000)`
- By extending `CoherenceHttpSessionConfiguration` and overriding the `setMaxInactiveIntervalInSeconds` method. In that case, you would not be using the `@EnableCoherenceHttpSession` annotation but instead use `@Configuration` and `@Import(MyCustomCoherenceHttpSessionConfiguration.class)`
- By declaring a `SessionRepositoryCustomizer<CoherenceIndexedSessionRepository>` bean, e.g.:

```
 @Bean
 public static SessionRepositoryCustomizer<CoherenceIndexedSessionRepository>
sessionRepositoryCustomizer() {
   return (sessionRepository) -> {
     sessionRepository.setDefaultMaxInactiveInterval(Duration.ofSeconds(120));
   };
 }
```

If you are using Spring Boot, you can also set the session timeout in your `application.properties` or `application.yaml` file using the `spring.session.timeout` property: `spring.session.timeout = 10m`.

### 6.4.2. Configuring the Expiration Time in `coherence-cache-config.xml`

If you rather prefer defining the session expiration timeouts in your `coherence-cache-config.xml` file, you should set the session timeout in the application to `0`, for instance `@EnableCoherenceHttpSession(sessionTimeoutInSeconds = 0)`. That way, put operations will never try to set an expiration value for the cache entry. You can then set the `expiry-delay` cache configuration element for your cache in the `coherence-cache-config.xml` file.

In regard to the question, whether one strategy or the other strategy is preferable: It is mostly a matter of preference. You do have, however, a bit more control when configuring expiration logic

via the `coherence-cache-config.xml` file, as you have the ability to define custom eviction policies.

For more information, please consult the respective chapter on *Controlling the Growth of a Local Cache* in the Coherence reference guide.



The underlying expiry delay parameter in Coherence is defined as an integer and is expressed in milliseconds. Therefore, the maximum amount of time can never exceed Integer.MAX_VALUE (2147483647) milliseconds or approximately 24 days.

## 6.5. Using HttpSessionListener

If you plan on use the `HttpSessionListener` interface, you can register a `HttpSessionListener` bean in your Spring configuration. The `HttpSessionListener` will be registered with the `ServletContext` and will be notified of session creation and destruction events.

```
@Bean
MyHttpSessionListener myHttpSessionListener() {
    return new MyHttpSessionListener();
}
```

# Chapter 7. Coherence Spring Data

## 7.1. Introduction

The Spring Data Coherence module provides integration with Coherence data grids. Key functional areas of Spring Data Coherence are a POJO centric model for interacting with a Coherence data grid and easily writing a Repository style data access layer.

## 7.2. Features

- Spring configuration support using Java-based @Configuration classes.
- Automatic implementation of Repository interfaces
- Rich query and event features from Coherence
- Native asynchronous repository support
- Projections

## 7.3. Getting Started

*Example 8. Coherence Spring Data Dependencies*

*Maven*

```
<dependency>
    <groupId>com.oracle.coherence.spring</groupId>
    <artifactId>coherence-spring-data</artifactId>
    <version>5.0.0-SNAPSHOT</version>
</dependency>
```

*Gradle*

```
implementation("com.oracle.coherence.spring:coherence-spring-data:5.0.0-SNAPSHOT")
```

## 7.4. Defining Repositories

Before proceeding, please be familiar with the Spring Data Commons documentation, as this section will assume some familiarity with Spring Data.

Simple repositories such as the following will, of course, work as expected:

```
public interface PersonRepository extends CrudRepository<Person, String> {
    // ...
}
```

However, it is recommended to extend the CoherenceRepository interface, to fully utilize the features Coherence for Spring Data has to offer such as:

- Powerful projection features
- Flexible in-place entity updates
- First-class data aggregation support
- Stream API support
- Event listener support
- Declarative acceleration and index creation
- Native asynchronous support

Please also see the chapter Using the Repository API of the Coherence reference documentation for more details on these features.

Example extending the blocking `CoherenceRepository` interface:

```
import com.oracle.coherence.spring.data.repository.CoherenceRepository;

// ...

public interface PersonRepository extends CoherenceRepository<Person, String> {
    // ...
}
```

or for the non-blocking flavor:

```
import com.oracle.coherence.spring.data.repository.CoherenceAsyncRepository;

// ...

public interface PersonRepository extends CoherenceAsyncRepository<Person, String> {
    // ...
}
```



In the less common use-case of using the `update` method of the `CoherenceRepository` to update entities with an entity Id that does NOT exist, a `NullPointerException` may be thrown. In order to plug-in your own logic, you can either provide an `EntityFactory` to create a new instance or you can provide a lambda expression that e.g. throws an exception:

```
this.bookRepository.update(new UUID(), Book::setPages, 700, uuid -> {
    throw new IllegalStateException("The book with id " + uuid + " does
not exist.");
});
```

### 7.4.1. Identifying the Coherence NamedMap

The Coherence `NamedMap` that will be used by the Repository implementation will be based on the type name in the Repository class assuming the Repository name follows the format of [Type]Repository (e.g., PersonRepository will use a NamedMap called `person`). If this is not desired, the name may instead be passed by the `@CoherenceMap` annotation. For example:

```
import com.oracle.coherence.spring.data.config.CoherenceMap;
import com.oracle.coherence.spring.data.repository.CoherenceRepository;

// ...

@CoherenceMap("people")
public interface PersonRepository extends CoherenceRepository<Person, String> {
    // ...
}
```

## 7.5. Mapping Entities

As Coherence is, at its core, a key-value store, mapping Entities for use with a Coherence Repository is relatively simple as only the id needs to be annotated. It is possible to use either `org.springframework.data.annotation.Id` or `jakarta.persistence.Id` to denote the entity's id.

For example:

```
public class Person implements Serializable {
    @org.springframework.data.annotation.Id
    protected String id;

    // ---- person functionality ----
}
```

## 7.6. Using the Repository

In order to enable Coherence-based Repositories, you must use the @EnableCoherenceRepositories annotation. A simple configuration example would be:

```
import com.oracle.coherence.spring.configuration.annotation.EnableCoherence;
import com.oracle.coherence.spring.data.config.EnableCoherenceRepositories;

// ...

@Configuration
@EnableCoherence
@EnableCoherenceRepositories
public static class Config {
```

```
}
```

Similarly to other Spring Data implementations, the `@EnableCoherenceRepositories` annotation offers several configuration options to configure how Spring will search for repositories. Please see the API docs for details.

### 7.6.1. Finder Queries

One of the benefits of Spring Data is the ability to define queries on the Repository interface using Spring Data's finder query syntax. For example:

```
import com.oracle.coherence.spring.data.repository.CoherenceRepository;
import com.oracle.coherence.spring.data.model.Author;
import com.oracle.coherence.spring.data.model.Book;
import com.tangosol.util.UUID;

// ...

public interface BookRepository extends CoherenceRepository<Book, UUID> {
    List<Book> findByAuthor(Author author);
    // other finders
}
```

It should be noted that finder queries defined on either the blocking or non-blocking Coherence repository will always execute in a blocking manner. For asynchronous versions of these methods, please use Spring's Async Method support.

```
import com.oracle.coherence.spring.data.config.CoherenceMap;
import com.oracle.coherence.spring.data.model.Author;
import com.oracle.coherence.spring.data.model.Book;
import com.oracle.coherence.spring.data.repository.CoherenceAsyncRepository;
import com.tangosol.util.UUID;

import org.springframework.scheduling.annotation.Async;

// ...

@CoherenceMap("book")
public interface CoherenceBookAsyncRepository extends CoherenceAsyncRepository<Book,
UUID> {

    @Async
    CompletableFuture<List<Book>> findByAuthor(Author author);
}
```

Don't forget to include the `@EnableAsync` annotation on the configuration:

```
import com.oracle.coherence.spring.configuration.annotation.EnableCoherence;
import com.oracle.coherence.spring.data.config.EnableCoherenceRepositories;
import org.springframework.scheduling.annotation.EnableAsync;

// ...

@Configuration
@EnableAsync
@EnableCoherence
@EnableCoherenceRepositories
public static class Config {
}
```

## 7.7. Projections

Spring Data Coherence module supports projections as defined in Spring Data Projections documentation. This allows us, among other things, to transfer a subset of the entities properties when `closed` projections are used.

Imagine a repository and aggregate root type such as the following example:

```
@Entity
public class Book implements Cloneable, Serializable {
    @Id
    protected final UUID uuid;
    protected String title;
    protected Author author;
    protected int pages;
    protected Calendar published;
}

@CoherenceMap("book")
interface BookRepository extends CrudRepository<Book, UUID> {

    List<BookProjection> findByTitle(String title);

    // ...
}
```

### 7.7.1. Interface-based Projections

The simplest way to simplify the result is to declare an interface that exposes methods reading the desired properties, as shown in the following example:

*A projection interface to retrieve a subset of attributes*

```
interface BookTitleAndPages {
```

```
    String getTitle();
    int getPages();
}
```

*A repository using an interface based projection with a query method*

```
interface BookRepository extends CrudRepository<Book, UUID> {

    List<BookTitleAndPages> findByTitle(String title);
}
```

The query execution engine creates proxy instances of that interface at runtime for each element returned and forwards calls to the exposed methods to the target object.

Projections can be used recursively as shown in the following example:

*A projection interface to retrieve a subset of attributes*

```
interface BookSummary {

    String getTitle();
    int getPages();
    AuthorSummary getAuthor();

    interface AuthorSummary {
        String getFirstName();
    }
}
```

### 7.7.2. Closed Projections

A projection interface whose accessor methods all match properties of the target aggregate is considered to be a closed projection. The following example is a closed projection:

*A closed projection*

```
interface BookTitleAndPages {

    String getTitle();
    int getPages();
}
```

### 7.7.3. Open Projections

Accessor methods in projection interfaces can also be used to compute new values by using the @Value annotation, as shown in the following example:

*An open projection*

```
interface BookTitleAndAuthor {

    @Value("#{target.author.firstName + ' - ' + target.title}")
    String getTitleAndAuthor();
}
```

A projection interface using `@Value` is an open projection. Spring Data cannot apply query execution optimizations in this case, because the SpEL expression could use any attribute of the aggregate root.

Default methods also can be used for open projection interfaces:

*A projection interface using a default method for custom logic*

```
interface BookTitleAndAuthor {

    default String getTitleAndAuthor() {
        return getAuthor().getFirstName().concat(' - ').concat(getTitle());
    }
}
```

A more flexible option is to implement the custom logic in a Spring bean:

*A projection interface using a default method for custom logic*

```
@Component
class MyBean {

    String getTitleAndAuthor(Book book) {
        return book.getAuthor().getFirstName().concat(' - ').concat(book.getTitle());
    }
}

interface BookTitleAndAuthor {

    @Value("#{@myBean.getTitleAndAuthor(target)}")
    String getTitleAndAuthor();
}
```

Methods backed by SpEL expression evaluation can also use method parameters, which can then be referred to from the expression. The method parameters are available through an Object array named args. The following example shows how to get a method parameter from the args array:

*A sample Book object*

```
interface NameOnly {
```

```
    @Value("args[0] + ' ' + #{target.author.firstName}")
    String getHonorificName(String honorific);
}
```

### 7.7.4. Nullable Wrappers

Getters in projection interfaces can make use of nullable wrappers for improved null-safety. Currently supported wrapper types are:

- java.util.Optional
- com.google.common.base.Optional
- scala.Option
- io.vavr.control.Option

*A projection interface using nullable wrappers*

```
interface TitleOnly {

    Optional<String> getTitle();
}
```

### 7.7.5. Class-based Projections (DTOs)

Another way of defining projections is by using value type DTOs (Data Transfer Objects) that hold properties for the fields that are supposed to be retrieved - similar to the projection interfaces except that no proxying happens and no nested projections can be applied.

The fields to be loaded are determined from the parameter names of the constructor that is exposed.

The following example shows a projecting DTO:

*A projecting DTO*

```
class BookTitleAndPages {
    private final String title;
    private final int pages;

    BookTitleAndPages(String title, int pages) {
        this.title = title;
        this.pages = pages;
    }

    String getTitle() {
        return this.title;
    }

    int getPages() {
```

```
        return this.pages;
    }

    // equals(···) and hashCode() implementations
}
```

### 7.7.6. Dynamic Projections

It's possible to select the return type to be used at invocation time (up to now all examples shown exact projection type to be used as a return type). To apply dynamic projections, use a query method such as the one shown in the following example:

*A repository using a dynamic projection parameter*

```
@CoherenceMap("book")
interface BookRepository extends CrudRepository<Book, UUID> {

    <T> Collection<T> findByTitle(String title, Class<T> type);
}
```

*Using a repository with dynamic projections*

```
Collection<BookSummary> aggregates = books.findByTitle("Shadow", BookSummary.class);

Collection<BookTitleAndPages> aggregates = books.findByTitle("Remember",
BookTitleAndPages.class);
```

# Chapter 8. Coherence Spring Boot

This section dives into the Coherence Spring Boot module. It explains how to use Coherence's dedicated support for Spring Boot, e.g., Autoconfiguration.

## 8.1. Getting Started

In order to start using Coherence with Spring Boot you have to add the `coherence-spring-boot-starter` dependency as well as the desired version of Coherence.

*Example 9. Adding the Coherence Spring Boot Starter Dependency*

*Maven*

```
<dependencies>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-boot-starter</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence</artifactId>
        <version>26.04</version>
    </dependency>
</dependencies>
```

*Gradle*

```
dependencies {
    implementation("com.oracle.coherence.spring:coherence-spring-boot-
starter:5.0.0-SNAPSHOT")
    implementation("com.oracle.coherence.ce:coherence:26.04")
}
```



Under the covers Coherence Spring takes advantage of the Coherence Bootstrap API. For more information, check out the respective chapter on the Bootstrap API in the Coherence reference guide.

## 8.2. Auto-configuration

By adding the `coherence-spring-boot-starter` dependency, AutoConfiguration will be activated via the CoherenceAutoConfiguration class. This will also bind the CoherenceProperties class for further configuration.



By default, Coherence Spring will start Coherence in clustered mode (Server). If

> you want to use Coherence in client mode (Coherence*Extend or gRPC), please see the chapter on setting up Spring Boot as a Coherence Client.

When using Coherence Spring Boot, you may want to verify that only the auto-configuration that you actually need is enabled. Spring Boot 4 places feature-specific auto-configuration in dedicated modules. For example, if an application includes the `spring-boot-gson` module and Gson is present, Boot may activate `GsonAutoConfiguration`.

To find out which auto-configuration is applied for your application, start your Spring Boot application with the `--debug` argument. The auto-configuration report will be logged to the console.

Any auto-configuration that you do not want to be applied, can be disabled by specifying the `exclude` property on the `@SpringBootApplication` annotation on your main application class. Just specify the name of the auto-configuration classes that you do not want to be applied.

```
import org.springframework.boot.gson.autoconfigure.GsonAutoConfiguration;

@SpringBootApplication(exclude = GsonAutoConfiguration.class)
public class MyCoherenceApplication {
    public static void main(String[] args) {
        SpringApplication.run(MyCoherenceApplication.class, args);
    }
}
```

Alternatively, you can also disable specific auto-configuration by setting the `spring.autoconfigure.exclude` property in your `application.properties` or `application.yaml` file.

*application.yaml*

```
spring:
    autoconfigure:
        exclude: org.springframework.boot.gson.autoconfigure.GsonAutoConfiguration
```

### 8.2.1. Testing without starting Coherence

For mock-based `@SpringBootTest` tests that do not need a running Coherence instance, exclude Coherence's core, Spring Session, and Spring Data auto-configurations in the test configuration. Session and Data auto-configuration are registered independently of `CoherenceAutoConfiguration` and can remain active when their conditions match, even if only the core auto-configuration is excluded. Session configuration requires Coherence-backed sessions, and Data configuration can create Coherence repositories; these are usually unwanted when testing with mock caches.

Use `@TestPropertySource` to keep the exclusions scoped to the test. Place the following test in your application's test sources, where `@SpringBootTest` can discover your `@SpringBootApplication` class:

```
import org.junit.jupiter.api.Test;

import org.springframework.boot.test.context.SpringBootTest;
```

```
import org.springframework.test.context.TestPropertySource;

@SpringBootTest
@TestPropertySource(properties = {
    "spring.autoconfigure.exclude="
        + "com.oracle.coherence.spring.boot.autoconfigure.CoherenceAutoConfiguration,"
        + "com.oracle.coherence.spring.boot.autoconfigure.session."
        + "CoherenceSpringSessionAutoConfiguration,"
        + "com.oracle.coherence.spring.boot.autoconfigure.data."
        + "CoherenceRepositoriesAutoConfiguration"
})
class MockCacheTests {

    @Test
    void testWithMockCaches() {
        // Add assertions for application behavior using your test's mock caches.
    }
}
```

The exclusions do not supply mock beans. Configure the mocks needed by your application, including any cache, session, or repository dependencies, separately in the test context.



These exclusions apply to Spring Boot auto-configuration. They do not disable explicit `@EnableCoherence` imports or other manually configured Coherence startup. Omit or replace that configuration in mock-based tests as well.

If your production `@SpringBootApplication` class declares `@EnableCoherence`, select a dedicated test bootstrap with `@SpringBootTest(classes = …)`. For example, the following application service reads an order's status from the `orders` cache through `@CoherenceMap`:

```
package com.oracle.coherence.spring.doc.boot.mockcache;

import com.oracle.coherence.spring.configuration.annotation.CoherenceMap;
import com.tangosol.net.NamedCache;

import org.springframework.stereotype.Service;

@Service
public class OrderService {

    private final NamedCache<Long, String> orders;

    public OrderService(@CoherenceMap("orders") NamedCache<Long, String> orders) {
        this.orders = orders;
    }

    public String getStatus(long orderId) {
        return this.orders.get(orderId);
    }
```

```
}
```

Place this test in your test sources and adapt the packages and imported application components as needed. Spring Framework's `@MockitoBean` supplies the cache mock to both the test and the service:

```
package com.oracle.coherence.spring.doc.boot.mockcache.tests;

import com.oracle.coherence.spring.configuration.NamedCacheConfiguration;
import com.oracle.coherence.spring.doc.boot.mockcache.OrderService;
import com.tangosol.net.NamedCache;
import org.junit.jupiter.api.Test;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.boot.autoconfigure.EnableAutoConfiguration;
import org.springframework.boot.test.context.SpringBootTest;
import org.springframework.context.annotation.Configuration;
import org.springframework.context.annotation.Import;
import org.springframework.test.context.TestPropertySource;
import org.springframework.test.context.bean.override.mockito.MockitoBean;

import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.mockito.Mockito.verify;
import static org.mockito.Mockito.when;

@SpringBootTest(classes = IsolatedMockCacheTests.TestApplication.class)
@TestPropertySource(properties = {
    "spring.autoconfigure.exclude="
        + "com.oracle.coherence.spring.boot.autoconfigure.CoherenceAutoConfiguration,"
        + "com.oracle.coherence.spring.boot.autoconfigure.session."
        + "CoherenceSpringSessionAutoConfiguration,"
        + "com.oracle.coherence.spring.boot.autoconfigure.data."
        + "CoherenceRepositoriesAutoConfiguration"
})
class IsolatedMockCacheTests {

    @MockitoBean(name = NamedCacheConfiguration.COHERENCE_CACHE_BEAN_NAME)
    NamedCache<Long, String> orders;

    @Autowired
    OrderService orderService;

    @Test
    void readsOrderStatusFromCache() {
        when(this.orders.get(42L)).thenReturn("SHIPPED");

        assertEquals("SHIPPED", this.orderService.getStatus(42L));
        verify(this.orders).get(42L);
    }
```

```
    @Configuration(proxyBeanMethods = false)
    @EnableAutoConfiguration
    @Import(OrderService.class)
    static class TestApplication {
    }

}
```

The explicit mock bean name matters: `@CoherenceMap` is meta-annotated with `@Value` resolving `#{getCacheProxy}`, and `NamedCacheConfiguration.COHERENCE_CACHE_BEAN_NAME` supplies that bean name. The `orders` annotation value is the logical cache name used by production cache resolution. A mock registered only by type or named `orders` does not satisfy this expression. With Coherence configuration excluded, `@MockitoBean` creates the named bean; leave `enforceOverride` at its default of `false`, since there is no production cache bean to replace.

This example uses one cache mock. Every `@CoherenceMap` injection point resolving `getCacheProxy` receives that same singleton mock, even if it specifies a different cache or session name. This does not reproduce production's cache- and session-aware resolution. Separate tests work when each test isolates a component that uses one cache. Splitting tests cannot supply distinct cache mocks to one component whose injection points all resolve `getCacheProxy`. For such a component, introduce application-level collaborators, each wrapping a cache operation, and mock those collaborators independently.

The explicitly selected, plain `@Configuration` supplies the test's primary configuration, so Boot does not search for the production `@SpringBootApplication` class or load its explicit Coherence enablement. This bootstrap uses targeted imports without component scanning. `@EnableAutoConfiguration` enables Boot's auto-configuration support, so the same three exclusions remain necessary. A `@TestConfiguration` alone supplements the primary configuration and does not prevent Boot from discovering it, even when supplied through `classes`.

Do not import or scan the production application configuration from this bootstrap. Check that imported components do not transitively import or scan configuration that enables or starts Coherence. Their dependencies still need appropriate test beans or mocks; selecting a different bootstrap does not provide them.

## 8.3. Configuration Properties

Additional configuration can be provided for instance via Spring Boot's `application.yaml` or `application.properties` file. For instance YAML configuration for Spring Boot's Coherence support may look like the following:

```
coherence:
  property-prefix: "coherence.properties."
  logging:
    destination: slf4j
    logger-name: MyCoherence
  sessions:
  - name: default
```

```
    config: "coherence-cache-config.xml"
    priority: 1
  - name: test
    config: "test-coherence-config.xml"
    priority: 2
  properties:
    coherence.log.limit: 400
    coherence.log.level: 1
```

The following configuration properties are available.

*Table 1. Coherence Configuration Properties*

| Key | Default Value | Description |
|---|---|---|
| coherence.logging.destination | `slf4j` | The type of the logging destination. |
| coherence.logging.severity-level | | Specifies which logged messages are emitted to the log destination. The legal values are `-1` to `9`. No messages are emitted if `-1` is specified. More log messages are emitted as the log level is increased. |
| coherence.logging.logger-name | `Coherence` | Specifies a logger name within chosen logging system |
| coherence.logging.message-format | | Specifies how messages that have a logging level specified are formatted before passing them to the log destination. |
| coherence.logging.character-limit | | Specifies the maximum number of characters that the logger daemon processes from the message queue before discarding all remaining messages in the queue |
| coherence.sessions.<type> | N/A | Indicates the type of the session. One of the following: `server`, `client` (For both Coherence*Extend and gRPC) |
| coherence.sessions.<type>[0].name | | Name of the session. |
| coherence.sessions.<type>[0].config | | The Coherence cache configuration URI for the session |

| Key | Default Value | Description |
|---|---|---|
| coherence.sessions.<type>[0].priority | `SessionConfiguration#DEFAULT_PRIORITY` | The priority order to be used when starting the session. Sessions will be started with the lowest priority first. |
| coherence.sessions.<type>[0].scope-name | | The scope name for the session. |
| coherence.instance.type | Depends on session type. As soon as you specify a `server` session, it defaults to `cluster` | Type of the Coherence instance: `cluster` or `client` |
| coherence.server.startup-timeout | `5m` | Overrides the default startup-timeout when starting Coherence. |

`Session`-related configuration properties are defined based on the session type in:

- AbstractSessionConfigurationBean
- SessionConfigurationBean
- ClientSessionConfigurationBean



Many properties are translated into native Coherence properties. If both Spring Boot property AND a native property `coherence.properties.*` are configured, the Spring Boot property is used.

If the provided Spring Boot configuration properties are not sufficient for your needs, you can also specify any of the native Coherence properties. For a list of available native properties, please consult the reference guide chapter on System Property Overrides.

## 8.4. Coherence Cluster Setup

In order to set up Coherence clusters with Spring Boot, you can use the following approaches:

- Co-locate Coherence instances with your application
- Access a dedicated Coherence Cluster as a Client, either via *gRPC* or *Coherence*Extend*.



For an in-depth introduction to Coherence clusters, please consult the chapter Introduction to Coherence Clusters.

### 8.4.1. Co-located Coherence Clusters

In this setup, Coherence is started as part of your Spring Boot application. Each instance of your application will run Coherence and using the Tangosol Cluster Management Protocol (TCMP), they will form a Coherence cluster. This is typically the recommended approach for most use-cases and the default. Therefore, by just adding the `coherence-spring-boot-starter` Maven dependency, Spring Boot autoconfiguration for Coherence is enabled and will enable Coherence in Server (Clustered)

mode.

If you need to provide additional configuration, e.g. to point to your own Coherence cache configuration file or to provide Coherence System Property Overrides, you can add those to your `application.yaml` file:

*Coherence Configuration Properties*

```
coherence:
  sessions:
    server:
      - name: default
        config: "coherence-cache-config.xml"  ①
  logging:
    destination: slf4j                        ②
coherence.wka: 127.0.0.1                      ③
```

① The Coherence cache configuration URI for the session (classpath resource)

② Several Oracle Coherence system property overrides are directly mapped to Spring Boot properties

③ Alternatively, you can specify *any* Coherence system property override directly as well

### 8.4.2. Access Coherence Clusters as a Client

In this approach, your Spring Boot application will connect to a dedicated Coherence cluster as a client. This can be done either via *Coherence*Extend* or gRPC. For your Spring Boot application, the configuration is basically the same for both approaches. In your Spring Boot `application.yaml` file, you will need to specify the following:

*Coherence Client Configuration*

```
coherence:
  spring:
    - server:                         ①
    - client:                         ②
      - name: default
        config: remote-cache-config.xml ③
coherence.tcmp.enabled: false         ④
```

① Disable the server (clustered) session

② Enable the client session

③ The Coherence cache configuration URI for the client session, which contains the gRPC or Coherence*Extend-specific configuration

④ Disable TCMP



When setting up pure client connections to a Coherence cluster, you should ensure that TCMP is disabled. For more information, please see Disabling TCMP

> Communication in the Coherence reference guide.

An alternative to the yaml or properties configuration above is to specify a dedicated `SessionConfigurationBean` in your Spring Boot application.

*Configure the Coherence Client using a SessionConfigurationBean*

```
@Configuration
public class CoherenceClientConfig {
  @Bean
  public SessionConfigurationBean grpcSessionConfigurationBean() {
    final ClientSessionConfigurationBean sessionConfigurationBean = new
ClientSessionConfigurationBean();
    sessionConfigurationBean.setName(SessionConfigurationBean.DEFAULT_SESSION_NAME);
    sessionConfigurationBean.setConfig("remote-cache-config.xml");
    return sessionConfigurationBean;
  }
}
```

In the configuration above the `remote-cache-config.xml` file will contain the relevant Coherence configuration for either *Coherence*Extend* or *gRPC*. The configuration for both approaches is described in the following sections.

#### 8.4.2.1. gRPC

The main gRPC configuration is done in your `coherence-cache-config.xml` file. The configuration would look similar to the following:

*Minimal gRPC Configuration*

```
<?xml version="1.0"?>
<cache-config
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns="http://xmlns.oracle.com/coherence/coherence-cache-config"
    xsi:schemaLocation="http://xmlns.oracle.com/coherence/coherence-cache-config
coherence-cache-config.xsd">
    <caching-scheme-mapping>
        <cache-mapping>
            <cache-name>*</cache-name>                    ①
            <scheme-name>remote-grpc</scheme-name>        ②
        </cache-mapping>
    </caching-scheme-mapping>

    <caching-schemes>
        <remote-grpc-cache-scheme>                        ③
            <scheme-name>remote-grpc</scheme-name>
            <service-name>RemoteGrpcCache</service-name> ④
            <cluster-name>Mycluster</cluster-name>
        </remote-grpc-cache-scheme>
    </caching-schemes>
```

```
</cache-config>
```

① The cache name * is a wildcard and will match all caches

② The scheme name `remote-grpc` is used to map the all caches to the scheme

③ The `remote-grpc` cache is defined in the `remote-grpc-cache-scheme` XML element

④ The reference to the gRPC service name



For more information on gRPC, please consult the chapter on Getting Started with gRPC in the Coherence reference guide.

#### 8.4.2.2. Coherence*Extend

The setup for Coherence*Extend is very similar to the gRPC setup. The main difference is that you will use the `remote-cache-scheme` XML element instead. The configuration would look similar to the following:

*Minimal Coherence*Extend Configuration*

```
<?xml version="1.0"?>
<cache-config xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
              xmlns="http://xmlns.oracle.com/coherence/coherence-cache-config"
              xsi:schemaLocation="http://xmlns.oracle.com/coherence/coherence-cache-
config coherence-cache-config.xsd">

    <caching-scheme-mapping>
        <cache-mapping>
            <cache-name>*</cache-name>                          ①
            <scheme-name>remote</scheme-name>                   ②
        </cache-mapping>
    </caching-scheme-mapping>

    <caching-schemes>
        <remote-cache-scheme>                                   ③
            <scheme-name>remote</scheme-name>
            <service-name>ExtendTcpCacheService</service-name>
        </remote-cache-scheme>
    </caching-schemes>
</cache-config>
```

① The cache name * is a wildcard and will match all caches

② The scheme name `remote` is used to map the all caches to the scheme

③ The `remote` cache scheme is defined in the `remote-cache-scheme` XML element

The configuration above will use the name service to discover the Coherence cluster and thus the exposed Coherence*Extend port. However, you can also specify the host and port explicitly. Here is an example of the configuration where the Coherence*Extend host and port are specified explicitly:

*Coherence*Extend Configuration with explicit host/port configuration*

```
<?xml version="1.0"?>
<cache-config xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
              xmlns="http://xmlns.oracle.com/coherence/coherence-cache-config"
              xsi:schemaLocation="http://xmlns.oracle.com/coherence/coherence-cache-
config coherence-cache-config.xsd">

    <caching-scheme-mapping>
        <cache-mapping>
            <cache-name>*</cache-name>
            <scheme-name>remote</scheme-name>
        </cache-mapping>
    </caching-scheme-mapping>

    <caching-schemes>
        <remote-cache-scheme>
            <scheme-name>remote</scheme-name>
            <service-name>ExtendTcpCacheService</service-name>
            <initiator-config>
                <tcp-initiator>
                    <name-service-addresses>
                        <socket-address>
                            <address>127.0.0.1</address>
                            <port>7574</port>
                        </socket-address>
                    </name-service-addresses>
                </tcp-initiator>
                <outgoing-message-handler>
                    <request-timeout>5s</request-timeout>
                </outgoing-message-handler>
            </initiator-config>
        </remote-cache-scheme>
    </caching-schemes>
</cache-config>
```



For more information on Coherence*Extend, please consult the chapter on Getting Started with Coherence*Extend in the Coherence reference guide.

## 8.5. Support of the Spring Boot ConfigData API

Since Spring Boot 2.4.x, you can define your own custom config locations. This allows you to import these config locations as property sources. As such, Coherence Spring allows you to use a Coherence cluster as a source of configuration data for your Spring Boot based applications.



Please also consult the Spring Boot reference guide on Externalized Configuration, especially the chapter on Importing Additional Data.



Please also see the chapter on Coherence Spring Cloud Config.

You can trigger the import of remote configuration properties with the Spring Boot property `spring.config.import` using the value `coherence:`. You will also need the corresponding Coherence config-client configured to specify any remote connection settings for your Coherence cluster as well as settings specifying how properties will be applied, e.g., the name of the application used to fetch remote properties.

```
spring:
  config:
    import: "coherence:"
coherence:
  config-client:
    application-name: berlin
    profile: kona
```

Many properties have sensible default values. Please see class CoherenceConfigClientProperties for details.

## 8.6. Caching with Spring Boot

If you have not already done so, please read the chapter Configuring Coherence Cache for Spring first.

In this chapter, we see how we can use caching with Coherence in Spring Boot. As long as `coherence-spring-boot-starter` is added to your project, and caching is enabled via `@EnableCaching`, Coherence Autoconfiguration will automatically provide a CoherenceCacheManager (implementing Spring's CacheManager) to the ApplicationContext. However, the `CacheManager` is only added if no `CacheManager` was configured explicitly beforehand.

Once that is in place, you can take advantage of Spring's Cache abstraction backed by Coherence and use Spring's annotations such as `@Cacheable`, `@CacheEvict`, `@CachePut` etc.



When learning about Coherence's Spring cache abstraction support, please familiarize yourself with the following resources:

- Coherence Spring Quickstart chapter
- Coherence Core Spring Cache Support
- Spring Boot's reference documentation's support regarding caching
- The Cache Abstraction chapter in the core Spring Framework reference guide

### 8.6.1. Configure Circuit Breakers with Resilience4j

Generally, it is recommended to configure and run Coherence as part of your application as a *cluster member*. However, caching can also be configured using Coherence in *client mode* via Coherence*Extend or gRPC. However, in client mode you may encounter failures and/or reliability

situations due to network issues resulting in cache failures. In those situations, it would be desirable to retrieve the data from the persistence store instead, until the connectivity is being restored. Similarly, your application may encounter request timeout issues when retrieving data from the cache.

This is where the circuit breaker pattern can be quite helpful, allowing you to gracefully degrade functionality via configurable fallback methods. Spring Boot has excellent support via Resilience4j, a fault tolerance library.

Coherence Spring includes an example application that illustrates a basic circuit breaker use-case via Resilience4j. In this example a Spring Boot-based application has REST endpoints to retrieve Books:

- GET `/api/books` - Retrieve all books
- GET `/api/books/1234` - Retrieve a single book
- DELETE `/api/books/1234` - Evict a book from the Coherence cache

By default, 2 books are inserted into the in-memory database AND into the Coherence cache. The application uses Spring's cache abstraction backed by Coherence. The application is configured to connect to Coherence on a separate node via Coherence*Extend. The use-case of the application is that when you shut down the Coherence server, the application won't be able to retrieve cached domain data from Coherence. Instead, the Resilience4j circuit breaker will catch the connection exception and invoke a fallback method. In this case the data is returned from the main persistence store, bi-passing the Spring cache until the connection to the Coherence server has been restored.

With security-hardened Coherence 26.10, the application permits its exact `Book` payload in `META-INF/coherence/security-config.xml`. The permission is checked in the application JVM when cached Extend response values are deserialized. The model-free server stores and returns binary values on this path. HTTP 200 can also come from a database fallback after a cache failure; the sample's `BookCacheIT` verify actual individual and collection cache hits independently. See the Sample README for the permission boundary and focused positive and missing-permission checks. The default Coherence version remains 26.04.

#### 8.6.1.1. Running the Example

The example application consists of 2 applications:

- **circuit-breaker-cache-demo-server** - The stand-alone Coherence instance
- **circuit-breaker-cache-demo-app** - The client application that will connect to the Coherence server via Coherence*Extend

Let's first run the server:

```
./mvnw spring-boot:run -pl samples/circuit-breaker-cache-demo/circuit-breaker-cache-demo-server
```

Now we need to run the actual application:

```
./mvnw spring-boot:run -pl samples/circuit-breaker-cache-demo/circuit-breaker-cache-demo-app
```

When the application starts, 2 books are added not only to the persistence store (HSQLDB) but also to the Coherence cache. However, this is not true for the retrieval of all books in this example.

**Get all books**

When you retrieve a list of all books. You will see that the main relevant business method is executed and the data retrieved from the database. But at this point the collection of books is added to the Coherence cache for the first time.

*List all books*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X GET "http://localhost:8090/api/books"
```

Thus, when you retrieve the list of books again, you will see in the logs:

```
No cache entry for key 'SimpleKey []' in cache(s) [allBooks]
```

**Get a Single Book**

When retrieving a single book, on the other side, the book is retrieved from the Coherence cache right away.

*Get a single book*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X GET "http://localhost:8090/api/books/1"
```

You will see something like:

```
Cache entry for key '1' found in cache 'books'
```

Let's evict the book from the Coherence cache:

*Evict book with id 1 from the Coherence Cache*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
```

```
  -X DELETE "http://localhost:8090/api/books/1"
```

Now, when you retrieve the book again, it will be retrieved from the persistence store instead. Let's do something more interesting. When retrieving a single book we added a special case to the business service, where the retrieval of a book with id `42` will cause a `BusinessException` to be thrown.

*Get a single book throwing a business exception*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X GET "http://localhost:8090/api/books/42"
```

As you may notice, an `Internal Server Error` (HTTP status 500) is returned to you. Additionally, a `BusinessException` was thrown and handled by a Resilience4j fallback method.



Resilience4j selects fallback methods based on the specificity of the thrown Exceptions in relation to the exception declared in the fallback method. Thus, if you have multiple fallback methods, the method with the most specific exception is being chosen. Furthermore, it is important to know that expected exceptions (e.g. Business Exceptions) that you have included in the list of `ignoreExceptions` via `application.yaml`:

- `resilience4j.circuitbreaker.configs.*.ignoreExceptions`

will also trigger the execution of fallBack methods, but it will not change the state of the circuit breaker.

Next, we will first shut down the Coherence server, and then we try to retrieve a single book with id `1`:

*Get a single book again*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X GET "http://localhost:8090/api/books/1"
```

As you see, the JSON response is still the same (The book data is returned). However, when you look at the logs, you will see:

```
getBook fallback method (For Throwable) was called: Unable to locate ProxyService
'ExtendTcpCacheService' ...
```

So basically, the `CacheManager` was unable to connect to the Coherence instance and therefore the Circuit Breaker kicked in, calling the fallback method instead, and thus returning the Book not from

the cache but from the persistence store.

#### 8.6.1.2. Monitoring the Circuit Breaker

Spring Boot and Resilience4j also provide facilities to monitor the state of the Circuit Breaker via Spring Boot's health-endpoint as well as its circuit breaker events endpoint:

- localhost:8090/actuator/health
- localhost:8090/actuator/circuitbreakerevents/coherence

*Spring Boot Health Endpoint*


```
{
  "status":"UP",
  "components":{
    "circuitBreakers":{
      "status":"UNKNOWN",
      "details":{
        "coherence":{
          "status":"CIRCUIT_OPEN",
          "details":{
            "failureRate":"100.0%",
            "failureRateThreshold":"5.0%",
            "slowCallRate":"0.0%",
            "slowCallRateThreshold":"100.0%",
            "bufferedCalls":3,
            "slowCalls":0,
            "slowFailedCalls":0,
            "failedCalls":3,
            "notPermittedCalls":8,
            "state":"OPEN"
          }
        }
      }
    },
    "db":{
      "status":"UP",
      "details":{
        "database":"HSQL Database Engine",
        "validationQuery":"isValid()"
      }
    },
    "diskSpace":{
      "status":"UP",
      "details":{
        "total":2000796545024,
        "free":1490744430592,
        "threshold":10485760,
        "exists":true
      }
    },
```

```
    "ping":{
      "status":"UP"
    }
  }
}
```



For demonstrating purposes we enabled the relevant health endpoints via Spring Boot configuration in `application.yaml`:

```
management.endpoints.web.exposure.include: "*"
management.endpoint.health.show-details: always
```

You may not want to do this in production. This is solely for demonstration purposes, especially as no security is configured for this application.

#### 8.6.1.3. Add Resilience4j Dependencies

In order to use Resilience4j in your Coherence Spring project with Spring Boot, you need to add the following dependencies:

*Example 10. Resilience4j Spring Boot Dependency*

*Maven*

```
<dependency>
    <groupId>io.github.resilience4j</groupId>
    <artifactId>resilience4j-spring-boot4</artifactId>
    <version>2.4.0</version>
</dependency>
```

*Gradle*

```
implementation("io.github.resilience4j:resilience4j-spring-boot4:2.4.0")
```

#### 8.6.1.4. Resilience4j Annotations

In order to add circuit-breaker capabilities to our `@Cacheable` business methods in `DefaultBookService`, we simply add the `@CircuitBreaker` annotations, e.g.:

```
@Cacheable("allBooks")
@CircuitBreaker(name = "coherence", fallbackMethod = "getAllBooksFallback")
@Override
public List<Book> getAllBooks() {
 ...
}
```

The key is the specified fallback method: whenever an exception occurs, the fallback method is being executed. You can have multiple fallback methods, specifying different exception types. Resilience4j will then select the fallback methods based on the specificity of the thrown exception.



When dealing with fallback method, it may at times be necessary to call other methods of the same services that you expect to be proxied, e.g. have applied annotations etc. However, when calling other methods in the same service, you are calling those methods without the relevant AOP aspects applied to them. You may either need to refactor those methods into another Spring bean or can actually inject the same service into the service. This type of injection call self injection or self autowiring has been supported since Spring `4.3`.

## 8.7. Configure Hibernate Second-Level Caching

Spring's cache abstraction is not your only option with regard to caching. Another option is to use Hibernate's Second-Level cache support.

For this baseline, use `coherence-hibernate-cache-7` 4.1.0 with Hibernate ORM 7.4.5.Final. The adapter supports ORM 7.4.x; Spring Boot's managed ORM version must be overridden when using it. See Hibernate version selection and dependencies.

When using only Hibernate's second-level cache without the requirement of using Coherence for non-Hibernate application needs, you may want to disable Coherence's auto-configuration support for Spring Boot as it is not needed:

*Disable CoherenceAutoConfiguration*

```
@SpringBootApplication(exclude=CoherenceAutoConfiguration.class)
public class HibernateApplication {
    public static void main(String[] args) {
        SpringApplication.run(HibernateApplication.class, args);
    }
}
```

In order to configure Hibernate Second-Level Caching for Coherence using Spring Boot, you simply have to set the Hibernate property `hibernate.cache.region.factory_class` to `com.oracle.coherence.hibernate.cache.v7.CoherenceRegionFactory`.

Your Spring Boot `application.yaml` file may look like the following:

*RegionFactory Configuration using YAML*

```
spring:
  application:
    name: Your Spring Boot App
  jpa:
    properties:
      hibernate.cache.region.factory_class:
com.oracle.coherence.hibernate.cache.v7.CoherenceRegionFactory ①
```

```
      hibernate.cache.use_query_cache: true
      hibernate.cache.use_second_level_cache: true
      hibernate.format_sql: true
      hibernate.generate_statistics: true
      hibernate.show_sql: true
      hibernate.use_sql_comments: false
...
```

① Configuring the `CoherenceRegionFactory`

For more detailed information please see the Caching chapter of the Hibernate reference documentation.



Coherence Spring uses Coherence Hibernate 4.1.0. The v7 adapter packages `META-INF/coherence/security-config.xml` with executable processor and cache payload declarations for security-hardened Coherence 26.10. Application-specific serialized values may require additional permissions. The sample's `HibernateCacheIT` requires actual cross-member entity, query and timestamp cache hits with zero SQL on measured reads. Metadata presence alone does not establish runtime qualification. Coherence 26.04 remains the project default.

### 8.7.1. Hibernate Second Level Cache Example

The Coherence Spring source code repository also provides an example application, illustrating the Coherence support for Hibernate's Second Level caching using Spring Boot.

The example application has 1 REST endpoint that can persist, retrieve and delete a `Plant` object with taxonomic properties such as the genus and species.

*Example of a `Plant` JSON response*

```
{"id": 1, "genus": "Sabal", "species": "minor", "commonName": "Dwarf palmetto"}
```

#### 8.7.1.1. Run the Hibernate Application

First, let's build the application:

*Build the Coherence Server instance*

```
$ ./mvnw clean package -pl samples/hibernate-cache-demo
```

Next, run the application:

*Run the Spring Boot application*

```
 $ java -jar samples/hibernate-cache-demo/target/hibernate-cache-demo-5.0.0-
SNAPSHOT.jar
```

The application will be available on port `9090`.

*Add a plant*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X POST --data '{"genus": "Sabal", "species": "minor", "commonName": "Dwarf
palmetto"}' \
  "http://localhost:9090/plants"
```

*List all plants*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X GET "http://localhost:9090/plants"
```

*Get a single plant*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X GET "http://localhost:9090/plants/1"
```

*Delete a plant*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X DELETE "http://localhost:9090/plants/1"
```

When retrieving a single plant repeatedly, you will see no SQL printed to the console. Instead, the plant is returned from the second level cache as illustrated by the printed out cache statistics.

*Hibernate Cache Statistics*

```
2021-06-28 16:12:42.545  INFO 29022 --- [nio-9090-exec-7]
i.StatisticalLoggingSessionEventListener : Session Metrics {
27579 nanoseconds spent acquiring 1 JDBC connections;
0 nanoseconds spent releasing 0 JDBC connections;
0 nanoseconds spent preparing 0 JDBC statements;
0 nanoseconds spent executing 0 JDBC statements;
0 nanoseconds spent executing 0 JDBC batches;
0 nanoseconds spent performing 0 L2C puts;
1587296 nanoseconds spent performing 1 L2C hits;
0 nanoseconds spent performing 0 L2C misses;
0 nanoseconds spent executing 0 flushes (flushing a total of 0 entities and 0
collections);
```

```
0 nanoseconds spent executing 0 partial-flushes (flushing a total of 0 entities and 0
collections)
}
```

In order to also cache the results of query executions, you must provide query hints to Hibernate. The `PlantRepository` class has a custom query using such a hint for illustration purposes:

*Using Query Hints*

```
@QueryHints(@QueryHint(name = org.hibernate.jpa.HibernateHints.HINT_CACHEABLE, value =
"true"))
@Query("select p from Plant p")
List<Plant> getAllPlantsCacheable();
```

You can see the cache being used by retrieving the list of plants with an additional request parameter `use-cache`:

*List all plants*

```
curl -i \
  -H "Accept: application/json" \
  -H "Content-Type:application/json" \
  -X GET "http://localhost:9090/plants?use-cache=true"
```

## 8.8. Spring Session Support

Coherence Spring also provides support for Spring Session. This includes auto-configuration support as well as a set of Coherence-specific configuration properties. Before you continue, please consider reading the chapter on Coherence Spring Session first.

For a Spring Boot servlet web application, select `coherence-spring-session-boot-starter`. It supplies the general Coherence starter, `coherence-spring-session` and Boot's `spring-boot-session`, including `spring-session-core`. Keep an explicit Coherence runtime and the application's servlet web dependencies. The following recipes assume the Spring Boot parent or BOM manages Boot versions; Security and Actuator remain application choices.

*Example 11. Add Coherence Spring Session Support*

*Maven*

```
<dependencies>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-session-boot-starter</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
```

```
        <artifactId>coherence</artifactId>
        <version>26.04</version>
    </dependency>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-webmvc</artifactId>
    </dependency>
</dependencies>
```

*Gradle*

```
dependencies {
    implementation("com.oracle.coherence.spring:coherence-spring-session-boot-starter:5.0.0-SNAPSHOT")
    implementation("com.oracle.coherence.ce:coherence:26.04")
    implementation("org.springframework.boot:spring-boot-starter-webmvc")
}
```

With these dependencies, Boot discovery activates `CoherenceSpringSessionAutoConfiguration` automatically in a servlet web application and creates the Coherence repository and `springSessionRepositoryFilter`. No `@EnableCoherenceHttpSession` annotation is required. The general starter alone does not supply Spring Session; the old general-starter plus session-library combination also needs Boot Session explicitly. See the 5.x dependency migration for the manual combination.

Auto-configuration backs off in these situations:

- Set property `coherence.spring.session.enabled` to `false`
- Define `spring.session.store-type`. Any value, including an empty value or `none`, deactivates Coherence's auto-configuration. This property does not install or configure another store by itself.
- Supply an application-owned `SessionRepository`, including one enabled through `@EnableCoherenceHttpSession`. The application then owns its repository and HTTP-session configuration. A bare repository bean does not create an HTTP filter; configure that explicitly, for example with `@EnableSpringHttpSession` when supplying the repository.

This integration supports servlet applications, including embedded servers and Boot WAR deployments. It does not provide reactive WebSession support or enable HTTP sessions in non-web applications. Required Session, Boot Session and servlet classes must be present; `coherence.spring.session.enabled=true` cannot supply a missing dependency.

The following Coherence-specific configuration properties are available:

*Table 2. Coherence Configuration Properties*

| Key | Default Value | Description |
|---|---|---|
| coherence.spring.session.enabled | `true` | Set to `false` to disable Spring Session support |
| coherence.spring.session.map-name | `spring:session:sessions` | Name of the map used to store sessions |
| coherence.spring.session.flush-mode | `ON_SAVE` | Sessions flush mode. Determines when session changes are written to the session store. |
| coherence.spring.session.save-mode | `ON_SET_ATTRIBUTE` | The session save mode determines how session changes are tracked and saved to the session store. |
| coherence.spring.session.use-entry-processor | `true` | If true, a Coherence Entry Processor will be used for handling updates to the persisted HTTP session. |

# 8.9. Coherence Messaging Support

Support for injecting Coherence Publishers is enabled automatically by adding the `coherence-spring-boot-starter` dependency. By default, base package to scan for `@CoherencePublisher` annotated interfaces is derived from the main class annotated with `@SpringBootApplication`. Base package can be overridden by annotating configuration class with `@CoherencePublisherScan` as described at Messaging with Coherence Topics.

# 8.10. Coherence Metrics

Metrics are an application-level choice. The general `coherence-spring-boot-starter` does not add Boot's metrics module or Micrometer core to an application's runtime classpath. To publish Coherence Metrics, add `coherence-micrometer` and make a Micrometer `MeterRegistry` available using one of the following configurations.

## 8.10.1. Use Spring Boot Actuator

Applications that use Actuator should add its starter. Actuator already includes Boot's metrics starter, so the two Boot starters are alternatives and should not both be declared. These examples assume that the Spring Boot parent or BOM manages the Boot dependency version.

*Example 12. Coherence Metrics with Spring Boot Actuator*

*Maven*

```
<dependencies>
    <dependency>
```

```
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-boot-starter</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence</artifactId>
        <version>26.04</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence-micrometer</artifactId>
        <version>26.04</version>
    </dependency>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-actuator</artifactId>
    </dependency>
</dependencies>
```

*Gradle*

```
dependencies {
    implementation("com.oracle.coherence.spring:coherence-spring-boot-
starter:5.0.0-SNAPSHOT")
    implementation("com.oracle.coherence.ce:coherence:26.04")
    implementation("com.oracle.coherence.ce:coherence-micrometer:26.04")
    implementation("org.springframework.boot:spring-boot-starter-actuator")
}
```

### 8.10.2. Use Boot metrics without Actuator

Applications that want Boot to configure metrics without the full Actuator starter can add the dedicated metrics starter instead.

*Example 13. Coherence Metrics without Spring Boot Actuator*

*Maven*

```
<dependencies>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-boot-starter</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence</artifactId>
        <version>26.04</version>
```

```
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence-micrometer</artifactId>
        <version>26.04</version>
    </dependency>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-micrometer-metrics</artifactId>
    </dependency>
</dependencies>
```

*Gradle*

```
dependencies {
    implementation("com.oracle.coherence.spring:coherence-spring-boot-
starter:5.0.0-SNAPSHOT")
    implementation("com.oracle.coherence.ce:coherence:26.04")
    implementation("com.oracle.coherence.ce:coherence-micrometer:26.04")
    implementation("org.springframework.boot:spring-boot-starter-micrometer-
metrics")
}
```

### 8.10.3. Supply an application-owned registry

An application can provide its own registry without adding Boot's metrics module. For example, the `coherence-micrometer` dependency supplies Micrometer core, allowing the application to define a simple registry:

```
import io.micrometer.core.instrument.MeterRegistry;
import io.micrometer.core.instrument.simple.SimpleMeterRegistry;
import org.springframework.context.annotation.Bean;
import org.springframework.context.annotation.Configuration;

@Configuration(proxyBeanMethods = false)
class MetricsConfiguration {

    @Bean
    MeterRegistry meterRegistry() {
        return new SimpleMeterRegistry();
    }
}
```

Coherence binds its singleton Micrometer adapter to the selected registry when both the adapter and a `MeterRegistry` bean are available. The integration does not necessarily register the adapter itself as a Spring bean. Creating a registry, binding Coherence meters, exposing an HTTP endpoint, and exporting meters to a monitoring backend are separate steps. In particular, a

`SimpleMeterRegistry` does not export metrics to a monitoring service.



Spring Boot 4 moved registry auto-configuration from `spring-boot-actuator-autoconfigure` to `spring-boot-micrometer-metrics`. Under Spring Boot 4, the Coherence starter and `coherence-micrometer` alone still allow the application to start, but no registry is created automatically and Coherence metrics are not bound. Applications already using Actuator satisfy the new prerequisite.

When Boot manages the registry, the following property filters meters whose names begin with `coherence`:

*application.yaml*

```
management:
  metrics:
    enable:
      coherence: false
```

This property does not remove metrics dependencies or disable other Boot metrics. An application that uses only its own registry is also responsible for configuring any desired Micrometer meter filters.

## 8.11. Spring Data Support

Coherence Spring's support for Spring Data also contain auto-configuration support for Spring Boot. The auto-configuration is activated as soon as the Coherence Spring Data dependency is added to your Spring Boot project.

*Example 14. Add Coherence Spring Data Support*

*Maven*

```
<dependencies>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-boot-starter</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.spring</groupId>
        <artifactId>coherence-spring-data</artifactId>
        <version>5.0.0-SNAPSHOT</version>
    </dependency>
    <dependency>
        <groupId>com.oracle.coherence.ce</groupId>
        <artifactId>coherence</artifactId>
        <version>26.04</version>
    </dependency>
```

```
</dependencies>
```

*Gradle*

```
dependencies {
    implementation("com.oracle.coherence.spring:coherence-spring-boot-
starter:5.0.0-SNAPSHOT")
    implementation("com.oracle.coherence.spring:coherence-spring-data:5.0.0-
SNAPSHOT")
    implementation("com.oracle.coherence.ce:coherence:26.04")
}
```

There is no need to add the `@EnableCoherenceRepositories` annotation, as the Coherence Spring Data auto-configuration support, will automatically detect any Coherence repositories. In fact, adding `@EnableCoherenceRepositories` to your Spring Boot project, will cause auto-configuration to back-off.

Auto-configuration can also be de-activated by setting environment property `coherence.spring.data.repositories.enabled` to `false`.

# Chapter 9. Coherence Spring Cloud Config

This section explains how to configure Coherence using Spring Cloud Config.

## 9.1. Overview

Spring Cloud Config provides support for externalized configuration in distributed systems. It integrates seamlessly with Spring Boot applications and allows you to externalize / centralize critical application properties. Spring Cloud Config provides numerous storage backends for your configuration data and as part of Coherence Spring we also provide a backend for Oracle Coherence.



Please familiarize yourself with the Spring Cloud Config reference documentation.

In this chapter we will cover two aspects of Coherence-specific support for Spring Cloud Config:

- Configure Coherence and its Spring support using Spring Cloud Config

Let's get started with an example to show the general functioning of Spring Cloud Config.

## 9.2. Demo

This demo is essentially the same as is used in the Quickstart chapter. However, we externalize some Coherence configuration using Spring Cloud Config. The source code for the demo is part of the Coherence Spring source code repository. Therefore, to get started, please clone its repository:

*Clone the Spring Cloud Config demo project*

```
$ git clone https://github.com/coherence-community/coherence-spring.git
$ cd coherence-spring
$ git switch main
```

You now have checked out all the code for Coherence Spring! The relevant demo code for the Spring Cloud Config demo is under `samples/coherence-spring-cloud-config-demo/`. The demo consists of 2 Maven modules:

- **coherence-spring-cloud-config-demo-server**: Spring Cloud Config Server implementation
- **coherence-spring-cloud-config-demo-app**: Main application

The Config Server is essentially using 2 dependencies:

*Maven*

```
<dependency>
    <groupId>org.springframework.cloud</groupId>
    <artifactId>spring-cloud-config-server</artifactId>    ①
</dependency>
<dependency>
```

```
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-security</artifactId>  ②
</dependency>
```

① Spring Cloud Config Server dependency

② Provides rudimentary security for the exposed configuration REST endpoints using Spring Security

The demo client on the other hand will use the following dependencies:

*Maven*

```
<dependency>
    <groupId>com.oracle.coherence.spring</groupId>
    <artifactId>coherence-spring-boot-starter</artifactId> ①
    <version>5.0.0-SNAPSHOT</version>
</dependency>
<dependency>
    <groupId>com.oracle.coherence.ce</groupId>
    <artifactId>coherence</artifactId>                     ②
    <version>26.04</version>
</dependency>
<dependency>
    <groupId>org.springframework.cloud</groupId>
    <artifactId>spring-cloud-starter-config</artifactId>   ③
</dependency>
```

① Provides all integration code, caching + autoconfiguration support

② The Oracle Coherence dependency

③ The dependency to integrate with the Spring Cloud Config server



Coherence Spring does not bring in Coherence automatically. Coherence Spring 5.x applications must declare the supported Coherence CE dependency explicitly.

### 9.2.1. Configure the Demo Application

In order to run the demo, we first need to create a Git repository that will contain the configuration data.

*Set up the Config Data*

```
$ cd /path/to/git/repo
$ mkdir coherence-spring-config-repository
$ cd coherence-spring-config-repository
$ git init
```

Add a properties file called `config-client.properties`:

*config-client.properties*

```
coherence.logging.severity-level=6                                          ①
coherence.logging.destination=slf4j                                         ②

coherence.properties.coherence.cluster=Demo Cluster                         ③
coherence.properties.coherence.member=Demo Cluster Member                   ④
coherence.properties.coherence.management.remote=true                       ⑤
coherence.properties.coherence.management=all                               ⑥
coherence.properties.coherence.management.report.autostart=true             ⑦
coherence.properties.coherence.reporter.output.directory=/path/to/reports/  ⑧
coherence.properties.coherence.management.report.configuration=/reports/report-
all.xml ⑨
```

① `-1` emits no log messages, `9` emits the most

② Specifies the logger e.g. `stdout`, `log4j`, `log4j2`, `slf4j`

③ The name of the cluster

④ The name of the cluster member

⑤ Specifies whether this cluster node exposes its managed objects to remote MBean server. `true` or `false`

⑥ `none` means no MBean server is instantiated. `all` enables management of both local and remotely manageable cluster nodes.

⑦ `true` or `false` (default) Specifies whether the Reporter automatically starts when the node starts.

⑧ The output directory for generated reports. By default, reports are saved reports to the directory from which the cluster member starts.

⑨ You can control which reports are generated by specifying a different report group configuration file. The pre-defined reports are located at `coherence-26.04.jar/reports`

For more options please see the following three chapters in the official Oracle Coherence reference guide:

- Operational Configuration Elements
- System Property Overrides
- Using Oracle Coherence Reporting

The sample's `EventService` uses Spring's `events` cache; `PersonService` reads the database. Its default configuration does not enable Hibernate second-level/query caching or select the shipped Hibernate-oriented XML. The app packages exact, non-executable payload metadata for `Event`, the two Hibernate persistent-set classes observed in the cached creation result, and the JDBC `java.sql.Timestamp` that can populate its date field after a database reload. See the sample README for the packaged `CloudConfigCacheIT`, its isolated Config Server fixture and per-permission negative controls. The shared compiler retains production parameter names for the named cache key `#id` and implicit controller argument names. The integration check requires annotated service and HTTP cache hits with zero SQL after a controlled database change, plus eviction and database reload through both paths. It does not qualify arbitrary populated association graphs.

### 9.2.2. Run the Demo Application

Please execute the following:

*Start the Spring Cloud Config Server*

```
 $ ./mvnw clean package -pl :coherence-spring-cloud-config-demo-server
 $ cd samples/coherence-spring-cloud-config-demo/coherence-spring-cloud-config-demo-
server/target
 $ java -jar coherence-spring-cloud-config-demo-server-5.0.0-SNAPSHOT.jar \n
     --spring.cloud.config.server.git.uri=file:///path/to/git/repo
```

*Start the Coherence Spring Application*

```
 $ ./mvnw clean package -pl :coherence-spring-cloud-config-demo-app
 $ cd samples/coherence-spring-cloud-config-demo/coherence-spring-cloud-config-demo-
app/target
 $ java -jar coherence-spring-cloud-config-demo-app-5.0.0-SNAPSHOT.jar
```

Feel free to change configuration settings and see, once you restart the apps, how the behavior of the Coherence cluster changes.

## 9.3. Use Spring Cloud Config Server to Configure Coherence

The previously discussed demo application illustrated the main concepts of using Spring Cloud Config Server as a configuration backend for Oracle Coherence. For a general understanding of Spring Cloud Config Server, please consult the respective reference documentation.

Coherence Spring is essentially unaware of Spring Cloud Config Server. Coherence Spring merely takes advantage of Spring Boot's configuration facilities. The main integration point for configuration between Spring and Oracle Coherence is the SpringSystemPropertyResolver class, which makes the properties of Spring's Environment available to Oracle Coherence.

When using Spring Boot (and not just plain Spring Framework), we also provide the `CoherenceProperties` class. It provides means to expose Coherence Spring configuration options in a type-safe manner, to provide code completion via your IDE etc.



Providing dedicated CoherenceProperties support is work in progress.

Behind the scenes using `CoherenceProperties.getCoherencePropertiesAsMap()` will translate the explicit Spring Boot properties into the property format used by Oracle Coherence. It is important to note that you can always provide ANY Oracle Coherence property as well.

For instance the following properties are equivalent:

*Equivalent Properties*

```
coherence.logging.severity-level=5
coherence.logging.destination=log4j

coherence.log.level=5
coherence.log=log4j
```



Please also see Coherence Support of the Spring Boot ConfigData API.

# Chapter 10. Appendices

## Appendix A: Coherence Spring Example Applications

The Coherence Spring project itself includes a number of examples that demonstrate how to use Coherence Spring. Furthermore, there are several additional examples that are not part of this repository but that may be of interest to Coherence Spring users.

The following examples are included in this repository:

- JPA Repository CacheStore Demo
- Circuit Breaker Cache Demo
- Coherence Spring Demo
  - Coherence Spring Boot Demo
  - Coherence Spring Classic Demo (non-Boot)
- Coherence Spring Session Demo
- Hibernate Second Level Cache Demo

The following examples are not included in this repository but are available in separate repositories:

- Coherence To Do List Example Application for Spring Boot
- Coherence Spring Sock Shop