



COMP 2012H Honors Object-Oriented Programming and Data Structures

Topic 16: Some New Features in C++11

Dr. Desmond Tsoi

Department of Computer Science & Engineering
The Hong Kong University of Science and Technology
Hong Kong SAR, China




A List of New Features in C++11

- uniform and general initialization using `{ }-list` ★
prevention of narrowing ★
- type deduction of variables from initializer: `auto`
— **NOT ALLOWED TO USE IN COMP 2012H**
- generalized and guaranteed constant expressions: `constexpr` ★
- **Range-for**-statement ★
- **lambdas** or **lambda expressions** ★
- delegating constructors ★
- explicit conversion operators ★
- support for unicode characters
- null pointer keyword: `nullptr` †
- **long long** integer type †
- in-class member initializers †
- override control keywords: **override** and **final** †
- scoped and strongly typed enums: **enum_class** †
- **rvalue references**, enabling move semantics †

Part I

Uniform and General Initialization Using { }-Lists and Prevention of Narrowing



= and { } Initializer for Variables

- In the past, you always initialize variables using the assignment operator =.

Example: = Initializer

```
int x = 5;  
float y = 9.8;  
int& xref = x;  
int a[] = {1, 2, 3};
```

- C++11 allows the more uniform and general curly-brace-delimited initializer list.

Example: { } Initializer

```
int x = {5};           // But = here is optional  
float y {9.8};  
int& xref {x};  
int a[] {1, 2, 3};
```

Initializer Example 1

```
1  #include <iostream>      /* File: initializer1.cpp */
2  using namespace std;
3
4  int main()
5  {
6      int w = 3.4;
7      int x1 {6};
8      int x2 = {8};        // = here is optional
9      int y {'k'};
10     int z {6.4};          // Error!
11
12     cout << "w = " << w << endl;
13     cout << "x1 = " << x1 << endl << "x2 = " << x2 << endl;
14     cout << "y = " << y << endl << "z = " << z << endl;
15
16     int& ww = w;
17     int& www {ww}; www = 123;
18     cout << "www = " << www << endl;
19     return 0;
20 }
```

initializer1.cpp:10:15: error: narrowing conversion of 6.4000000000000004e+0
from double to int inside { } [-Wnarrowing]

int z {6.4};
^

Initializer Example 2

```
#include <iostream>          /* File: initializer2.cpp */
using namespace std;

int main()
{
    const char s1[] = "Steve Jobs";
    const char s2[] {"Bill Gates"};
    const char s3[] = {'h', 'k', 'u', 's', 't', '\0'};
    const char s4[] {'h', 'k', 'u', 's', 't', '\0'};

    cout << "s1 = " << s1 << endl;
    cout << "s2 = " << s2 << endl;
    cout << "s3 = " << s3 << endl;
    cout << "s4 = " << s4 << endl;
    return 0;
}
```



Differences Between the `=` and `{ }` Initializers

- The `{ }` initializer is more **restrictive**: it doesn't allow conversions that lose information — **narrowing conversions**.
- The `{ }` initializer is more **general** as it also works for:
 - ▶ arrays
 - ▶ other aggregate structures
 - ▶ class objects



Part II

Generalized and Guaranteed Constant
Expressions: `constexpr`

CONSTEXPR

constexpr

- **constexpr** is a construct in C++11 to improve the performance of programs by doing computations at compile time rather than runtime.
- It specifies that the value of an object or a function can be evaluated at compile time and the expression can be used in other constant expressions.
- Restrictions of **constexpr** function
 1. In C++11, a constexpr function **should contain only ONE return statement**. (Relaxed in C++14)
 2. Each of its **parameters** must be a **literal type**.
 3. Its return type should **not be void type and other operator** like prefix increment are not allowed in constexpr function. It must be a **literal type** (e.g. scalar type, reference type, an array of literal type).
 4. A constexpr function should **refer only constant global variables**.
 5. A constexpr function can **call only other constexpr functions**.
 6. A constexpr function has to be **non-virtual**.

Constant Expression Example 1

```
#include <iostream>    /* File : constexpr-addition.cpp */
using namespace std;

constexpr int addition(int x, int y)
{
    return (x + y);
}

int main()
{
    const int sum = addition(10, 20);  // Evaluate at compile time
    cout << sum << endl;
    return 0;
}
```



Constant Expression Example 2 (More Than One Return Statements)

```
1  #include <iostream>      /* File : constexpr-find-max.cpp */
2  using namespace std;
3
4  constexpr int find_max(int x, int y)
5  {
6      if(x > y)
7          return x;
8      else
9          return y;
10 }
11
12 int main()
13 {
14     int max = find_max(20, 30);
15     cout << max << endl;
16     return 0;
17 }
```


```
constexpr-find-max.cpp: In function constexpr int find_max(int, int):
constexpr-find-max.cpp:10:1: error: body of constexpr function
constexpr int find_max(int, int) not a return-statement
}
```

Constant Expression Example 2 (Updated)

```
#include <iostream>    /* File : constexpr-find_max2.cpp */
using namespace std;

constexpr int find_max(int x, int y)
{
    return (x > y) ? x : y;
}

int main()
{
    int max = find_max(20, 30);
    cout << max << endl;
    return 0;
}
```

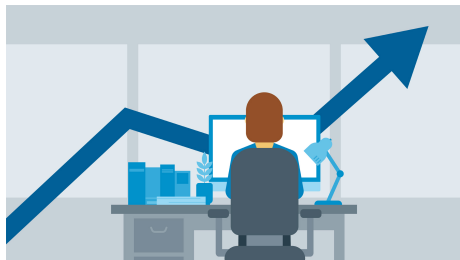

Constant Expression Example 3 (Access Non-const Global Variable)

```
1  #include <iostream>      /* File : constexpr-bigger-than.cpp */
2  using namespace std;
3
4  int ten = 10;
5
6  constexpr bool bigger_than(int x) { return x > ten; }
7
8  int main() {
9      if(bigger_than(21))
10         cout << "21 is bigger than 10" << endl;
11     else
12         cout << "21 is not bigger than 10" << endl;
13     return 0;
14 }
```

constexpr-bigger-than.cpp: In function constexpr bool bigger_than(int):
constexpr-bigger-than.cpp:8:1: error: the value of ten is not usable in a
constant expression
}
~

constexpr-bigger-than.cpp:4:5: note: int ten is not const
int ten = 10;
^

Constant Expression Example 3 (Updated)

```
#include <iostream>    /* File : constexpr-bigger-than2.cpp */
using namespace std;

const int TEN = 10;

constexpr bool bigger_than(int x) { return x > TEN; }

int main() {
    if(bigger_than(21))
        cout << "21 is bigger than 10" << endl;
    else
        cout << "21 is not bigger than 10" << endl;
    return 0;
}
```



Constant Expression Example 4 (Calling Non-constexpr Function)

```
1  #include <iostream>      /* File : constexpr-prime-bigger-than.cpp */
2  using namespace std;
3
4  const int TEN = 10;
5
6  bool is_prime_recursive(int x, int c) {
7      return (c*c > x) ? true : (x % c == 0) ? false : is_prime_recursive(x, c+1);
8  }
9
10 bool is_prime(int x) { return (x <= 1) ? false : is_prime_recursive(x, 2); }
11
12 constexpr bool prime_bigger_than(int x) { return is_prime(x) && x > TEN; }
13
14 int main() {
15     if(prime_bigger_than(13))
16         cout << "13 is a prime number and bigger than 10" << endl;
17     else
18         cout << "13 is either not a prime number or smaller than 10" << endl;
19     return 0;
20 }
```

constexpr-prime-bigger-than.cpp: In function constexpr bool prime_bigger_than(int):
constexpr-prime-bigger-than.cpp:12:60: error: call to non-constexpr
function bool is_prime(int) constexpr
bool prime_bigger_than(int x) { return is_prime(x) && x > TEN; }

Constant Expression Example 4 (Updated)

```
#include <iostream>      /* File : constexpr-prime-bigger-than2.cpp */
using namespace std;

const int TEN = 10;

constexpr bool is_prime_recursive(int x, int c) {
    return (c*c > x) ? true : (x % c == 0) ? false : is_prime_recursive(x, c+1);
}

constexpr bool is_prime(int x) {
    return (x <= 1) ? false : is_prime_recursive(x, 2);
}

constexpr bool prime_bigger_than(int x) { return is_prime(x) && x > TEN; }

int main() {
    if(prime_bigger_than(13))
        cout << "13 is a prime number and bigger than 10" << endl;
    else
        cout << "13 is either not a prime number or smaller than 10" << endl;
    return 0;
}
```


constexpr with Constructors and Objects

- `constexpr` can be used in constructors and objects.

```
#include <iostream>    /* File : constexpr-constructor-object.cpp */
using namespace std;

class Rectangle {
private:
    int width {0};
    int height {0};

public:
    // A constexpr constructor
    constexpr Rectangle(int width, int height) : width(width), height(height) {}
    constexpr int getArea() { return width * height; }
};

int main() {
    // rect is initialized at compile time
    constexpr Rectangle rect(10, 20);
    cout << rect.getArea();
    return 0;
}
```

constexpr vs. inline Functions

- Both `constexpr` and `inline` functions are for performance improvements.
- `inline functions` request compiler to expand at compile time and save time of function call overheads.
- Expressions in `inline functions` are always evaluated at runtime, but expressions in `constexpr function` are evaluated at compile time.



Part III

Range-for-Statement

Data set:

③ 4, 5, 5, ⑥



Lowest



Highest

for-Statements

- In the past, you write a for-loop by
 - ▶ **initializing** an index variable,
 - ▶ giving an **ending condition**, and
 - ▶ writing some **post-processing** that involves the index variable.

Example: Traditional for-Loop

```
for (int k = 0; k < 5; ++k)
    cout << k*k << endl;
```

- C++11 adds a more flexible **range-for** syntax that allows looping through a **sequence** of values specified by a **list**.

Example: Range-for-Loops

```
for (int k : { 0, 1, 2, 3, 4 })
    cout << k*k << endl;
```

```
for (int k : { 1, 19, 54 }) // Numbers need not be successive
    cout << k*k << endl;
```

Range-for Example

```
#include <iostream>      /* File : range-for.cpp */
using namespace std;

int main()
{
    cout << "Square some numbers in a list" << endl;
    for (int k : {0, 1, 2, 3, 4})
        cout << k*k << endl;

    int range[] { 2, 5, 27, 40 };

    cout << "Square the numbers in range" << endl;
    for (int k : range) // Won't change the numbers in range
        cout << k*k << endl;

    cout << "Print the numbers in range" << endl;
    for (int v : range) cout << v << endl;

    for (int& x : range) // Double the numbers in range in situ
        x *= 2;

    cout << "Again print the numbers in range" << endl;
    for (int v : range) cout << v << endl;
    return 0;
}
```

Program Output of Range-for Example

Square some numbers in a list

0

1

4

9

16

Square the numbers in range

4

25

729

1600

Print the numbers in range

2

5

27

40

Again print the numbers in range

4

10

54

80



Part IV

Local Anonymous Functions — Lambdas



Lambda Expressions (Lambdas)

Syntax: Lambda

```
[ <capture-list> ] ( <parameter-list> ) mutable → <return-type> { <body> }
```

- C++11's **lambda expressions** enable you to define **anonymous functions** — functions *without* a name.
- They are defined **locally** inside functions.
- The **capture list** (of variables) allows the lambda to use the local variables that are already defined in the **enclosing** function.
 - ▶ [=]: capture all local variables by **value**.
 - ▶ [&]: capture all local variables by **reference**.
 - ▶ [variables]: specify only the variables to capture
- The **return type**
 - ▶ is **void** by default if there is no return statement.
 - ▶ is **automatically inferred** if there is a return statement.
 - ▶ may be explicitly specified by the **→** syntax.

Example: Simple Lambdas with No Captures

```
#include <iostream>      /* File : simple-lambdas.cpp */
using namespace std;

int main()
{
    // A lambda for computing squares
    int range[] = { 2, 5, 7, 10 };
    for (int v : range)
        cout << [](int k) { return k * k; } (v) << endl;

    // A lambda for doubling numbers
    for (int& v : range) [](int& k) { return k *= 2; } (v);
    for (int v : range) cout << v << "\t";
    cout << endl;

    // A lambda for computing max between 2 numbers
    int x[3][2] = { {3, 6}, {9, 5}, {7, 1} };
    for (int k = 0; k < sizeof(x)/sizeof(x[0]); ++k)
        cout << [](int a, int b) { return (a > b) ? a : b; } (x[k][0], x[k][1])
            << endl;

    return 0;
}
```

Program Output of Simple Lambdas with No Captures

```
4
25
49
100
4      10      14      20
6
9
7
```



Example: Lambdas with Captures

```
1  #include <iostream>      /* File : lambda-capture.cpp */
2  using namespace std;
3  int main()
4  {
5      int sum = 0, a = 1, b = 2, c = 3;
6
7      for (int k = 0; k < 4; ++k) // Evaluate a quadratic polynomial
8          cout << [=](int x) { return a*x*x + b*x + c; } (k) << endl;
9      cout << "a = " << a << "\tb = " << b << "\tc = " << c << endl;
10
11     for (int k = 0; k < 4; ++k) // a and b are used as accumulators
12         cout << [&](int x) { a += x*x; return b += x; } (k) << endl;
13     cout << "a = " << a << "\tb = " << b << "\tc = " << c << endl;
14
15     for (int v : { 2, 5, 7, 10 }) // Only variable sum is captured
16         cout << [&sum](int x) { return sum += a*x; } (v) << endl; // Error!
17     cout << "sum = " << sum << endl;
18
19     return 0;
20 }
```

lambda-capture.cpp:16:47: error: variable 'a' cannot be implicitly captured
in a lambda with no capture-default specified

```
cout << [&sum](int x) { return sum += a*x; } (v) << endl;
```

^

Example: When Are Values Captured?

```
#include <iostream>      /* File : lambda-value-binding.cpp */
using namespace std;

int main()
{
    int a = 1, b = 2, c = 3;
    auto f = [=](int x) { return a*x*x + b*x + c; };

    for (int k = 0; k < 4; ++k)
        cout << f(k) << endl;
    cout << "a = " << a << "\tb = " << b << "\tc = " << c << endl;

    a = 11, b = 12, c = 13;
    for (int k = 0; k < 4; ++k)
        cout << f(k) << endl; // Will f use the new a, b, c?
    cout << "a = " << a << "\tb = " << b << "\tc = " << c << endl;

    return 0;
}
```

- The keyword **auto** allows one to declare a variable **without** a **type** which will be inferred **automatically** by the compiler.
- **WARNING:** You are not allowed to use **auto** in this course!

Program Output

```
3
6
11
18
a = 1   b = 2   c = 3
3
6
11
18
a = 11  b = 12  c = 13
```



Example: When Are References Captured?

```
#include <iostream>      /* File : lambda-ref-binding.cpp */
using namespace std;

int main()
{
    int a = 1, b = 2, c = 3;
    auto f = [&](int x) { a *= x; b += x; c = a + b; };

    for (int k = 1; k < 3; f(k++))
        ;
    cout << "a = " << a << "\tb = " << b << "\tc = " << c << endl;

    a = 11, b = 12, c = 13;
    for (int k = 1; k < 3; f(k++)) // Will f use the new a, b, c?
        ;
    cout << "a = " << a << "\tb = " << b << "\tc = " << c << endl;

    return 0;
}
```

Question: What is the printout now?

```
a = 2    b = 5    c = 7
a = 22   b = 15   c = 37
```

Capture by Value or Reference

- When a lambda expression **captures** variables by **value**, their values are captured **by copying only once** at the time the lambda is defined.
- **Capture-by-value** is similar to **pass-by-value**.
- Unlike PBV, variables captured by value cannot be modified inside the lambda unless you make it **mutable**.

Examples

```
/* File: mutable-lambda.cpp */  
int a = 1, b = 2;  
  
cout << [a](int x) { return a += x; } (20) << endl; // Error!  
cout << [b](int x) mutable { return b *= x; } (20) << endl; // OK!  
cout << "a = " << a << "\tb = " << b << endl;
```

- Similarly, **capture-by-reference** is similar to **pass-by-reference**.

Example: Mutable Lambda with Return

```
#include <iostream>      /* File : mutable-lambda-with-return.cpp */
using namespace std;

int main()
{
    float a = 1.6, b = 2.7, c = 3.8;

    // [&, a] means all except a are captured by reference; a by value
    auto f = [&, a](int x) mutable ->int { a *= x; b += x; return c = a+b; };

    for (int k = 1; k < 3; ++k)
        cout << "a = " << a << "\tb = " << b << "\tc = " << c
              << "\tf(" << k << ") = " << f(k) << endl;

    cout << "a = " << a << "\tb = " << b << "\tc = " << c << endl;
    return 0;
}
```

- One may mix the **capture-default** [=] or [&] with explicit variable captures as in [&, a] above.
- In this case, all variables but a are captured by **reference** while a is captured by **value**.

Program Output of Mutable Lambda with Return Example

```
a = 1.6 b = 3.7 c = 5.3 f(1) = 5  
a = 1.6 b = 5.7 c = 8.9 f(2) = 8  
a = 1.6 b = 5.7 c = 8.9
```



Example: Nested Lambda

```
#include <iostream>      /* File : nested-lambda.cpp */
using namespace std;

int main()
{
    int a = 1, b = 1, c = 1;

    auto f = [a, &b, &c]() mutable
    {
        auto g = [a, b, &c]() mutable    // Nested lambda
        {
            cout << a << b << c << endl;
            a = b = c = 4;
        };

        a = b = c = 3; g();

        a = b = c = 2; f();
        cout << a << b << c << endl;
        return 0;
    }
}
```

Program
Output:

123
234

Quiz: What if we capture `b` by value in `f` and by reference in `g`?

Part V

Delegating Constructors



Delegating Constructors

- In C++11, constructors allow to call another constructor from the same class using member initialization list.
- It prevents code duplication and to delegate the initialization list.

```
class Complex {    /* File : complex-delegate-constructor.cpp */
private:
    double real, imag;
public:
    Complex(double real, double imag) : real(real), imag(imag) {}
    // Call Complex(double real, double imag)
    Complex(double real) : Complex(real, 0.0) {}
    // Call Complex(double real)
    Complex() : Complex(0.0) {}
};


int main() {
    Complex c1;
    Complex c2(1.0);
    Complex c3(1.0, 2.0);
}
```

Constructors with Default Values

- In fact, we can use default values of the arguments in constructors to deal with this before C++11.

```
class Complex {    /* File : complex-default-values.cpp */
private:
    double real, imag;
public:
    Complex(double real = 0.0, double imag = 0.0) : real(real), imag(imag) {}
};

int main() {
    Complex c1;
    Complex c2(1.0);
    Complex c3(1.0, 2.0);
}
```

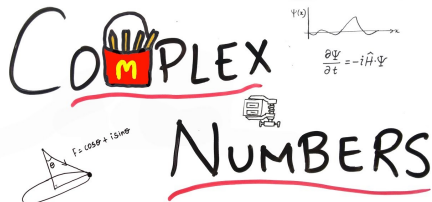

Part VI

Explicit Conversion Operators



Conversion Constructors

- Before C++11, conversion constructors can be used for explicit and implicit conversions.

```
#include <cstring>    /* File : conversion-constructor.cpp */
class Word {
private:
    int frequency; char* str;
public:
    Word(const char* s )
        { frequency = 1; str = new char[strlen(s) + 1]; strcpy(str, s); }
};

int main() {
    Word* p = new Word("action");    // Explicit conversion
    Word movie("Titanic");           // Explicit conversion
    Word director = "James Cameron"; // Implicit conversion
}
```

- However, a constructor is not the only mechanism for defining a conversion in C++11.
- If we cannot modify a class, we can define a conversion operator from a different class.

Conversion Operators

```
#include <iostream>
#include <cstring>
using namespace std;

class Word {
private: int frequency; char* str;
public:
    Word(const char* s)
        { frequency = 1; str = new char[strlen(s) + 1]; strcpy(str, s); }
};

class EnglishWord {
private: int frequency; char* str;
public:
    EnglishWord(const char* s)
        { frequency = 1; str = new char[strlen(s) + 1]; strcpy(str, s); }

    operator Word()
        { cout << "conversion operator is called" << endl; return Word(str); }
};

void process_word(Word aObj) {}

int main() {
    EnglishWord engWord("Titanic");
    Word word = engWord;    // Implicit conversion by surprise
    process_word(engWord);  // Implicit conversion by surprise
}
```


Explicit Conversion Operators

- Similar to constructors, explicit keyword can be added to conversion operators to prevent implicit conversion.

```
#include <iostream>
#include <cstring>
using namespace std;

class Word {
private: int frequency; char* str;
public:
    Word(const char* s) { /* ... */ }
};

class EnglishWord {
private: int frequency; char* str;
public:
    EnglishWord(const char* s) { /* ... */ }

    explicit operator Word()
    { cout << "conversion operator is called" << endl; return Word(str); }
};

void process_word(Word aObj) {}

int main() {
    EnglishWord engWord("Titanic");
    Word word = engWord;    // Bug: Implicit conversion
    process_word(engWord);  // Bug: Implicit conversion
}
```

That's all!

Any questions?

