


Lab Activity 2

Submission Form

Name	Rumbawa, Sarah Kaye S.
Section	INF 233
Date	December 9, 2025

Place output based on the source code.

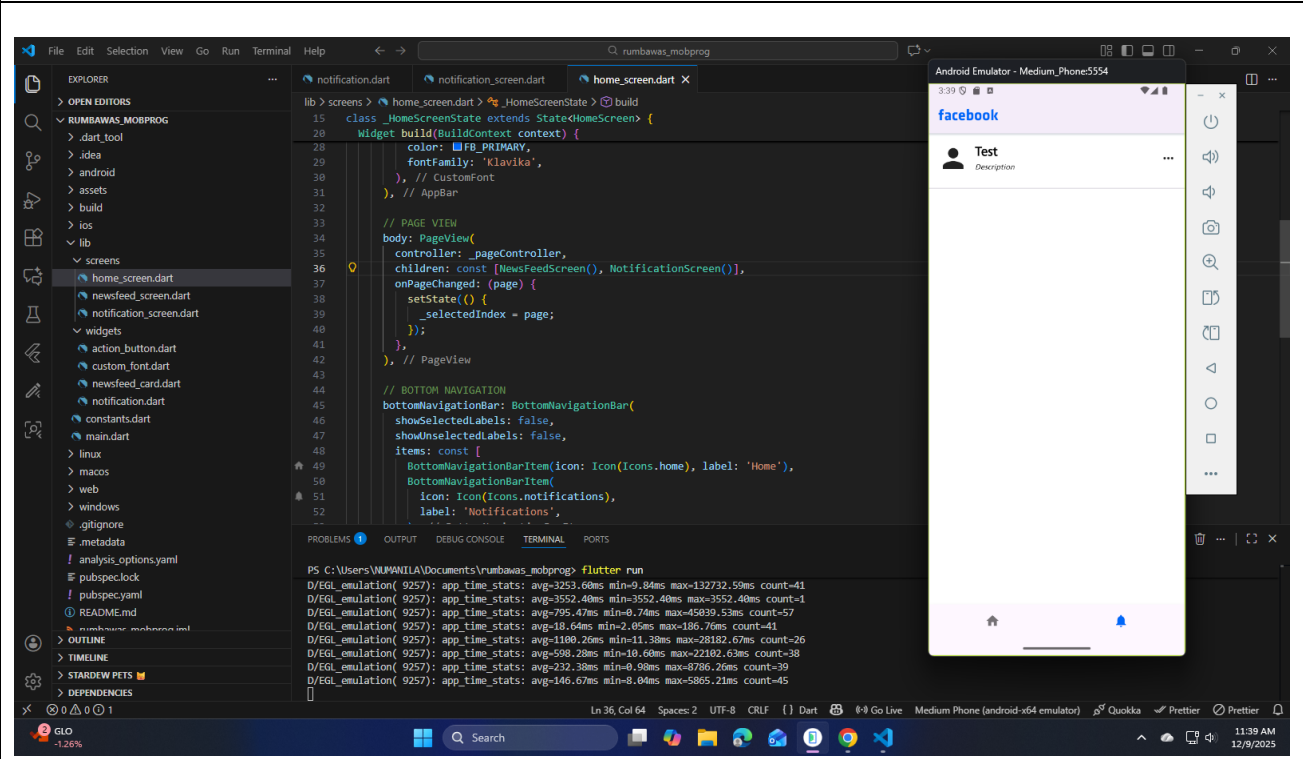

The screenshot displays an IDE environment with the following components:

- EXPLORER:** A file tree on the left showing the project structure, including folders like `assets`, `build`, `ios`, `lib`, and `screens`. The `screens` folder is expanded, showing files like `home_screen.dart`, `newsfeed_screen.dart`, and `notification_screen.dart`.
- EDITOR:** The main workspace shows the `home_screen.dart` file. The code defines a `HomeScreenState` class that extends `State<HomeScreen>`. It includes a `build` method for the widget tree, a `PageView` for page navigation, and a `BottomNavigationBar` at the bottom with items for 'Home' and 'Notifications'.
- TERMINAL:** The bottom panel shows the output of the `flutter run` command, displaying various performance metrics and log messages from the Android emulator.
- Android Emulator:** A window on the right shows the app running on a virtual device. The app displays a Facebook-like interface with a header, a user profile section, and a list of posts.

Place your sample code and output based on the enhancement. You may add rows or cells if needed.

Source code – newsfeed_screen.dart


```
import 'package:flutter/material.dart';
import '../widgets/newsfeed_card.dart';


class NewsFeedScreen extends StatelessWidget {
  const NewsFeedScreen({super.key});


  final List<Map<String, dynamic>> posts = const [
    {
      'username': 'Kaye Rumbawa',
      'postContent': 'Kicking off the holiday season with ICeP-NCR!',
      'numOfLikes': 100,
      'date': 'October 11',
      'hasImage': false,
    },
    {
      'username': 'Skye Sera Jose',
      'postContent': 'Just finished my morning run!',
      'numOfLikes': 50,
      'date': 'December 2',
      'hasImage': true,
    },
    {
      'username': 'Juan Dela Cruz',
      'postContent': 'Loving this new café in town ☺',
      'numOfLikes': 75,
      'date': 'December 4',
      'hasImage': true,
    },
    {
      'username': 'Andres Bonifacio',
      'postContent': 'Historical tour at Intramuros today!',
      'numOfLikes': 120,
      'date': 'December 5',
      'hasImage': false,
    },
    {
      'username': 'Lisa Soberano',
      'postContent': 'Excited for the weekend getaway 🌴',
      'numOfLikes': 90,
      'date': 'December 6',
      'hasImage': true,
    },
    {
      'username': 'Daniel Padilla',
      'postContent': 'New song coming out soon!',
      'numOfLikes': 300,
      'date': 'December 7',
      'hasImage': false,
    },
    {
      'username': 'Ariel Rivera',
      'postContent': 'Throwback to last year\'s concert 🎤',
      'numOfLikes': 80,
      'date': 'December 8',
      'hasImage': true,
    },
    {
      'username': 'Anne Curtis',
      'postContent': 'Baking some cookies today 🍪',
      'numOfLikes': 60,
      'date': 'December 9',
      'hasImage': false,
    },
    {
      'username': 'Piolo Pascual',
      'postContent': 'Movie night with the family 🎬',
      'numOfLikes': 110,
      'date': 'December 10',
      'hasImage': true,
    },
  ];

  @override
  Widget build(BuildContext context) {
    return ListView.builder(
      physics: const BouncingScrollPhysics(), // smooth scrolling effect
      padding: const EdgeInsets.all(10),
      itemCount: posts.length,
      itemBuilder: (context, index) {
        final post = posts[index];
        return Padding(
          padding: const EdgeInsets.symmetric(vertical: 5),
          child: NewsFeedCard(
            username: post['username'],
            postContent: post['postContent'],
            numOfLikes: post['numOfLikes'],
            date: post['date'],
            hasImage: post['hasImage'] ?? false,
          ),
        );
      },
    );
  }
}
```

Output – Enhancement 1- Create a dynamic post with these considerations:

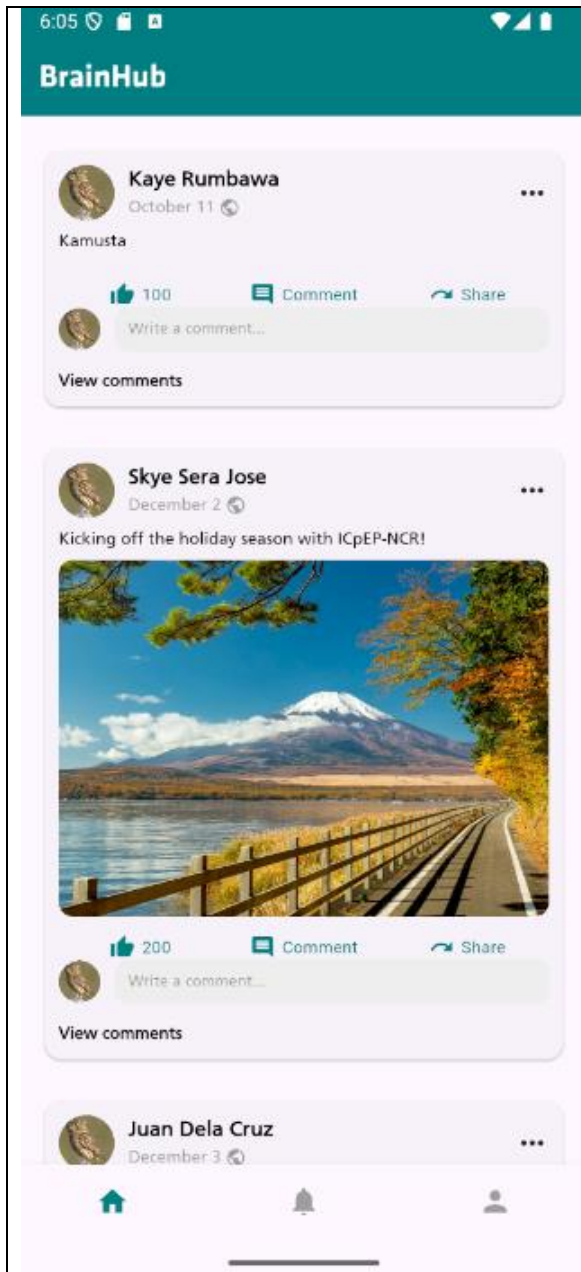

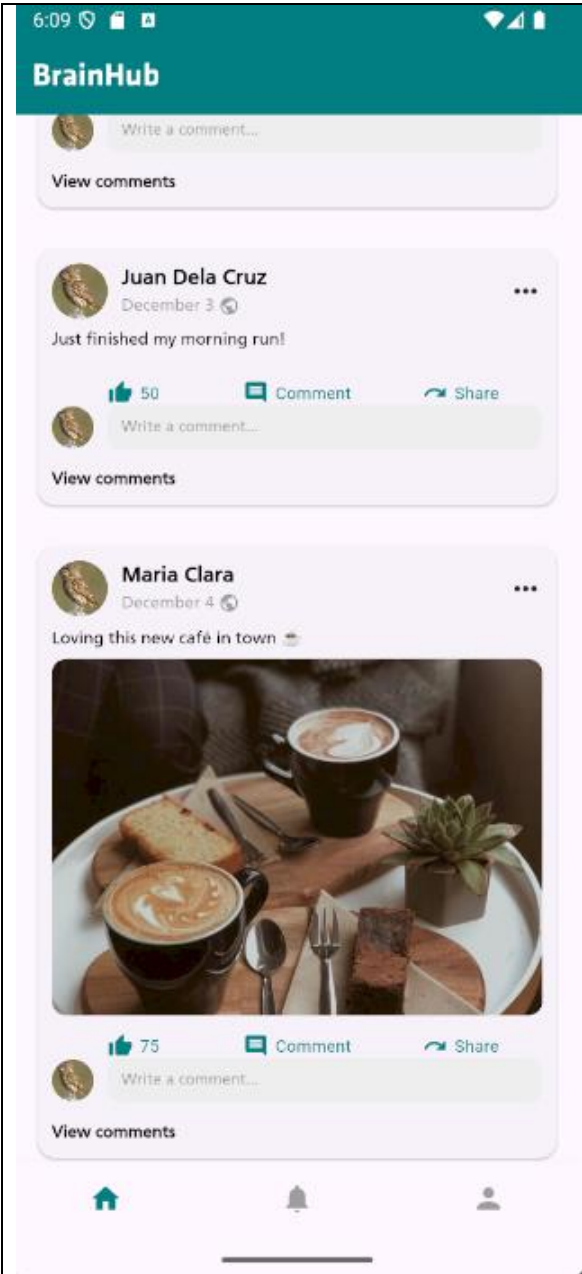

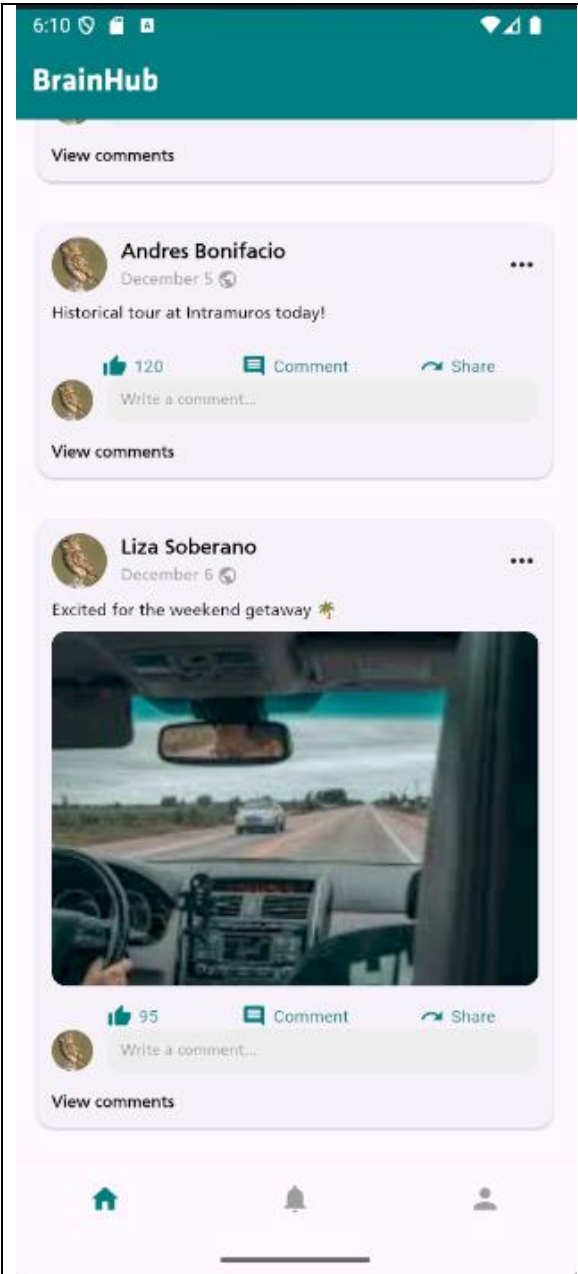

Source Code – home_screen.dart



```
import 'package:flutter/material.dart';
import 'package:flutter_screenutil/flutter_screenutil.dart';
import '../constants.dart';
import '../screens/newsfeed_screen.dart';
import '../screens/notification_screen.dart';
import '../widgets/custom_font.dart';

class HomeScreen extends StatefulWidget {
  const HomeScreen({super.key});

  @override
  State<HomeScreen> createState() => _HomeScreenState();
}

class _HomeScreenState extends State<HomeScreen> {
  int _selectedIndex = 0;
  final PageController _pageController = PageController();

  String getAppBarTitle() {
    switch (_selectedIndex) {
      case 0:
        return 'BrainHub';
      case 1:
        return 'Notifications';
      case 2:
        return 'Profile';
      default:
        return 'BrainHub';
    }
  }


  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(
        backgroundColor: FB_PRIMARY,
        elevation: 1,
        title: CustomFont(
          text: getAppBarTitle(),
          fontSize: 22.sp,
          color: Colors.white,
          fontFamily: 'Klavika',
        ),
      ),
      body: PageView(
        controller: _pageController,
        physics: const NeverScrollableScrollPhysics(),
        children: const [
          NewsFeedScreen(),
          NotificationScreen(),
          ProfilePlaceholderScreen(),
        ],
        onPageChanged: (page) {
          setState(() => _selectedIndex = page);
        },
      ),
      bottomNavigationBar: BottomNavigationBar(
        showSelectedLabels: false,
        showUnselectedLabels: false,
        currentIndex: _selectedIndex,
        selectedItemColor: FB_PRIMARY,
        unselectedItemColor: Colors.grey,
        onTap: _onTappedBar,
        items: const [
          BottomNavigationBarItem(icon: Icon(Icons.home), label: "Home"),
          BottomNavigationBarItem(
            icon: Icon(Icons.notifications),
            label: "Notifications",
          ),
          BottomNavigationBarItem(icon: Icon(Icons.person), label: "Profile"),
        ],
      ),
    );
  }

  void _onTappedBar(int index) {
    setState(() => _selectedIndex = index);
    _pageController.jumpToPage(index);
  }
}

class ProfilePlaceholderScreen extends StatelessWidget {
  const ProfilePlaceholderScreen({super.key});

  @override
  Widget build(BuildContext context) {
    return Center(
      child: Text(
        "Profile Page",
        style: TextStyle(
          fontSize: 22.sp,
          fontWeight: FontWeight.bold,
          color: FB_PRIMARY,
        ),
      ),
    );
  }
}
```

Output – Enhancement 2 - Create a dynamic AppBar title.

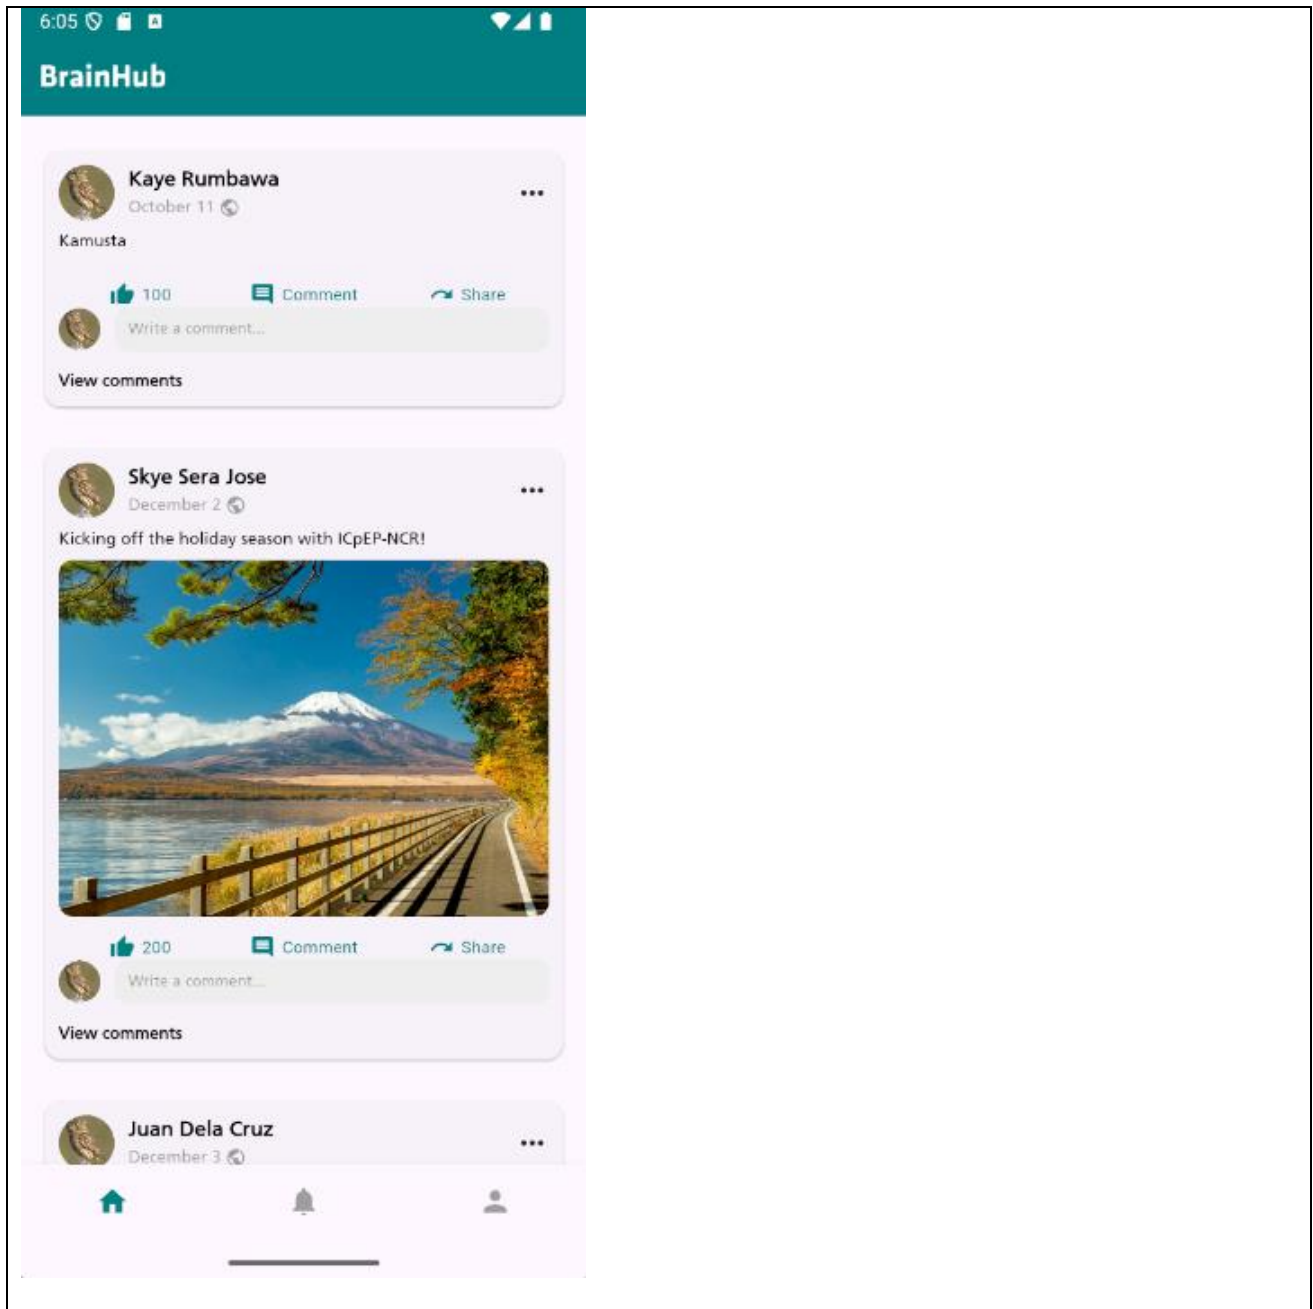

5:05

Notifications



Kaye Rumbawa

reacted  to your post • 2h ago

...



Miguel Santos

commented: "Nice one!" • 3h ago

...



Aira Mendoza

shared your post • 5h ago

...



Patrick Cruz

reacted  to your story • 1h ago

...



Andrea Dela Cruz

mentioned you in a comment • 4h ago

...



Nicole Reyes

liked your album • 7h ago

...



Janelle Robles

tagged you in a picture • 8h ago

...



Luke Villanueva

reacted  to your reel • 30m ago

...



Renz Bautista

commented: "Sobrang ganda!" • 10h ago

...







Source code – home_screen.dart - Add more BottomNavigationBarItem.



```
import 'package:flutter/material.dart';
import 'package:flutter_screenutil/flutter_screenutil.dart';
import '../constants.dart';
import '../screens/newsfeed_screen.dart';
import '../screens/notification_screen.dart';
import '../widgets/custom_font.dart';

class HomeScreen extends StatefulWidget {
  const HomeScreen({super.key});

  @override
  State<HomeScreen> createState() => _HomeScreenState();
}

class _HomeScreenState extends State<HomeScreen> {
  int _selectedIndex = 0;
  final PageController _pageController = PageController();

  String getAppBarItem() {
    switch (_selectedIndex) {
      case 0:
        return 'BrainHub';
      case 1:
        return 'Notifications';
      case 2:
        return 'Profile';
      default:
        return 'BrainHub';
    }
  }

  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(
        backgroundColor: FB_PRIMARY,
        elevation: 1,
        title: CustomFont(
          text: getAppBarItem(),
          fontSize: 22.sp,
          color: Colors.white,
          fontFamily: 'Klavika',
        ),
      ),
      body: PageView(
        controller: _pageController,
        physics: const NeverScrollableScrollPhysics(),
        children: const [
          NewsFeedScreen(),
          NotificationScreen(),
          ProfilePlaceholderScreen(),
        ],
        onPageChanged: (page) {
          setState(() => _selectedIndex = page);
        },
      ),
      bottomNavigationBar: BottomNavigationBar(
        showSelectedLabels: false,
        showUnselectedLabels: false,
        currentIndex: _selectedIndex,
        selectedItemColor: FB_PRIMARY,
        unselectedItemColor: Colors.grey,
        onTap: _onTappedBar,
        items: const [
          BottomNavigationBarItem(icon: Icon(Icons.home), label: "Home"),
          BottomNavigationBarItem(
            icon: Icon(Icons.notifications),
            label: "Notifications",
          ),
          BottomNavigationBarItem(icon: Icon(Icons.person), label: "Profile"),
        ],
      ),
    );
  }

  void _onTappedBar(int index) {
    setState(() => _selectedIndex = index);
    _pageController.jumpToPage(index);
  }
}

class ProfilePlaceholderScreen extends StatelessWidget {
  const ProfilePlaceholderScreen({super.key});

  @override
  Widget build(BuildContext context) {
    return Center(
      child: Text(
        "Profile Page",
        style: TextStyle(
          fontSize: 22.sp,
          fontWeight: FontWeight.bold,
          color: FB_PRIMARY,
        ),
      ),
    );
  }
}
```

Output – Enhancement 3

6:05

BrainHub

Kaye Rumbawa

October 11

Kamusta

100

Comment

Share

Write a comment...

View comments

Skye Sera Jose

December 2

Kicking off the holiday season with ICpEP-NCR!



200

Comment

Share

Write a comment...

View comments

Juan Dela Cruz

December 3

Home

Notifications

Profile

Source code – home_screen.dart - Change the App name into your own social media application name.



```
import 'package:flutter/material.dart';
import 'package:flutter_screenutil/flutter_screenutil.dart';
import '../constants.dart';
import '../screens/newsfeed_screen.dart';
import '../screens/notification_screen.dart';
import '../widgets/custom_font.dart';

class HomeScreen extends StatefulWidget {
  const HomeScreen({super.key});

  @override
  State<HomeScreen> createState() => _HomeScreenState();
}

class _HomeScreenState extends State<HomeScreen> {
  int _selectedIndex = 0;
  final PageController _pageController = PageController();

  String getAppBarItem() {
    switch (_selectedIndex) {
      case 0:
        return 'BrainHub';
      case 1:
        return 'Notifications';
      case 2:
        return 'Profile';
      default:
        return 'BrainHub';
    }
  }


  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(
        backgroundColor: FB_PRIMARY,
        elevation: 1,
        title: CustomFont(
          text: getAppBarItem(),
          fontSize: 22.sp,
          color: Colors.white,
          fontFamily: 'Klavika',
        ),
      ),
      body: PageView(
        controller: _pageController,
        physics: const NeverScrollableScrollPhysics(),
        children: const [
          NewsFeedScreen(),
          NotificationScreen(),
          ProfilePlaceholderScreen(),
        ],
        onPageChanged: (page) {
          setState(() => _selectedIndex = page);
        },
      ),
      bottomNavigationBar: BottomNavigationBar(
        showSelectedLabels: false,
        showUnselectedLabels: false,
        currentIndex: _selectedIndex,
        selectedItemColor: FB_PRIMARY,
        unselectedItemColor: Colors.grey,
        onTap: _onTappedBar,
        items: const [
          BottomNavigationBarItem(icon: Icon(Icons.home), label: "Home"),
          BottomNavigationBarItem(
            icon: Icon(Icons.notifications),
            label: "Notifications",
          ),
          BottomNavigationBarItem(icon: Icon(Icons.person), label: "Profile"),
        ],
      ),
    );
  }

  void _onTappedBar(int index) {
    setState(() => _selectedIndex = index);
    _pageController.jumpToPage(index);
  }
}

class ProfilePlaceholderScreen extends StatelessWidget {
  const ProfilePlaceholderScreen({super.key});

  @override
  Widget build(BuildContext context) {
    return Center(
      child: Text(
        "Profile Page",
        style: TextStyle(
          fontSize: 22.sp,
          fontWeight: FontWeight.bold,
          color: FB_PRIMARY,
        ),
      ),
    );
  }
}
```

Output – Enhancement 4

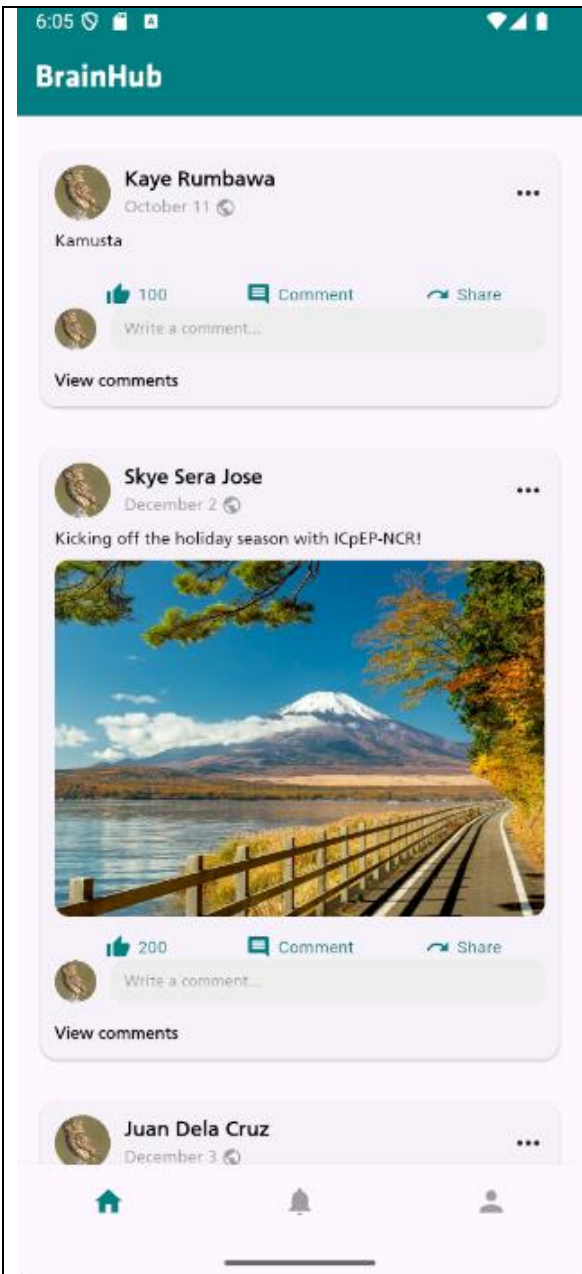

Source code – constant.dart - Change the color palette based on your preference. You can use color palette link as your reference.

```
import 'package:flutter/material.dart';

const Color FB_PRIMARY = Color(0xFF008080);
const Color FB_SECONDARY = Color(0xFF001F54);
const Color FB_DARK_PRIMARY = Color(0xFF001A40);
const Color FB_LIGHT_PRIMARY = Color(0xFF66B2B2);
const Color FB_TEXT_COLOR_WHITE = Color(0xFFFFFFFF);
```

Output – Enhancement 5

Lab Activity Rubric

Name	Rumbawa, Sarah Kaye S.
Section	INF 233
Date	December 9, 2025

Criteria	Excellent (4 pts)	Good (3 pts)	Fair (2 pts)	Poor (1 pt)	Points
Code Implementation	Code runs flawlessly, includes all required features (placeholders, avatars, widgets for like/comment).	Code mostly correct, minor errors, or missing one minor feature.	Noticeable errors or missing two or more features.	Code does not run or is significantly incomplete.	
Design Consistency	UI closely resembles intended layout, proper spacing, alignment, and styling.	Layout mostly accurate, minor spacing or alignment issues.	Layout deviates significantly from the intended design or appears incomplete.	Layout is unrecognizable or does not follow the instructions.	
Use of Widgets and Enhancements	Properly implements widgets for placeholders, avatars, and like/comment buttons.	Most widgets are correctly implemented, with minor issues or missing one enhancement.	Widgets are inconsistently used or missing two or more enhancements.	Widgets are not used, or enhancements are not implemented.	
Code Organization and Readability	Code is well-structured, follows best practices, and adheres to the specified file organization.	Code is mostly organized and readable, minor deviations from the required structure.	Code is poorly organized or does not follow the specified structure.	Code is disorganized and difficult to understand.	
Other Comments/ Observations:				Total Score	
				Rating: (Total Score/16) * 100	