INSTITUTO FEDERAL
São Paulo

Publicação de uma aplicação PHP (*deploy*)

PROF. DR. EDER PANSANI
epansani@gmail.com / epansani@ifsp.edu.br

INSTITUTO FEDERAL
São Paulo

Praticando

Praticando

Vamos agora praticar um pouco com um exercício.

Praticando

O praticando da aula de deploy consiste em enviar para sua máquina na EC2 a atividade da aula de ***composer***, o formulário de busca de CEP.

Praticando

Minha sugestão, para esse praticando é usar o ***Filezilla*** e algum ***cliente SSH*** como o ***Termius*** ou o ***CloudShell*** .

Praticando

O Filezilla será usado para enviar os arquivos para sua instância:

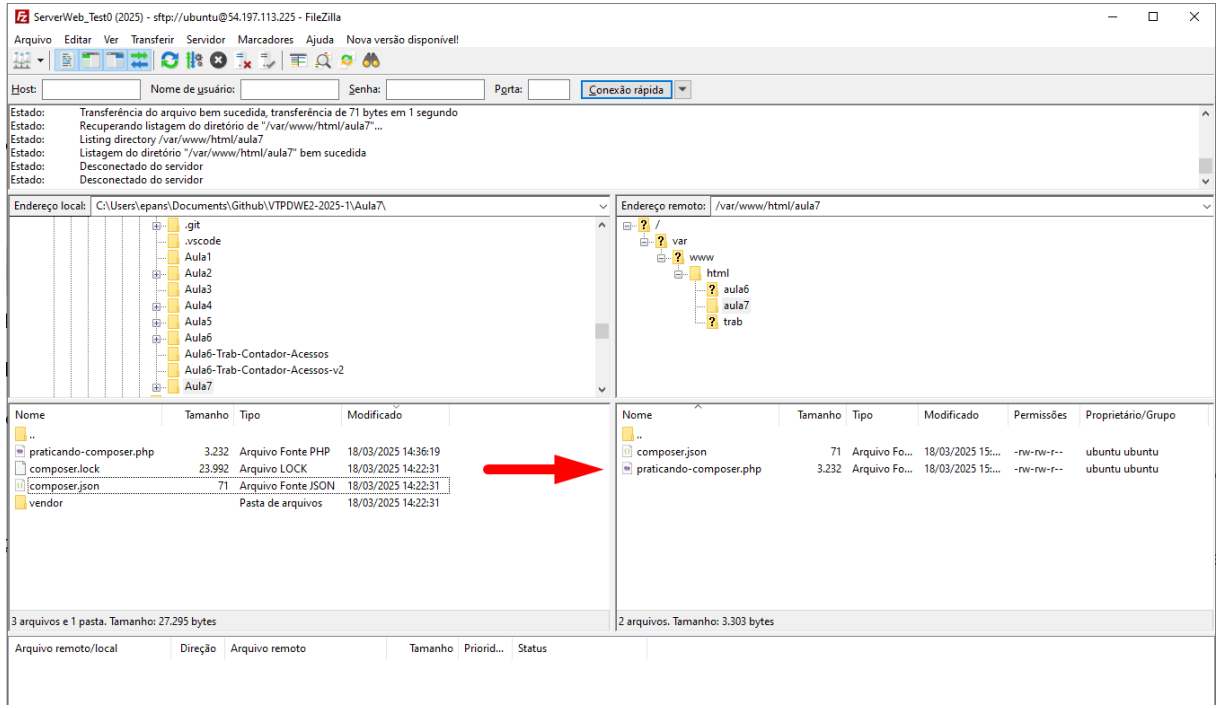

ServerWeb_Test0 (2025) - sftp://ubuntu@54.197.113.225 - FileZilla

Arquivo Editar Ver Transferir Servidor Marcadores Ajuda Nova versão disponível!

Host: Nome de usuário: Senha: Porta: Conexão rápida

Estado: Transferência do arquivo bem sucedida, transferência de 71 bytes em 1 segundo
Estado: Recuperando listagem do diretório de "/var/www/html/aula7"...
Estado: Listing directory /var/www/html/aula7
Estado: Listagem do diretório "/var/www/html/aula7" bem sucedida
Estado: Desconectado do servidor
Estado: Desconectado do servidor

Endereço local: C:\Users\epans\Documents\Github\VTPDWE2-2025-1\Aula7\

- .git
- .vscode
- Aula1
- Aula2
- Aula3
- Aula4
- Aula5
- Aula6
- Aula6-Trab-Contador-Acessos
- Aula6-Trab-Contador-Acessos-v2
- Aula7

Endereço remoto: /var/www/html/aula7

- /
  - var
    - www
      - html
        - aula6
        - aula7
        - trab

Nome	Tamanho	Tipo	Modificado
..			
praticando-composer.php	3.232	Arquivo Fonte PHP	18/03/2025 14:36:19
composer.lock	23.992	Arquivo LOCK	18/03/2025 14:22:31
composer.json	71	Arquivo Fonte JSON	18/03/2025 14:22:31
vendor		Pasta de arquivos	18/03/2025 14:22:31

3 arquivos e 1 pasta. Tamanho: 27.295 bytes

Nome	Tamanho	Tipo	Modificado	Permissões	Proprietário/Grupo
..					
composer.json	71	Arquivo Fo...	18/03/2025 15:...	-rw-rw-r--	ubuntu ubuntu
praticando-composer.php	3.232	Arquivo Fo...	18/03/2025 15:...	-rw-rw-r--	ubuntu ubuntu

2 arquivos. Tamanho: 3.303 bytes

Arquivo remoto/local	Direção	Arquivo remoto	Tamanho	Priorid...	Status

Praticando

Importante!

Você **não deve** enviar a pasta ***vendor***.

Nome	Tamanho	Tipo	Modificado
..			
praticando-composer.php	3.232	Arquivo Fonte PHP	18/03/2025 14:36:19
composer.lock	23.992	Arquivo LOCK	18/03/2025 14:22:31
composer.json	71	Arquivo Fonte JSON	18/03/2025 14:22:31
vendor		Pasta de arquivos	18/03/2025 14:22:31

Nome	Tamanho	Tipo	Modificado	Permissões	Proprietário/Grupo
..					
composer.json	71	Arquivo Fo...	18/03/2025 15:...	-rw-rw-r--	ubuntu ubuntu
praticando-composer.php	3.232	Arquivo Fo...	18/03/2025 15:...	-rw-rw-r--	ubuntu ubuntu

Praticando

Importante!

Praticando

Presta

A-TEN-ÇÃO!

Praticando

INSTITUTO FEDERAL
São Paulo

Quando vocês forem fazer o *deploy* do projeto PHP, não **enviem a pasta *vendor/* para o servidor**.

Praticando

INSTITUTO FEDERAL
São Paulo

A pasta ***vendor/*** contém todas as dependências instaladas pelo Composer, mas ela pode ser **recriada automaticamente** a partir dos arquivos:

composer.json → lista das dependências do projeto

composer.lock → versões exatas que devem ser instaladas

Praticando

INSTITUTO FEDERAL
São Paulo

Então, no *deploy* vocês **devem**:

1) Enviar apenas o código do projeto (sem a pasta vendor/)

2) Garantir que os arquivos composer.json e composer.lock estão no servidor

Praticando

INSTITUTO FEDERAL
São Paulo

Então, no *deploy* vocês **devem**:

3) Executar no servidor:

composer install

Praticando

INSTITUTO FEDERAL
São Paulo

Por que fazer isso?

- **Evita enviar centenas de arquivos** desnecessários
- **Evita problemas de incompatibilidade** entre máquinas (Windows vs Linux, por exemplo)

Praticando

Essas **incompatibilidades** **podem** (na verdade provavelmente VÃO) **acontecer** porque em geral seu **ambiente local** não é **exatamente** igual sua **instância**.

Praticando

Repita comigo,

“A pasta *vendor* não sobe para produção — ela é sempre gerada no servidor com ***composer install***.”

Praticando

INSTITUTO FEDERAL
São Paulo

Mais uma vez!

"A **pasta *vendor* não sobe para produção** — ela é sempre **gerada** no servidor com ***composer install***."

Praticando

Para **instalar os componentes (via *composer install*)** você precisará estar **conectado por SSH** e, obviamente você precisará do ***composer* instalado** em sua instância.

Praticando

Para instalar o *composer* vamos ao site da ferramenta.

Praticando

INSTITUTO FEDERAL
São Paulo

https://getcomposer.org/download/

Composer

getcomposer.org/download/

Download Composer

Latest: v2.8.6

Windows Installer

The installer - which requires that you have PHP already installed - will download Composer for you and set up your PATH environment variable so you can simply call `composer` from any directory.

Download and run Composer-Setup.exe - it will install the latest composer version whenever it is executed.

Command-line installation

To quickly install Composer in the current directory, run the following script in your terminal. To automate the installation, use the guide on installing Composer programmatically.

1)

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
php -r "if (hash_file('sha384', 'composer-setup.php') === 'dac665fdc30fdd8ec78b38b9800061b4150413ff2e3b6f88543c
php composer-setup.php
php -r "unlink('composer-setup.php');"
```

This installer script will simply check some `php.ini` settings, warn you if they are set incorrectly, and then download the latest `composer.phar` in the current directory. The 4 lines above will, in order:

- Download the installer to the current directory
- Verify the installer SHA-384, which you can also cross-check here
- Run the installer
- Remove the installer

Most likely, you want to put the `composer.phar` into a directory on your PATH, so you can simply call `composer` from any directory (*Global install*), using for example:

2)

```
sudo mv composer.phar /usr/local/bin/composer
```

For details, see the instructions on how to install Composer globally.

Pr

htt

Composer

getcomposer.org/download/

Download Composer

Latest: v2.8.6

Windows Installer

The installer - which requires that you have PHP already installed - will download Composer for you and set up your PATH environment variable so you can simply call `composer` from any directory.

Download and run Composer-Setup.exe - it will install the latest composer version whenever it is executed.

Command-line installation

To quickly install Composer in the current directory, run the following script in your terminal. To automate the installation, use the guide on installing Composer programmatically.

1)

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
php -r "if (hash_file('sha384', 'composer-setup.php') === 'dac665fdc30fdd8ec78b38b9800061b4150413ff2e3b6f88543c
php composer-setup.php
php -r "unlink('composer-setup.php');"
```

This installer script will simply check some `php.ini` settings, warn you if they are set incorrectly, and then download the latest `composer.phar` in the current directory. The 4 lines above will, in order:

- Download the installer to the current directory
- Verify the installer SHA-384, which you can also cross-check here
- Run the installer
- Remove the installer

Most likely, you want to put the `composer.phar` into a directory on your PATH, so you can simply call `composer` from any directory (*Global install*), using for example:

2)

```
sudo mv composer.phar /usr/local/bin/composer
```

For details, see the instructions on how to install Composer globally.

INSTITUTO FEDERAL
São Paulo

Praticando

INSTITUTO FEDERAL
São Paulo

Dica importante!

Instalem as seguintes dependências:

php-cli unzip curl

Praticando

INSTITUTO FEDERAL
São Paulo

Dica importante!

Instalem as seguintes dependências:

sudo apt install php-cli unzip curl

Vaults SFTP ServerWeb26

```
ubuntu@ip-172-31-41-101:~$ sudo apt install php-cli unzip curl
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
php-cli is already the newest version (2:8.3+93ubuntu2).
unzip is already the newest version (6.0-28ubuntu4.1).
curl is already the newest version (8.5.0-2ubuntu10.8).
0 upgraded, 0 newly installed, 0 to remove and 0 not upgraded.
ubuntu@ip-172-31-41-101:~$
```

Praticando

INSTITUTO FEDERAL
São Paulo

Agora executem estes comandos um a um (um por vez!)

Command-line installation

To quickly install Composer in the current directory, run the following script in your terminal. To automate the installation, use the guide on installing Composer programmatically.

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
php -r "if (hash_file('sha384', 'composer-setup.php') === 'c8b085408188070d5f52bcfe4ecfbee5f727afa458b2573b8eaa
php composer-setup.php
php -r "unlink('composer-setup.php');"
```

This installer script will simply check some `php.ini` settings, warn you if they are set incorrectly, and then download the latest `composer.phar` in the current directory. The 4 lines above will, in order:

- Download the installer to the current directory

Vaults SFTP ServerWeb26

```
ubuntu@ip-172-31-41-101:~$ php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
ubuntu@ip-172-31-41-101:~$ php -r "if (hash_file('sha384', 'composer-setup.php') === 'c8b085408188070d5f52bcfe4ecfbee5f727afa4
58b2573b8eaaf77b3419b0bf2768dc67c86944da1544f06fa544fd47') { echo 'Installer verified'.PHP_EOL; } else { echo 'Installer corru
pt'.PHP_EOL; unlink('composer-setup.php'); exit(1); }"
Installer verified
ubuntu@ip-172-31-41-101:~$ php composer-setup.php
All settings correct for using Composer
Downloading...

Composer (version 2.9.5) successfully installed to: /home/ubuntu/composer.phar
Use it: php composer.phar

ubuntu@ip-172-31-41-101:~$ php -r "unlink('composer-setup.php');"
ubuntu@ip-172-31-41-101:~$
```

Use Ctrl . to open side panel

Praticando

INSTITUTO FEDERAL
São Paulo

Em seguida execute esse:

Most likely, you want to put the `composer.phar` into a directory on your PATH, so you can simply call `composer` from any directory (*Global install*), using for example:

```
sudo mv composer.phar /usr/local/bin/composer
```

Vaults SFTP ServerWeb26

```
ubuntu@ip-172-31-41-101:~$ sudo mv composer.phar /usr/local/bin/composer
ubuntu@ip-172-31-41-101:~$
```

Praticando

Por fim, teste se funcionou, se o composer foi devidamente instalado:

composer --version

Vaults SFTP ServerWeb26

```
ubuntu@ip-172-31-41-101:~$ sudo mv composer.phar /usr/local/bin/composer
ubuntu@ip-172-31-41-101:~$ composer --version
Composer version 2.9.5 2026-01-29 11:40:53
PHP version 8.3.6 (/usr/bin/php8.3)
Run the "diagnose" command to get more detailed diagnostics output.
ubuntu@ip-172-31-41-101:~$
```

Praticando

INSTITUTO FEDERAL
São Paulo

Pronto, agora com o *composer* instalado vamos executar:

composer install

<u>Importante</u>, confira se você está na pasta certa!

Vaults SFTP ServerWeb26

```
ubuntu@ip-172-31-41-101:~$ sudo mv composer.phar /usr/local/bin/composer
ubuntu@ip-172-31-41-101:~$ composer --version
Composer version 2.9.5 2026-01-29 11:40:53
PHP version 8.3.6 (/usr/bin/php8.3)
Run the "diagnose" command to get more detailed diagnostics output.
ubuntu@ip-172-31-41-101:~$ pwd
/home/ubuntu
ubuntu@ip-172-31-41-101:~$
```

Praticando

Não está!

Vaults SFTP ServerWeb26

```
ubuntu@ip-172-31-41-101:~$ pwd
/home/ubuntu
ubuntu@ip-172-31-41-101:~$ cd /var/www/html/
ubuntu@ip-172-31-41-101:/var/www/html$ ll
total 28
drwxrwxr-x 4 ubuntu www-data  4096 Mar 20 01:22 ./
drwxr-xr-x 3 root   root      4096 Mar 19 17:50 ../
drwxr-xr-x 2 ubuntu ubuntu    4096 Mar 20 01:22 busca_cep/
-rwxrwxr-x 1 ubuntu www-data 10671 Mar 19 17:50 index.html*
drwxrwxr-x 3 ubuntu ubuntu    4096 Mar 19 18:01 trab1/
ubuntu@ip-172-31-41-101:/var/www/html$
```

Vaults SFTP ServerWeb26

```
ubuntu@ip-172-31-41-101:~$ pwd
/home/ubuntu
ubuntu@ip-172-31-41-101:~$ cd /var/www/html/
ubuntu@ip-172-31-41-101:/var/www/html$ ll
total 28
drwxrwxr-x 4 ubuntu www-data  4096 Mar 20 01:22 ./
drwxr-xr-x 3 root   root      4096 Mar 19 17:50 ../
drwxr-xr-x 2 ubuntu ubuntu    4096 Mar 20 01:22 busca_cep/
-rwxrwxr-x 1 ubuntu www-data 10671 Mar 19 17:50 index.html*
drwxrwxr-x 3 ubuntu ubuntu    4096 Mar 19 18:01 trab1/
ubuntu@ip-172-31-41-101:/var/www/html$ cd busca_cep/
ubuntu@ip-172-31-41-101:/var/www/html/busca_cep$ ll
total 44
drwxr-xr-x 2 ubuntu ubuntu    4096 Mar 20 01:22 ./
drwxrwxr-x 4 ubuntu www-data  4096 Mar 20 01:22 ../
-rw-rw-r-- 1 ubuntu ubuntu      71 Mar 20 01:22 composer.json
-rw-rw-r-- 1 ubuntu ubuntu   24026 Mar 20 01:22 composer.lock
-rw-rw-r-- 1 ubuntu ubuntu      55 Mar 20 01:22 index.php
-rw-rw-r-- 1 ubuntu ubuntu    3232 Mar 20 01:22 praticando-composer.php
ubuntu@ip-172-31-41-101:/var/www/html/busca_cep$
```

Praticando

INSTITUTO FEDERAL
São Paulo

Agora sim, vamos executar:

composer install

Vaults SFTP ServerWeb26

```
Verifying lock file contents can be installed on current platform.
Package operations: 9 installs, 0 updates, 0 removals
  - Downloading symfony/deprecation-contracts (v3.6.0)
  - Downloading psr/http-message (2.0)
  - Downloading psr/http-client (1.0.3)
  - Downloading ralouphie/getallheaders (3.0.3)
  - Downloading psr/http-factory (1.1.0)
  - Downloading guzzlehttp/psr7 (2.9.0)
  - Downloading guzzlehttp/promises (2.3.0)
  - Downloading guzzlehttp/guzzle (7.10.0)
  - Downloading claudsonm/cep-promise-php (v1.2.0)
  - Installing symfony/deprecation-contracts (v3.6.0): Extracting archive
  - Installing psr/http-message (2.0): Extracting archive
  - Installing psr/http-client (1.0.3): Extracting archive
  - Installing ralouphie/getallheaders (3.0.3): Extracting archive
  - Installing psr/http-factory (1.1.0): Extracting archive
  - Installing guzzlehttp/psr7 (2.9.0): Extracting archive
  - Installing guzzlehttp/promises (2.3.0): Extracting archive
  - Installing guzzlehttp/guzzle (7.10.0): Extracting archive
  - Installing claudsonm/cep-promise-php (v1.2.0): Extracting archive
Generating autoload files
4 packages you are using are looking for funding.
Use the `composer fund` command to find out more!
ubuntu@ip-172-31-41-101:/var/www/html/busca_cep$
```

Praticando

Liste os arquivos e veja se a pasta *vendor* foi criada:

Vaults SFTP ServerWeb26

```
ubuntu@ip-172-31-41-101:/var/www/html/busca_cep$ ll
total 48
drwxr-xr-x 3 ubuntu ubuntu    4096 Mar 20 01:24 ./
drwxrwxr-x 4 ubuntu www-data  4096 Mar 20 01:22 ../
-rw-rw-r-- 1 ubuntu ubuntu      71 Mar 20 01:22 composer.json
-rw-rw-r-- 1 ubuntu ubuntu   24026 Mar 20 01:22 composer.lock
-rw-rw-r-- 1 ubuntu ubuntu      55 Mar 20 01:22 index.php
-rw-rw-r-- 1 ubuntu ubuntu    3232 Mar 20 01:22 praticando-composer.php
drwxrwxr-x 8 ubuntu ubuntu    4096 Mar 20 01:24 vendor/
ubuntu@ip-172-31-41-101:/var/www/html/busca_cep$
```

Praticando

INSTITUTO FEDERAL
São Paulo

E agora, teste se está tudo funcionando...

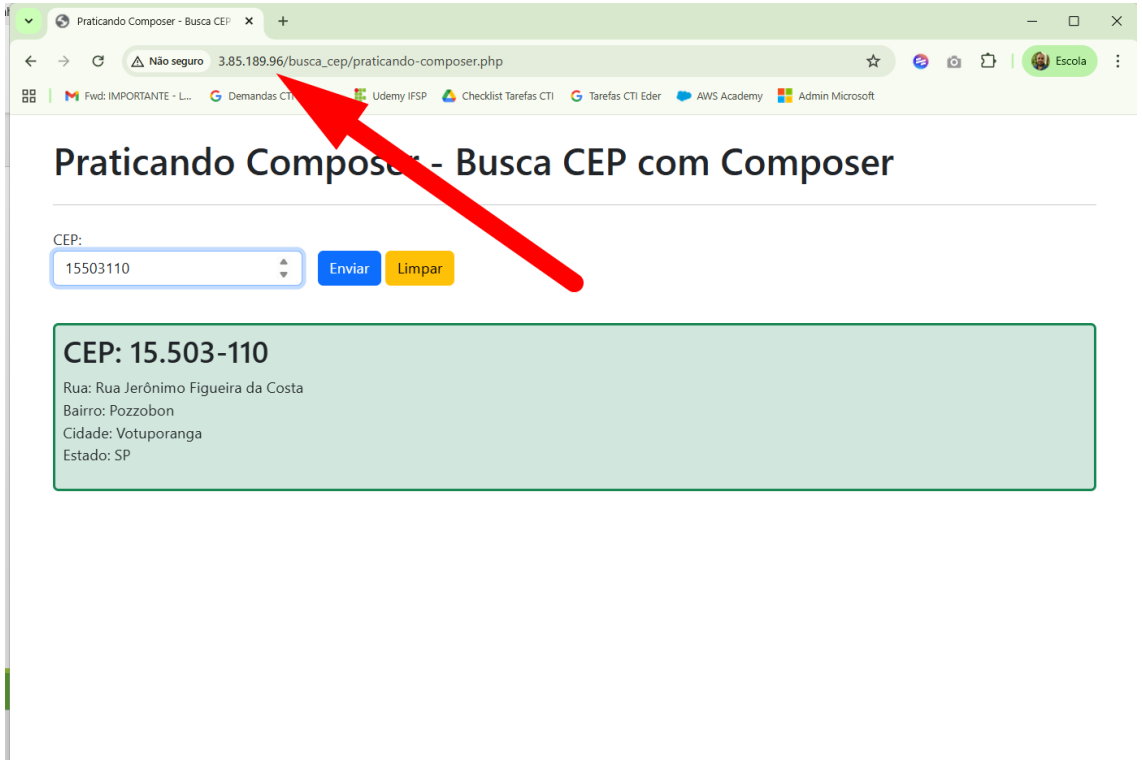

Praticando Composer - Busca CEP

Não seguro 3.85.189.96/busca_cep/praticando-composer.php

Fwd: IMPORTANTE - L... Demandas CTI Udemy IFSP Checklist Tarefas CTI Tarefas CTI Eder AWS Academy Admin Microsoft

Praticando Composer - Busca CEP com Composer

CEP:

15503110 Enviar Limpar

CEP: 15.503-110

Rua: Rua Jerônimo Figueira da Costa
Bairro: Pozzobon
Cidade: Votuporanga
Estado: SP

TITUTO
DERAL
o Paulo

INSTITUTO FEDERAL
São Paulo

Dúvidas?

Perguntas?

Sugestões?