PRISM.

# See what survives the scrub

AI reads the headers.
Code measures what survives.

# Names are gone.
# Details still give clues.

Before sharing a spreadsheet with a partner or AI tool, removing names can leave clues. Combinations of age, location, and dates still distinguish individual records.

01

### Original data

Review columns, types, and values.

02

### Protected file

Remove obvious names. Group identifying fields.

03

### Your questions

Verify that your key answers still hold.

Change what you share. Check what happens to your analysis.

Protection choices depend on your data and the specific questions you need to answer.

# AI interprets.
# Code measures.


| | | |
|---|---|---|
| 01 | **Read headers** | Local rules spot common columns. Optional AI interprets labels. |
| 02 | **Review meaning** | Confirm what columns mean. Correct a label, then rerun the checks. |
| 03 | **Test exposure** | Deterministic Python code checks how easily rows are singled out. |
| 04 | **Check answers** | Verify whether key calculations still match the original data. |
| 05 | **Compare options** | Review tested recipes and see which meet your required limits. |
| 06 | **Download file** | Export the protected table, recipe, and audit evidence. |

No row values are ever sent to an AI model. Code calculates all numbers deterministically.

# From 75 matches down to 20

One change: removing ZIP code from the protected recipe.

**Simulated exact-match lookup**

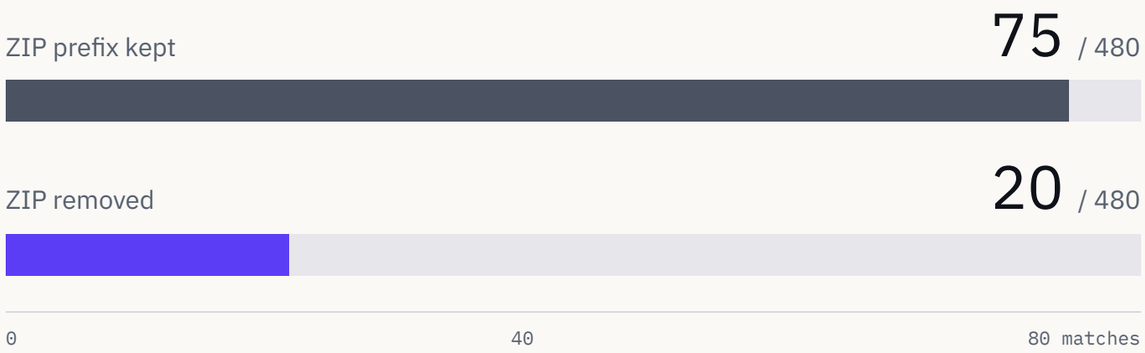


Simulated lookup on test data. Reflects sample matching, not population risk.

## Three protected answers stay identical between these two recipes

| | |
|---|---|
| Six-month failure rate | 36.25% |
| Liver-subgroup failure rate | 45.03% |
| Age–weight correlation | 0.6893 |

Both recipes preserve these target answers within tolerance. Correlation uses interval midpoints.

Tested on fictional benchmark data. Selected answers do not guarantee all analyses stay unchanged.

# 24

options per search
up to 24 tested recipes

# Tested recipes. Measured tradeoffs.

PRISM generates protection options and tests privacy and accuracy for each one.

Compare options side by side and instantly spot which recipes miss your limits.

01 Apply recipe

02 Measure privacy & answers

03 Pick best option

Standard search tests up to 24 options. Shows which meet your accuracy and privacy limits.

# AI helps read the columns. Code checks the data.

**145** column meanings

**25** exposure patterns

13 groups of meanings.
Missing tests stay visible.

## You can correct the AI

OpenRouter Jev reads approved column headers to suggest types. Row values stay out of AI requests. Manual corrections take precedence.

Local scans run first without any model. AI confidence is never treated as a privacy score.

## Measured on real values

In a separate 480-row appointment table, default protection dropped unique combinations from 480 to 96 while keeping the selected query exact.

These are unique rows in a fictional example, not proof of anyone’s identity.

Archie hosts the app entry and stored tables. Vercel serves the interface and Python calculations.

# Know what you are sharing

See which combinations still single out records.
See what your key questions lose.
Compare the results before you send the file.

### Try your own table

Upload CSV, JSON, or XLSX (up to 3 MiB).
Or audit an already protected file.

### Direct CSV download

Export your protected table and recipe directly.
No login or account required.

PRISM shows what it tested; you decide whether to share.
The results cover the checks shown, not every possible way to identify someone.

Open PRISM on Archie