PRISM.

See what survives the scrub

AI understands the fields.
Measurements guide the sharing decision.

The names are gone.
The retained detail still matters.

A research team wants to share a table with an internal or external collaborator.
Our fictional oncology demo shows how retained age, geography and weight can distinguish records.

01

Source table

Review identifiers,
known attributes and units.

02

Candidate release

Remove identifiers.
Generalize retained detail.

03

Study questions

Measure exposure and
changes to selected answers.

PRISM ties disclosure and utility review to the team's declared purpose.

Understand the fields.
Measure what survives.


01	**Interpret meaning**	Local rules first. Optional Jev interprets approved schema metadata.
02	**Review uncertainty**	145 semantic types. Alternatives, corrections and provenance stay visible.
03	**Test the release**	Deterministic tests measure current values. A label is not an attack result.
04	**Preserve purpose**	Compare source and candidate against selected scientific questions.
05	**Choose a recipe**	Inspect evaluated tradeoffs, field controls and failed constraints.
06	**Carry the evidence**	Export the candidate, recipe, findings, limitations and semantic lineage.

No chatbot. No record cells sent to Jev. Cached classifications are reused; transformations trigger real reassessment.

55 fewer unique correct matches

One change: remove ZIP from the protected candidate.

Declared exact-match attack

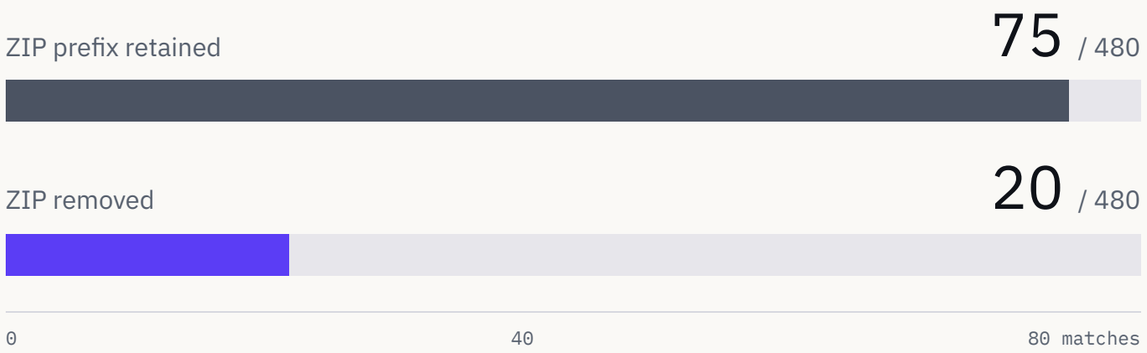

Known membership. Public deterministic QI rules.
Private owner correspondence scores matches after the attack.

Three protected answers stay identical between these two recipes

Six-month failure rate	36.25%
Liver-subgroup failure rate	45.03%
Age–weight correlation	0.6893

All three meet their declared tolerances against the source. Correlation uses interval midpoints.

Baseline: age bands 5 years, ZIP prefix 3, weight bands 5 kg. Modeled source-target matches, not population risk probabilities. Selected answers do not establish full scientific equivalence.

24

configurations requested
in the standard demo search

Actual recipes. Measured tradeoffs.

The deterministic Python engine applies transformations, recalculates disclosure and research metrics, then marks nondominated candidates.

Teams can inspect the recipe, selected answers and failed constraints for every candidate.

01 Apply recipe

02 Measure both objectives

03 Compare the frontier

Finite grammar. Hard cap 80. Small inputs may exhaust available recipes earlier. Frontier status does not imply feasibility or release clearance.

AI interprets. The engine measures.

145 semantic types

25 attack categories

13 semantic families.
Unsupported tests abstain.

Meaning with review

Jev 1.14 uses typed decisions through OpenRouter. Approved metadata only; corrections, caching and offline fallbacks preserve control.

Basic identifier scans run independently of the model. Classification confidence never becomes a privacy score.

Current values, actual evidence

In a separate fictional appointment fixture, a date/place/demographic combination falls from 480 to 96 unique rows. The selected response query stays identical.

Sample distinguishability, not verified identity linkage. Population, model and cross-release attacks need additional artifacts.

React + TypeScript; Python + FastAPI. Archie: public entry + Core state. Vercel: UI assets + compute. Optional OpenRouter Jev classifies metadata; scientific calculations remain deterministic.

A clearer review before teams share data

See what remains identifying.
See what the selected study questions lose.
Carry evidence into internal or partner review.

Try your own table

Import CSV, JSON or XLSX.
Compare, protect and export.

Desktop-first engine

CSV, JSON and XLSX on your computer.
Optional approved metadata to Jev.

Human review required. No automatic release clearance, compliance certification or privacy guarantee.

Open PRISM on Archie