OUTBOUND CALLS

Make your agent call first.

One trigger, and your agent calls the lead in seconds. From GoHighLevel, n8n or anything that can send a request.

IN THIS VIDEO

01 What an outbound trigger is
02 When to use one
03 The GoHighLevel way
04 The n8n way
05 Any other system
06 Let Claude set it up

BUILT LIVE IN THIS VIDEO

HighLevel n8n

Leadlock.ai

THE IDEA

Something happens. Your agent dials.

An outbound trigger is one request to Leadlock: which agent, which number.

The event: a form, a tag, a date

The trigger: one request

The call: your agent dials

`agent_id`	Which agent calls
`to_number`	Who it calls, +1 first
`context`	Name, source, notes. Optional.

`Leadlock API: POST /outbound/trigger.`

Leadlock.ai

WHEN TO USE ONE

Four moments worth a call.

01

New lead form

Call while they're still on the page.

02

Missed call

Nobody picked up? Call them right back.

03

Stale lead

No reply in 30 days? Wake them up.


04

Appointment no-show

Rebook before they go cold.

HOW IT FLOWS

Event in, result back.

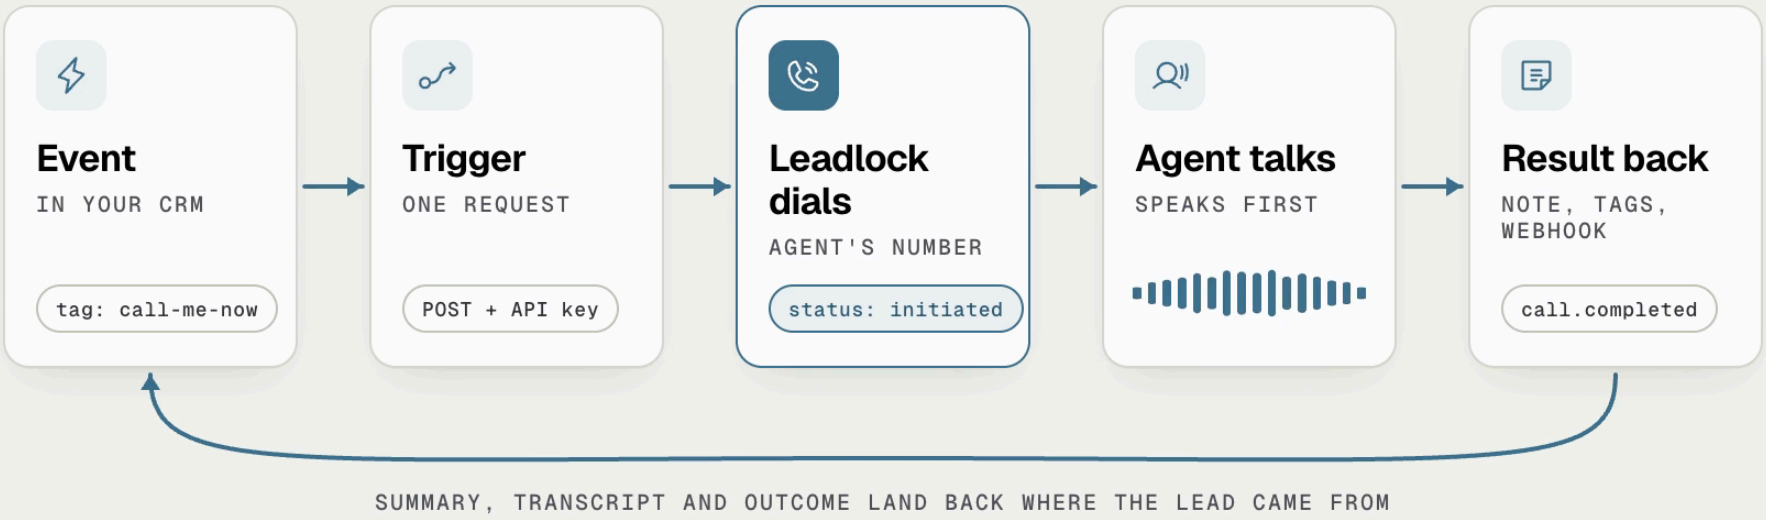

Result back: post-call note and tags in GoHighLevel when connected, or your post-call webhook.

Leadlock.ai

BEFORE YOU START

Four things, once.

01 Turn on outbound calling

02 Agent set to Outbound or Both, with a number

03 Copy the agent ID

04 An API key, for n8n and webhooks

GOHIGHLEVEL SHORTCUT

The Leadlock app action needs no key.

It knows your account from the connected GoHighLevel location.

Outbound terms opt-in, agent Setup tab Voice Direction, Settings > API Keys.
The GoHighLevel app action finds your account from the connected location.

Leadlock.ai

THE GOHIGHLEVEL WAY

Tag added, Leadlock calls.

Trigger: tag call-me-now

↓

Webhook: call this contact

↓

Remove tag call-me-now

Custom Webhook · POST

```
URL     https://leadlock-app.onrender.com/outbound/trigger
Header  X-API-Key: ••••••••
Body
{
  "customData": {
    "agent_id": "your-agent-id",
    "to_number": "{{contact.phone}}",
    "ghl_contact_id": "{{contact.id}}",
    "first_name": "{{contact.first_name}}"
  }
}
```

Our test: tag to ringing phone in about 10 seconds.

Tested 2026-10-23: tag added, call started 10 seconds later, completed.

Leadlock.ai

LIVE: GOHIGHLEVEL

Open GoHighLevel now.

WORKFLOW

Leadlock - Call new lead (course demo)

Your sub-account › Automation › Workflows

OR THE APP ACTION

+ Add action, search Leadlock, Outbound Call. Agent ID, phone {{contact.phone}}.

DO THIS

01 Open the webhook: paste agent ID and key

02 Save, then Publish


03 Contacts: add tag call-me-now to the test contact

04 Phone rings. Answer it. Back to Draft after.

Leadlock.ai

THE N8N WAY

Three nodes. One request.

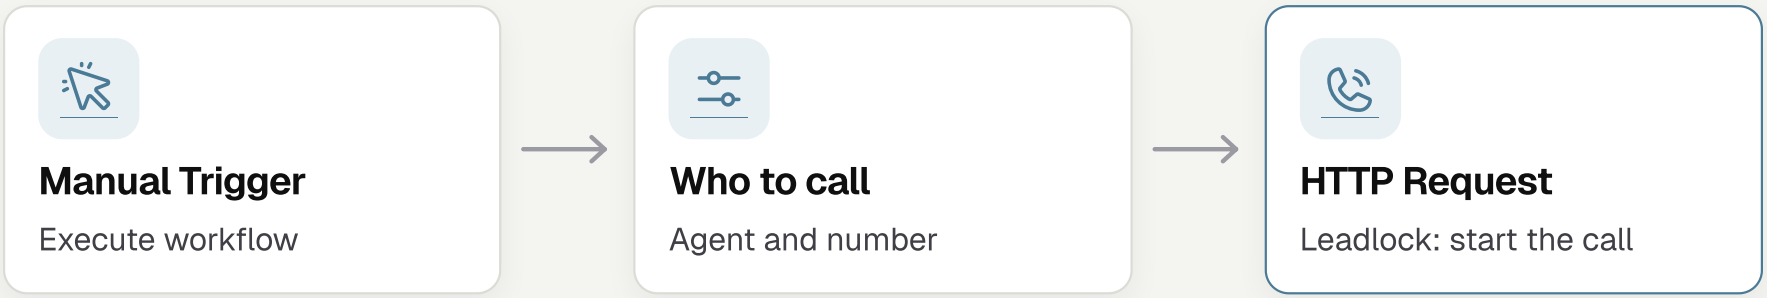

POST to	https://leadlock-app.onrender.com/outbound/trigger
Authentication	Generic, Header Auth: X-API-Key in a credential
Body (JSON)	{ agent_id, to_number, context: { first_name } }
Back comes	call_id, status: initiated

n8n Cloud or self-hosted, same workflow (importable JSON in the course files).
Test 2026-10-23: HTTP 200, call completed.

Leadlock.ai

LIVE: N8N

Open n8n now.

WORKFLOW

Leadlock - Outbound call

Import it from the course files: course/n8n/.

DO THIS

01 Open Who to call, type your cell, +1 first

02 Show the HTTP Request node and its credential

03 Execute workflow

04 Phone rings. Show the response: call_id.

Leadlock.ai

ANY OTHER SYSTEM

Same request, from anywhere.

curl

```
curl -X POST \
  https://leadlock-app.onrender.com/outbound/trigger \
  -H "X-API-Key: sk_live_[redacted]" \
  -H "Content-Type: application/json" \
  -d '{
    "agent_id": "your-agent-id",
    "to_number": "+15555550123",
    "context": { "first_name": "Sam" }
  }'
```

Leadlock API: JSON, form or multipart bodies accepted; GoHighLevel customData is unwrapped.

zapier

Make

</> Your own code

Webhooks or HTTP step: POST, header, JSON body.

BACK COMES

call_id, status: initiated

Then the call result to your webhook.


Anything with an API can be connected.

Leadlock.ai

THE SHORTCUT

Or ask Claude to set it up.

The free Leadlock Agent Kit, in Claude Code.

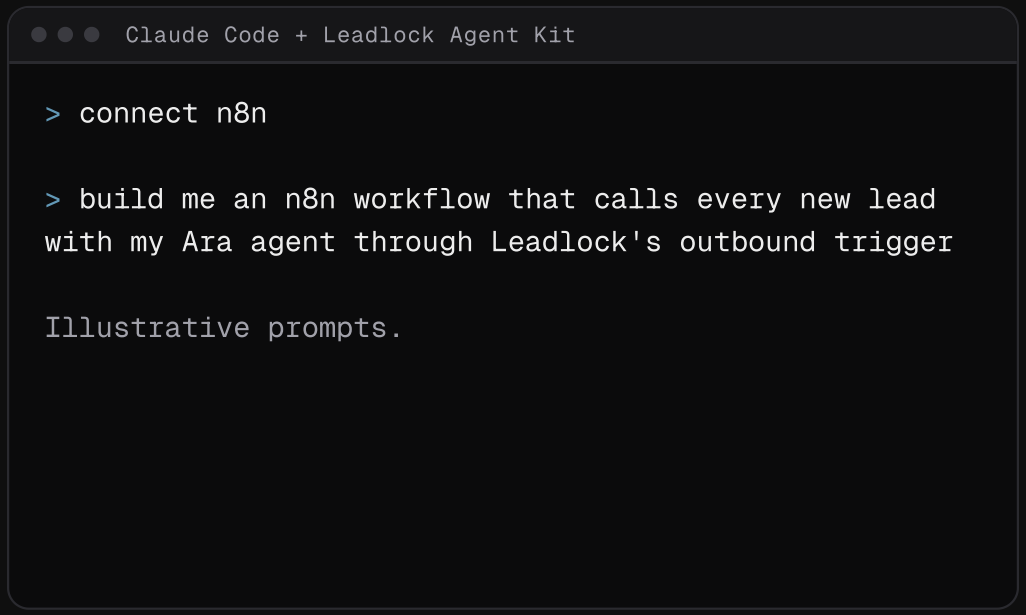

`build-agent`	Makes an outbound caller
`connect-n8n`	Claude builds n8n workflows
`ghl-workflow-api`	Edits GoHighLevel workflow actions

leadlock.ai/agent-kit · GoHighLevel triggers are still set in the builder.

LeadLockAgentKit main: skills build-agent, connect-n8n, ghl-workflow-api (triggers are UI-only).

Leadlock.ai

YOUR HOMEWORK

Call one lead. Automatically.

Build one trigger for your own business. Test it on your own phone.

REMEMBER

01 Outbound on, agent on Outbound or Both

02 Agent ID and the number, +1 first

03 Keep the key in a credential

Leadlock.ai