

Joins

Grinnell College

February 10, 2026

Warm-up

You've got two lists:

- A list of people who RSVP'd to your party
- A list of people who showed up

Who do you email:

1. To say thank you for coming
2. To ask, "Hey, where were you?"
3. To ask, "Who are you and why were you at my house?"

Overview

- Keys
- Joins

Most generally, a **key** is an identifier or set of identifiers for observations in a table

- **Primary Key** is a key associated with a table of interest that *uniquely identifies* each observation
- **Foreign Key** is a variable or set of variables that correspond to a primary key in a different table

Key Considerations

- Single or compound keys
- Checking for uniqueness
- Anticipate conflicts from future entries in primary keys
- Use appropriate identifiers


Primary Keys

```
1 > head(airlines)
2
3   carrier name
4   <chr>      <chr>
5 1 9E        Endeavor Air Inc.
6 2 AA        American Airlines Inc.
7 3 AS        Alaska Airlines Inc.
8 4 B6        JetBlue Airways
9 5 DL        Delta Air Lines Inc.
10 6 EV        ExpressJet Airlines Inc.
```

Primary Keys

```
1 > head(airports[, c(1, 2, 3, 4)])
2
3   faa   name                lat   lon
4   <chr> <chr>              <dbl> <dbl>
5 1 04G   Lansdowne Airport    41.1 -80.6
6 2 06A   Moton Field Municipal Airport 32.5 -85.7
7 3 06C   Schaumburg Regional    42.0 -88.1
8 4 06N   Randall Airport       41.4 -74.4
9 5 09J   Jekyll Island Airport  31.1 -81.4
10 6 0A9   Elizabethton Municipal Airport 36.4 -82.2
```

Key Relations

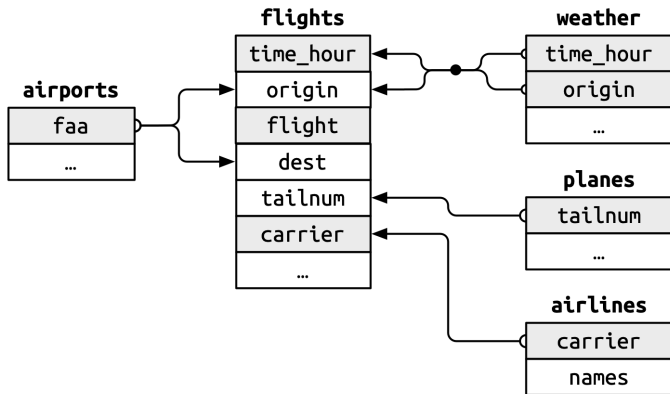

Gray boxes represent primary keys

Types of Joins

1. Mutating Joins

- ▶ Defined by combination of different datasets
- ▶ Typically used to add variables or metadata
- ▶ Left, right, inner, full

2. Filtering Joins

- ▶ Characterized by filtering of datasets
- ▶ New variables are not added to existing
- ▶ Semi, anti

A Note on Notation

In virtually all of our examples, we'll assume we are working with two datasets or tables, X and Y

X will always be our primary table (with the primary key) and will serve as the first argument in any functions of the form $f(X, Y)$

This is especially important as most joins are *not* commutative

Mutating Joins

Left (and Right) Joins

The primary purpose of a left join is to preserve a primary table X while adding metadata from Y

- Retains all rows of X
- Adds corresponding variables from Y
- Adds `NA` to rows of Y when missing
- Example: bringing in plane specific data to the table of all flights

Inner Joins

Inner joins are primary used for finding complete records




- Retains only rows in X that have a match in Y
- This join is commutative
- Example: A table of all enrolled Grinnell students inner joined with all STEM courses offered Spring 2026 will return a list of all students enrolled in a science class (with class information)

Outer Joins

Outer joins are primarily used as a diagnostic tool

- Retains all rows from X and Y
- Adds NA in either when missing
- Quickly shows which tables have missing entries
- Example: Merging a list of all MAP students with all MAP directors will show if there are any students listed as having a MAP without an advisor or if any advisors are paid for a MAP but have no students

Mutating Joins

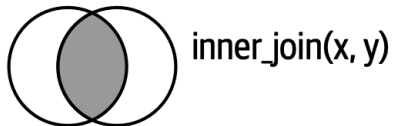

Filtering Joins

Filtering Joins

In all cases, filtering joins are characterized by both removing rows from X and adding no new data from Y

Essentially we ask ourselves, am I filtering on a logical condition (for some purpose) or am I using this join as a diagnostic tool?

Both `semi_join(x,y)` and `anti_join(x,y)` are basically `dplyr::filter()` where the filtering criteria comes from a separate table

Semi Joins

Semi joins are used for keeping observations from one table that appear in another

Basically `semi_join(X, Y)` is equivalent to
`dplyr::filter(X, key %in% Y$key)`

Example: From my list of customers, which ones have an order placed in the last 2 months?

Anti Joins

Almost exclusively a diagnostic tool for data quality

`anti_join(X, Y)` is equivalent to
`dplyr::filter(X, !(key %in% Y$key))`

Example: anti joining a list of Grinnell students with Spring 2026 enrollment will return a list of any students not enrolled in classes this semester

This is an example of *implicit* missing values; no NAs are returned

How do Joins Work?


- Equijoins vs nonequijoins
- `by = "stuff"` vs `by = join_by(stuff)`
- `by = c("a" == "b")` vs `join_by(x == y)`
- Tidy selection
- Key name confusion
- What to retain

Visualizing Joins

x		y	
1	x1	1	y1
2	x2	2	y2
3	x3	4	y3

Mutating Joins


`left_join(x, y)`

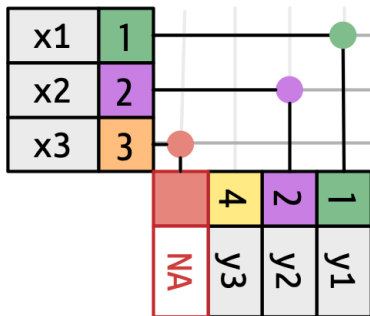

key	val_x	val_y
1	x1	y1
2	x2	y2
3	x3	NA

Mutating Joins


`inner_join(x, y)`



key	val_x	val_y
1	x1	y1
2	x2	y2


Mutating Joins

`full_join(x, y)`

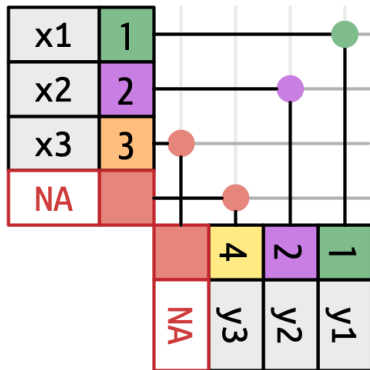

key	val_x	val_y
1	x1	y1
2	x2	y2
3	x3	NA
4	NA	y3

Mutating Joins

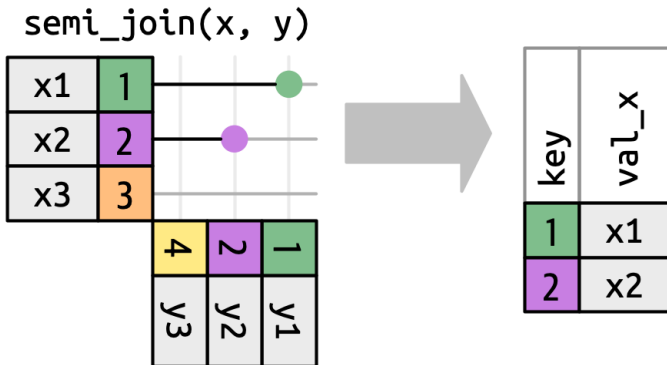

Mutating Joins

