

Solutions to ggplot2 Exercises

Based on *R Graphics Cookbook* by Winston Chang

Colonel Smoothie

27.12.2013

Introduction

Just leaving some notes here. I've been having some trouble with the tidy so I'm explicitly setting the option here:

```
opts_chunk$set(tidy = FALSE, message = FALSE, warning = FALSE)
```

Things to do

I don't want this to be too similar to Chang's book or else there's not really much point in making this document, other than having it in question format so you can use active recall to test yourself. For the most part, I'll be creating exercises using the MASS package in addition to what's already in the book, they will be tailored to match the chapters but will be slightly different so you'll have something new.

I've also added a Miscellaneous chapter for features of ggplot2 that are not covered in the textbook as well as an Actuarial Graphics chapter that includes actuarial applications of ggplot2.

Contents

1	R Basics	3
2	Quickly Exploring Data	4
3	Bar Graphs	50
4	Miscellaneous	81
5	Actuarial Graphics	87

Chapter 1

R Basics


There's not really much to add for this chapter. Move on to the next one.

Chapter 2

Quickly Exploring Data


1. Produce the following plot with the `mtcars` dataset. It's built into R so you do not need to load any packages:

```
plot(mtcars$wt, mtcars$mpg)
```

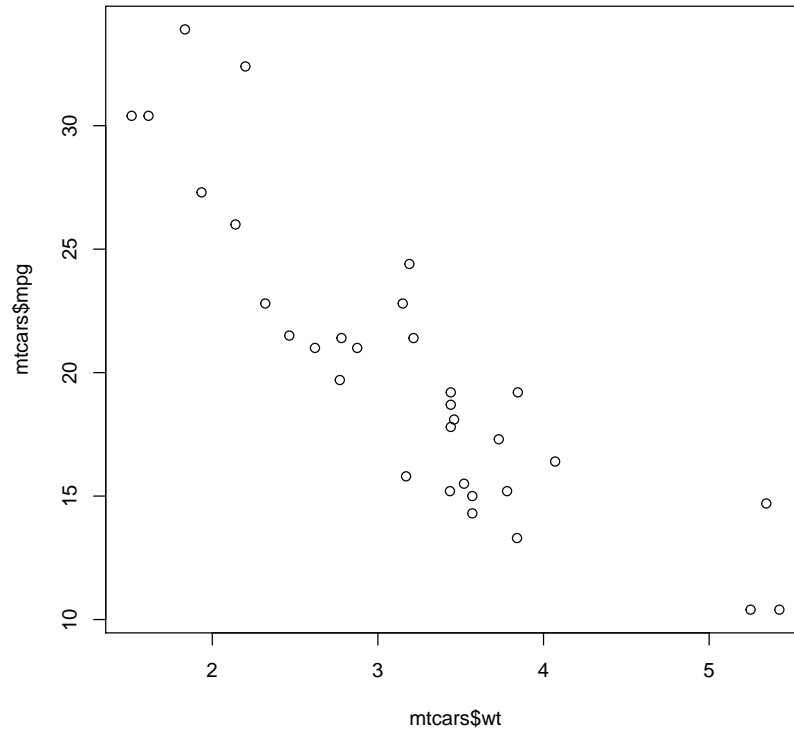


2. Produce the following plot with the `mtcars` dataset. It's built into R so you do not need to load any packages:

```
plot(mtcars$mpg, mtcars$wt)
```

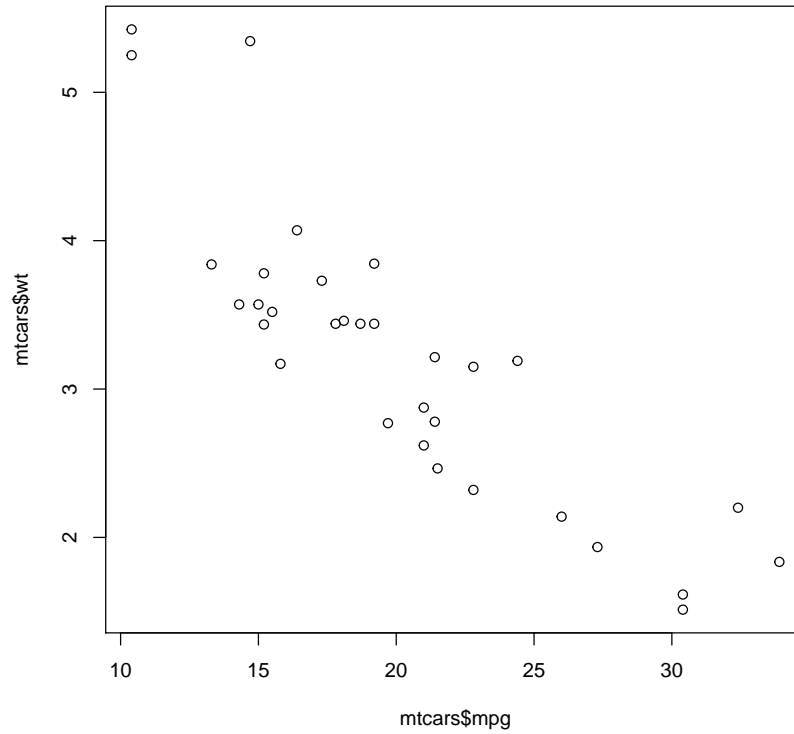


3. Load the `ggplot2` package and produce the following plot with the `mtcars` dataset:

```
library(ggplot2)
qplot(mtcars$wt, mtcars$mpg)
```

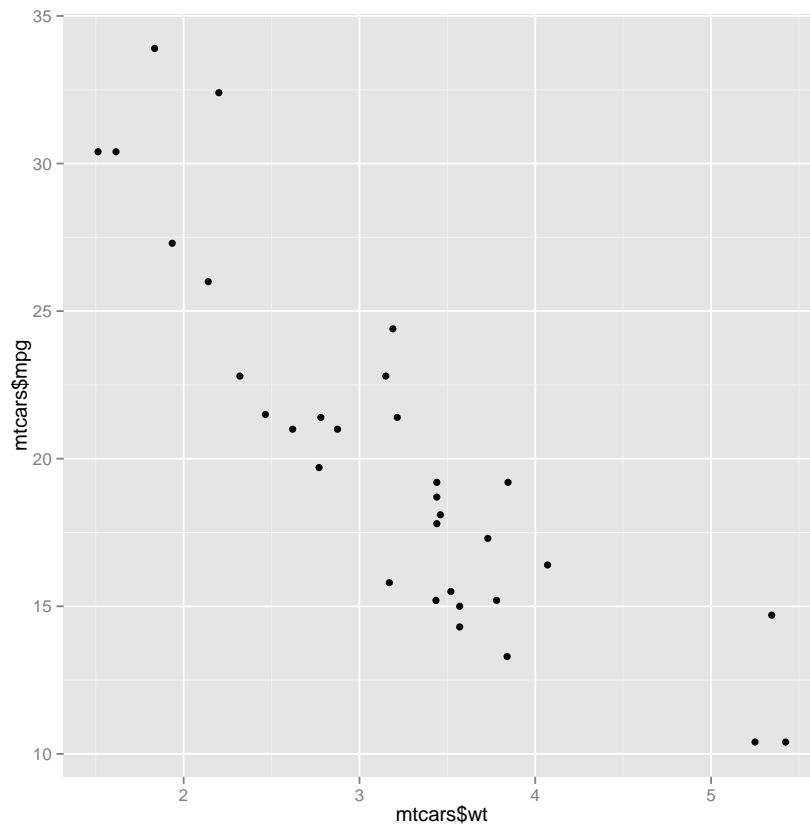

4. Load the `ggplot2` package and produce the following plot with the `mtcars` dataset:


```
library(ggplot2)
qplot(wt, mpg, data=mtcars)
```

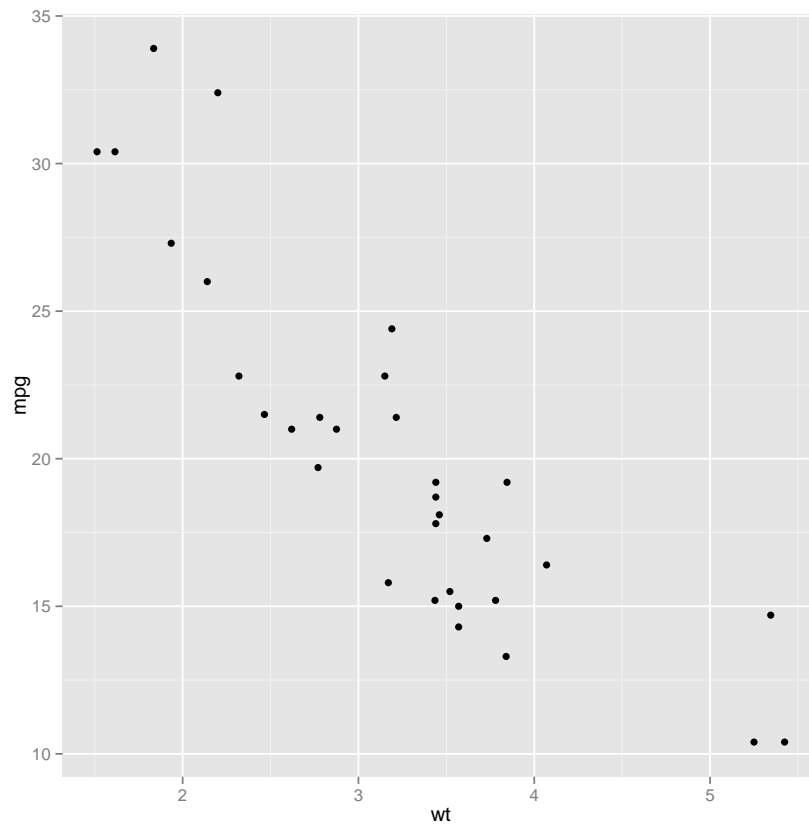

```
#Alternative Solution
library(ggplot2)
ggplot(mtcars, aes(x=wt, y=mpg))+geom_point()
```


5. Load the `ggplot2` package and produce the following plot with the `mtcars` dataset:

```
library(ggplot2)
qplot(mtcars$mpg, mtcars$wt)
```

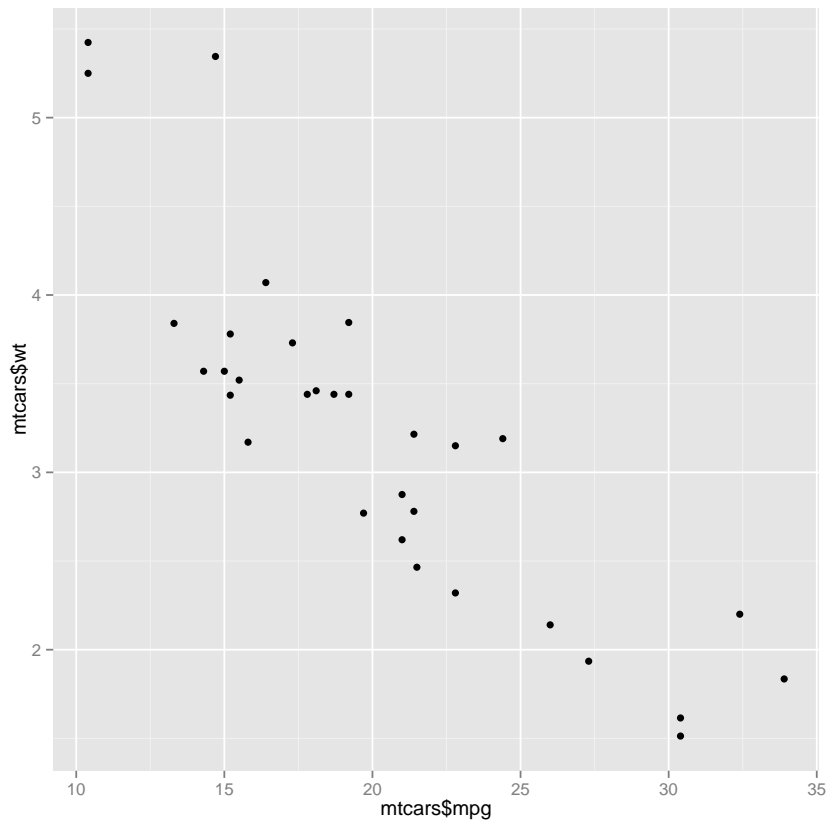


6. Produce the following plot with the `pressure` dataset. It's built into R so you do not need to load any packages:

```
plot(pressure$temperature, pressure$pressure, type = "l")
```

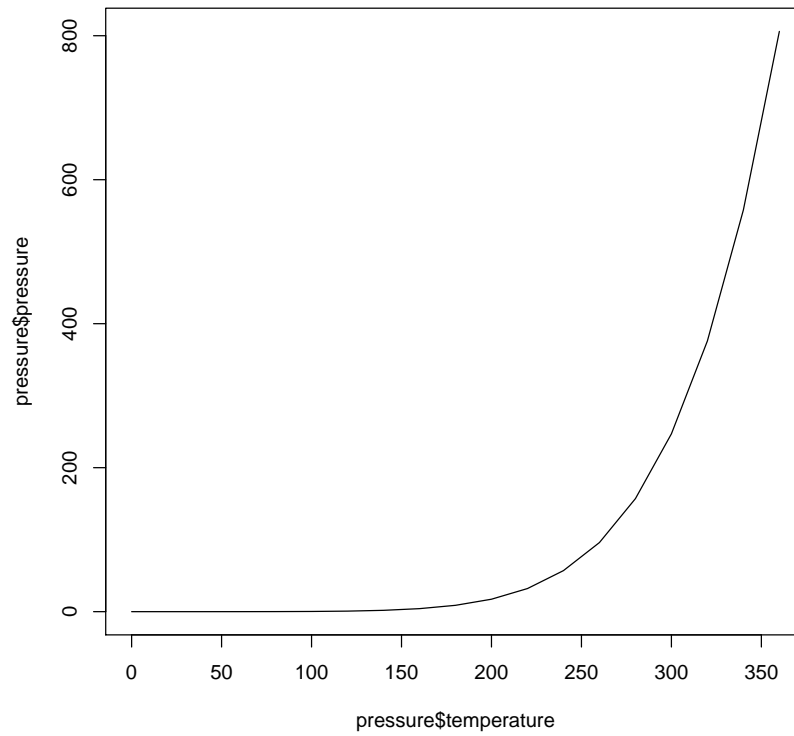

7. Produce the following plot with the `pressure` dataset. It's built into R so you do not need to load any packages:


```
plot(pressure$temperature, pressure$pressure, type = "l")  
points(pressure$temperature, pressure$pressure)
```

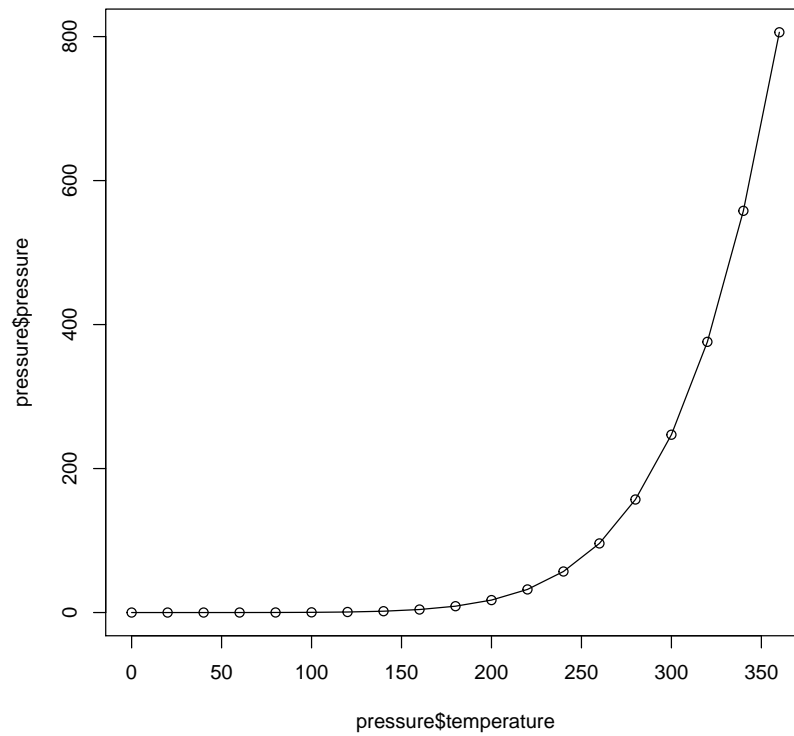

8. Produce the following plot with the `pressure` dataset. It's built into R so you do not need to load any packages. The height of the red line is one-half of the height of the black line at all points:

```
plot(pressure$temperature, pressure$pressure, type = "l")
points(pressure$temperature, pressure$pressure)


lines(pressure$temperature, pressure$pressure/2, col="red")
points(pressure$temperature, pressure$pressure/2, col="red")
```

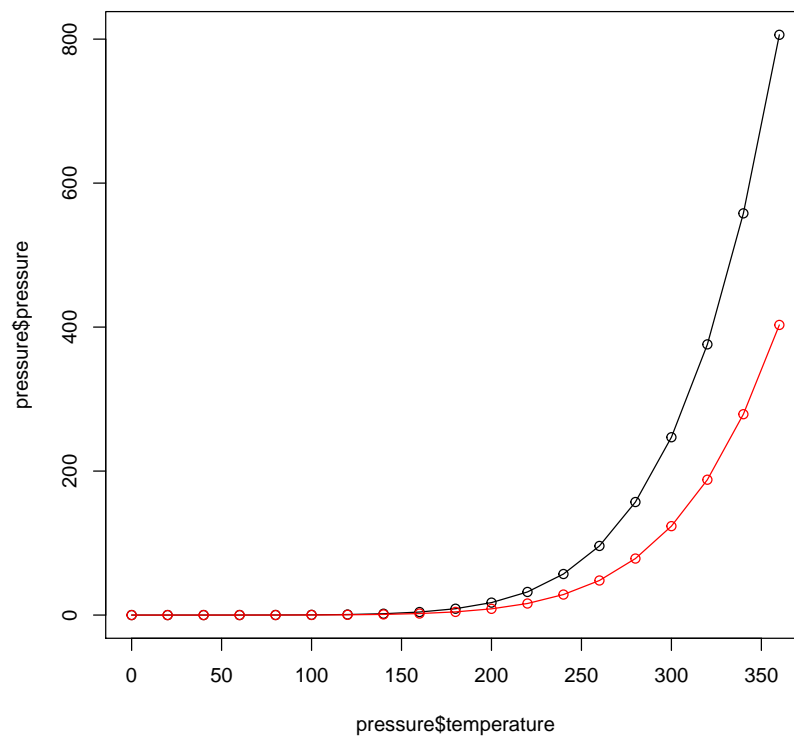

9. Produce the following plot with the `pressure` dataset. It's built into R so you do not need to load any packages. The height of the blue line is one-half of the height of the black line at all points:


```
plot(pressure$temperature, pressure$pressure, type = "l")
points(pressure$temperature, pressure$pressure)

lines(pressure$temperature, pressure$pressure/2, col="blue")
points(pressure$temperature, pressure$pressure/2, col="blue")
```

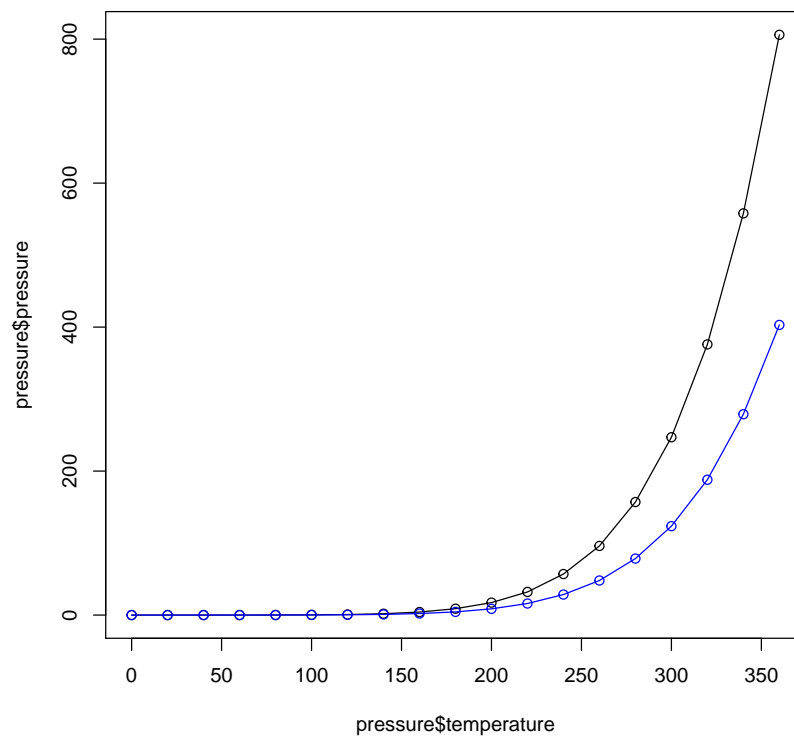


10. Load the `ggplot2` package and produce the following plot with the `pressure` dataset. It's built into R so you do not need to load any packages:

```
library(ggplot2)
qplot(pressure$temperature, pressure$pressure, geom="line")
```

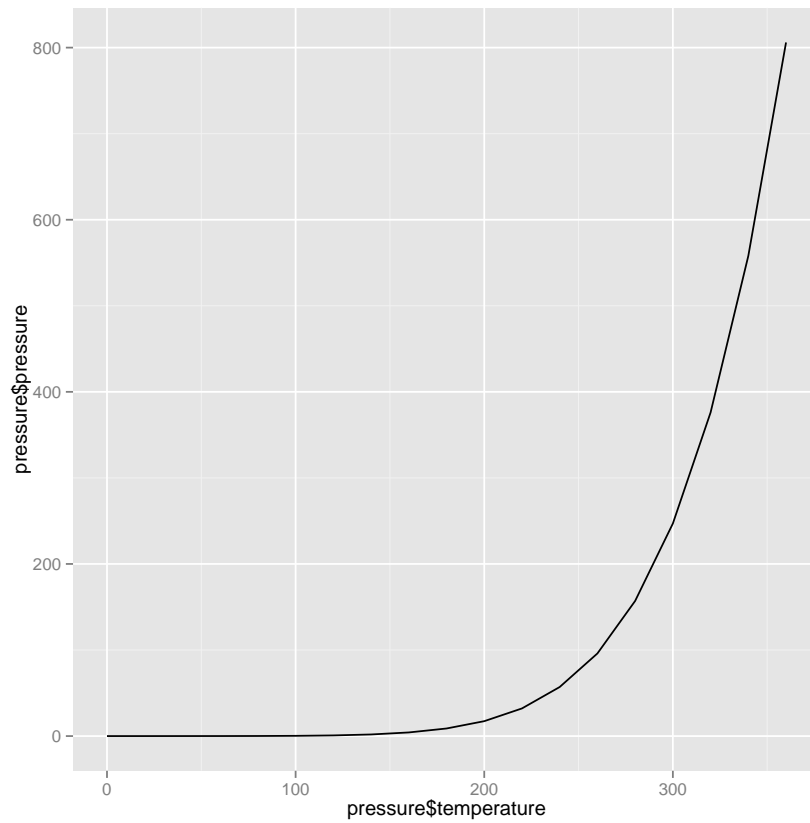

11. Load the `ggplot2` package and produce the following plot with the `pressure` dataset. It's built into R so you do not need to load any packages:


```
library(ggplot2)
qplot(temperature, pressure, data=pressure, geom="line")
```

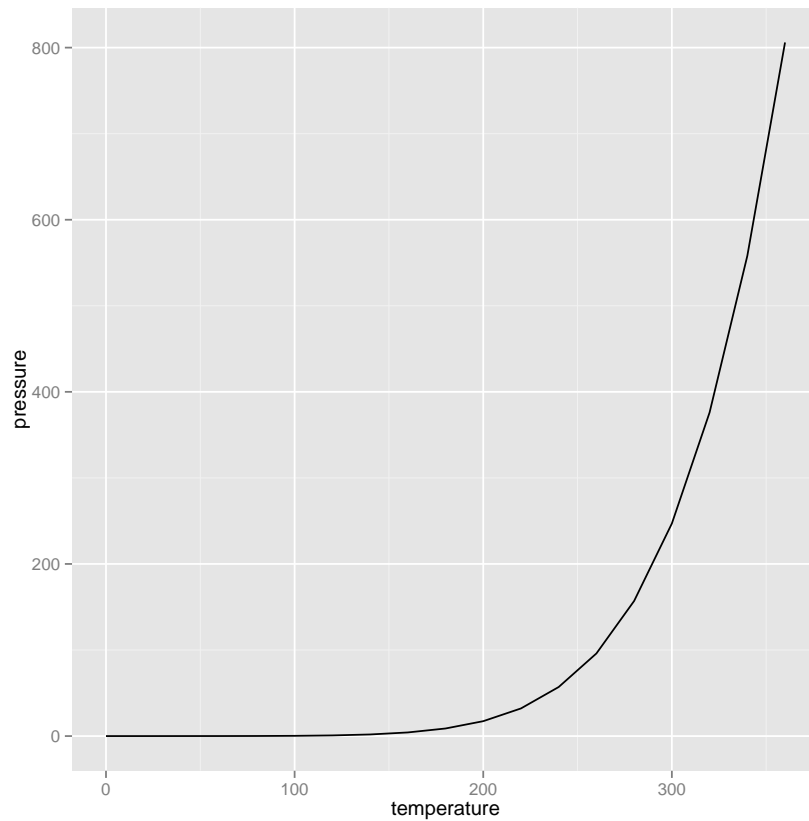

```
#Alternative Solution
library(ggplot2)
ggplot(pressure, aes(x=temperature, y=pressure))+geom_line()
```


12. Load the `ggplot2` package and produce the following plot with the `pressure` dataset. It's built into R so you do not need to load any packages:


```
library(ggplot2)
qplot(temperature, pressure, data=pressure, geom=c("line", "point"))
```

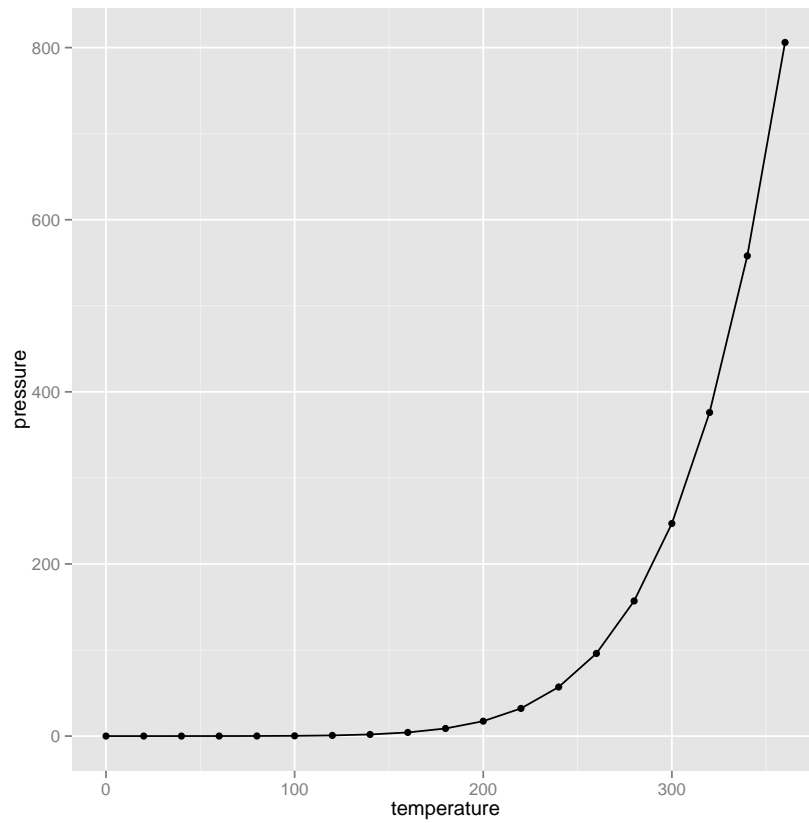

```
library(ggplot2)
ggplot(pressure, aes(x=temperature, y=pressure)) + geom_line() + geom_point()
```


13. Produce the following plot with the BOD dataset. It's built into R so you do not need to load any packages:

```
barplot(BOD$demand, names.arg=BOD$Time)
```

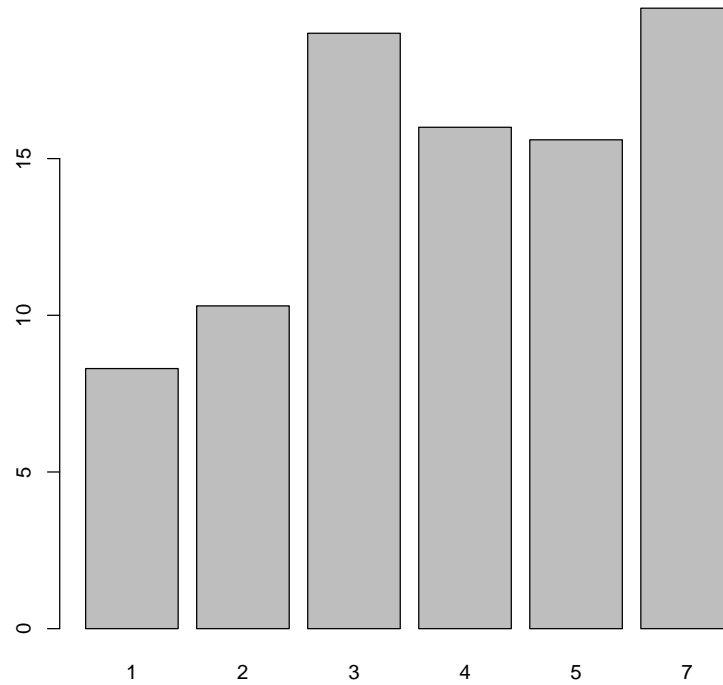

14. Load the MASS package and produce the following plot with the Animals dataset:


```
library(MASS)
barplot(Animals$brain, names.arg=row.names(Animals), las=2)
```

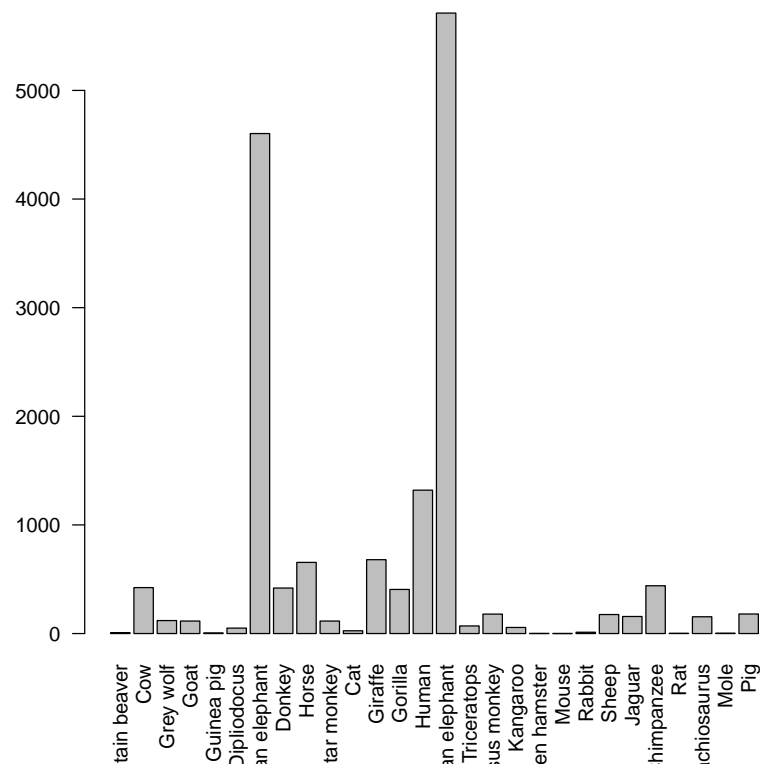

```
# Alternative solution provided by smumentum
library(MASS)
barplot(Animals$brain, names.arg=as.character(row.names(Animals)),
        , las = 2, cex.names = .7)
```


15. Load the MASS package and produce the following plot with the Animals dataset:

```
library(MASS)
barplot(Animals$body, names.arg=row.names(Animals), las=2)
```

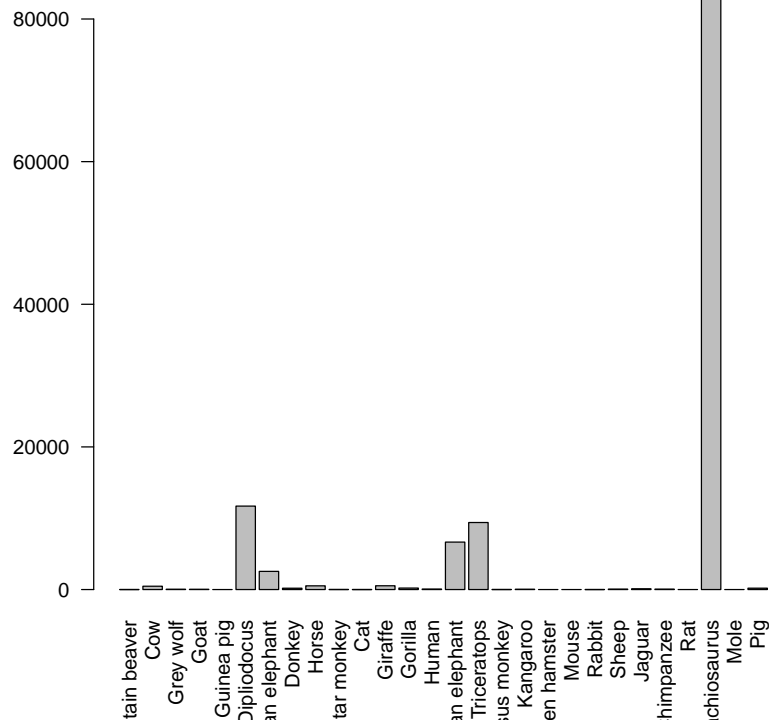


16. Produce the following plot with the `mtcars` dataset. It's built into R so you do not need to load any packages:

```
barplot(table(mtcars$cyl))
```

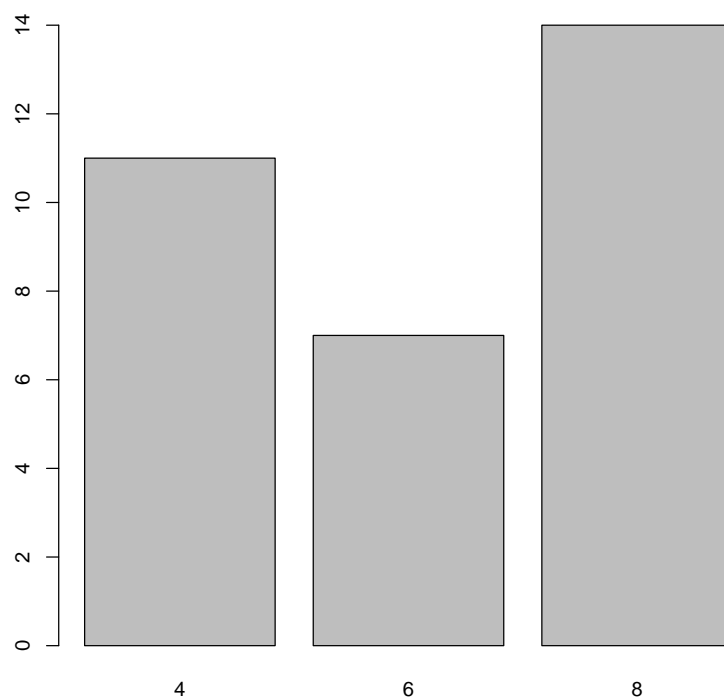


17. Load the MASS package and produce the following plot with the Aids2 dataset:

```
library(MASS)
barplot(table(Aids2$state))
```

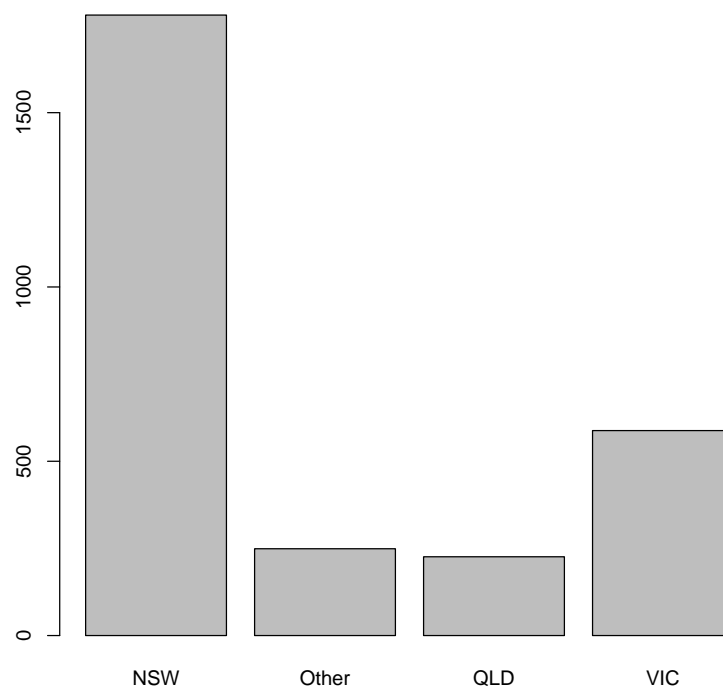


18. Load the MASS package and produce the following plot with the Aids2 dataset:

```
library(MASS)
barplot(table(Aids2$T.categ))
```

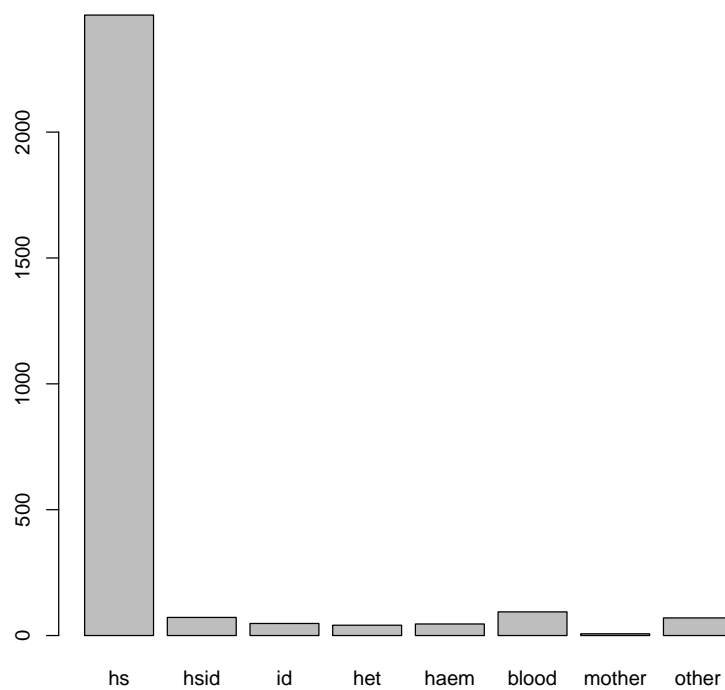


19. Load the `ggplot2` package and produce the following plot with the `BOD` dataset. It's built into R so you do not need to load any packages:

```
library(ggplot2)
qplot(BOD$Time, BOD$demand, geom="bar", stat="identity")
```

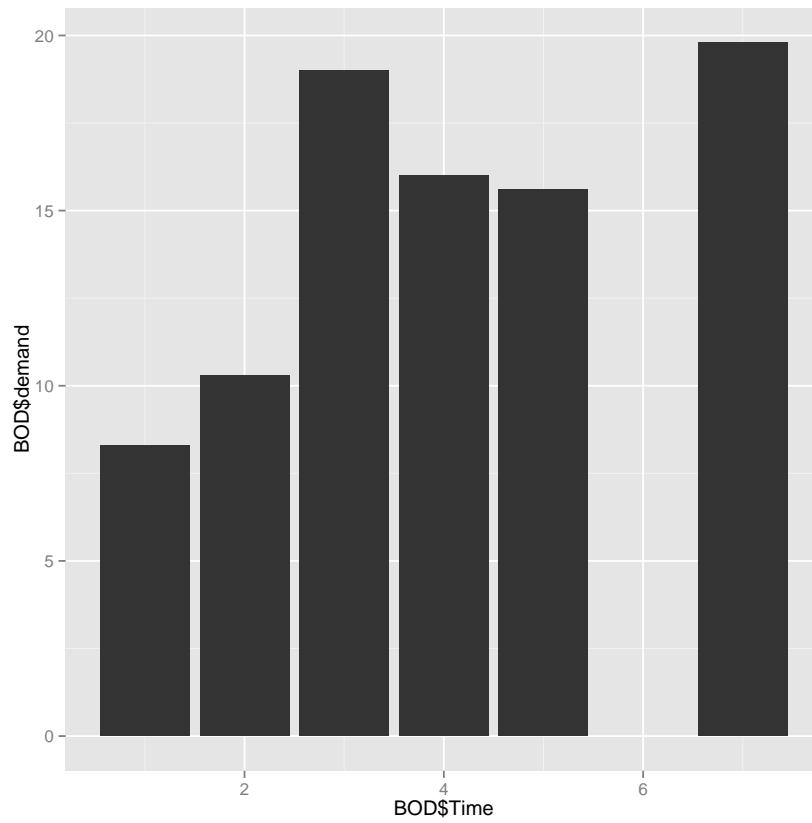


20. Load the `ggplot2` package and produce the following plot with the BOD dataset. It's built into R so you do not need to load any packages:

```
library(ggplot2)
qplot(factor(BOD$Time), BOD$demand, geom="bar", stat="identity")
```

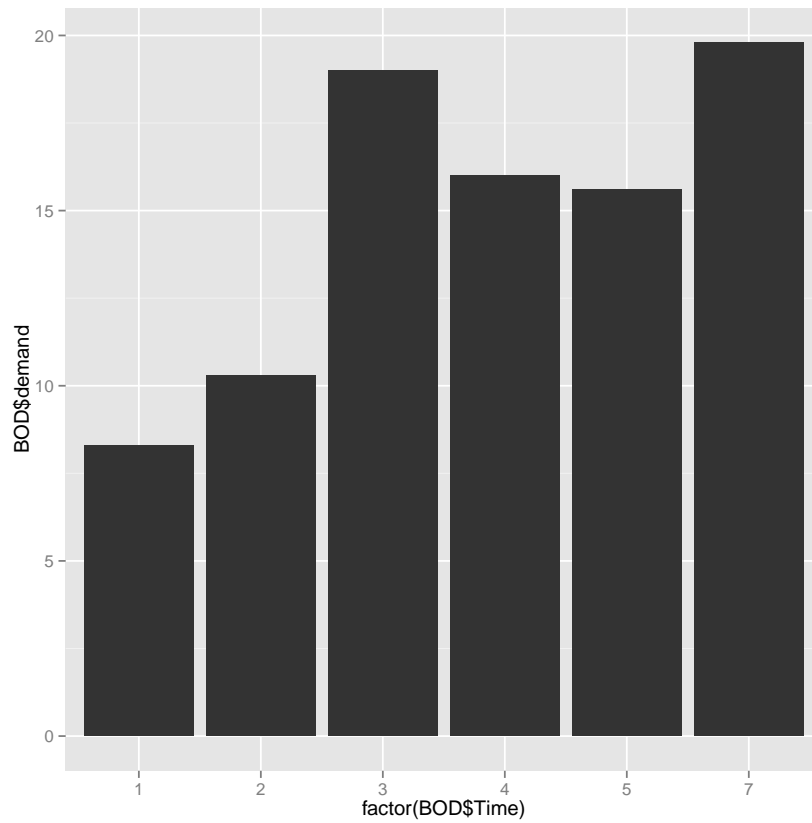


21. Load the `ggplot2` package and produce the following plot with the `mtcars` dataset. It's built into R so you do not need to load any packages:

```
library(ggplot2)  
qplot(mtcars$cyl)
```

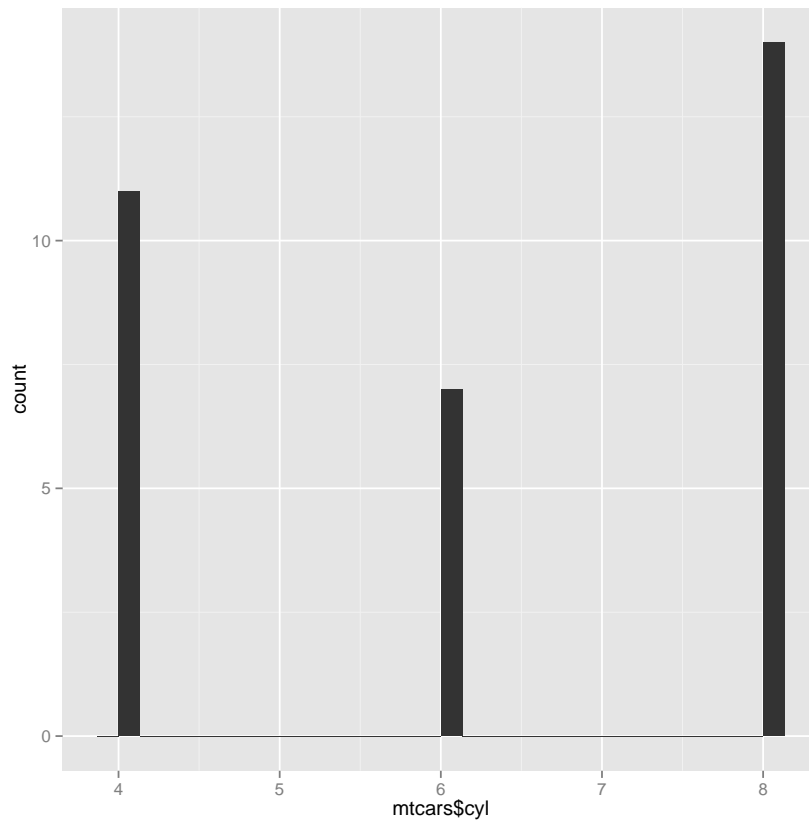


22. Load the `ggplot2` package and produce the following plot with the `mtcars` dataset. It's built into R so you do not need to load any packages:

```
library(ggplot2)
qplot(factor(mtcars$cyl))
```

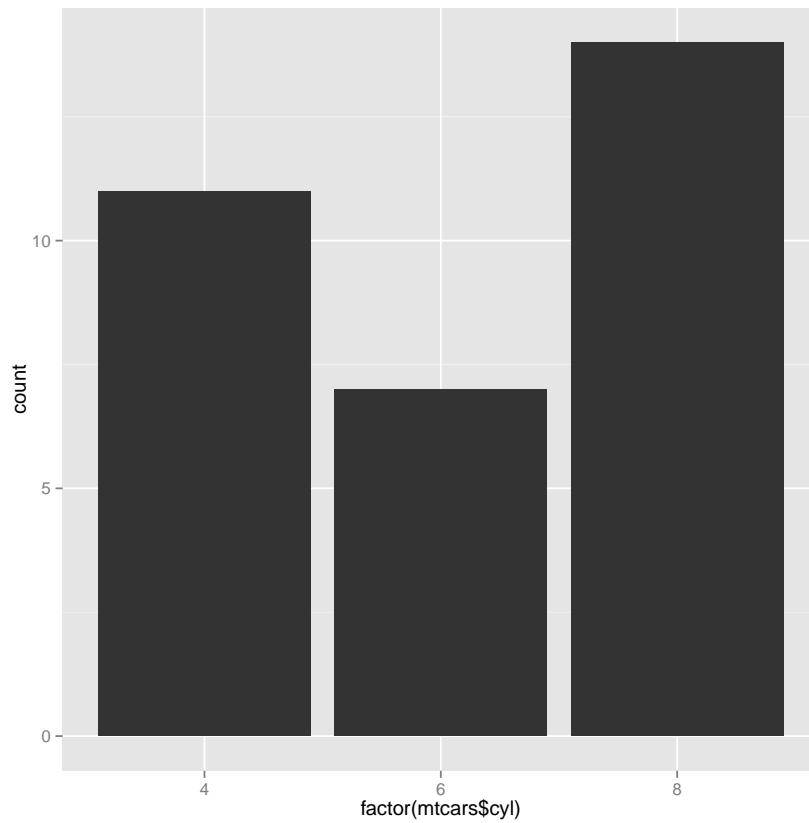

23. Load the `ggplot2` package and produce the following plot with the BOD dataset. It's built into R so you do not need to load any packages:


```
library(ggplot2)
qplot(Time, demand, data=BOD, geom="bar", stat="identity")
```

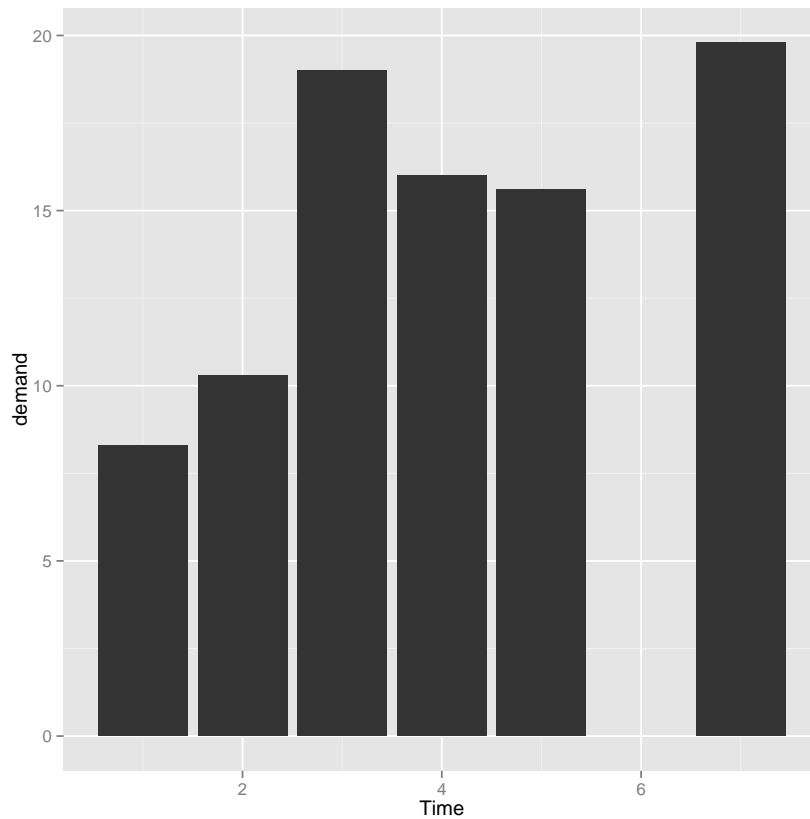

```
#Alternate Solution
library(ggplot2)
ggplot(BOD, aes(x=Time, y=demand)) + geom_bar(stat="identity")
```

24. Load the `ggplot2` package and produce the following plot with the `mtcars` dataset. It's built into R so you do not need to load any packages:


```
library(ggplot2)
qplot(factor(cyl), data=mtcars)
```

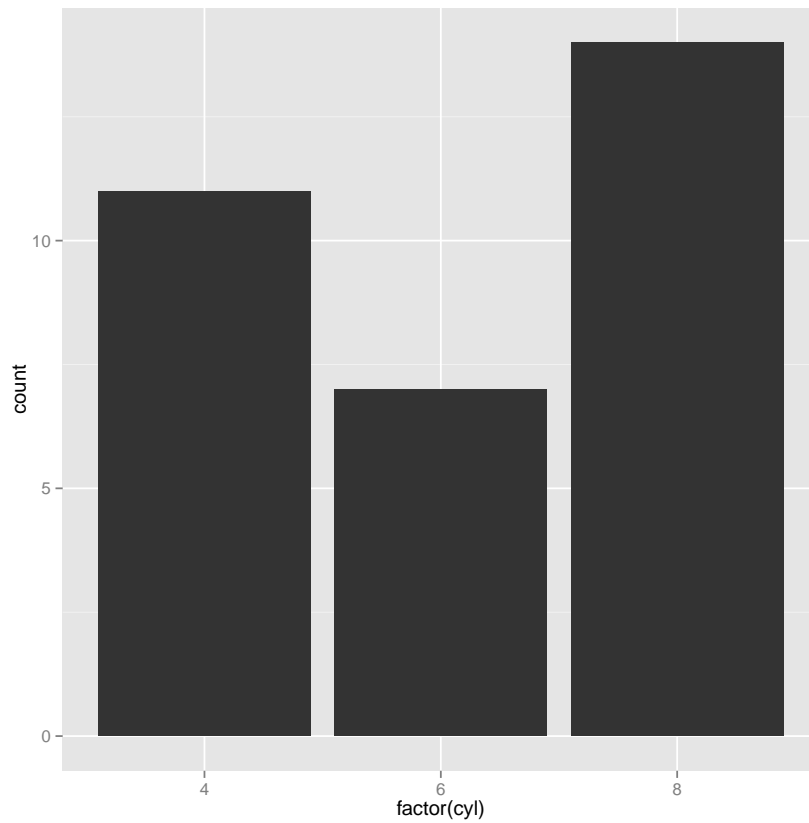

```
#Alternate Solution
library(ggplot2)
ggplot(mtcars, aes(x=factor(cyl))) + geom_bar()
```


25. Produce the following plot using the `mtcars` dataset. It's built into R so you do not need to load any packages:

```
hist(mtcars$mpg)
```

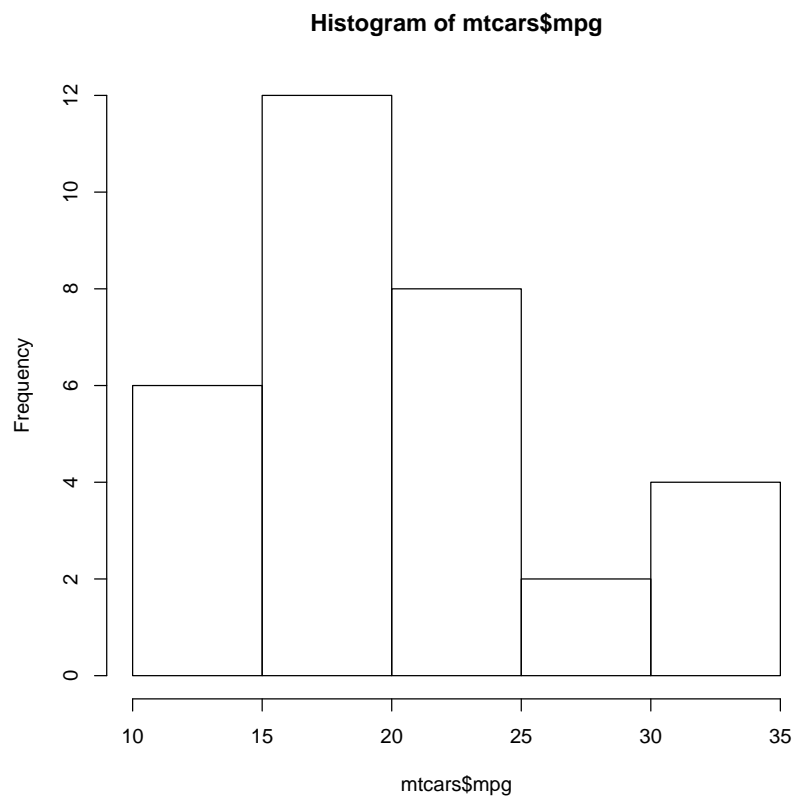


26. Produce the following plot using the `mtcars` dataset. It's built into R so you do not need to load any packages. This time, use 10 bins in the plot:

```
hist(mtcars$mpg, breaks=10)
```

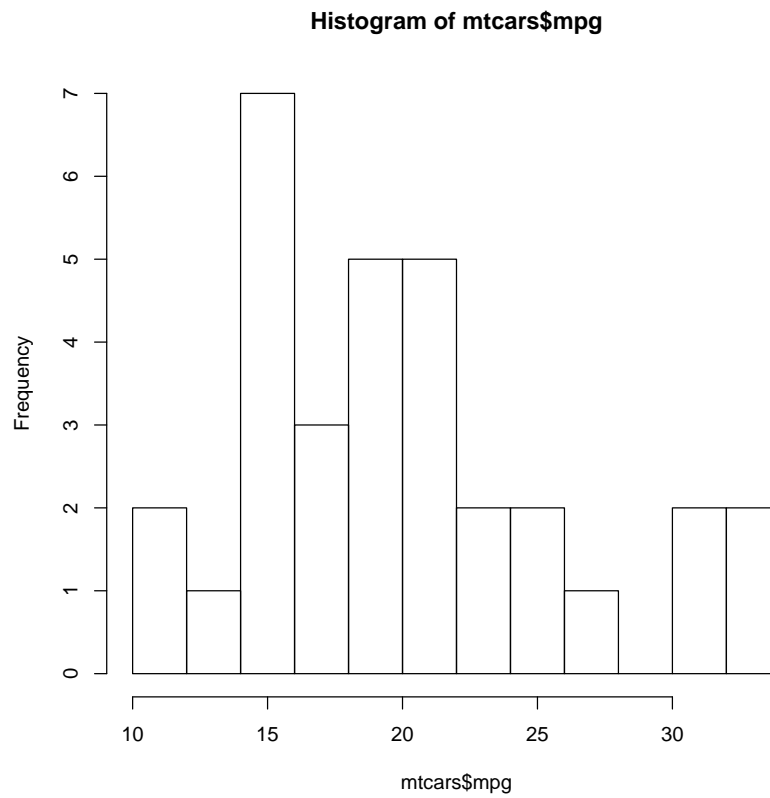


27. Load the `ggplot2` package and produce the following plot with the `mtcars` dataset. It's built into R so you do not need to load any packages:

```
library(ggplot2)  
qplot(mtcars$mpg)
```

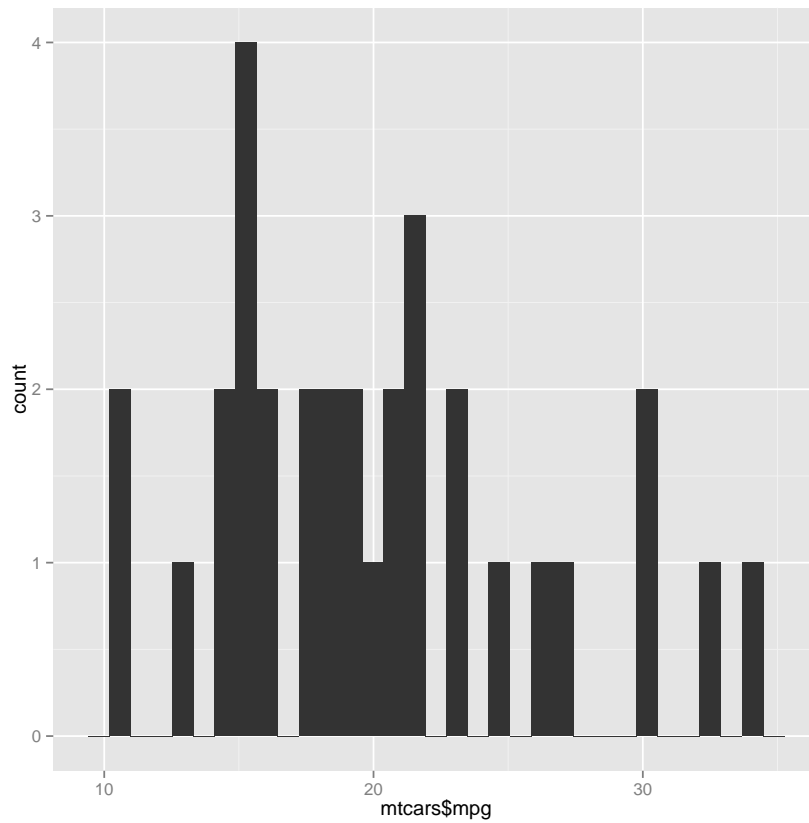

28. Load the `ggplot2` package and produce the following plot with the `mtcars` dataset. It's built into R so you do not need to load any packages. Set the width of the bins to 4:


```
library(ggplot2)
qplot(mpg, data=mtcars, binwidth=4)
```

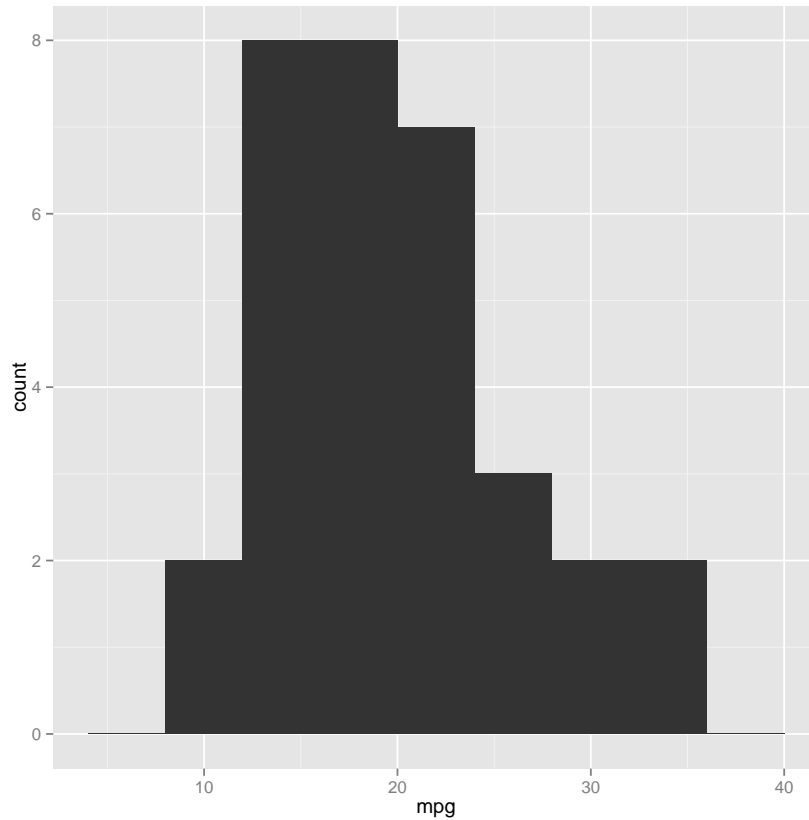

```
#Alternate Solution
library(ggplot2)
ggplot(mtcars, aes(x=mpg)) + geom_histogram(binwidth=4)
```

29. Produce the following plot with the `ToothGrowth` dataset. It's built into R so you do not need to load any packages:


```
plot(ToothGrowth$supp, ToothGrowth$len)
```

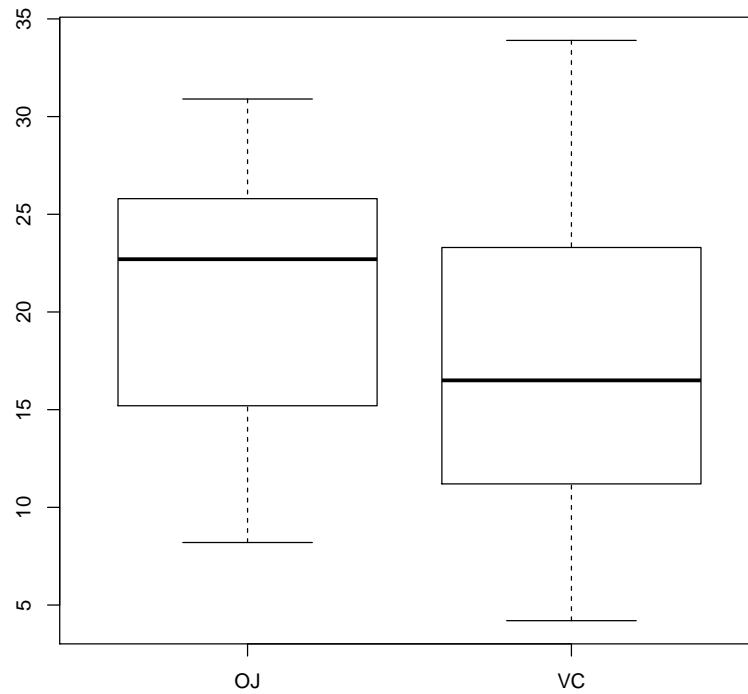

```
#Alternate Solution  
boxplot(len ~ supp, data = ToothGrowth)
```


30. Produce the following plot with the `ToothGrowth` dataset. It's built into R so you do not need to load any packages:

```
boxplot(len ~ supp + dose, data = ToothGrowth)
```

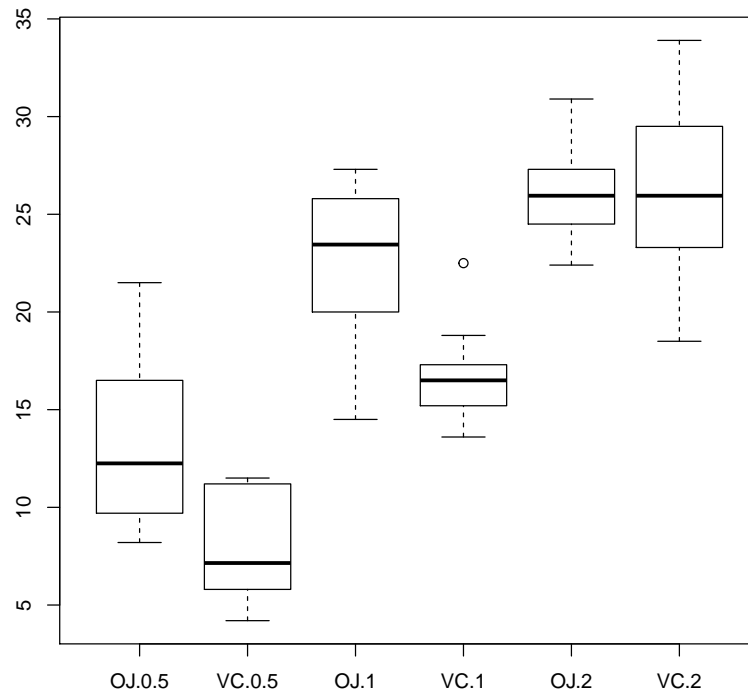


31. Load the `ggplot2` package and produce the following plot with the `ToothGrowth` dataset. It's built into R so you do not need to load any packages:

```
library(ggplot2)
qplot(ToothGrowth$supp, ToothGrowth$len, geom="boxplot")
```

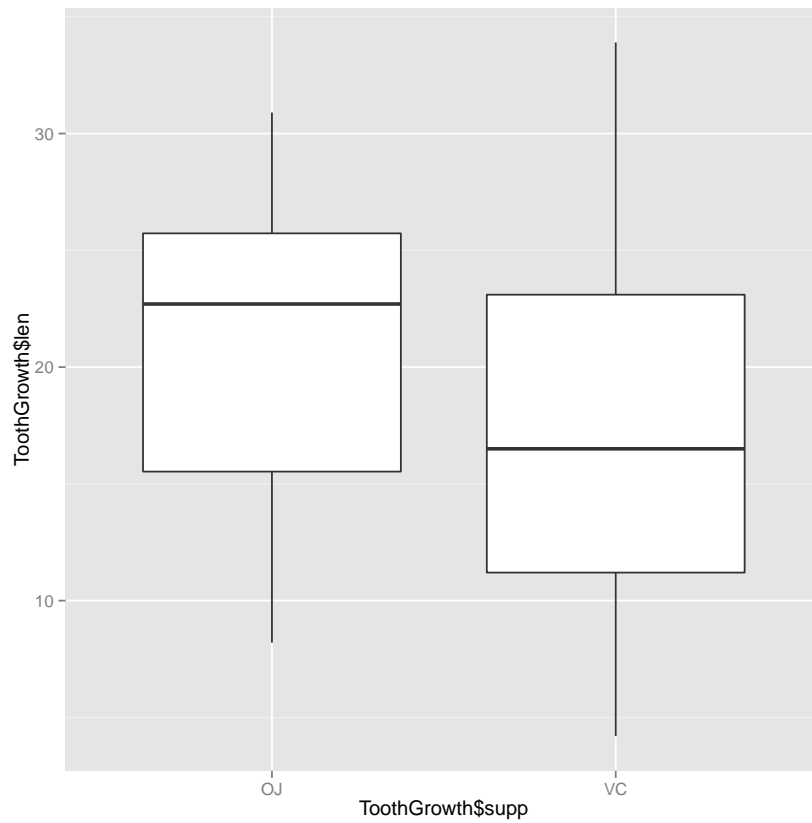

32. Load the `ggplot2` package and produce the following plot with the `ToothGrowth` dataset. It's built into R so you do not need to load any packages:


```
library(ggplot2)
qplot(supp, len, data=ToothGrowth, geom="boxplot")
```

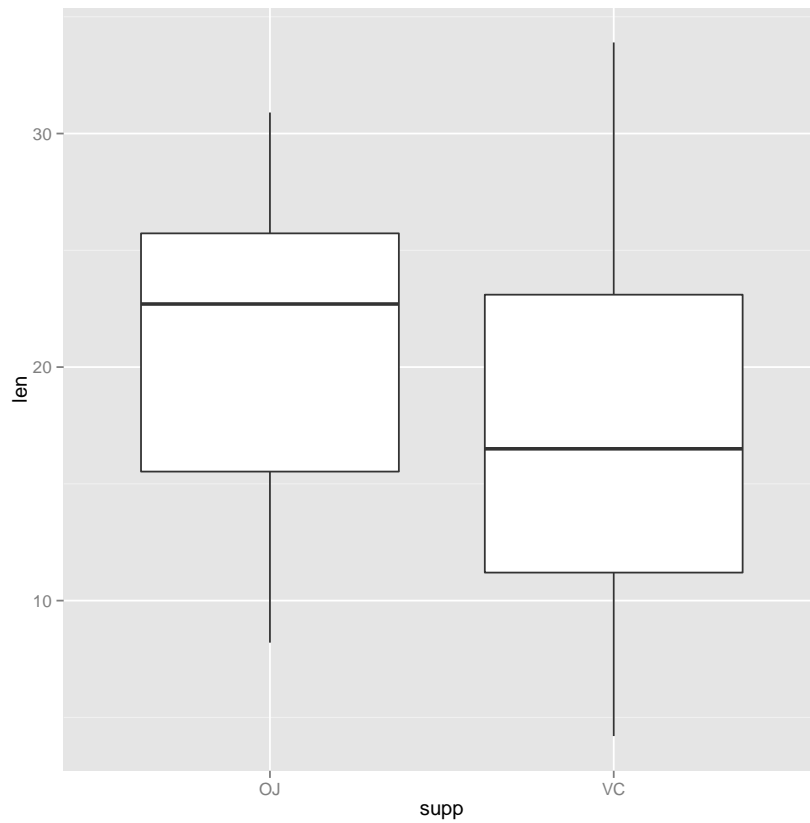

```
#Alternative Solution
library(ggplot2)
ggplot(ToothGrowth, aes(x=supp, y=len)) + geom_boxplot()
```


33. Load the `ggplot2` package and produce the following plot with the `ToothGrowth` dataset. It's built into R so you do not need to load any packages:

```
library(ggplot2)
qplot(interaction(ToothGrowth$supp, ToothGrowth$dose), ToothGrowth$len,
      geom="boxplot")
```

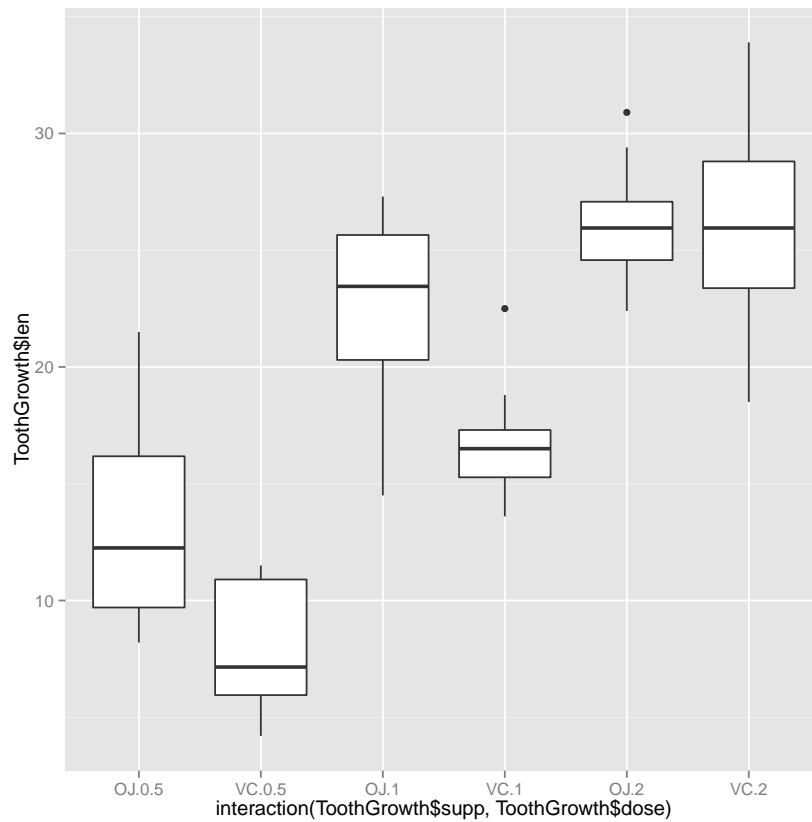

34. Load the `ggplot2` package and produce the following plot with the `ToothGrowth` dataset. It's built into R so you do not need to load any packages:


```
library(ggplot2)
qplot(interaction(supp, dose), len, data=ToothGrowth, geom="boxplot")
```

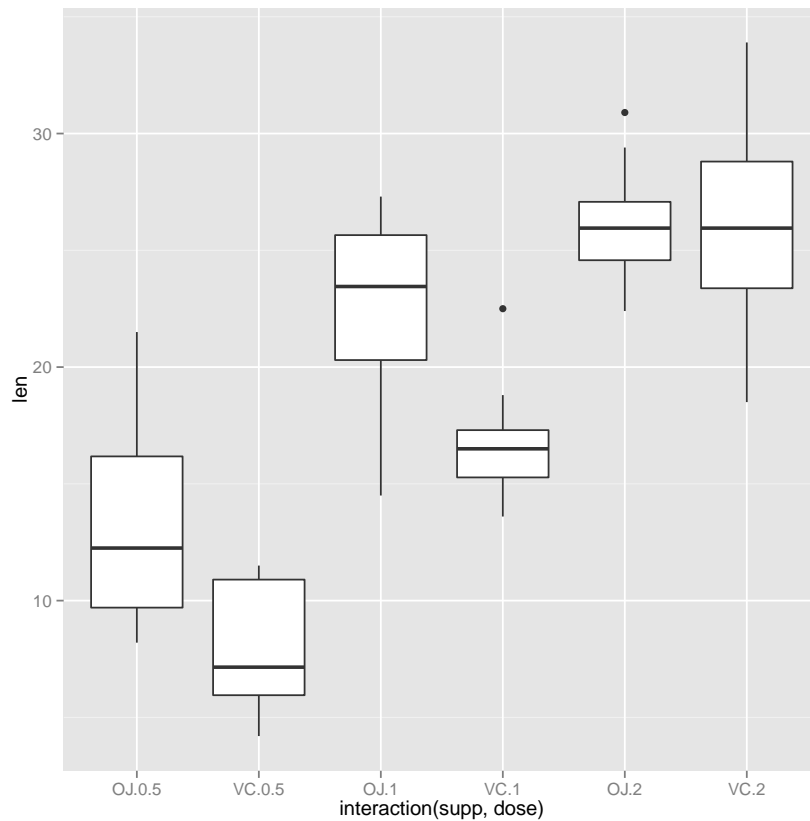

```
#Alternative Solution
library(ggplot2)
ggplot(ToothGrowth, aes(x=interaction(supp, dose), y=len)) + geom_boxplot()
```


35. Plot the function $x^3 - 5x$ on the range $[-4, 4]$:

```
curve(x^3-5*x, from=-4, to=4)
```

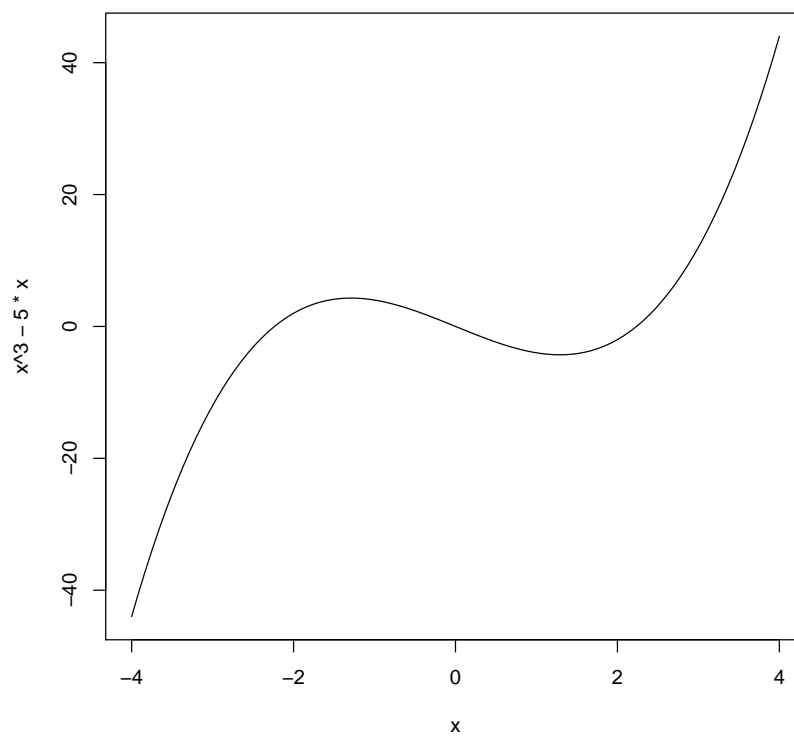

36. Plot the curves $1/(1 + e^{-x+10})$ and $1 - 1/(1 + e^{-x+10})$ as shown below:

```
myfun <- function(xvar) {  
  1/(1 + exp(-xvar + 10))  
}  
curve(myfun(x), from=0, to=20)  
curve(1-myfun(x), add = TRUE, col = "red")
```

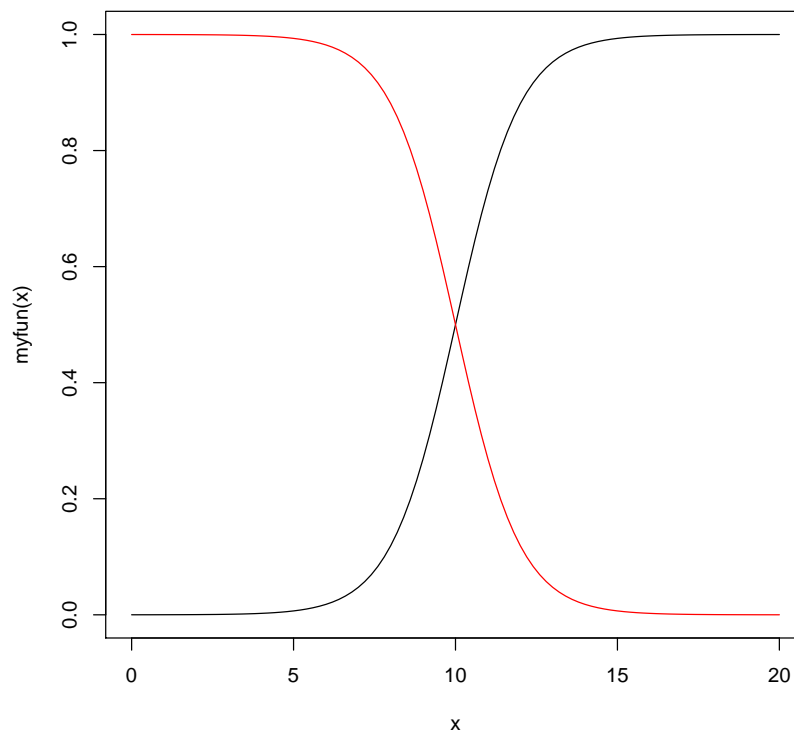


37. Run the following code below:

```
myfun <- function(xvar) {  
  1/(1 + exp(-xvar + 10))  
}
```

This represents the function $f(x) = 1/(1 + e^{-x+10})$. Load the ggplot2 package and plot the function on the range [0, 10]:


```
library(ggplot2)  
qplot(c(0,20), fun=myfun, stat="function", geom="line")
```

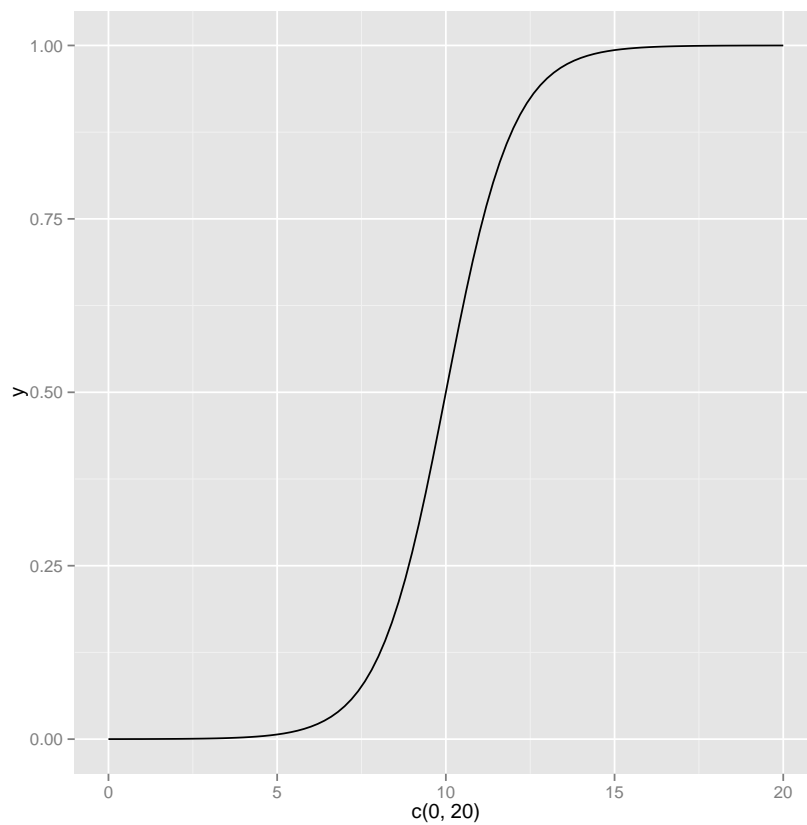

```
#Alternative solution  
library(ggplot2)  
ggplot(data.frame(x=c(0, 20)), aes(x=x)) +  
  stat_function(fun=myfun, geom="line")
```


38. Produce the following graph using the `biopsy` dataset from the `MASS` package:

```
library(MASS)
barplot(table(biopsy$V1), xlab="V1", ylab="Count", col="lavender")
```

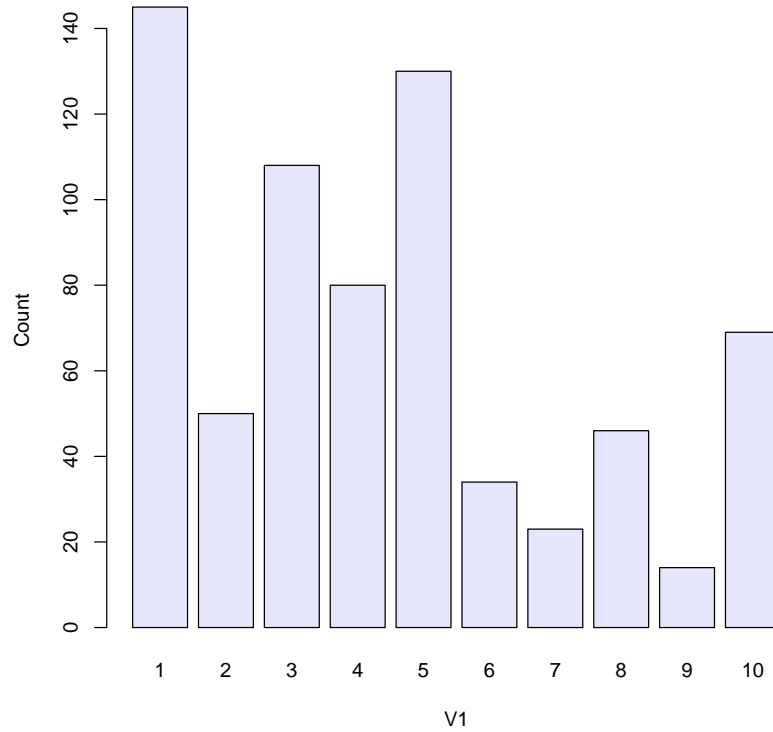


39. Produce the following graph using the Boston dataset from the MASS package:

```
library(MASS)
hist(Boston$age, breaks=8, col="orange")
```

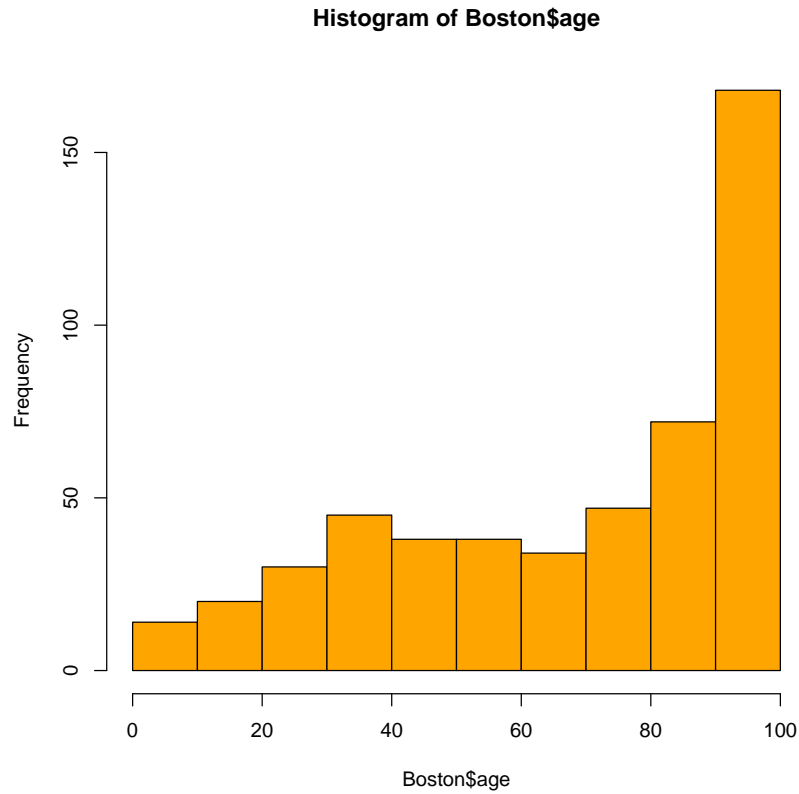

40. Produce the following graph using the `coop` dataset from the `MASS` package:


```
library(MASS)
hist(coop$Conc,col="deepskyblue",
     main="Concentration of Analyte in g/kg")
```

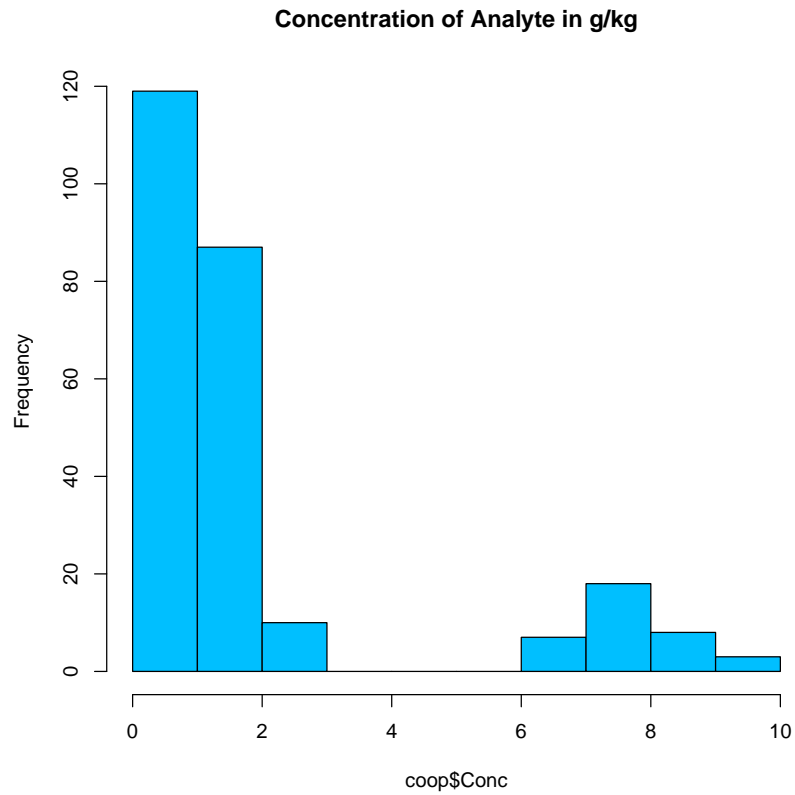

41. Produce the following graph using the `cpus` dataset from the `MASS` package:


```
library(MASS)

plot(factor(cpus$cach), cpus$perf, las=2,
     main="CPU Performance by Cache Size",
     xlab="Cache Size (kilobytes)",
     ylab="Performance Relative to IBM 370/158-3")
```

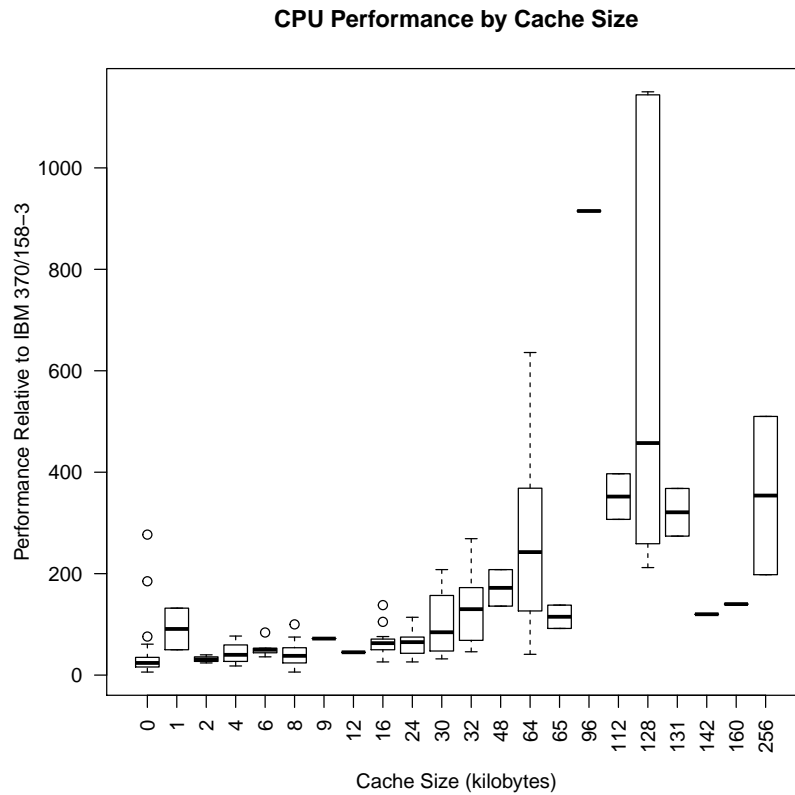


42. Load the MASS package and produce the following plot with the crabs dataset:

```
library(MASS)
hist(crabs$RW,col="seagreen2",
     main="Rear Width Measurement\n of Leptograpsus Crabs",
     prob=TRUE,
     xlab="RW",breaks=10)
```

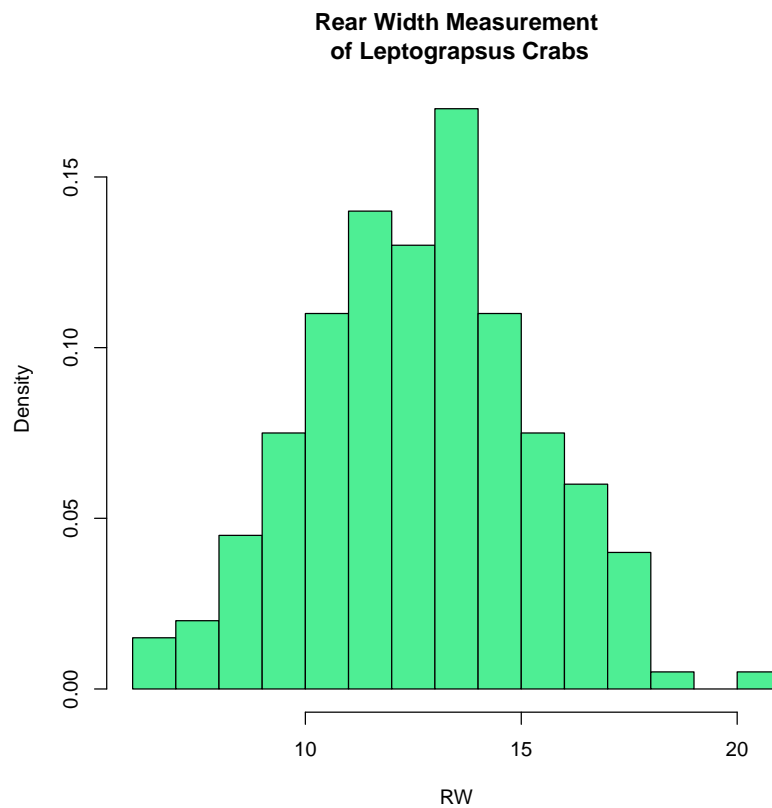


43. Load the `ggplot2` and `MASS` packages and produce the following plot with the `crabs` dataset:

```
library(ggplot2)
library(MASS)
ggplot(crabs, aes(x=RW)) +
  geom_histogram(colour="black", fill="steelblue1")
```

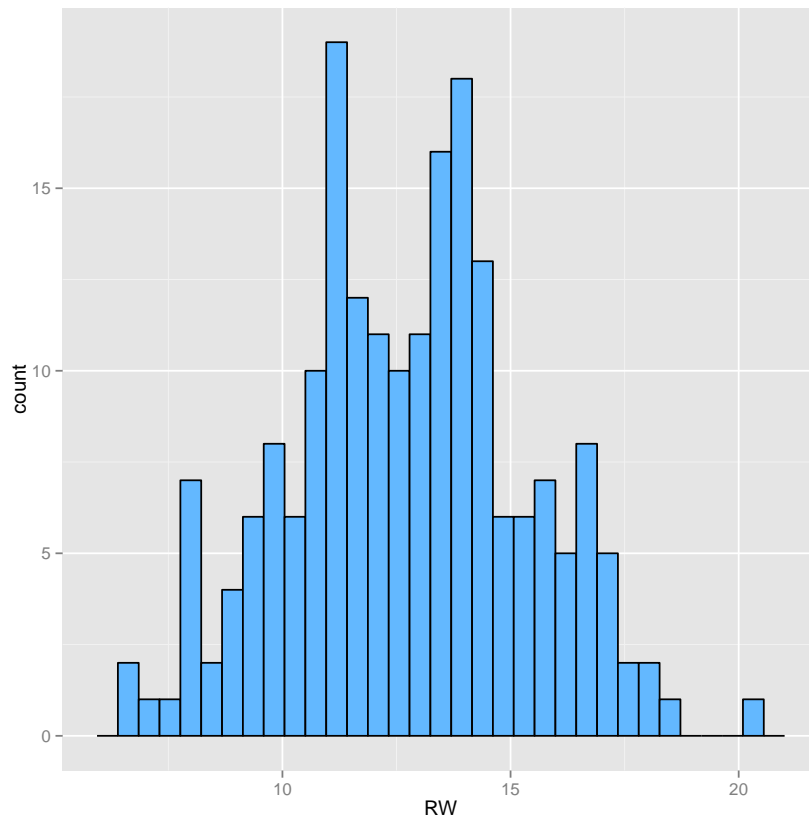


44. Load the `ggplot2` and `Mass` packages and produce the following plot with the `forbes` dataset:

```
library(ggplot2)
library(MASS)
plot(pres ~ bp, data=forbes, main = "Boiling Points in the Alps",
     xlab="Boiling point",
     ylab="Barometric Pressure")
```

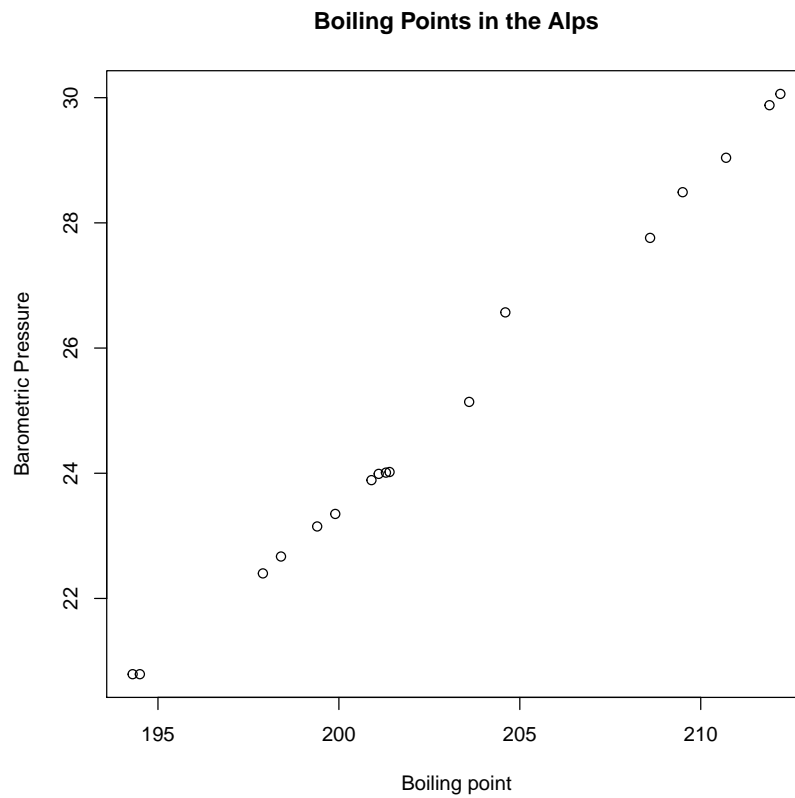

45. Load the `ggplot2` package and produce the following plot with the `GAGurine` dataset:

```
library(ggplot2)
library(MASS)
ggplot(GAGurine, aes(x=Age, y=GAG))+geom_point()
```

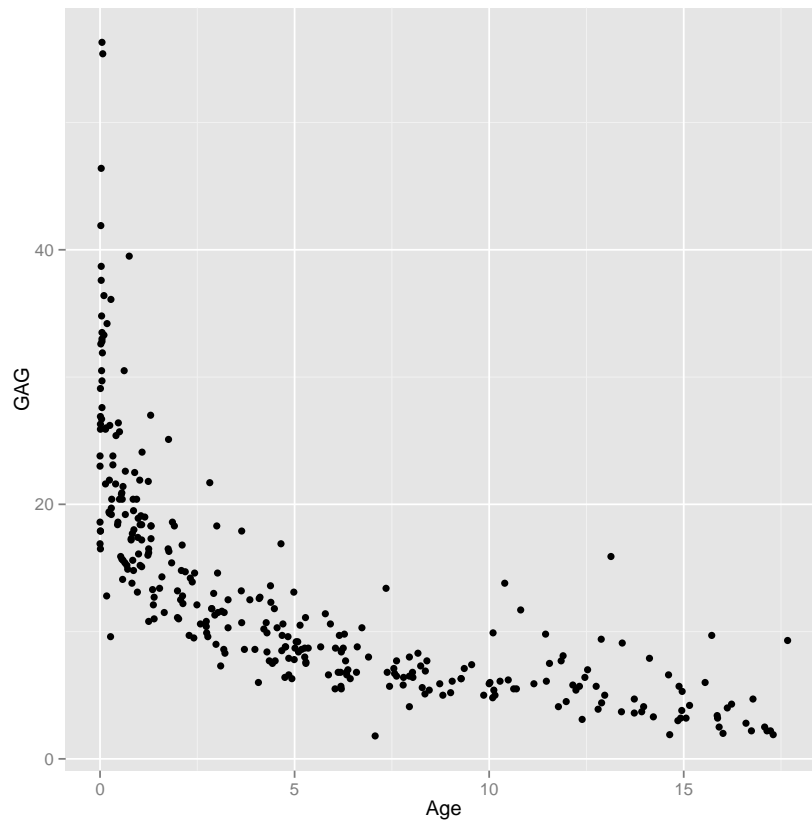


Chapter 3

Bar Graphs


1. Load the `ggplot2` package and produce the following plot with the BOD (automatically loaded with R) dataset:

```
library(ggplot2)
ggplot(BOD, aes(x=Time, y=demand)) + geom_bar(stat="identity")
```

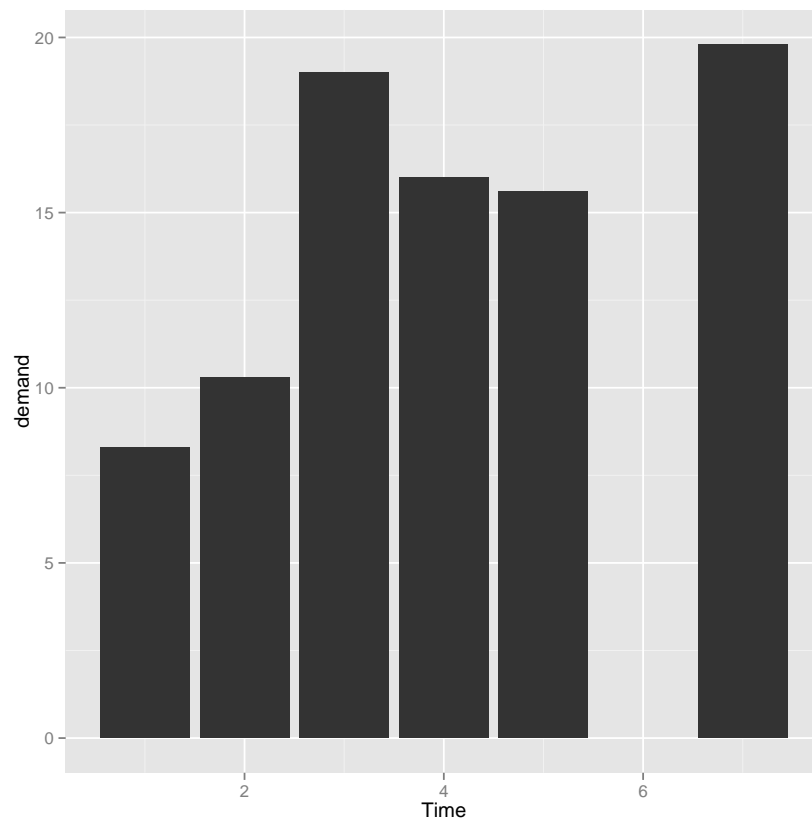


2. Load the `ggplot2` package and produce the following plot with the BOD (automatically loaded with R) dataset:

```
library(ggplot2)
ggplot(BOD, aes(x=factor(Time), y=demand)) + geom_bar(stat="identity")
```

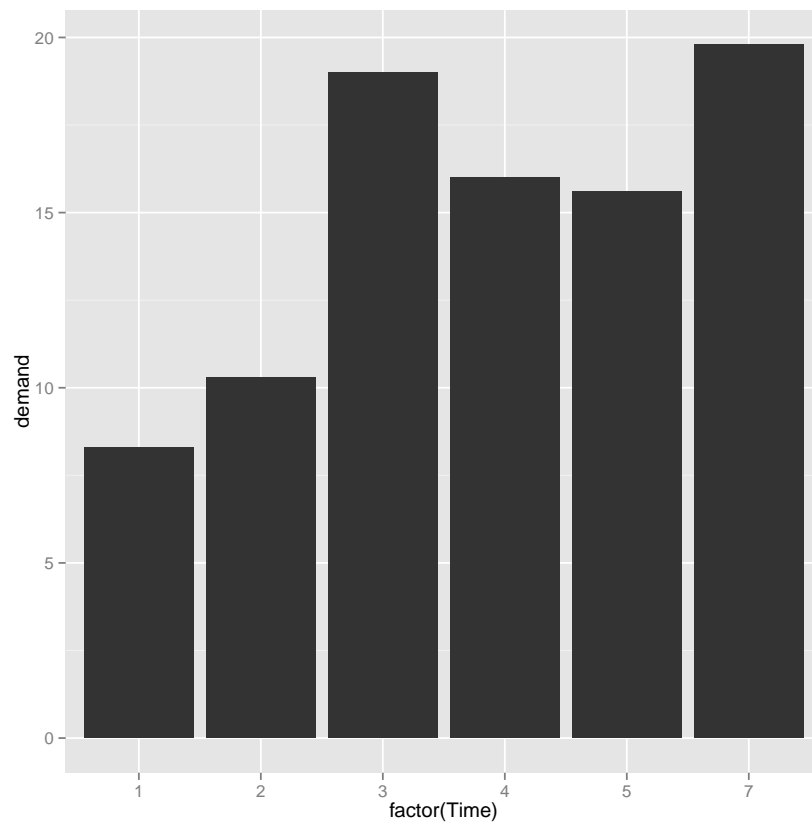


3. Load the `ggplot2` package and produce the following plot with the BOD (automatically loaded with R) dataset:

```
library(ggplot2)
ggplot(BOD, aes(x=Time, y=demand)) +
  geom_bar(stat="identity", fill="pink", colour="black")
```

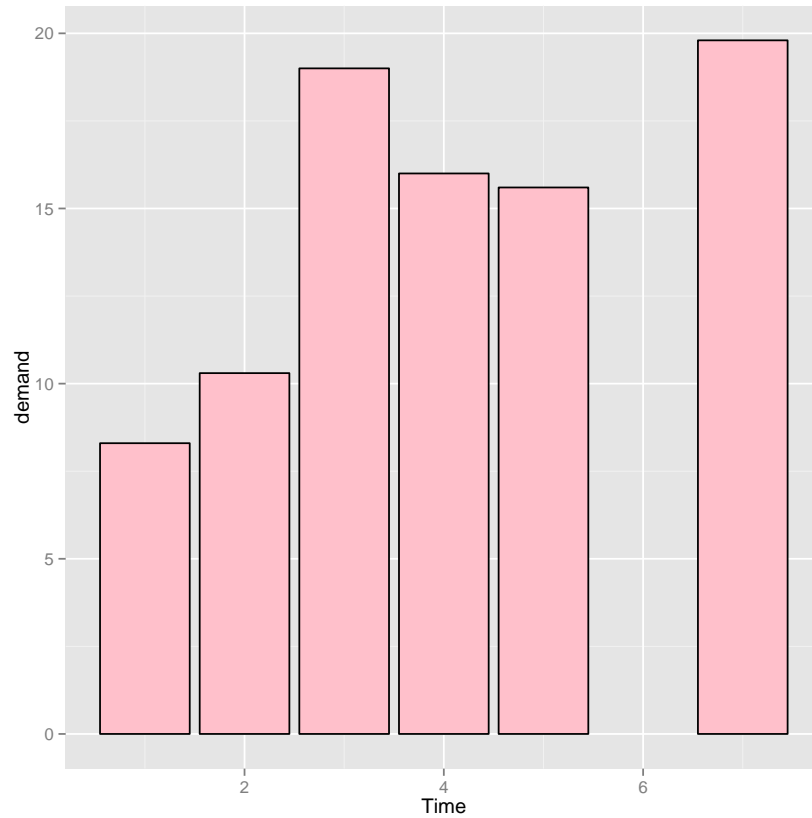


4. Load the `ggplot2` package and produce the following plot with the BOD (automatically loaded with R) dataset:

```
library(ggplot2)
ggplot(BOD, aes(x=Time, y=demand)) +
  geom_bar(stat="identity", fill="lightblue", colour="red")
```

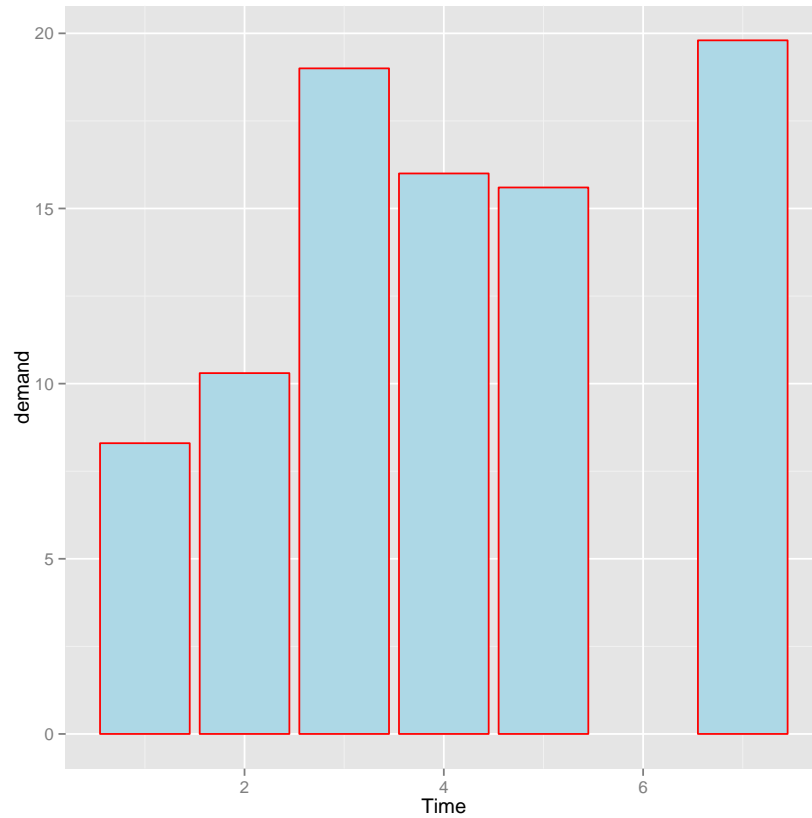

5. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:


```
library(ggplot2)
library(gcookbook)
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(position="dodge")
```

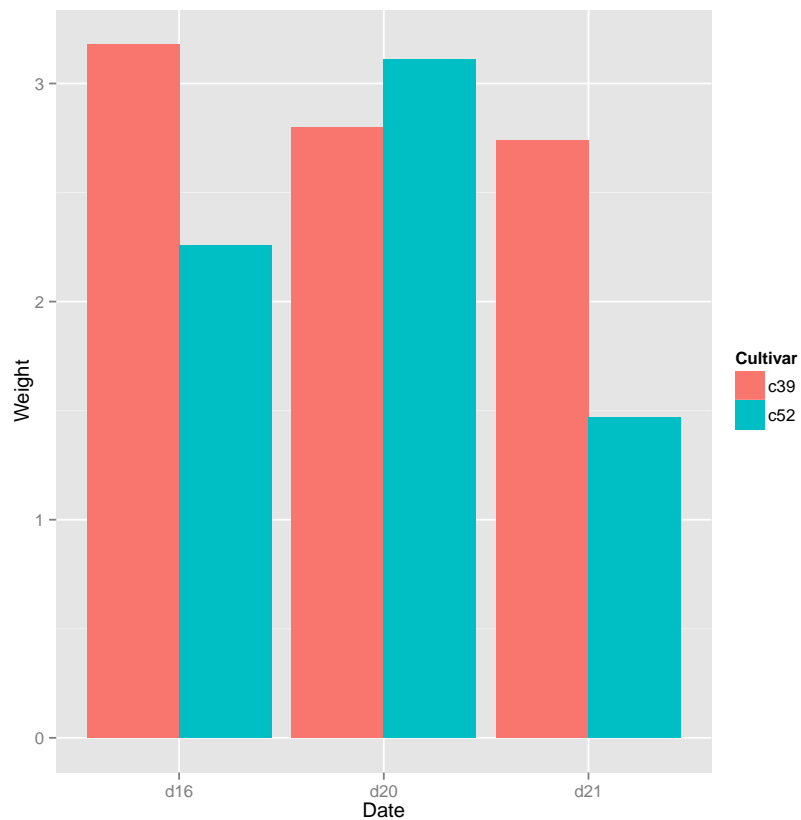

```
# Alternative solutions
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(width=0.9, position=position_dodge())
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(position=position_dodge(0.9))
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(width=0.9, position=position_dodge(width=0.9))
```


6. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:


```
library(ggplot2)
library(gcookbook)
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar))+
  geom_bar(position="dodge", colour="black") +
  scale_fill_brewer(palette="Pastel1")
```

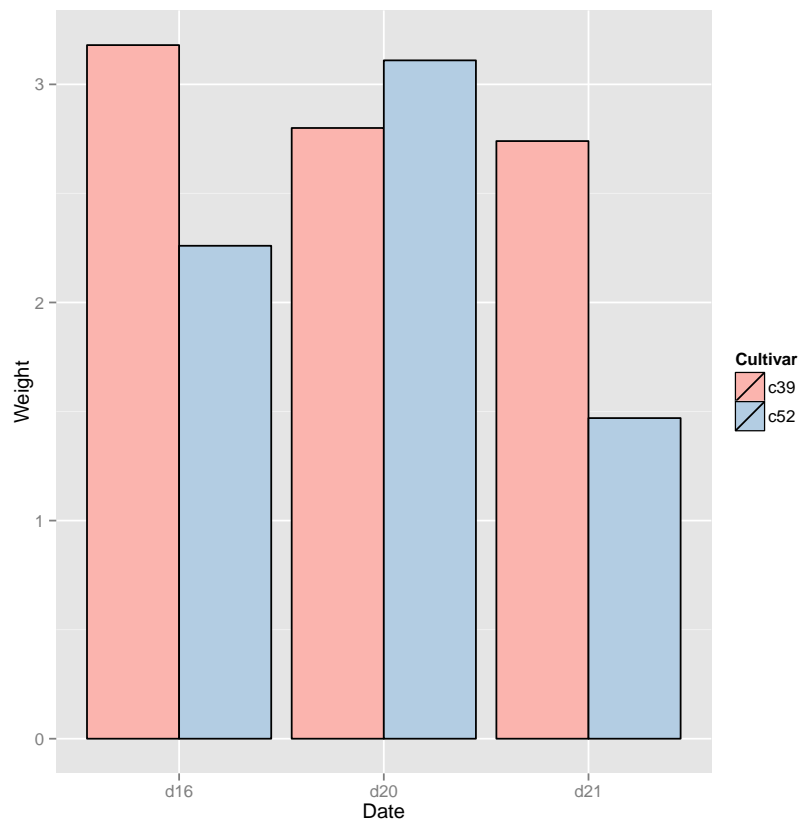

7. Load the `texttt` `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:


```
library(ggplot2)
library(gcookbook)
ce <- cabbage_exp
ce[6,3:6] <- c(NA, NA, NA, NA)

ggplot(ce, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(stat="identity", position="dodge", colour="black", na.rm=TRUE) +
  scale_fill_brewer(palette="Pastel1")
```

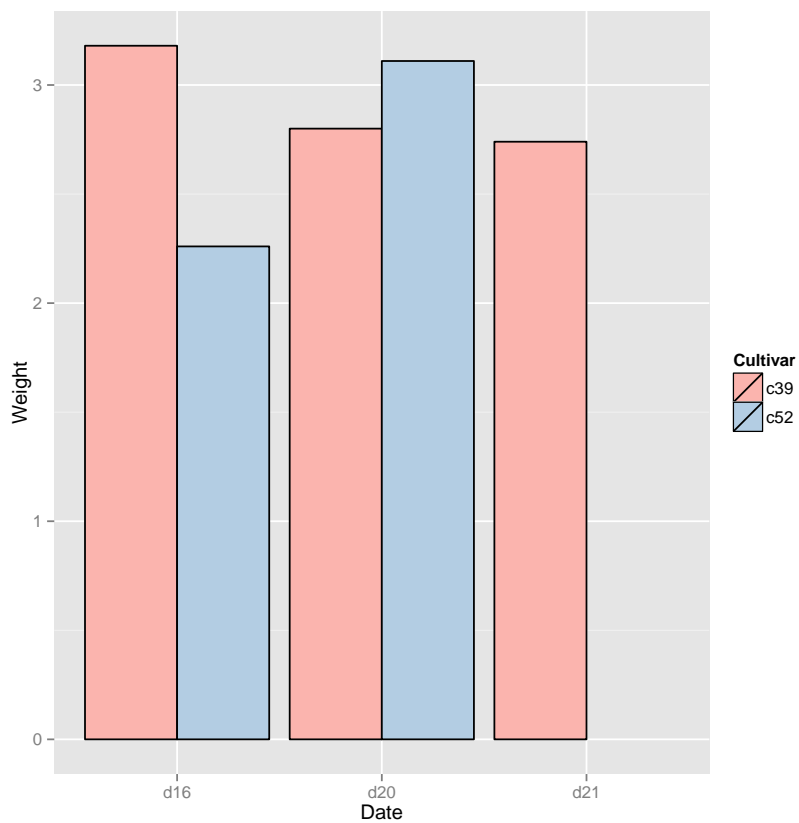


8. Load the `ggplot2` package and produce the following plot with the `diamonds` dataset:

```
library(ggplot2)
ggplot(diamonds, aes(x=cut))+geom_bar()
```

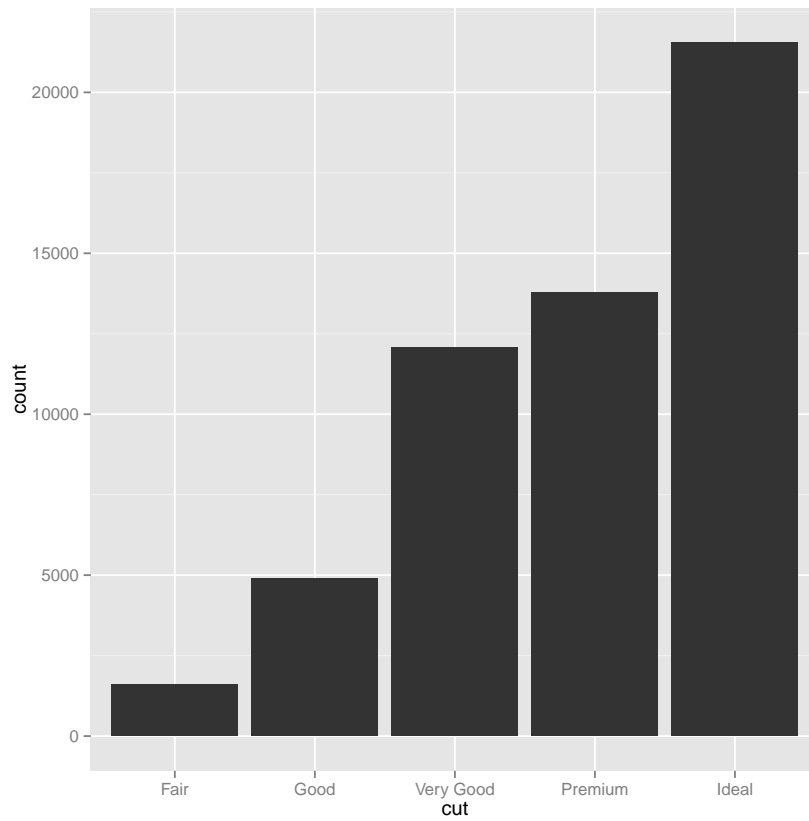

9. Load the `ggplot2` package and produce the following plot with the `diamonds` dataset:

```
library(ggplot2)
ggplot(diamonds, aes(x=carat)) + geom_bar()
```

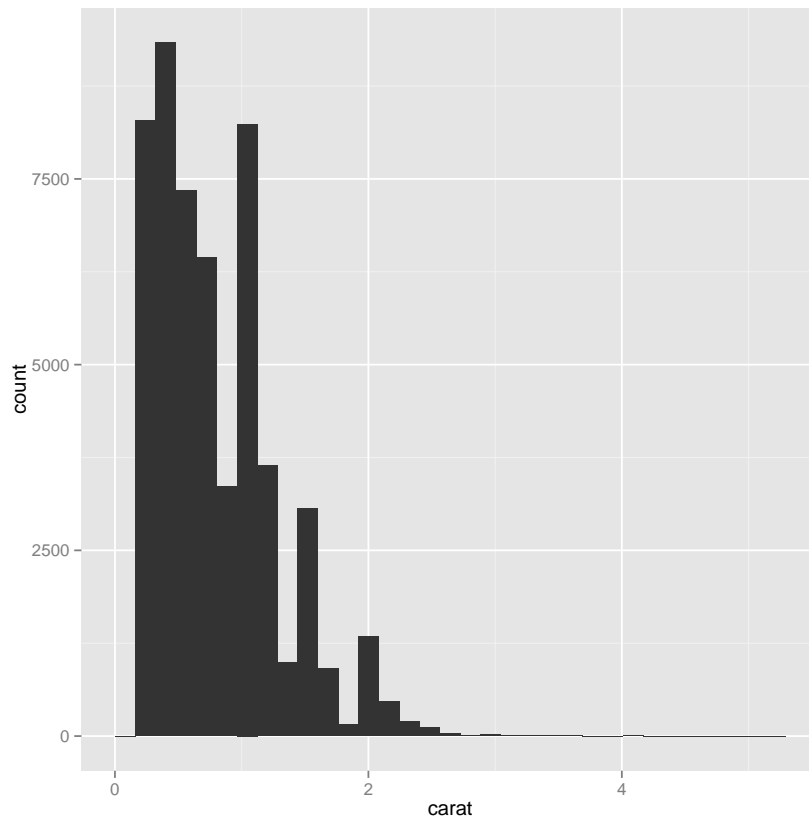


```
# Alternative Solution
library(ggplot2)
ggplot(diamonds, aes(x=carat)) + geom_histogram()
```

10. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `upc` dataset (Run the following code first):

```
library(gcookbook)
upc <- subset(uspopschange, rank(Change)>40)


ggplot(upc, aes(x=Abb, y=Change, fill=Region)) + geom_bar(stat="identity")
```

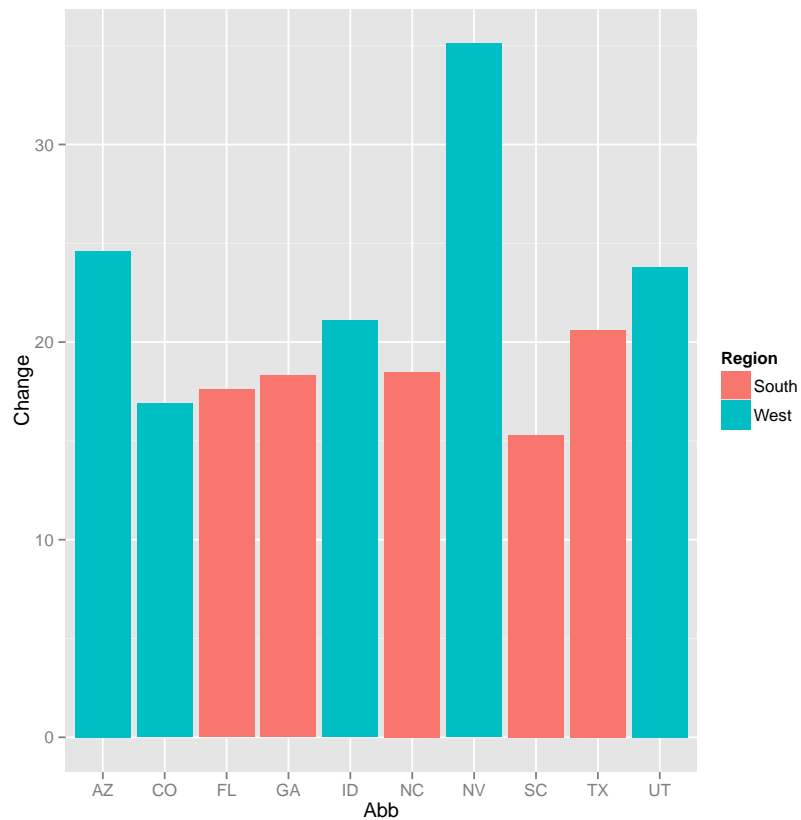

11. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `upc` dataset (run the following code first and use fill colours `#669933` and `#FFCC66`):

```
library(ggplot2)
library(gcookbook)
upc <- subset(uspopcchange, rank(Change)>40)


ggplot(upc, aes(x=reorder(Abb, Change), y=Change, fill=Region)) +
  geom_bar(stat="identity", colour="black") +
  scale_fill_manual(values=c("#669933", "#FFCC66")) +
  xlab("State")
```

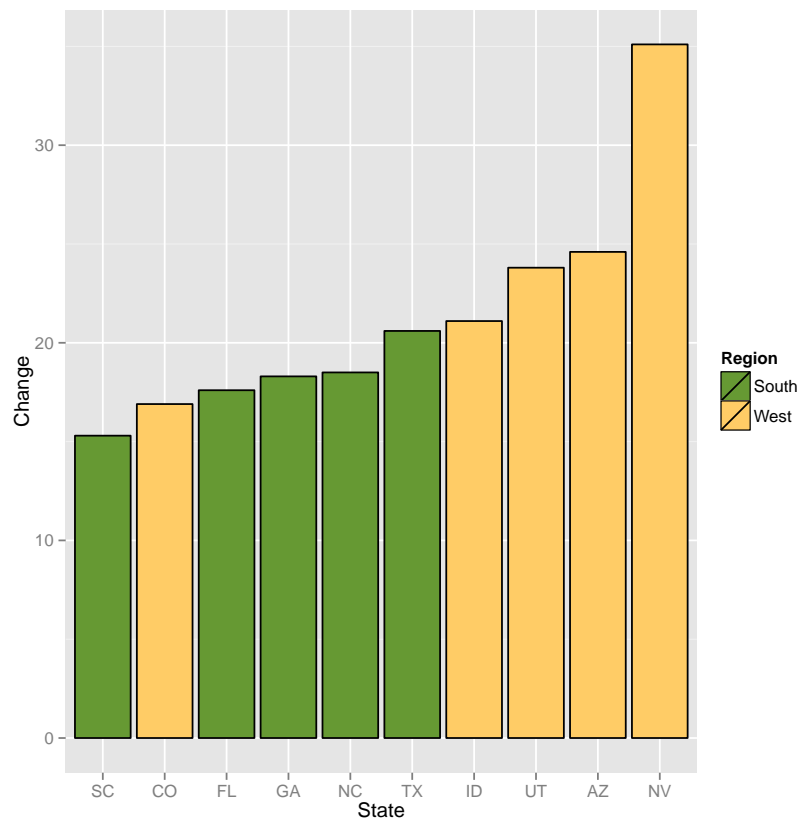

12. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `csub` dataset (run the following code first):

```
library(ggplot2)
library(gcookbook)
csub <- subset(climate, Source=="Berkeley" & Year >= 1900)
csub$pos <- csub$Anomaly10y >= 0
```


```
ggplot(csub, aes(x=Year, y=Anomaly10y, fill=pos)) +
  geom_bar(stat="identity", position="identity")
```

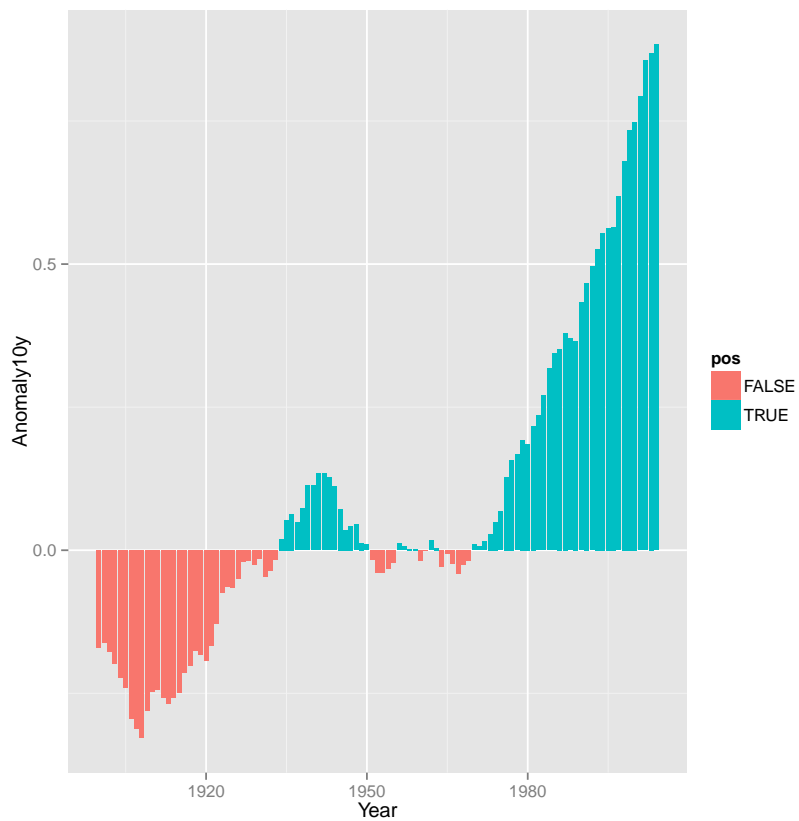

13. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `csub` dataset (run the following code first and use fill colours `#CCEEFF` and `#FFDDDD`):


```
library(ggplot2)
library(gcookbook) # For the data set
csub <- subset(climate, Source=="Berkeley" & Year >= 1900)
csub$pos <- csub$Anomaly10y >= 0
```

```
ggplot(csub, aes(x=Year, y=Anomaly10y, fill=pos)) +
  geom_bar(stat="identity", position="identity",
           colour="black", size=0.25) +
  scale_fill_manual(values=c("#CCEEFF",
                             "#FFDDDD"), guide=FALSE)
```

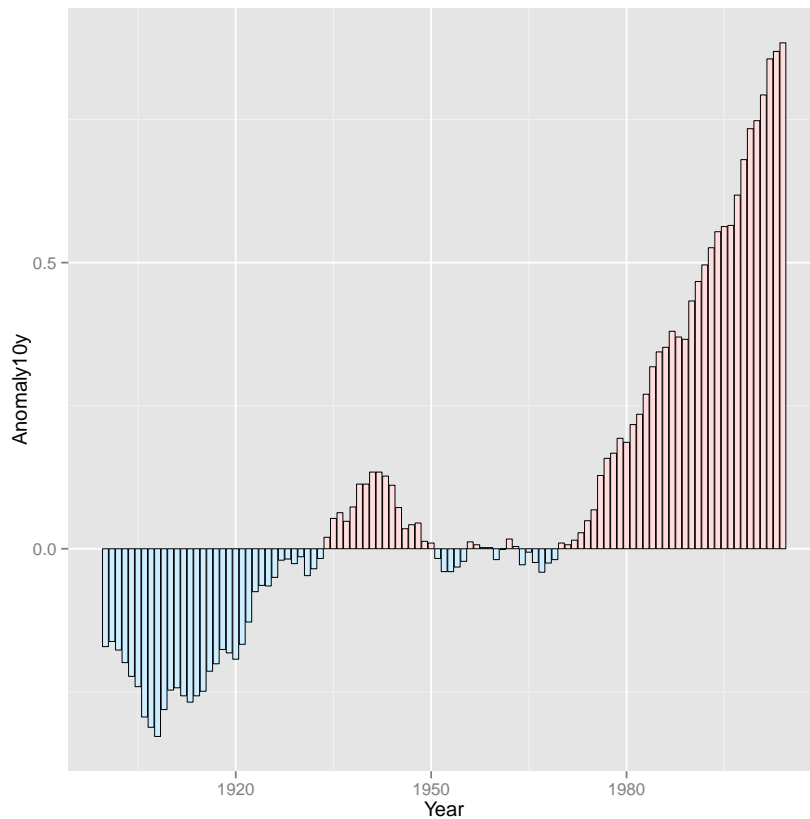


14. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `pg_mean` dataset:

```
ggplot(pg_mean, aes(x=group, y=weight)) +  
  geom_bar(stat="identity")
```

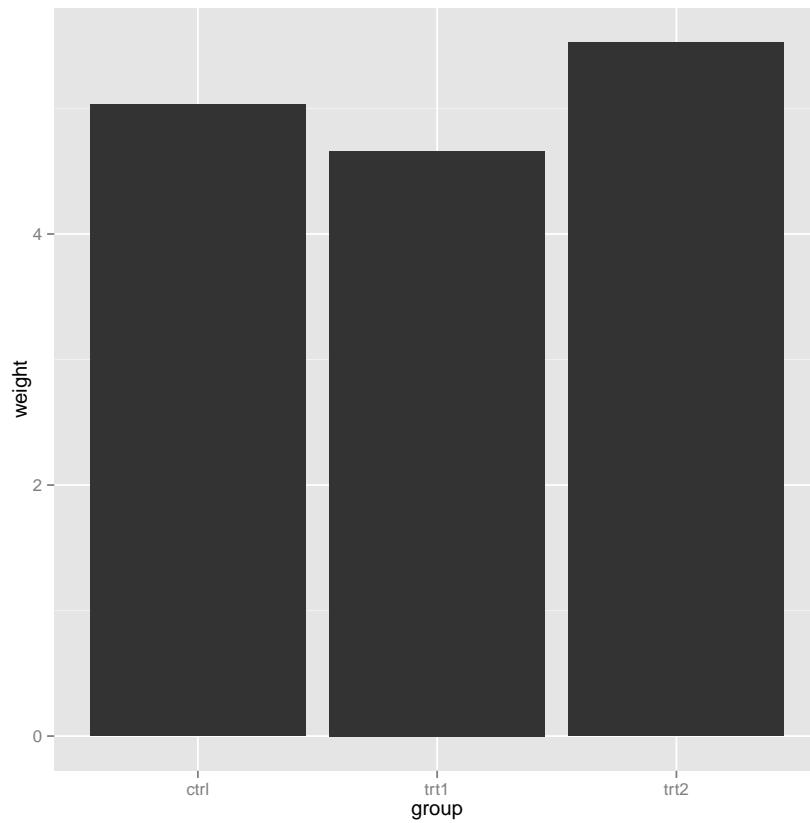


15. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `pg_mean` dataset:

```
ggplot(pg_mean, aes(x=group, y=weight)) +  
  geom_bar(stat="identity", width = 0.5)
```

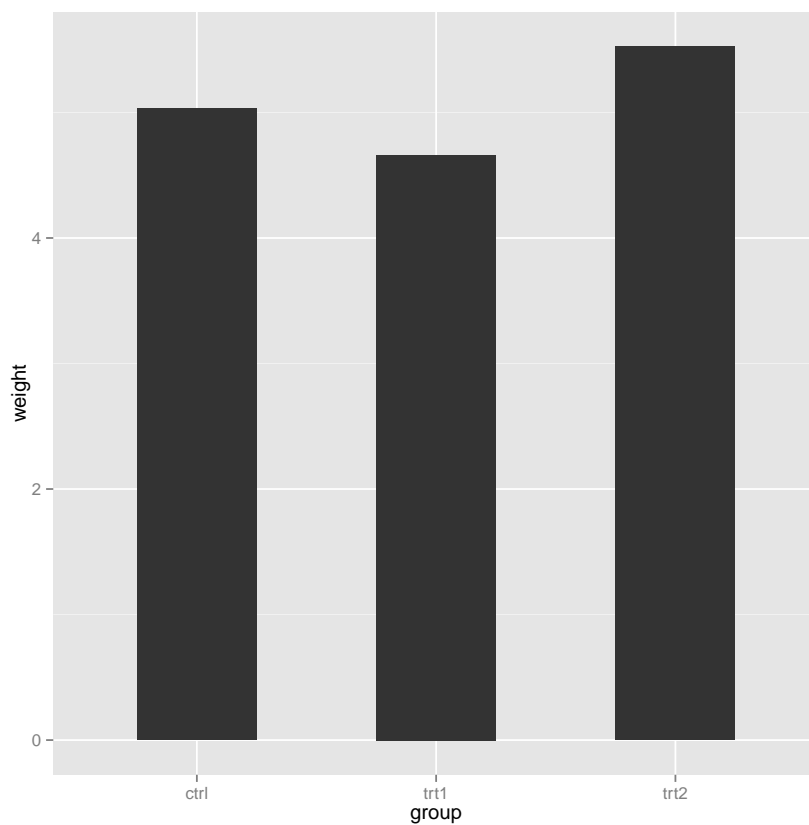


16. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `pg_mean` dataset:

```
ggplot(pg_mean, aes(x=group, y=weight)) +  
  geom_bar(stat="identity", width = 1)
```

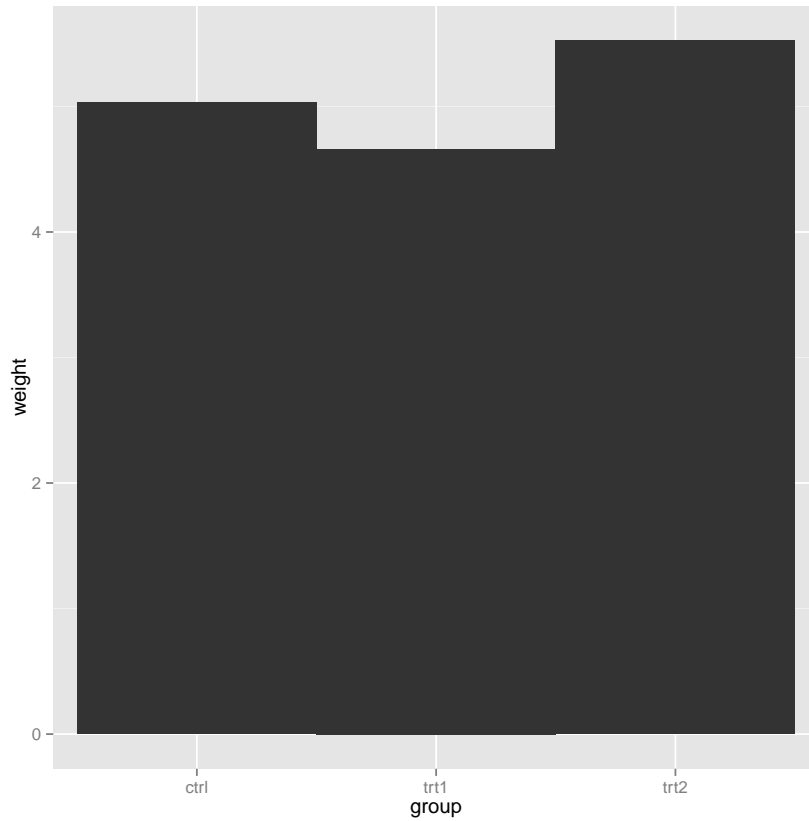


17. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +  
  geom_bar(stat="identity", width=0.5, position="dodge")
```

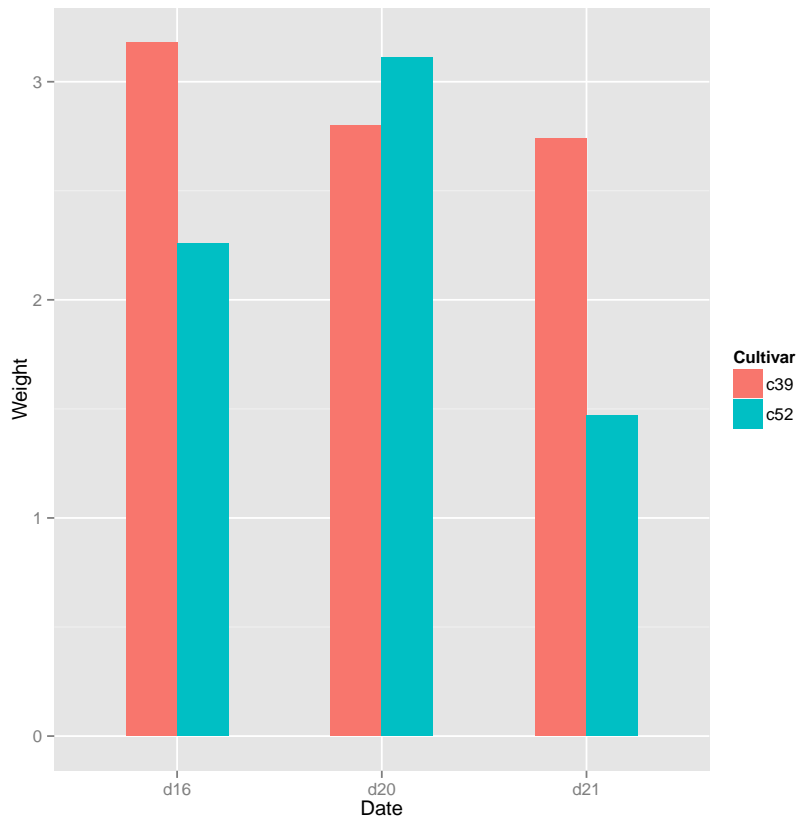


18. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +  
  geom_bar(stat="identity", width=0.5,  
          position=position_dodge(0.7))
```

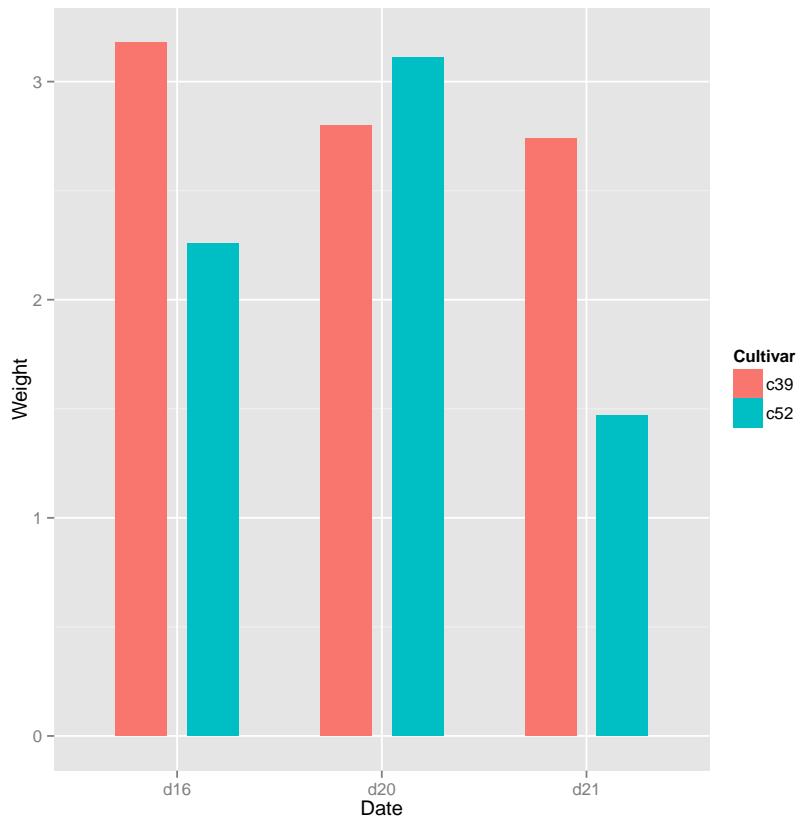

19. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:


```
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +  
  geom_bar(stat="identity")
```

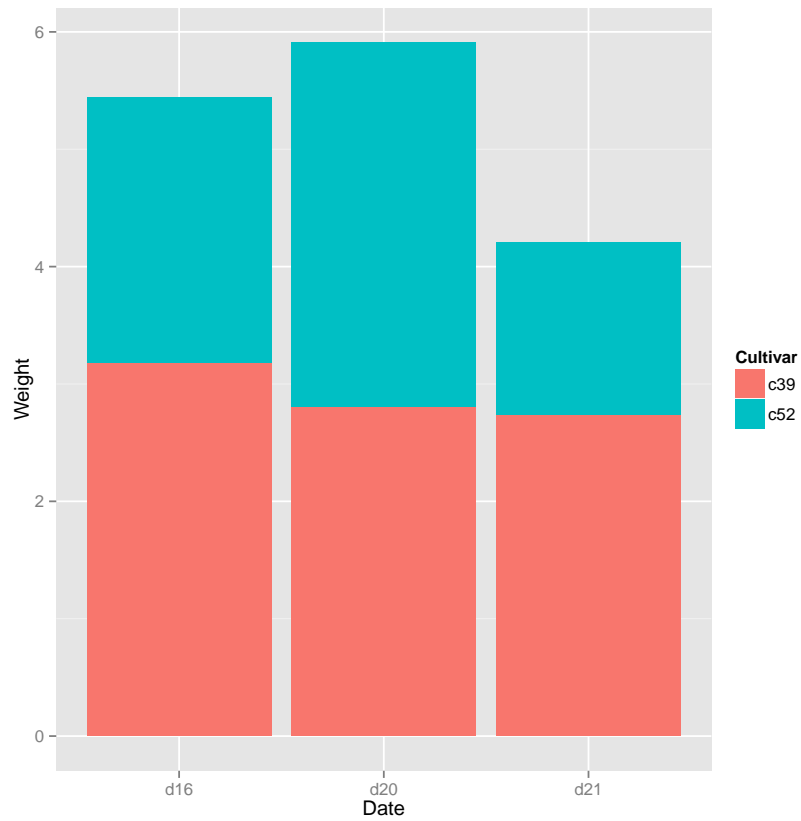

20. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)


ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(stat="identity") +
  guides(fill=guide_legend(reverse=TRUE))
```

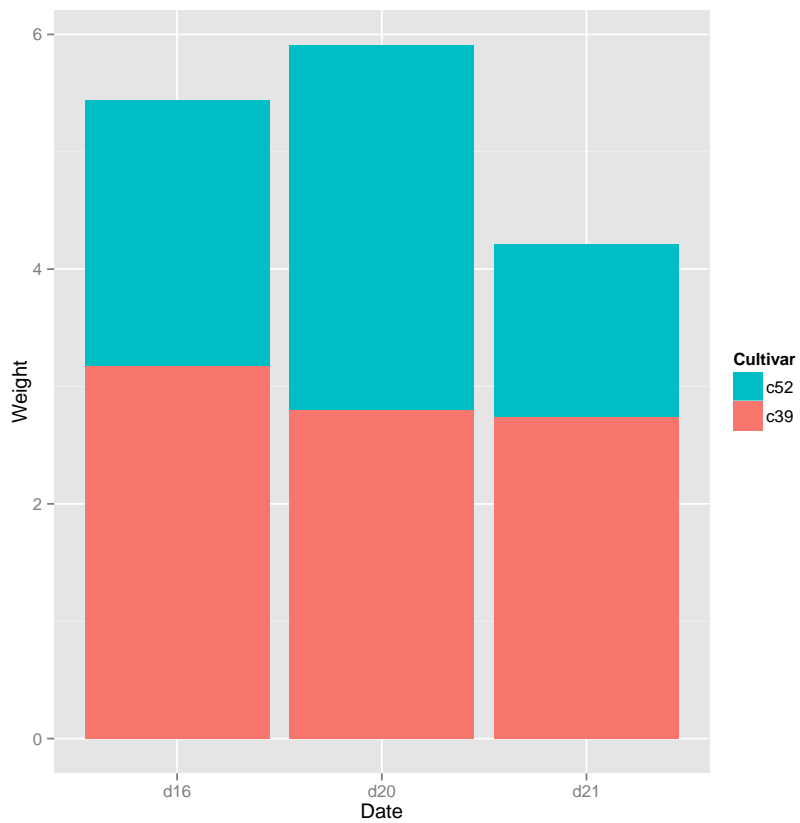

21. Load the `ggplot2`, `plyr` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(plyr)
library(gcookbook)


ggplot(cabbage_exp, aes(x=Date, y=Weight,
                        fill=Cultivar, order=desc(Cultivar))) +
geom_bar(stat="identity")
```

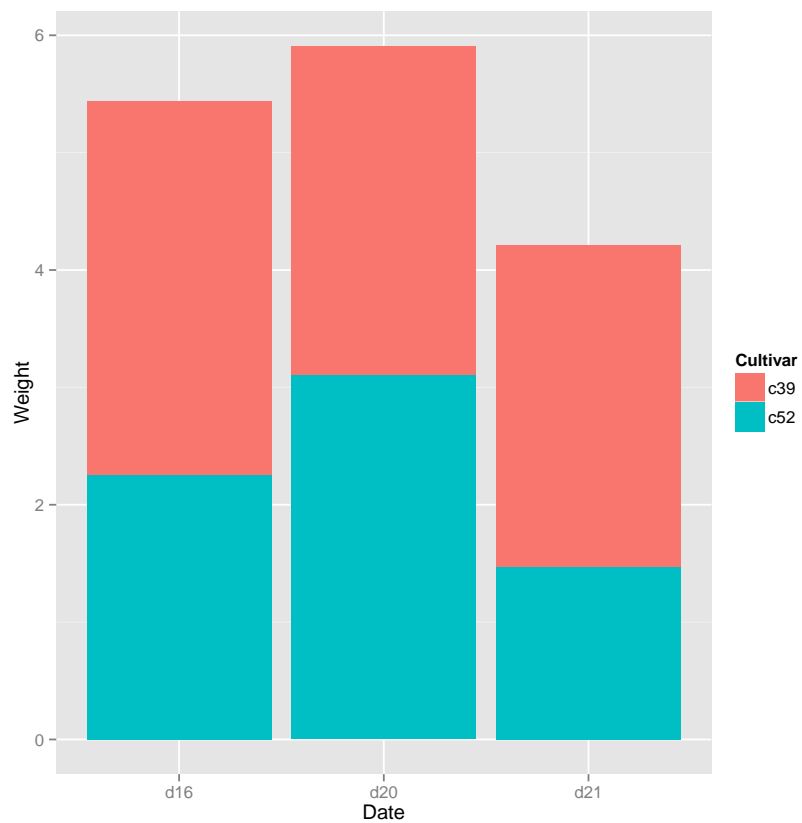

22. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)

ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(stat="identity", colour="black") +
  guides(fill=guide_legend(reverse=TRUE)) +
  scale_fill_brewer(palette="Pastel1")
```

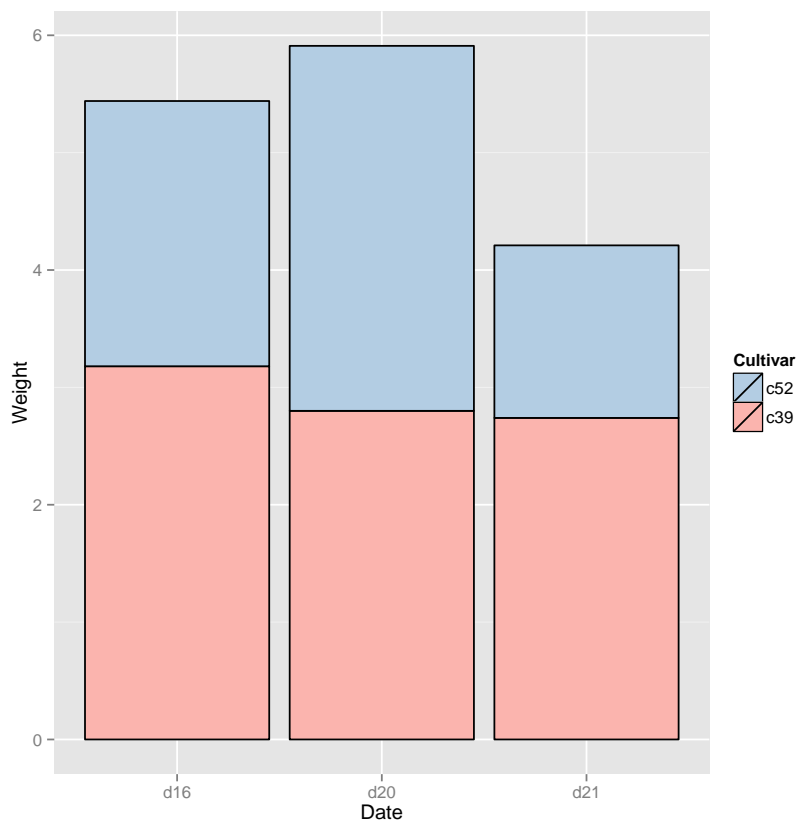


23. Load the `ggplot2`, `gcookbook`, and `plyr` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)
library(plyr)

ce <- ddply(cabbage_exp, "Date", transform,
            percent_weight = Weight / sum(Weight) * 100)

ggplot(ce, aes(x=Date, y=percent_weight, fill=Cultivar)) +
  geom_bar(stat="identity")
```

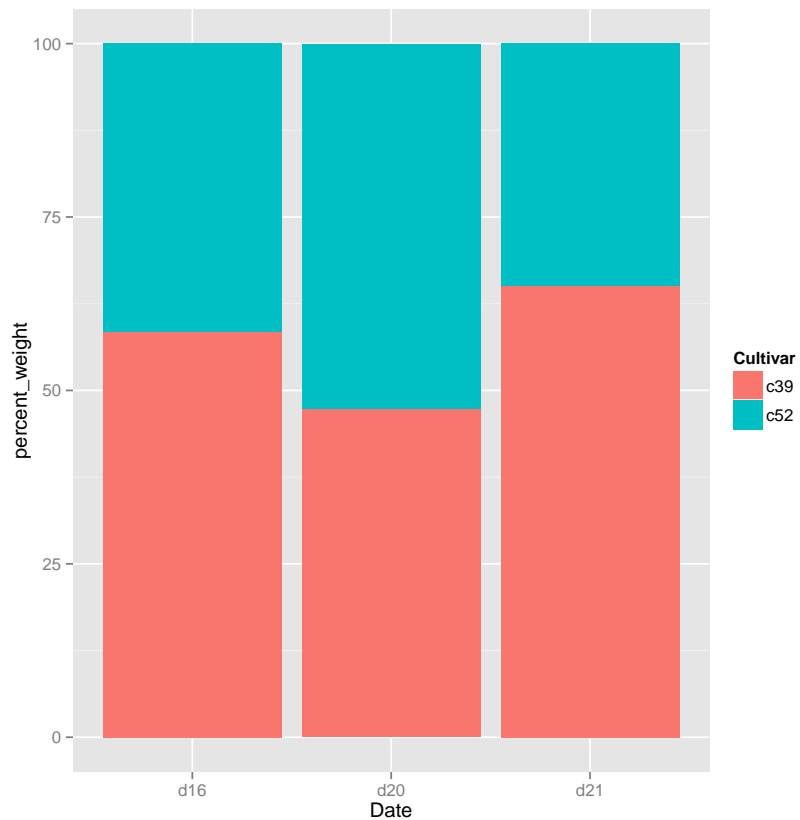


24. Load the `ggplot2`, `gcookbook`, and `plyr` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)
library(plyr)

ce <- ddply(cabbage_exp, "Date", transform,
            percent_weight = Weight / sum(Weight) * 100)


ggplot(ce, aes(x=Date, y=percent_weight, fill=Cultivar)) +
  geom_bar(stat="identity", colour="black") +
  guides(fill=guide_legend(reverse=TRUE)) +
  scale_fill_brewer(palette="Pastel1")
```

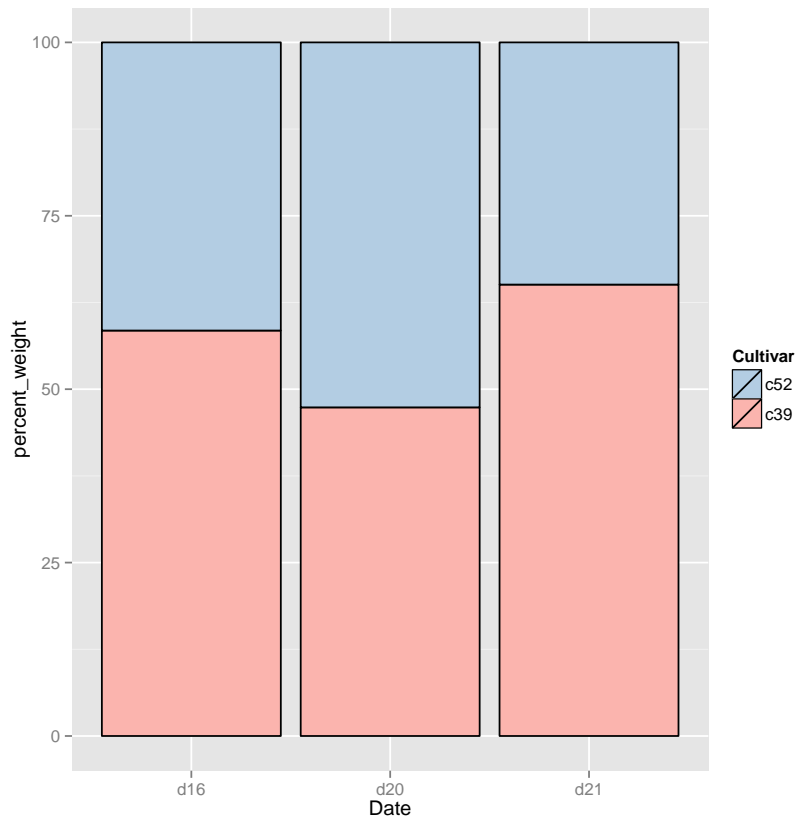

25. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)


ggplot(cabbage_exp, aes(x=interaction(Date, Cultivar),
                        y=Weight)) +
  geom_bar(stat="identity") +
  geom_text(aes(label=Weight), vjust=1.5, colour="white")
```

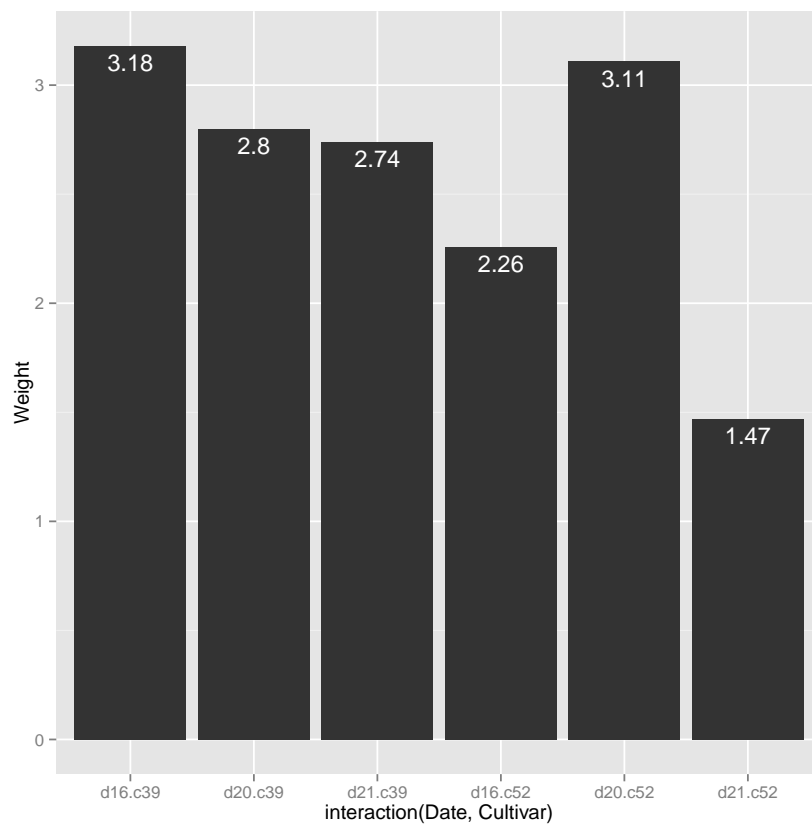

26. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)

ggplot(cabbage_exp, aes(x=interaction(Date, Cultivar),
                        y=Weight)) +
  geom_bar(stat="identity") +
  geom_text(aes(label=Weight), vjust= -0.2)
```

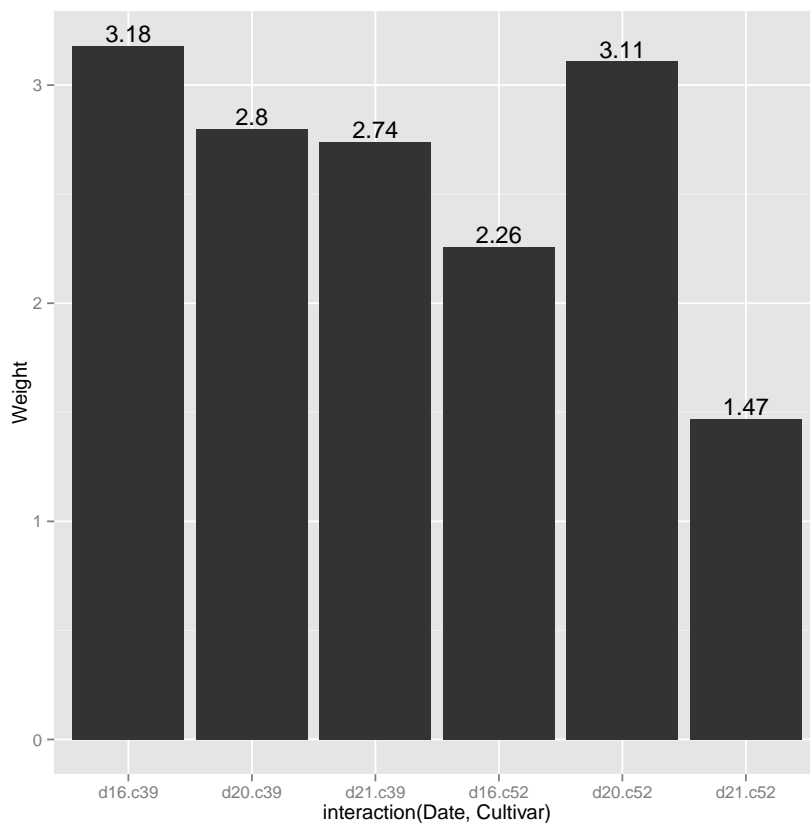


Alternative Solutions

```
# Adjust y limits to be a little higher
library(ggplot2)
library(gcookbook)
ggplot(cabbage_exp, aes(x=interaction(Date, Cultivar),
                        y=Weight)) +
  geom_bar(stat="identity") +
```

```
geom_text(aes(label=Weight), vjust=-0.2) +  
ylim(0, max(cabbage_exp$Weight) * 1.05)  
  
# Map y positions slightly above bar top - y range of  
# plot will auto-adjust  
library(ggplot2)  
library(gcookbook)  
ggplot(cabbage_exp, aes(x=interaction(Date, Cultivar),  
                        y=Weight)) +  
  geom_bar(stat="identity") +  
  geom_text(aes(y=Weight+0.1, label=Weight))
```

27. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(stat="identity", position="dodge") +
  geom_text(aes(label=Weight), vjust=1.5, colour="white",
            position=position_dodge(.9), size=3)
```

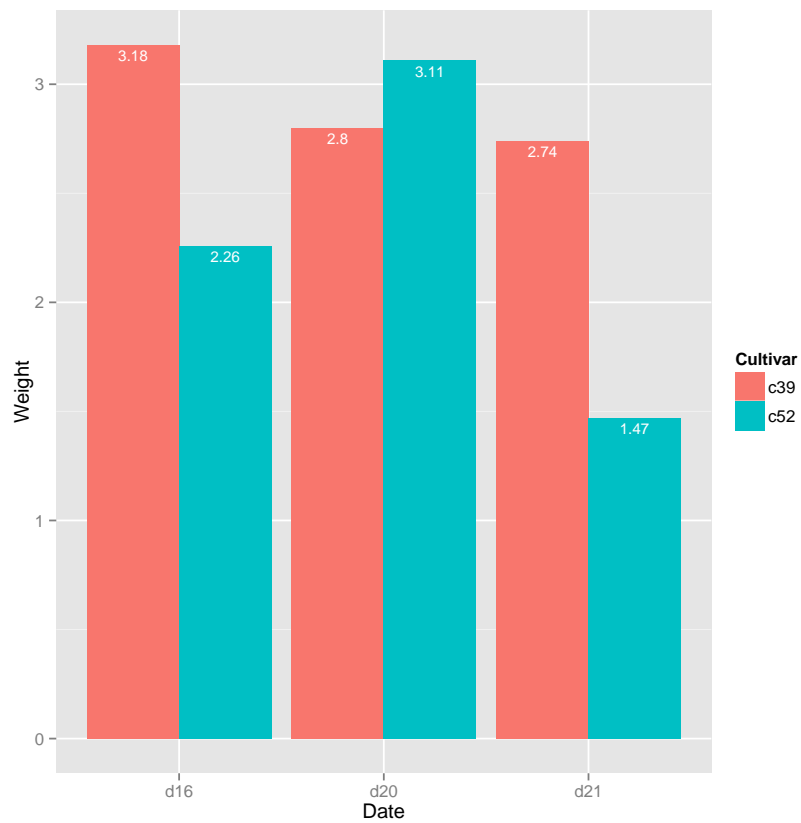


28. Load the `ggplot2`, `gcookbook`, and `plyr` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)
library(plyr)
ce <- arrange(cabbage_exp, Date, Cultivar)


ce <- ddply(ce, "Date", transform, label_y=cumsum(Weight))

ggplot(ce, aes(x=Date, y=Weight, fill=Cultivar)) +
  geom_bar(stat="identity") +
  geom_text(aes(y=label_y, label=Weight),
            vjust=1.5, colour="white")
```

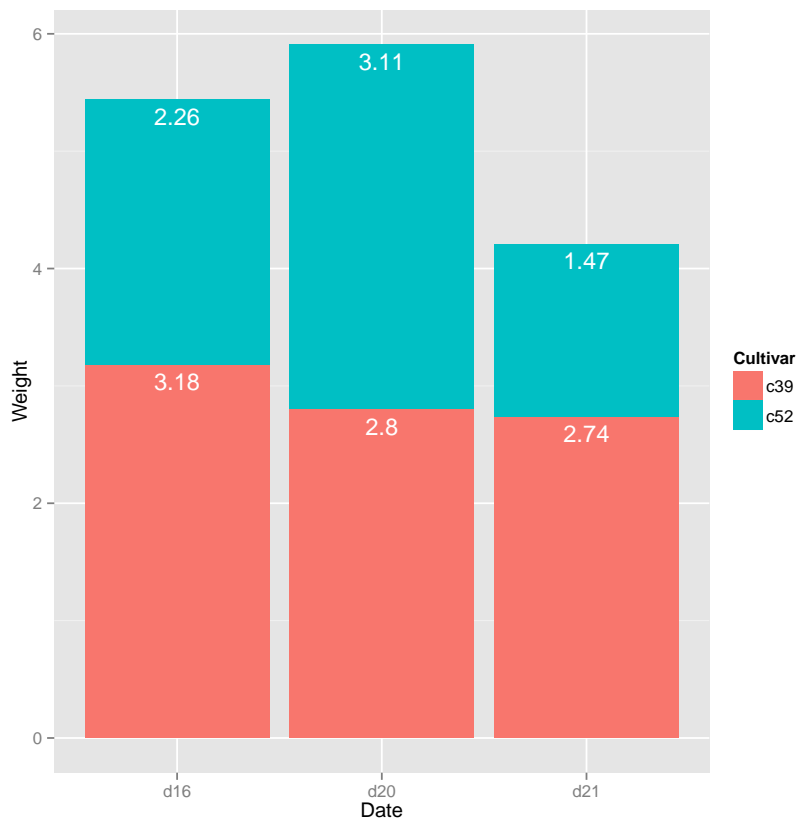

29. Load the `ggplot2` and `gcookbook` packages and produce the following plot with the `cabbage_exp` dataset:

```
library(ggplot2)
library(gcookbook)
ggplot(cabbage_exp, aes(x=Date, y=Weight, fill=Cultivar))+
  geom_bar(position="dodge", colour="black") +
  scale_fill_brewer(palette="Pastel2")
```

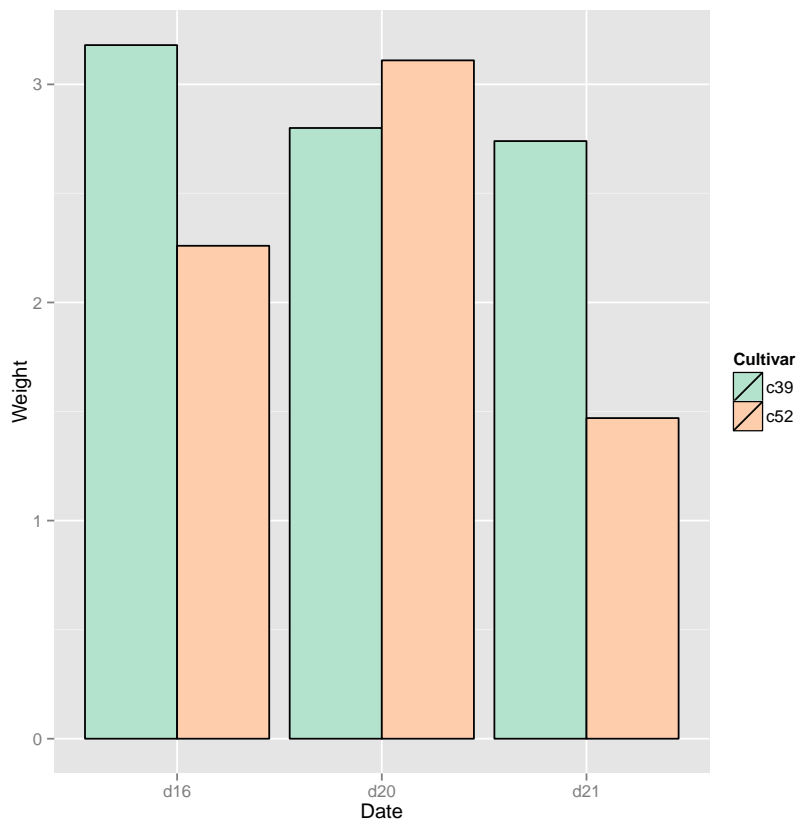

Chapter 4


Miscellaneous


1. Load the package `ggplot2` and produce the following 5 charts from the `bacteria` dataset from the `MASS` package using a single loop. Be sure to remove the `ID` variable from your dataset:


```
library(ggplot2)
library(MASS)


bacteria2 <- bacteria[which(names(bacteria) != "ID")]


for(i in 1:length(bacteria2)){
  print(ggplot(bacteria2,aes_string(x=names(bacteria2[i]))) +
        geom_histogram())
}
```

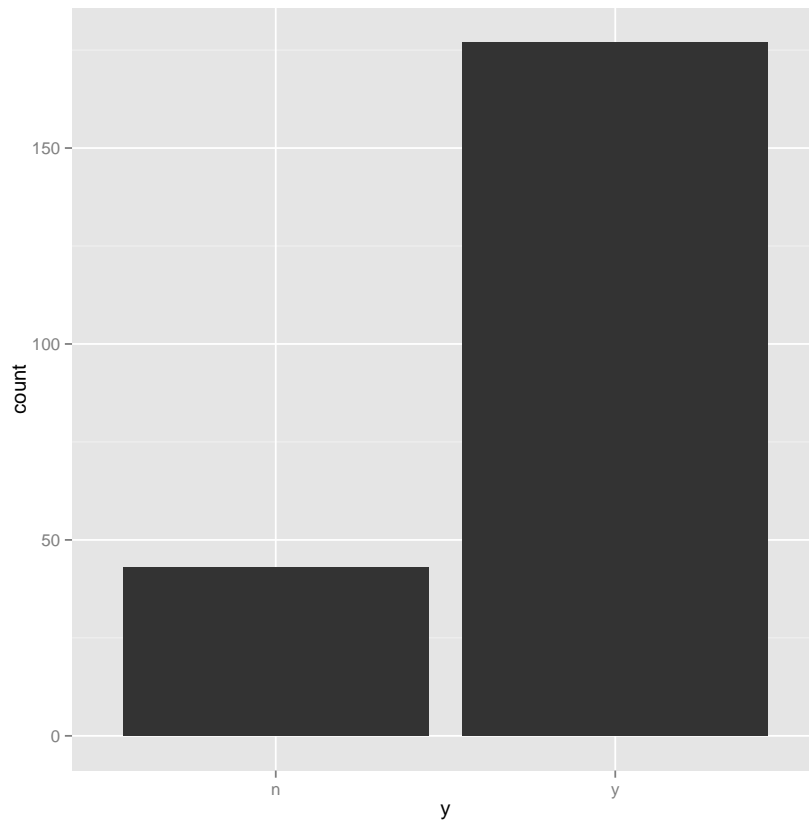

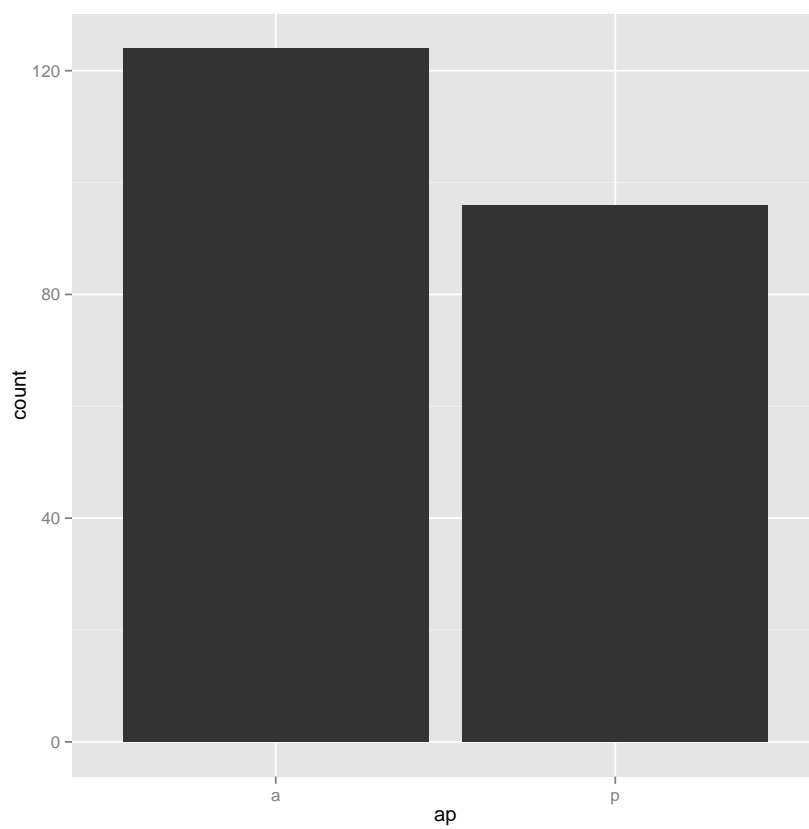

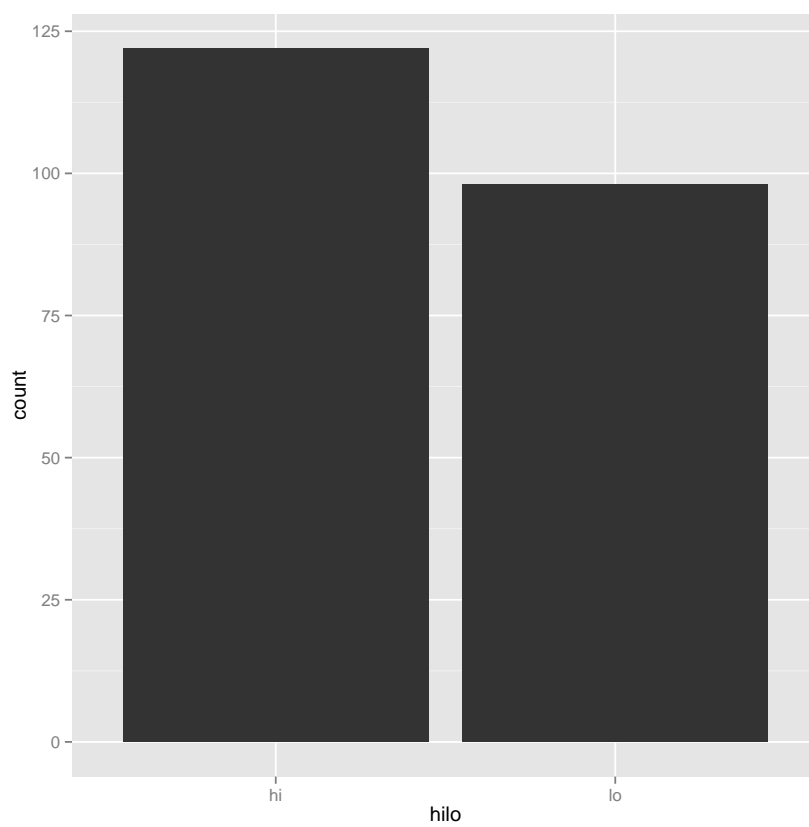

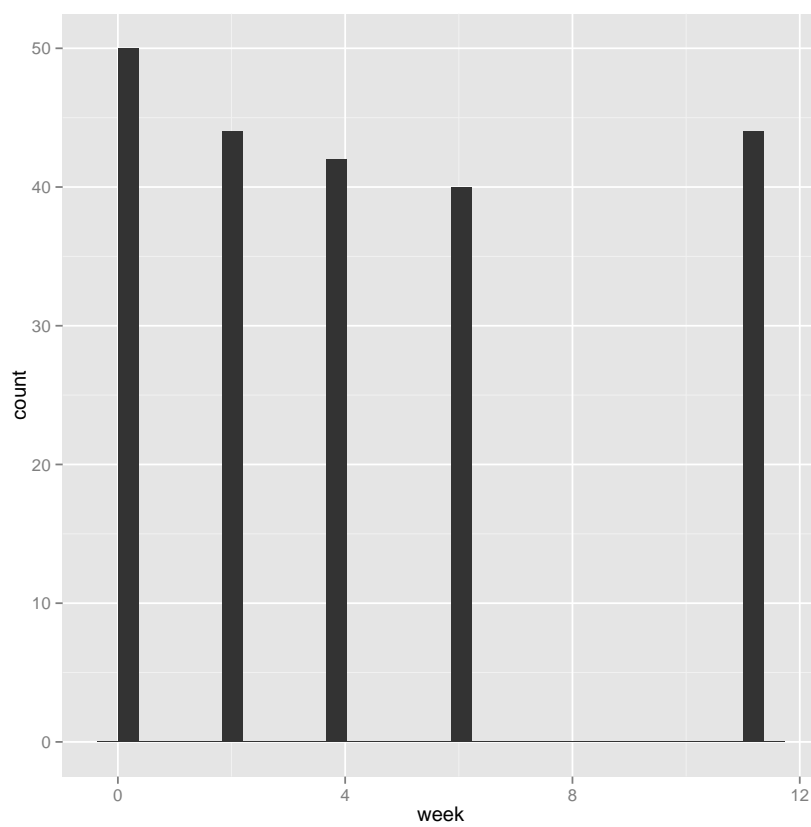

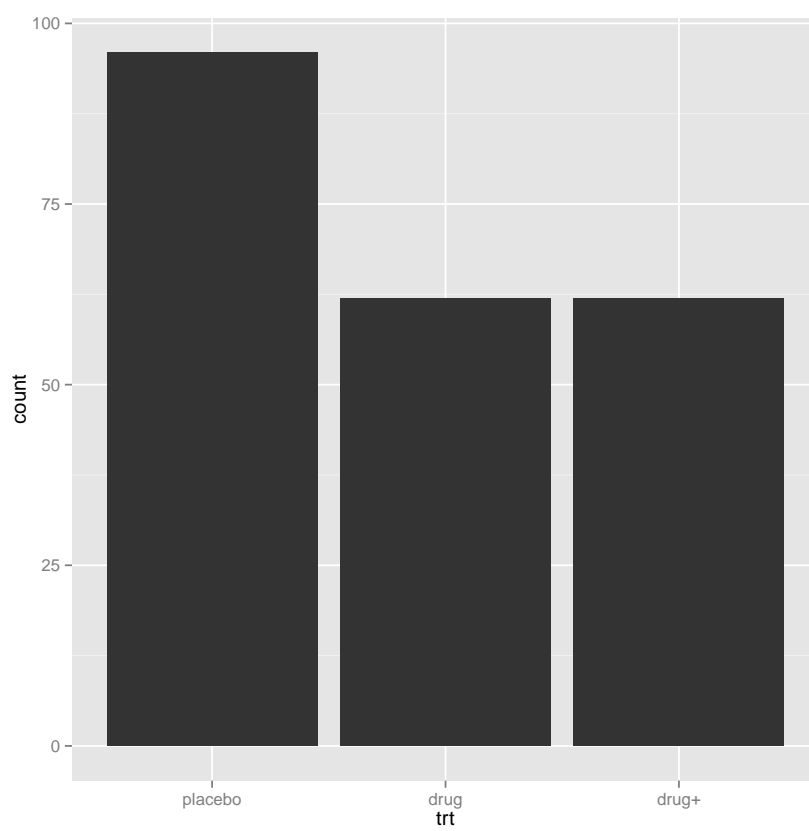

Chapter 5

Actuarial Graphics