

Notes for LAMP stack creation using Digital Ocean – Instructions to recreate the color app

You will need a digitalocean.com account for this. I suggest being logged onto the account before you begin. You will also need to have purchased a domain. I am using COP4331-5.com since I already own it and am not using it. .xyz domains are inexpensive, so you might want to consider those.


The digital ocean hosting will cost \$7 per month, and you will need it for two months. The domain will cost something, too.

Hosting

(Note to self, sign in to Digital Ocean before going to the following link. Also sign in to GoDaddy. Run Postman.)

Make sure you are logged in to your Digital Ocean account. Go to <https://marketplace.digitalocean.com/apps/lamp>

Create a LAMP Droplet

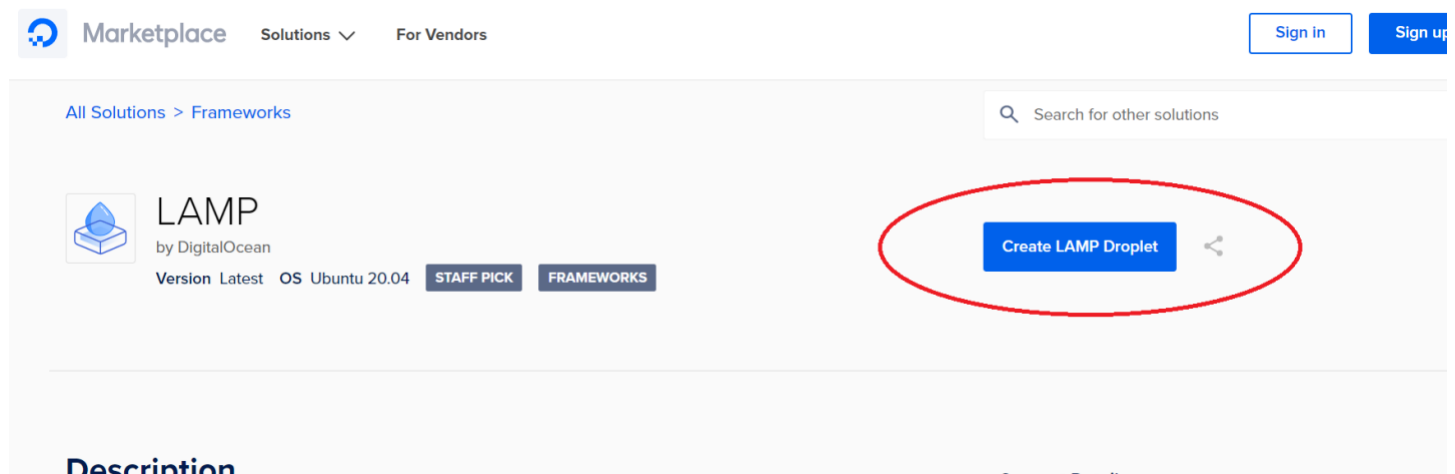

The screenshot shows the Digital Ocean Marketplace interface. At the top, there's a navigation bar with 'Marketplace', 'Solutions', and 'For Vendors'. On the right, there are 'Sign in' and 'Sign up' buttons. Below the navigation bar, there's a breadcrumb trail 'All Solutions > Frameworks' and a search bar. The main content area displays the 'LAMP' app by DigitalOcean. It includes a version selector set to 'Latest', the OS 'Ubuntu 20.04', and two badges: 'STAFF PICK' and 'FRAMEWORKS'. A blue button labeled 'Create LAMP Droplet' is prominently displayed and circled in red. To the right of this button is a share icon. Below the main content area, there's a section titled 'Description'.

Select Ubuntu, Basic Plan, and the *Create*

The screenshot shows the DigitalOcean Marketplace interface. At the top right, a green 'Create' button is circled in red. Below the search bar, the 'LAMP on Ubuntu 20.04' droplet template is highlighted with a red oval. Under the 'Choose a plan' section, the 'Basic' plan under the 'SHARED CPU' category is circled in red.

Search by resource name or public IP (Ctrl+B)

Search keyword

See all Marketplace Apps

LAMP on Ubuntu 20.04 Details

Choose a plan

SHARED CPU	DEDICATED CPU			
Basic	General Purpose	CPU-Optimized	Memory-Optimized	Storage-Optimized

You will need to select the \$5 (now \$7) / mo plan. Also, create a root password (suggest writing it down somewhere). The droplet will then be provisioned while you wait several minutes. (You can optionally edit the hostname.)

The screenshot shows the DigitalOcean droplet configuration page. Under 'CPU options', 'Premium AMD with NVMe SSD' is selected. Below, a table lists six pricing plans with their respective specifications.

CPU options: ☐ Regular with SSD ☐ Premium Intel with NVMe SSD ☒ Premium AMD with NVMe SSD

Plan	Price / mo	Price / hour	Specs
Basic	\$7	\$0.010	1 GB / 1 AMD CPU 25 GB NVMe SSDs 1000 GB transfer
General Purpose	\$14	\$0.021	2 GB / 1 AMD CPU 50 GB NVMe SSDs 2 TB transfer
CPU-Optimized	\$21	\$0.031	2 GB / 2 AMD CPUs 60 GB NVMe SSDs 3 TB transfer
Memory-Optimized	\$28	\$0.042	4 GB / 2 AMD CPUs 80 GB NVMe SSDs 4 TB transfer
Memory-Optimized	\$56	\$0.083	8 GB / 4 AMD CPUs 160 GB NVMe SSDs 5 TB transfer
Storage-Optimized	\$112	\$0.167	16 GB / 8 AMD CPUs 320 GB NVMe SSDs 6 TB transfer

Once done, click **Get started**





todo DEFAULT
Just trying out DigitalOcean

→ Move Resources

Resources Activity Settings

DROPLETS (4)

  cop4331	157.230.225.160	 Get started	 ...
---	-----------------	---	---

Open command prompt and run SSH

ssh root@MyDomainOrIPAddress

Install Putty in order to easily SSH in to your droplet

Then enter your password.

Please note that everything you essentially need is already installed in the droplet. This includes MySQL, Apache, and PHP.

Navigate to the root – **cd /root**

The web root is in /var/www/html – Go to that directory now with **cd /var/www/html**

View the contents of the directory with **ls**

View the contents of index.html with **cat index.html** – it's a lot

Now we will edit the contents of index.html – open for editing with **vi index.html**

(Note to self, change the SSH font. Right Click, Properties, Size, OK Button)

You can highlight and delete a block by positioning the cursor at the top of the block and pressing Shift-V, cursoring down to the end of the block and pressing d


You need to add the <body> and be in insert mode, so press the insert key

Your index.html file should look like the following:

```
<html>
  <body>
    <h1>We love COP 4331</h1>
  </body>
</html>
```

To save and quit hit the **escape key** (to get out of insert mode), type **:wq** – now verify the edit with **cat index.html**

You can access this via a web browser. Open a browser and type in your http://IP address.

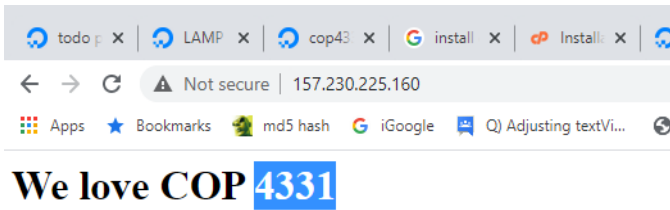


Now for a domain. You cannot buy a domain through digital ocean (that I know of, but that may have changed). Choose another domain registrant. I use GoDaddy, but there are lots of them. Purchase a domain and point the domain to your digital ocean applet. Below are the steps I took on GoDaddy.


1. I already had this domain purchased:




2. Navigate to the DNS manager:

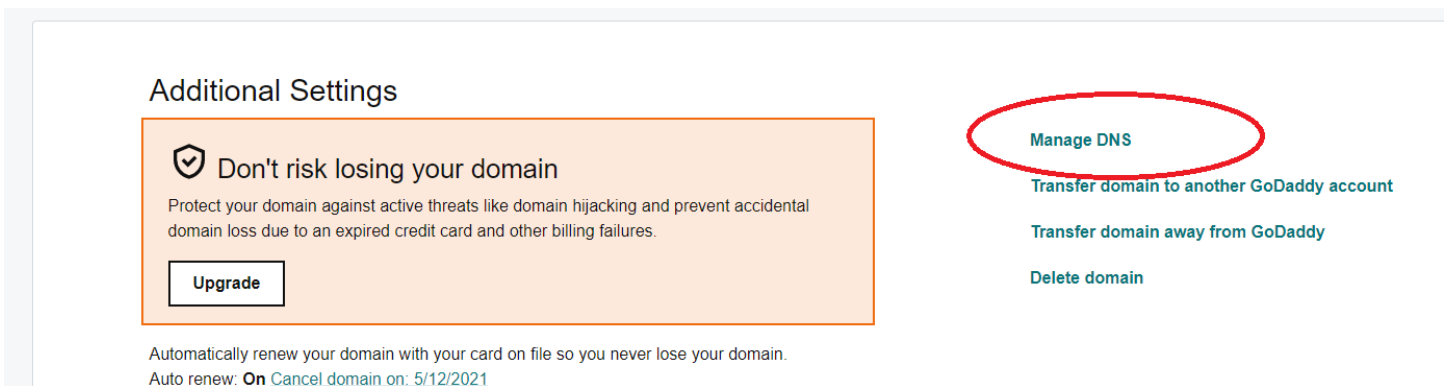

3. Edit the IP address and save:

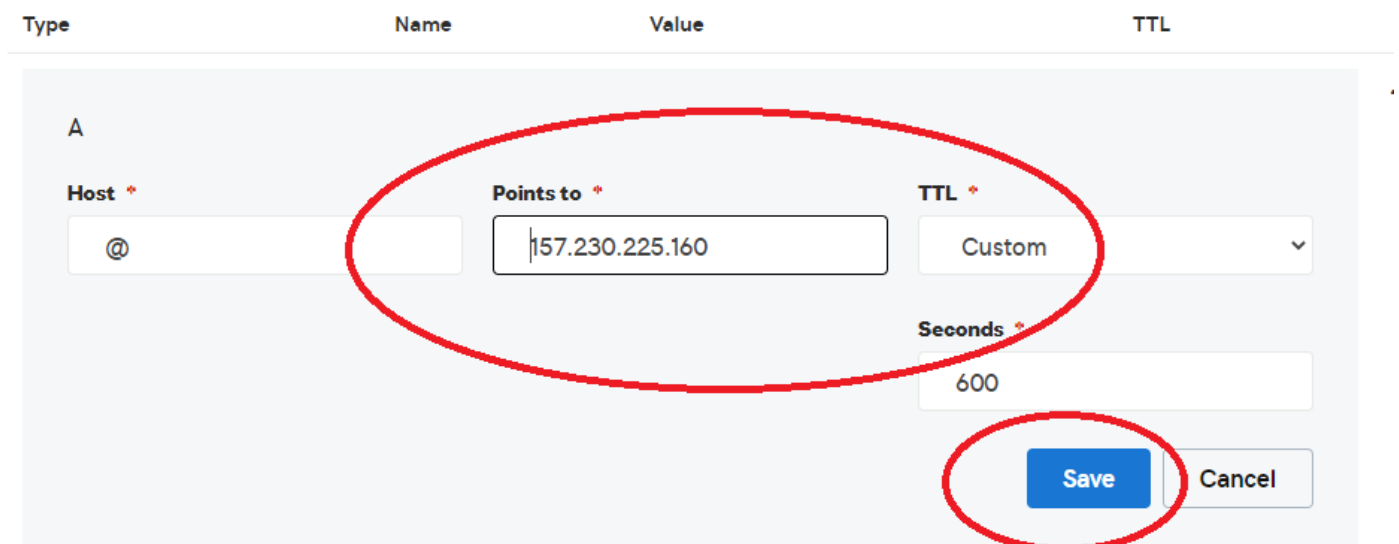

4. Test with a browser. It might take a few minutes to propagate. (On Windows it is helpful to go to a command prompt and type **ipconfig /flushdns**) You might also want to use Ctrl-F5 to hard reset the web content.

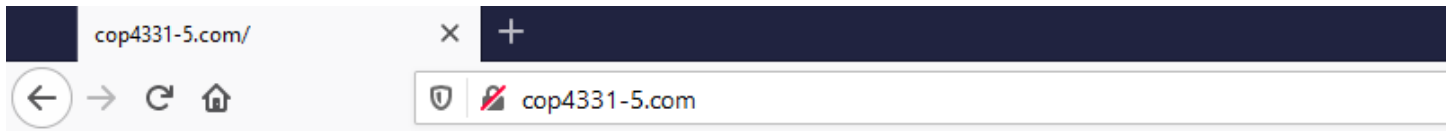

We love COP 4331

Get started

Option: Connect to MySQL: **mysql -u root -p** (then enter your password)

Note: There are three levels of password you will need to think about. This is the first, which gives you access to MySQL from the command line.

Here are the steps to create the database, tables, and working data.

1. Create database

```
create database COP4331;
```

```
use COP4331;
```

2. Create tables

```
CREATE TABLE `COP4331`.`Users` ( `ID` INT NOT NULL AUTO_INCREMENT , `FirstName`  
VARCHAR(50) NOT NULL DEFAULT "", `LastName` VARCHAR(50) NOT NULL DEFAULT "", `Login`  
VARCHAR(50) NOT NULL DEFAULT "", `Password` VARCHAR(50) NOT NULL DEFAULT "",  
PRIMARY KEY (`ID`)) ENGINE = InnoDB;
```

```
CREATE TABLE `COP4331`.`Users`
```

```
(
```

```
    `ID` INT NOT NULL AUTO_INCREMENT ,  
    `FirstName` VARCHAR(50) NOT NULL DEFAULT "",  
    `LastName` VARCHAR(50) NOT NULL DEFAULT "",  
    `Login` VARCHAR(50) NOT NULL DEFAULT "",  
    `Password` VARCHAR(50) NOT NULL DEFAULT "",
```

PRIMARY KEY ('ID'))

) ENGINE = InnoDB;

```
CREATE TABLE `COP4331`.`Colors` ( `ID` INT NOT NULL AUTO_INCREMENT , `Name`
VARCHAR(50) NOT NULL DEFAULT " , `UserID` INT NOT NULL DEFAULT '0' , PRIMARY KEY
(`ID`)) ENGINE = InnoDB;
```

```
CREATE TABLE `COP4331`.`Colors`
```

```
(
    `ID` INT NOT NULL AUTO_INCREMENT ,
    `Name` VARCHAR(50) NOT NULL DEFAULT " ,
    `UserID` INT NOT NULL DEFAULT '0' ,
    PRIMARY KEY (`ID`)
```

```
) ENGINE = InnoDB;
```

```
CREATE TABLE `COP4331`.`Contacts`
```

```
(
    `ID` INT NOT NULL AUTO_INCREMENT ,
    `FirstName` VARCHAR(50) NOT NULL DEFAULT " ,
    `LastName` VARCHAR(50) NOT NULL DEFAULT " ,
    `Phone` VARCHAR(50) NOT NULL DEFAULT " ,
    `Email` VARCHAR(50) NOT NULL DEFAULT " ,
    `UserID` INT NOT NULL DEFAULT '0' ,
    PRIMARY KEY (`ID`)
```

```
) ENGINE = InnoDB;
```

3. Populate working data rows

```
USE COP4331;
```

```
insert into Users (FirstName,LastName,Login>Password) VALUES ('Rick','Leinecker','RickL','COP4331');  
insert into Users (FirstName,LastName,Login>Password) VALUES ('Sam','Hill','SamH','Test');  
insert into Users (FirstName,LastName,Login>Password) VALUES  
('Rick','Leinecker','RickL','5832a71366768098cceb7095efb774f2');  
insert into Users (FirstName,LastName,Login>Password) VALUES  
('Sam','Hill','SamH','0cbc6611f5540bd0809a388dc95a615b');
```

```
insert into Colors (Name,UserID) VALUES ('Blue',1);  
insert into Colors (Name,UserID) VALUES ('White',1);  
insert into Colors (Name,UserID) VALUES ('Black',1);  
insert into Colors (Name,UserID) VALUES ('gray',1);  
insert into Colors (Name,UserID) VALUES ('Magenta',1);  
insert into Colors (Name,UserID) VALUES ('Yellow',1);  
insert into Colors (Name,UserID) VALUES ('Cyan',1);  
insert into Colors (Name,UserID) VALUES ('Salmon',1);  
insert into Colors (Name,UserID) VALUES ('Chartreuse',1);  
insert into Colors (Name,UserID) VALUES ('Lime',1);  
insert into Colors (Name,UserID) VALUES ('Light Blue',1);  
insert into Colors (Name,UserID) VALUES ('Light Gray',1);  
insert into Colors (Name,UserID) VALUES ('Light Red',1);  
insert into Colors (Name,UserID) VALUES ('Light Green',1);  
insert into Colors (Name,UserID) VALUES ('Chiffon',1);  
insert into Colors (Name,UserID) VALUES ('Fuscia',1);  
insert into Colors (Name,UserID) VALUES ('Brown',1);  
insert into Colors (Name,UserID) VALUES ('Beige',1);
```

```
insert into Colors (Name,UserID) VALUES ('Blue',3);  
insert into Colors (Name,UserID) VALUES ('White',3);  
insert into Colors (Name,UserID) VALUES ('Black',3);  
insert into Colors (Name,UserID) VALUES ('gray',3);  
insert into Colors (Name,UserID) VALUES ('Magenta',3);  
insert into Colors (Name,UserID) VALUES ('Yellow',3);
```

```
insert into Colors (Name,UserID) VALUES ('Cyan',3);
insert into Colors (Name,UserID) VALUES ('Salmon',3);
insert into Colors (Name,UserID) VALUES ('Chartreuse',3);
insert into Colors (Name,UserID) VALUES ('Lime',3);
insert into Colors (Name,UserID) VALUES ('Light Blue',3);
insert into Colors (Name,UserID) VALUES ('Light Gray',3);
insert into Colors (Name,UserID) VALUES ('Light Red',3);
insert into Colors (Name,UserID) VALUES ('Light Green',3);
insert into Colors (Name,UserID) VALUES ('Chiffon',3);
insert into Colors (Name,UserID) VALUES ('Fuchsia',3);
insert into Colors (Name,UserID) VALUES ('Brown',3);
insert into Colors (Name,UserID) VALUES ('Beige',3);
```

Test with:

```
select * from Users;
```

```
select * from Colors;
```

also:

```
select * from Colors where UserID=1;
```

```
select * from Colors where UserID=3;
```

We will create a user:

Note: Remember, there are three levels of password you will need to think about. This is the second, which allows the webapp (the API code) to run queries against MySQL.

```
Use COP4331;
```

```
create user 'TheBeast' identified by 'WeLoveCOP4331';
```

Now we need to grant permissions to the database for that user:

```
grant all privileges on COP4331.* to 'TheBeast'@'%';
```

The database is ready to use.

Here: Talk about primary and foreign keys

The web directory hierarchy is as follows:

root (/var/www/html)

css (/var/www/html/css)

images (/var/www/html/images)

js (/var/www/html/js)

LAMPAPI (/var/www/html/LAMPAPI)

index.html

color.html

Navigate to /var/www/html

Create the directories

mkdir css

mkdir images

mkdir js

mkdir LAMPAPI

API

There will be three API endpoints: **AddColor**, **Login**, and **SearchColors**. They each have a single .php file that is contained in the LAMPAPI directory.

Please note that there is a php statement that must be changed with your database username, password, and database name.

```
$conn = new mysqli("localhost", "username", "password", "database");
```

For our example that becomes

```
$conn = new mysqli("localhost", "TheBeast", "WeLoveCOP4331", "COP4331");
```


There are three example .php files in the stacks\LAMP\LAMPAPI path of the file on the webcourse.

Upload the .php files to the server. They will be placed into LAMPAPI.

Run PuTTY FTP. (PSFTP)

Type open COP4331-5.com (your domain name)

Enter username and password



```
psftp: no hostname specified; use "open host.name" to connect
psftp> open COP4331-5.com
login as: root
root@COP4331-5.com's password:
```

Type `cd /var/www/html`

You can type `ls` to see the subdirectories

Enter the LAMPAPI directory (`cd LAMPAPI`)

Now you will upload the API endpoint files with the following:

```
put "C:\work\LAMP Stack\LAMPAPI\AddColor.php"
```

```
put "C:\work\LAMP Stack\LAMPAPI>Login.php"
```

```
put "C:\work\LAMP Stack\LAMPAPI\SearchColors.php"
```

Use the `ls` command to double check that the files have been uploaded

Remember that Linux is case sensitive for file names and directories

You can consider using [FileZilla](#) to do the FTP transfers.

[Here: analysis of .php API endpoint files.](#)

Now the API endpoints can be tested.

Use ARC or Postman or CURL or Swagger

(Make sure you are set for POST method and application/json content type)

`http://cop4331-5.com/LAMPAPI/Login.php`

login

password

`http://cop4331-5.com/LAMPAPI/AddColor.php`

userId

color

http://cop4331-5.com/LAMPAPI/SearchColors.php
userId
search

For your contacts you will want to return an array of JSON objects. I have a video here:
<https://www.youtube.com/watch?v=G7GTKjTLCsI> that explains this.

Front End

Upload css, images, js directories. Also upload color.html and index.html

cd css

put "C:\work\LAMP Stack\css\styles.css"

cd ../images

put "C:\work\LAMP Stack\images\background.png"

cd ../js

put "C:\work\LAMP Stack\js\code.js"


put "C:\work\LAMP Stack\js\md5.js"

cd ..

put "C:\work\LAMP Stack\index.html"

put "C:\work\LAMP Stack\color.html"

FileZilla is way easier.

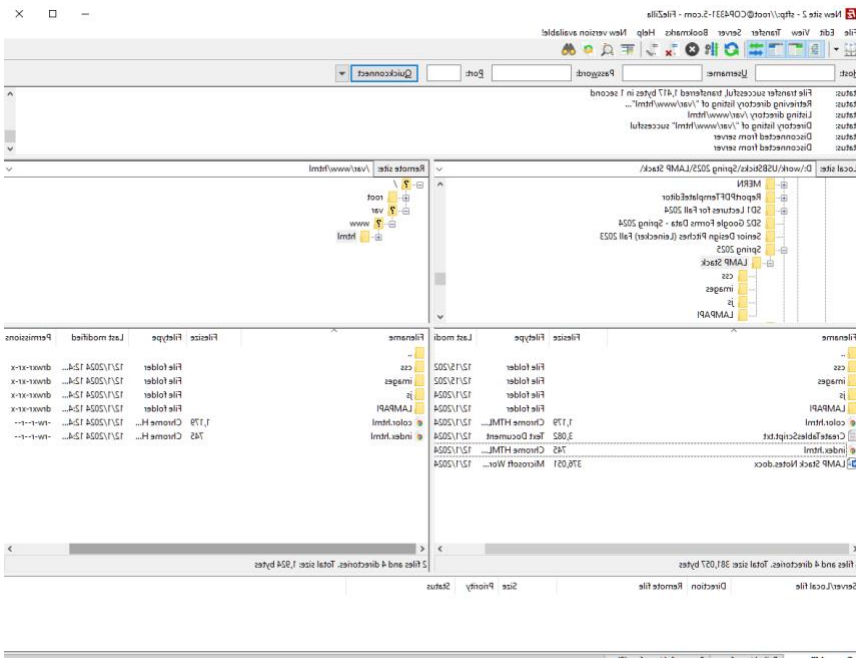

Here: Analysis of all source code

Hashing passwords

```
insert into Users (FirstName,LastName,Login,Password) VALUES ('Rick','Leinecker','RickL','5832a71366768098cceb7095efb774f2');
```

```
insert into Users (FirstName,LastName,Login,Password) VALUES ('Sam','Hill','SamH','0cbc6611f5540bd0809a388dc95a615b');
```

For an example of a previous project visit <http://4331paradise.com/>