

Computational Physics: Problem Solving with Julia

Colton Quirk

2026-05-01

Table of contents

Preface	3
1 Introduction	4
2 Differential Equations and Nonlinear Oscillations	5
2.1 Nonlinear Oscillations	5
2.2 Orbit Around a Point Mass	5
3 Summary	8
References	9

Preface

The idea for this book came from my love and appretiation of the book *Compuational Physics Problem Solving with Python* by Landau et al. (2024) and the Julia Programming Language.

1 Introduction

Computational Physics is a fascinating field which the Julia Programming Language is particularly well suited for.

2 Differential Equations and Nonlinear Oscillations

Numerical methods for solving ordinary differential equations. Applying those methods to nonlinear systems.

```
using Pkg;  
Pkg.activate("../");  
using CairoMakie, LaTeXStrings, LinearAlgebra;
```

Activating project at `~/Desktop/comp\_phys\_julia/chapters`

2.1 Nonlinear Oscillations

$$F_k(x) + F_{\text{ext}}(x, t) = m \frac{d^2 x}{dt^2} \quad (2.1)$$

2.2 Orbit Around a Point Mass

```
const G = 1.0  
const M = 1.0;
```

```
function f(t, state)  
    pos, vel = state  
    acc = - G * M * pos / norm(pos)^3  
    return [vel, acc]  
end;
```

```
mutable struct Star{T}  
    state::Array{T}  
    pos_hist  
end;
```

```

function rk4(t, y, force, dt)
    """
    Function to calculate the next timestep using:
    4th-order Runge-Kutta
    """
    k1 = force(t, y)
    k2 = force(t + 0.5 * dt, y + 0.5 * k1 * dt)
    k3 = force(t + 0.5 * dt, y + 0.5 * k2 * dt)
    k4 = force(t + dt, y + k3 * dt)

    y_new = y + dt * (k1 + 2.0*k2 + 2.0*k3 + k4) / 6.0
end;

```

```

function orbit(t_start, t_end, dt, star, force)
    t = t_start
    while t < t_end
        new_state = rk4(t, star.state, force, dt)
        star.state = new_state
        push!(star.pos_hist, star.state[1])
        t += dt
    end
    star.pos_hist = reduce(hcat, star.pos_hist)'
end;

```

```

start_pos = [1.0, 0.0, 0.0]
start_vel = [0.0, 1.0, 0.0]
start_state = [start_pos, start_vel]
star = Star(start_state, [start_state[1]])

h = 1e-4
norbits = 1.0
t_end = 2 * pi * norbits
orbit(0.0, t_end, h, star, f);

```

```

function plot_orbit(star, name; skip=5)
    inch = 96
    pt = 4/3

    fig = Figure(size=(10inch, 7inch), fontsize=16pt)
    ax = Axis(fig[1, 1],
        xlabel = "x",

```

```

        ylabel = "y",
        title=L"Orbit around a Point Mass ( $\Delta t = \%(h)$ )",
        aspect = DataAspect())

    lines!(ax, star.pos_hist[begin:skip:end, 1], star.pos_hist[begin:skip:end, 2])
    save(name, fig)
end;

with_theme(theme_latexfonts()) do
    plot_orbit(star, "images/rk4.svg"; skip=100)
end;

```

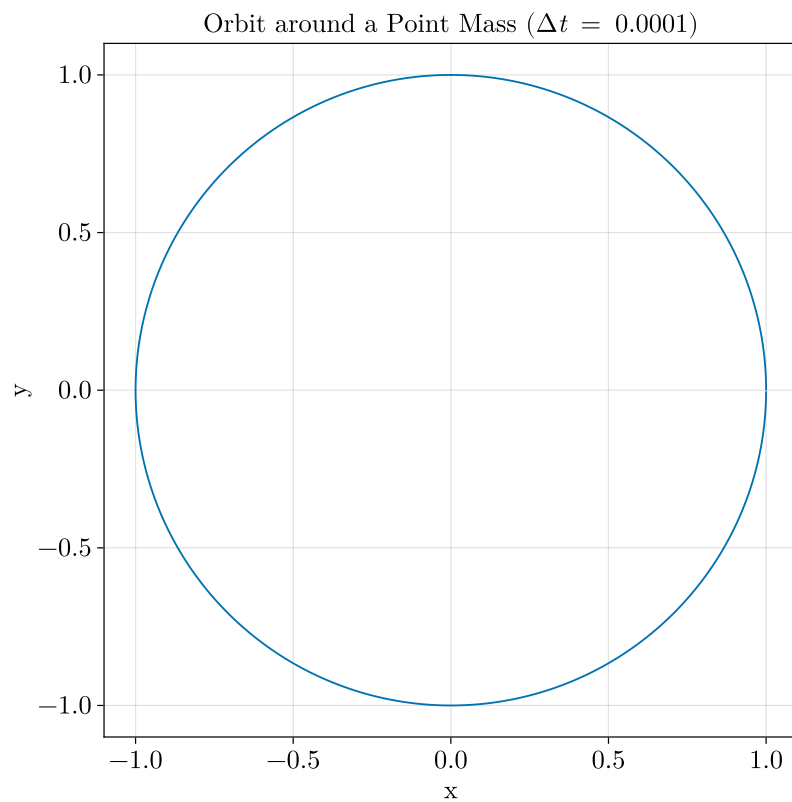


Figure 2.1: Orbit around a point mass using RK4

3 Summary

We have covered only a small fraction of what is possible with Julia in Computational Physics. I hope this book has inspired you to go on and solve physics problems with your computer on your own.

References

Landau, Rubin H., Manuel J. Páez, and Cristian C. Bordeianu. 2024. *Computational Physics: Problem Solving with Python*. 4th ed. WILEY VCH.