


# CS 246: Artificial Intelligence

## Project 1: Search (due Aug 27, 2019 at 11:59pm)

---

### Table of Contents

- Introduction
  - Welcome
  - Q1: Depth First Search
  - Q2: Breadth First Search
  - Q3: Uniform Cost Search
  - Q4: A\* Search
  - Team Formation
  - Submission
  - Grading
- 

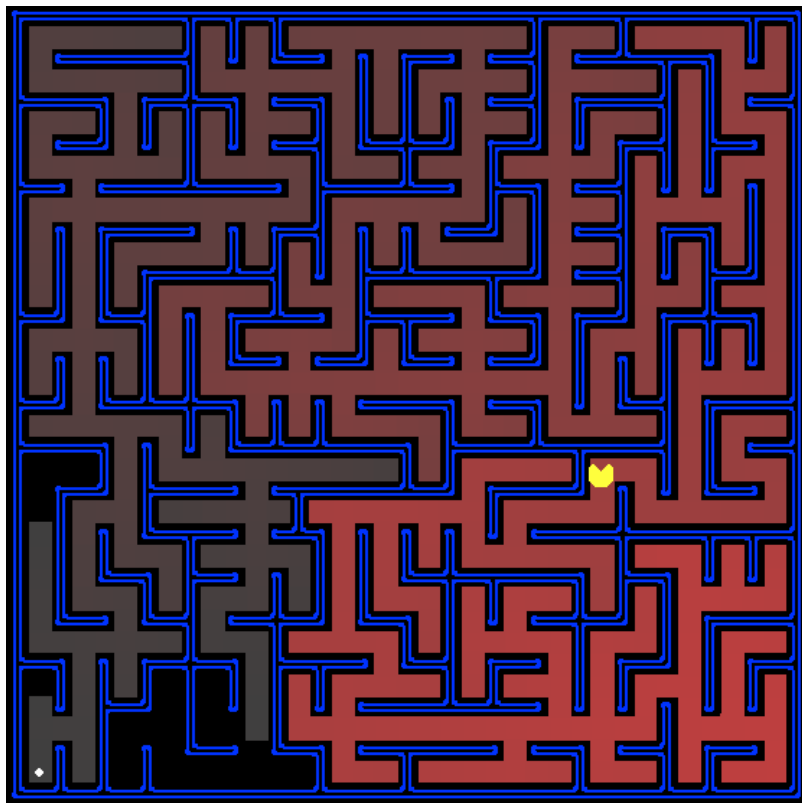

Teach Pacman to search.

### Introduction

In this project, your Pacman agent will find paths through his maze world to reach a particular location. You will build general search algorithms and apply them to Pacman scenarios.

The code for this project consists of several Python files, some of which you will need to read and understand in order to complete the assignment, and some of which you can ignore. You can download all the code and supporting files as a zip archive from Google Classroom.

Files you'll edit:	
<code>search.py</code>	Where all of your search algorithms will reside.
Files you might want to look at:	
<code>searchAgents.py</code>	Where search-based agents reside.
<code>pacman.py</code>	The main file that runs Pacman games. This file describes a Pacman GameState type, which you use in this project.
<code>game.py</code>	The logic behind how the Pacman world works. This file describes several supporting types like AgentState, Agent, Direction, and Grid.
<code>util.py</code>	Useful data structures for implementing search algorithms.
Supporting files you can ignore:	
<code>graphicsDisplay.py</code>	Graphics for Pacman
<code>graphicsUtils.py</code>	Support for Pacman graphics
<code>textDisplay.py</code>	ASCII graphics for Pacman
<code>ghostAgents.py</code>	Agents to control ghosts
<code>keyboardAgents.py</code>	Keyboard interfaces to control Pacman
<code>layout.py</code>	Code for reading layout files and storing their contents
<code>autograder.py</code>	Project autograder
<code>testParser.py</code>	Parses autograder test and solution files
<code>testClasses.py</code>	General autograding test classes
<code>test_cases/</code>	Directory containing the test cases for each question
<code>searchTestClasses.py</code>	Project 1 specific autograding test classes

**Files to Edit and Submit:** You will fill in portions of `search.py` during the assignment. Once you have completed the assignment, you will submit the file along with a short report. Please *do not* change the other files in this distribution or submit any of our original files other than these files.

**Evaluation:** After the due date, we will schedule a demo session where your team will demo the code before me. This is to check your understanding and to prevent plagiarism. Please *do not* change the names of any provided functions or classes within the code, or you will wreak havoc on the autograder.

**Academic Dishonesty:** We will be checking your code against other submissions in the class for logical redundancy. If you copy someone else's code and submit it with minor changes, we will know. These cheat detectors are quite hard to fool, so please don't try. We trust you all to submit your own work only; *please* don't let us down. If you do, we will pursue the strongest consequences available to us.

**Getting Help:** You are not alone! If you find yourself stuck on something, contact me for help. We want these projects to be rewarding and instructional, not frustrating and demoralizing. So, instead of getting stuck, come to my office for suggestions.

---

## Welcome to Pacman

After downloading the code, unzipping it, and changing to the directory, you should be able to play a game of Pacman by typing the following at the command line:

```
python pacman.py
```

Pacman lives in a shiny blue world of twisting corridors and tasty round treats. Navigating this world efficiently will be Pacman's first step in mastering his domain.

The simplest agent in `searchAgents.py` is called the `GoWestAgent`, which always goes West (a trivial reflex agent). This agent can occasionally win:

```
python pacman.py --layout testMaze --pacman GoWestAgent
```

But, things get ugly for this agent when turning is required:

```
python pacman.py --layout tinyMaze --pacman GoWestAgent
```

If Pacman gets stuck, you can exit the game by typing CTRL-c into your terminal.

Soon, your agent will solve not only `tinyMaze`, but any maze you want.

Note that `pacman.py` supports a number of options that can each be expressed in a long way (e.g., `--layout`) or a short way (e.g., `-l`). You can see the list of all options and their default values via:

```
python pacman.py -h
```

Also, all of the commands that appear in this project also appear in `commands.txt`, for easy copying and pasting. In UNIX/Mac OS X, you can even run all these commands in order with `bash commands.txt`.

---

## Question 1 (25 points): Finding a Fixed Food Dot using Depth First Search

In `searchAgents.py`, you'll find a fully implemented `SearchAgent`, which plans out a path through Pacman's world and then executes that path step-by-step. The search algorithms for formulating a plan are not implemented -- that's your job.

First, test that the `SearchAgent` is working correctly by running:

```
python pacman.py -l tinyMaze -p SearchAgent -a fn=tinyMazeSearch
```

The command above tells the `SearchAgent` to use `tinyMazeSearch` as its search algorithm, which is implemented in `search.py`. Pacman should navigate the maze successfully.

Now it's time to write full-fledged generic search functions to help Pacman plan routes! Pseudocode for the search algorithms you'll write can be found in the lecture slides. Remember that a search node must contain not only a state but also the information necessary to reconstruct the path (plan) which gets to that state.

**Important note:** All of your search functions need to return a list of *actions* that will lead the agent from the start to the goal. These actions all have to be legal moves (valid directions, no moving through walls).

**Important note:** Make sure to **use** the `Stack`, `Queue` and `PriorityQueue` data structures provided to you in `util.py`! These data structure implementations have particular properties which are required for compatibility with the autograder.

*Hint:* Each algorithm is very similar. Algorithms for DFS, BFS, UCS, and A\* differ only in the details of how the fringe is managed. So, concentrate on getting DFS right and the rest should be relatively straightforward. Indeed, one possible implementation requires only a single generic search method which is configured with an algorithm-specific queuing strategy. (Your implementation need *not* be of this form to receive full credit).

Implement the depth-first search (DFS) algorithm in the `depthFirstSearch` function in `search.py`. To make your algorithm *complete*, write the graph search version of DFS, which avoids expanding any already visited states.

Your code should quickly find a solution for:

```
python pacman.py -l tinyMaze -p SearchAgent
```

```
python pacman.py -l mediumMaze -p SearchAgent
```

```
python pacman.py -l bigMaze -z .5 -p SearchAgent
```

The Pacman board will show an overlay of the states explored, and the order in which they were explored (brighter red means earlier exploration). Is the exploration order what you would have expected? Does Pacman actually go to all the explored squares on his way to the goal?

*Hint:* If you use a `Stack` as your data structure, the solution found by your DFS algorithm for `mediumMaze` should have a length of 130 (provided you push successors onto the fringe in the order provided by `getSuccessors`; you might get 246 if you push them in the reverse order). Is this a least cost solution? If not, think about what depth-first search is doing wrong.

---

## Question 2 (25 points): Breadth First Search

Implement the breadth-first search (BFS) algorithm in the `breadthFirstSearch` function in `search.py`. Again, write a graph search algorithm that avoids expanding any already visited states. Test your code the same way you did for depth-first search.

```
python pacman.py -l mediumMaze -p SearchAgent -a fn=bfs
```

```
python pacman.py -l bigMaze -p SearchAgent -a fn=bfs -z .5
```

Does BFS find a least cost solution? If not, check your implementation.

*Hint:* If Pacman moves too slowly for you, try the option `--frameTime 0`.

*Note:* If you've written your search code generically, your code should work equally well for the eight-puzzle search problem without any changes.

```
python eightpuzzle.py
```

## Question 3 (25 points): Varying the Cost Function

While BFS will find a fewest-actions path to the goal, we might want to find paths that are "best" in other senses. Consider `mediumDottedMaze` and `mediumScaryMaze`.

By changing the cost function, we can encourage Pacman to find different paths. For example, we can charge more for dangerous steps in ghost-ridden areas or less for steps in food-rich areas, and a rational Pacman agent should adjust its behavior in response.

Implement the uniform-cost graph search algorithm in the `uniformCostSearch` function in `search.py`. We encourage you to look through `util.py` for some data structures that may be useful in your implementation. You should now observe successful behavior in all three of the following layouts, where the agents below are all UCS agents that differ only in the cost function they use (the agents and cost functions are written for you):

```
python pacman.py -l mediumMaze -p SearchAgent -a fn=ucs
```

```
python pacman.py -l mediumDottedMaze -p StayEastSearchAgent
```

```
python pacman.py -l mediumScaryMaze -p StayWestSearchAgent
```

*Note:* You should get very low and very high path costs for the `StayEastSearchAgent` and `StayWestSearchAgent` respectively, due to their exponential cost functions (see `searchAgents.py` for details).

## Question 4 (25 points): A\* search

Implement A\* graph search in the empty function `aStarSearch` in `search.py`. A\* takes a heuristic function as an argument. Heuristics take two arguments: a state in the search problem (the main argument), and the problem itself (for reference information). The `nullHeuristic` heuristic function in `search.py` is a trivial example.

You can test your A\* implementation on the original problem of finding a path through a maze to a fixed position using the Manhattan distance heuristic (implemented already as `manhattanHeuristic` in `searchAgents.py`).

```
python pacman.py -l bigMaze -z .5 -p SearchAgent -a fn=astar,heuristic=manhattanHeurist
```

You should see that A\* finds the optimal solution slightly faster than uniform cost search (about 549 vs. 620 search nodes expanded in our implementation, but ties in priority may make your numbers differ slightly). What happens on `openMaze` for the various search strategies?

# Team formation

You can have a team of size 3 or less. The recommended team size is 2. Try avoiding working solo though it's allowed. You need to inform the names of the team members prior to the submission. You will work with the same team throughout the semester.

---

## Submission

Once you have finished implementing the four methods, create a new folder. Rename the folder to 'Proj1\_YOURFIRSTNAME'. Replace YOURFIRSTNAME by your first name. For example, if your name is John Doe, you should name the folder as 'Proj1\_John'. Now copy search.py file to this folder. Also, submit a short project description which should contain an introduction, problem statement, and the algorithms you used. In order to submit your project, upload `search.py` file to Google Classroom. You must submit a short project report.

---

## Grading

Each problem is worth 25 points, making the sum 100. If you do not submit the report, there would be a 30 pts deduction. You can even get bonus points (maximum 20 points) by producing a professional report. The report ideally should be written in latex (must for any bonus points) but any other word processor used is okay.

---

## Acknowledgement

This project description and code is adapted from a project assigned in the course 'Introduction to Artificial Intelligence' at University of California, Berkeley