
LLaVA-4D: Embedding SpatioTemporal Prompt into LMMs for 4D Scene Understanding

Hanyu Zhou¹, Gim Hee Lee¹

¹ School of Computing, National University of Singapore
{hy.zhou, gimhee.lee}@nus.edu.sg

Abstract

Despite achieving significant progress in 2D image understanding, large multimodal models (LMMs) struggle in the physical world due to the lack of spatial representation. Typically, existing 3D LMMs mainly embed 3D positions as fixed spatial prompts within visual features to represent the scene. However, these methods are limited to understanding the static background and fail to capture temporally varying dynamic objects. In this paper, we propose LLaVA-4D, a general LMM framework with a novel spatiotemporal prompt for visual representation in 4D scene understanding. The spatiotemporal prompt is generated by encoding 3D position and 1D time into a dynamic-aware 4D coordinate embedding. Moreover, we demonstrate that spatial and temporal components disentangled from visual features are more effective in distinguishing the background from objects. This motivates embedding the 4D spatiotemporal prompt into these features to enhance the dynamic scene representation. By aligning visual spatiotemporal embeddings with language embeddings, LMMs gain the ability to understand both spatial and temporal characteristics of static background and dynamic objects in the physical world. Additionally, we construct a 4D vision-language dataset with spatiotemporal coordinate annotations for instruction fine-tuning LMMs. Extensive experiments have been conducted to demonstrate the effectiveness of our method across different tasks in 4D scene understanding.

1 Introduction

Large multimodal models (LMMs) [1, 2] aim to learn the representation alignment between language and other modalities such as vision [3] and audio [4]. They have been widely applied in multiple scene understanding tasks such as dense caption [5], visual QA [6, 7], scene grounding [8], etc. Although recent language-vision LMMs including LLaVA [2] and PaLI [9] have achieved great success in 2D image understanding, they still face challenges in the 3D physical world. This is because these LMMs trained solely on 2D images lack the representation of 3D spatial characteristics to interact with the physical world. In this work, our purpose is to improve the characteristic representation and scene understanding of LMMs for the physical world.

As shown in Fig. 1(a), existing 3D language-vision LMM methods [10, 11, 11] use 3D positions as spatial prompts which are then embedded into visual features to represent the whole scene. For example, Hong *et al.* [10] extract 2D visual features from multi-view images and use 3D positions to transform these features into corresponding 3D inputs for LMMs. However, these 3D LMM methods can only handle the static background with limited ability to understand dynamic objects in the scene. Unlike static backgrounds, dynamic objects exhibit temporally varying spatial characteristics such as position shifts and deformations. Unfortunately, existing 3D LMM frameworks neglect temporal aspects in using a unified spatial representation for the entire scene. As shown in Fig. 1(c-d), 3D

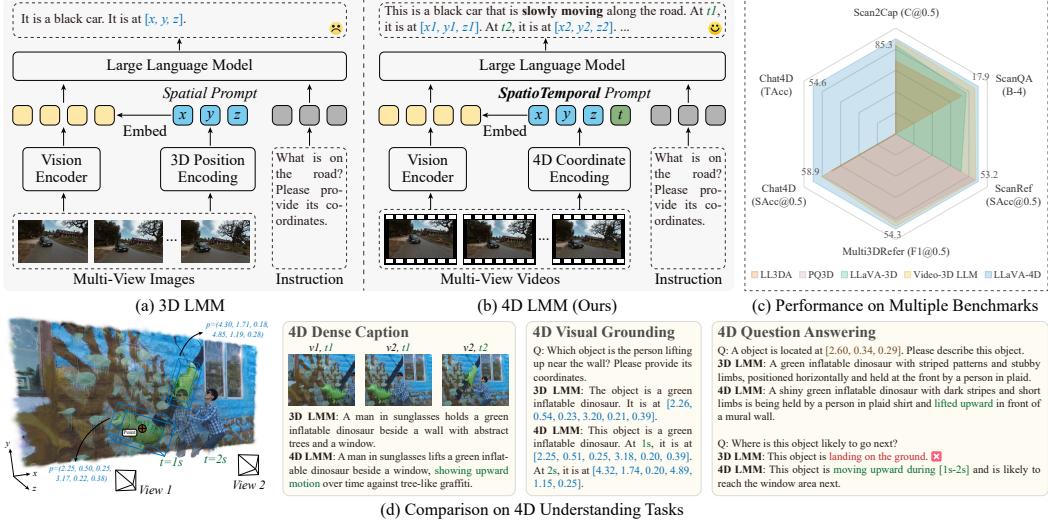


Figure 1: Illustration of 3D and 4D LMM paradigms for physical world understanding. (a) Existing 3D-LMMs encode 3D positions as spatial prompts but overlook dynamic objects. (b) Our 4D LMM framework embeds 4D coordinates: position and time as spatiotemporal prompts to capture both background and dynamic objects. (c) Performance comparison of LMMs on benchmarks. (d) Comparison on 4D understanding tasks.

LLMs perform poorly on dynamic understanding tasks. This highlights the need to capture both spatial and temporal information to improve scene understanding in dynamic physical environments.

As shown in Fig. 1, we propose a novel spatiotemporal prompt embedded with the visual representation to model the spatiotemporal characteristics of the scene. We design the spatiotemporal prompt based on the observation that dynamic objects and static backgrounds share similar 3D positional encoding but differ significantly in motion patterns. This motivates the extension of 3D positional encoding into a dynamic-aware 4D coordinate encoding to better differentiate objects from the background. Additionally, we observe that visual features of a scene can be disentangled into spatial and temporal components, which effectively distinguish objects from the background. This inspires the design of a spatiotemporal-disentangled vision embedding for scene representation. The 4D spatiotemporal prompt and visual spatiotemporal features jointly model the fine-grained spatiotemporal characteristics of dynamic objects and static backgrounds, thereby enhancing the 4D scene understanding of the physical world by LMMs.

In this paper, we propose LLaVA-4D, a general language-vision large multimodal model for 4D scene understanding. As illustrated in Fig. 2, our LLaVA-4D includes a dynamic-aware 4D coordinate encoding and a spatiotemporal-disentangled vision embedding. The 4D coordinate encoding module constructs 4D coordinates for multi-view videos and incorporates optical flow to enhance spatiotemporal encoding. The vision embedding module disentangles visual features from multi-view videos into spatial and temporal components, and enriches these spatiotemporal features with dynamic-aware 4D coordinate embeddings through cross-attention fusion. We further perform spatiotemporal encoding on textual 4D coordinates within language embeddings, which are then aligned with the fused visual spatiotemporal embeddings. In this unified framework, 4D coordinate encoding and visual spatiotemporal embedding collaboratively enhance the modeling of dynamic and static elements to improve 4D scene understanding in LMMs. Additionally, we present *Chat4D*, a 4D vision-language dataset with spatiotemporal coordinate annotations designed to instruction-tune our model for more effective 4D scene understanding. Our main contributions are summarized as follows:

- We are the first to propose a general vision-language large multimodal model for 4D scene understanding. Our model embeds a 4D spatiotemporal prompt into visual representation to enable LMMs to comprehend both dynamic objects and static backgrounds.
- We observe that backgrounds and objects share similar 3D spatial position encoding but exhibit distinct motion patterns in the temporal dimension. This motivates the design of a dynamic-aware 4D coordinate encoding as a spatiotemporal prompt to distinguish objects from backgrounds.

- We discover that spatial and temporal components disentangled from visual features are more discriminative for background and objects. This inspires the spatiotemporal-disentangled vision embedding for scene representation.
- We build a 4D vision-language dataset with coordinate annotations for instruction fine-tuning and conduct extensive experiments to verify the effectiveness of our method in 4D scene understanding.

2 Related Work

2D Vision-Language LMMs. Leveraging the strong reasoning capabilities of large language models [12, 13, 14], numerous vision-language LMMs [1, 15, 7, 16, 2, 17, 18] have been developed to learn the correspondence between image-based visual and linguistic representations with broad applications in 2D scene understanding tasks. However, these vision-language LMM methods cannot work well when applied to the 3D physical world. This is because these LMMs lack the representation of 3D spatial characteristics and can only learn visual knowledge within the camera plane from 2D images, leading to underperformance of LMMs on 3D scene understanding. We thus aim to enhance the visual representation and improve LMMs on 3D scene understanding.

3D Vision-Language LMMs. The main challenge in understanding the physical world is representing 3D spatial characteristics. Some researchers [10, 19, 20, 11, 21, 22, 23] address this by embedding 3D positions as spatial prompts within visual features, using point-based or image-based approaches. Point-based methods [19, 20, 22, 21] reconstruct point clouds from 3D positions and use a 3D vision encoder to extract features for LMMs. To reduce reliance on reconstruction precision [24], image-based methods [11, 10, 23] encode multi-view images into 2D visual features concatenated with embeddings of 3D positions. However, these methods use unified spatial representations that limit their ability to capture dynamic objects with temporal variations. We thus propose a novel spatiotemporal prompt for dynamic scene representation, and embed it into multi-view visual features to enable 4D scene understanding in LMMs.

4D Vision & Language. A related line of research is 4D vision and language [25, 26, 27], which focuses on modeling spatiotemporal characteristics. Li *et al.* [25] use 4D Gaussians [28] to represent dynamic scenes for semantic caption queries of different targets. Deng *et al.* [26] introduce a 4D encoder to directly extract scene visual features for alignment with object recognition texts. However, these 4D models have two limitations. First, they are usually task-specific and can only handle similar cases within the same data distribution of training set. Second, they adopt the same representation strategy for dynamic objects and static background, which has the potential risk of misalignment of heterogeneous features. In this work, we present the first general LMM for different tasks of 4D scene understanding by disentangling visual features and embedding 4D spatiotemporal prompts to differentiate objects and background.

3 Our LLaVA-4D

Overview. Fig. 2 shows the architecture of our LLaVA-4D. Given a multi-view video input sequence I , our LLaVA-4D achieves 4D scene understanding progressively through the following three stages:

- 1) **Dynamic-Aware 4D Coordinate Encoding (cf. Sec. 3.1).** This is the 4D prompt construction stage where we construct 4D coordinate tensors $[x, y, z, t]$ from multi-view videos using visual geometry, and perform spatiotemporal encoding $\text{PE}(\cdot)$, $\text{TE}(\cdot)$ on the coordinates. The encoded position and time are concatenated as a spatiotemporal prompt to guide visual fusion, *i.e.*:

$$p_{4D} = w_p \cdot [\text{PE}(x, y, z) \parallel \text{TE}(t) \cdot \beta], \quad (1)$$

where w_p is a learnable matrix and β is motion field for dynamic awareness of temporal encoding.

- 2) **Spatiotemporal-Disentangled Vision Embedding (cf. Sec. 3.2).** This is the visual representation stage where we extract visual features f from multi-view videos using a vision encoder, and disentangle these visual features into spatiotemporal components:

$$f_s, f_t = \text{STD}(f), \quad (2)$$

where f_s is spatial feature and f_t is temporal feature. We further embed encoded 4D coordinate features into these spatiotemporal features via cross-attention fusion:

$$f_{st} = \text{CAtt}([f_s, f_t], p_{4D}), \quad (3)$$

where f_{st} denotes the output visual spatiotemporal feature with 4D awareness.

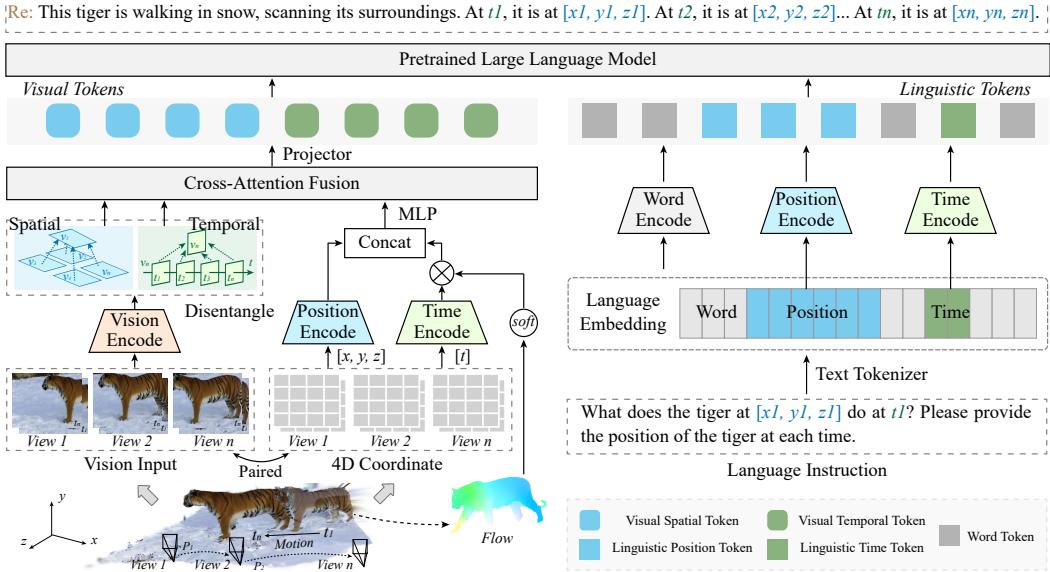


Figure 2: Our LLaVA-4D consists of three stages: 1) **4D coordinate encoding**. Encode 3D position and 1D time with optical flow. 2) **Vision embedding**. Disentangle visual features into spatiotemporal features and embed the encoded 4D coordinates via cross-attention fusion. 3) **Language embedding**. Align textual position and time with the fused vision embedding for 4D scene understanding.

- 3) **Coordinate-Aligned Language Embedding (cf. Sec. 3.3).** This is the linguistic representation stage where visual spatiotemporal features are projected into the language embedding space using multi-layer perception: $\tau_v^{st} = \text{MLP}(f_{st})$, where τ_v^{st} denotes visual spatiotemporal tokens. Input instructions are tokenized into language space, where textual position and time are spatiotemporally encoded into corresponding linguistic tokens τ_l^{st} .

Remarks. The output τ_v^{st} and τ_l^{st} denote the visual and linguistic representation with 4D coordinate prompt, respectively. Subsequently, the LLM [13] utilizes these enhanced visual and linguistic tokens to improve 4D scene understanding. Our unified framework embeds 4D coordinates as spatiotemporal prompts into visual representations to enable spatiotemporal understanding of dynamic objects and static background in LMMs. The following sections detail the design of each stage.

3.1 Dynamic-Aware 4D Coordinate Encoding

2D LLMs can capture spatial relationship between targets in images by using a vision encoder to implicitly or explicitly incorporate 2D position encoding. Similarly, 4D scene understanding can be enabled by the integration of 3D position and 1D time into LMMs.

4D Coordinate Definition. Given an image from a certain view at timestamp t , we use SfM [29] for camera pose $P = [R \mid T]$ and MVS [30] for depth D . Combined with intrinsic parameter K , we transform 2D pixel coordinate x_{2D} to world coordinate system via geometric projection [31, 32]:

$$x_{3D} = R^{-1}(D(x_{2D}) \cdot K^{-1}x_{2D} - T), \quad (4)$$

where $x_{3D} = [x, y, z]^\top$ denotes 3D position. After traversing all videos, we concatenate time and corresponding 3D position to form the 4D coordinate tensor $[x, y, z, t]$.

Spatiotemporal Encoding. We perform spatiotemporal encoding to convert the 4D coordinates into learnable feature patterns. It is challenging to directly distinguish objects from the background solely based on spatial dimensions such as multi-view images captured at a specific time. We circumvent this challenge by adopting the same spatial position encoding strategy for objects and background via learnable Fourier feature [33]:

$$p_{xyz} = 1/\sqrt{d} [\cos([x, y, z]W_r^\top \parallel \sin([x, y, z]W_r^\top))], \quad (5)$$

where d denotes the dimension and W_r is the learnable parameter of the Fourier feature. From the temporal dimension such as continuous video sequence at a certain view, objects and background

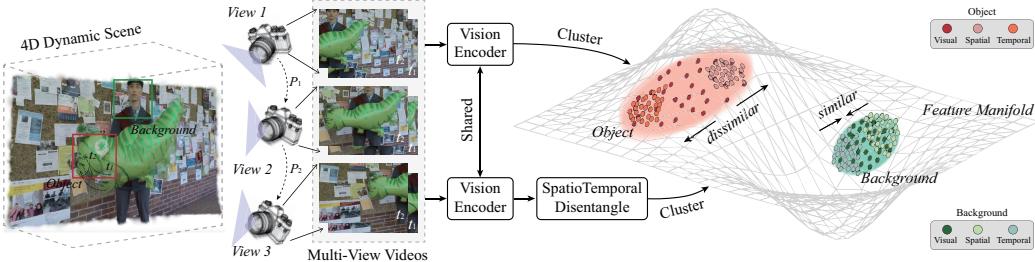


Figure 3: Feature distribution of static background and dynamic object in a 4D dynamic scene. Visual features of dynamic objects appear scattered while static backgrounds are clustered. In contrast, spatiotemporal features show clear discrimination between objects and background.

have different motion patterns and thus we add motion information into the temporal encoding:

$$p_t = 1/\sqrt{d} [\cos(tW_r^\top \parallel \sin(tW_r^\top))] \cdot (1 + \Phi(\text{vel})), \quad (6)$$

where vel is estimated optical flow, and $\Phi(\cdot)$ is softmax function. We further concatenate the spatial and temporal encoding outputs to obtain dynamic-aware 4D coordinate embeddings as the spatiotemporal prompt for subsequent visual fusion. Moreover, this spatiotemporal prompt is extensible, where we can further add some other spatiotemporal attributes such as semantic and action to guide the alignment between visual and linguistic representations (*cf.* Sec. 5.3 for details).

3.2 Spatiotemporal-Disentangled Vision Embedding

Unlike 2D image and 3D scene, 4D scene consists of spatial such as color and temporal such as motion components. A unified visual representation for 4D scene usually suffers from misaligned heterogeneous features, which inspires us to disentangle visual features into spatiotemporal components.

Spatiotemporal Disentanglement. Spatial features mainly reflect the appearance of the entire scene, while temporal features focus more on continuous varying in motion patterns. After obtaining multi-view visual features $f_{v,t}$, where v is the view and t is the time, we get the correlation of visual features between different views at the same time as spatial features:

$$f_s = \text{Aggregate}(\{f_{v=i,t}^\top f_{v=j,t} \mid i \neq j\}). \quad (7)$$

Next, we further calculate the correlation of visual features between adjacent images of continuous time at the same view as temporal features:

$$f_t = \text{Aggregate}(\{f_{v,t=i}^\top f_{v,t=i+1}\}). \quad (8)$$

To illustrate the importance of spatiotemporal features, we encode the selected object and background regions of multi-view videos into visual, spatial and temporal features, and cluster these features for visualization in Fig. 3. The visual features of the object region appear scattered, but the spatiotemporal features of both the object and background regions are clustered. This indicates that spatiotemporal features are highly discriminative for the entire scene. Consequently, disentangling visual features into spatiotemporal components is essential for effective 4D scene representation.

Cross-Attention Fusion. Single disentangled spatiotemporal features cannot be localized to world coordinate system. We need to further embed 4D coordinates into the spatiotemporal features for localization. We first introduce an MLP to make the dimension of the 4D coordinate embeddings the same as the dimension of the spatiotemporal features: $p_{4D} = \text{MLP}([p_{xyz} \parallel p_t])$. Next, we fuse the 4D coordinate embeddings with the spatiotemporal features via a cross-attention mechanism [34, 35]:

$$\begin{aligned} q &= w_q p_{4D}, \quad k = w_k [f_s, f_t], \quad v = w_v [f_s, f_t], \quad a = \text{softmax}(qk^\top / \sqrt{d}), \\ o &= a \cdot v, \quad \alpha = \sigma(\text{MLP}_{obj}(p_{4D})), \quad f_{st} = \alpha \cdot o + (1 - \alpha) \cdot f_s, \end{aligned} \quad (9)$$

where w is a learnable weight. As a result, we can obtain the 4D-aware visual spatiotemporal feature.

3.3 Coordinate-Aligned Language Embedding

Although vision embeddings can represent scene knowledge, LMMs understanding scenes require the alignment between visual and linguistic representations. Since the input of large language model

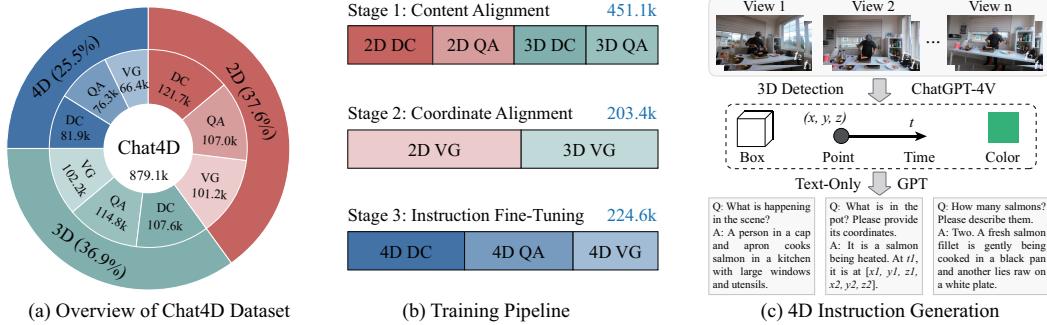


Figure 4: Overview of our dataset and training pipeline. (a) Chat4D dataset includes 2D, 3D, and 4D vision-language training sets for dense captioning, QA, and visual grounding. (b) Three-stage training: stages 1-2 use 2D/3D data for initialization; stage 3 uses 4D data for instruction fine-tuning. (c) Spatiotemporal characteristics are extracted as local descriptions to generate 4D instructions.

requires text-like tokens, we first build a multi-layer perception to project the fused spatiotemporal features into language embedding space for preliminary alignment with linguistic representations. This projected fused spatiotemporal features is the visual tokens denoted as τ_v^{st} . Subsequently, we tokenize the input instruction into the language space with word tokens τ_l , and apply the same spatiotemporal encodings $PE(\cdot)$ and $TE(\cdot)$ to textual position tp and time tt :

$$\tau_s = PE(tp), \tau_t = TE(tt). \quad (10)$$

We further fuse the encoded position and time with corresponding word token: $\tau_l^{st} = \tau_l + w_s \tau_s + w_t \tau_t$, where w_s and w_t denote the learnable weights. We concatenate 4D-aware visual tokens with coordinate-aligned linguistic tokens for the LLM to reason. Particularly, 4D coordinate encoding ensures spatiotemporal localization of the scene within our unified framework. Additionally, disentangled vision embedding models spatiotemporal knowledge of the scene, and vision-language alignment further enable the LMM to achieve interactive understanding of 4D scenes.

4 Dataset and Training Pipeline

4.1 Our Chat4D Dataset

Many vision-language datasets have been proposed to evaluate 2D/3D scene understanding of LMMs. However, there is currently no vision-language dataset specifically designed for 4D scene understanding in LMMs. To address this gap, we introduce the Chat4D dataset. As illustrated in Fig. 4(a-b), our dataset includes 2D, 3D and 4D vision-language data types, where 2D/3D data are used to initialize multimodal spatiotemporal understanding and 4D data is used for instruction fine-tuning.

2D&3D Vision-Language Data. To develop multimodal spatiotemporal understanding, our model requires image-format inputs and a large number of vision-language pairs. We thus integrate existing standard 2D/3D spatiotemporal datasets [36, 37, 38, 39, 40, 41, 42, 43, 44, 45] and adapt specific text instructions (e.g., 2D/3D position and time) to align with our spatiotemporal encoding strategy. This approach effectively trains the LMM for spatial and temporal understanding. These datasets cover dense captioning (DC), visual QA and visual grounding (VG) tasks with a total of 654.5K samples.

4D Vision-Language Data. We merge existing 4D dynamic scene reconstruction datasets to train the LMM for 4D spatiotemporal understanding: iPhone [46], HyperNeRF [47], N3DV [48], Panoptic-Sports [49], DAVIS [50], and Immersive [51]). Additionally, we develop a data generation approach to produce paired 4D vision-language data for instruction fine-tuning. As shown in Fig. 4(c), we utilize 3D object detection methods [52, 53] and GPT-4V [54] to extract local spatiotemporal information such as category, position, time from multi-view videos. These extracted features are then processed by text-only GPT to generate global 4D descriptions in instruction-following formats for typical spatiotemporal understanding tasks to produce a dataset of 224.6K samples.

4.2 Training Pipeline

To ensure the stability of the training process and improve the performance of the model, we divide the entire training into three stages in Fig. 4 (b) as follows:

Table 1: Quantitative results of LMMs for scene understanding tasks on different 3D and 4D datasets.

Methods	3D Benchmark						4D Benchmark						
	Scan2Cap [43]			ScanQA [41]			Multi3DRefer [44]		ScanRef [55]		Chat4D (Ours)		
	C@0.5↑	B-4@0.5↑	M@0.5↑	C↑	B-4↑	M↑	F1@0.5↑	SAcc@0.5↑	C↑	B-4↑	SAcc@0.5↑	TAcc↑	
3D	3D-LLM [10]	–	–	–	69.4	12.0	14.5	–	–	61.6	11.5	31.4	–
	Chat-3D v2 [56]	63.9	31.8	–	87.6	14.0	–	41.6	38.4	81.8	13.7	39.5	–
	LL3DA [20]	65.2	36.8	26.0	76.8	13.5	15.9	–	–	72.3	11.9	46.2	–
	3D-LLaVA [21]	78.8	36.9	27.1	92.6	17.1	18.4	–	–	85.1	16.0	52.0	–
	Grounded 3D-LLM [57]	70.6	35.5	–	72.7	13.4	–	40.6	44.1	66.3	12.2	43.7	–
	PQ3D [58]	80.3	36.0	29.1	87.8	–	17.8	50.1	51.2	84.7	14.3	51.5	–
	LLaVA-3D [11]	79.2	41.1	30.2	91.7	14.5	20.7	–	42.2	87.4	14.8	45.6	–
	Video-3D LLM [23]	83.8	42.4	28.9	102.1	16.2	19.8	52.7	51.7	89.4	16.1	52.8	–
4D	LLaVA-4D (Ours)	85.3	45.7	31.3	97.8	17.9	21.2	54.3	53.2	93.5	17.2	58.9	54.6

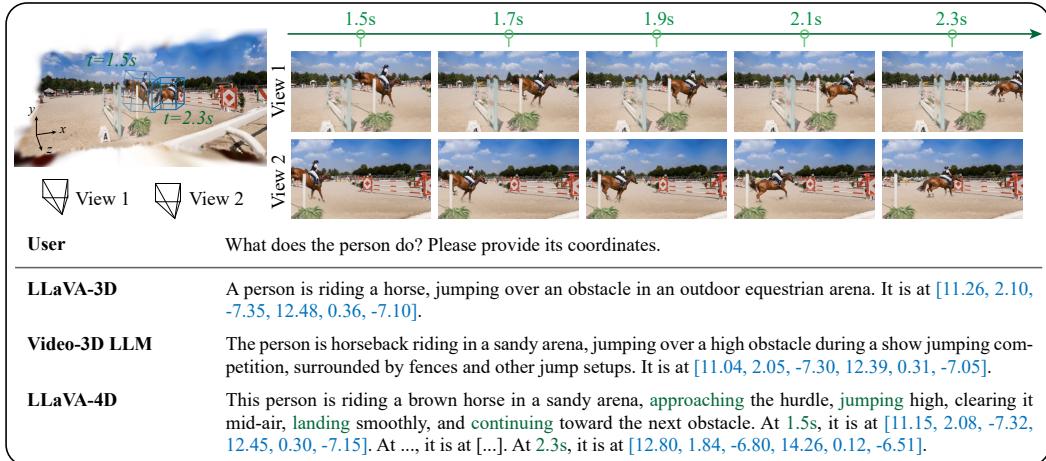


Figure 5: Visual comparison of LMMs on 4D scene understanding.

Stage 1: Content Alignment. The training sets of the DC and QA tasks in the 2D&3D vision-language data of our Chat4D are used to initially align the content between visual and linguistic representations. This provides a foundational spatiotemporal understanding for the proposed model. At this stage, only parameters of the cross-attention fusion and the projector are updated. The 4D spatiotemporal coordinate features p_{4D} are temporarily set as zero padding.

Stage 2: Spatiotemporal Coordinate Alignment. In order to further improve the fine-grained understanding capability of our model under the spatiotemporal coordinate prompt, we use the training data of the VG task in the 2D&3D vision-language subset of our Chat4D to refine the spatiotemporal coordinate alignment between visual and linguistic representations. At this stage, we update all trainable parameters of 4D coordinate encoding and cross-attention fusion modules while keeping all other modules frozen.

Stage 3: 4D Task Instruction Fine-Tuning. To further improve our model for 4D scene understanding, we use 4D vision-language data of Chat4D to enhance the generalization of our model for fine-grained spatiotemporal understanding with 4D coordinates through a multi-task instruction fine-tuning strategy. All trainable parameters are updated while the vision encoder remains frozen.

5 Experiments

5.1 Experiment Setup

Implements Details. Our LLaVA-4D model utilizes the pre-trained weights of LLaVA-1.5-7B [17] and the vision encoder of CLIP-ViT-L-336px [3, 59]. Cross-attention fusion module is a transformer-based network architecture [34]. The whole model is trained on 8 RTX 4090 GPUs over 86 hours using AdamW as the optimizer. In training stages 1-2, we set the learning rate to $1.0e - 4$ with a batch size of 48. We use a learning rate of $1.0e - 5$ with a batch size of 16 in training stage 3.

Comparison Methods. Since there are currently no other public 4D LMMs for comparison, we compare our model with 3D LMMs: 3D-LLM [10], Chat-3D v2 [56], LL3DA [20], 3D-LLaVA

Table 2: Effect of visual representation modules.

Coor. embed	Feat. disent.	Feat. fusion	C↑	B-4↑	SAcc@0.5↑	TAcc↑
×	×	×	62.3	11.7	34.8	12.7
✓	×	×	85.4	15.1	51.5	47.5
✓	✓	×	89.0	16.5	54.3	51.2
✓	✓	✓	93.5	17.2	58.9	54.6

Table 3: Role of coordinate encoding.

Encoding target	C↑	B-4↑	SAcc@0.5↑	TAcc↑
w/o Encoding	75.0	12.1	47.2	46.8
w/ 3D position	88.6	15.3	53.4	47.0
w/ 1D time	82.7	14.0	48.5	52.7
w/ 4D coordinate	93.5	17.2	58.9	54.6

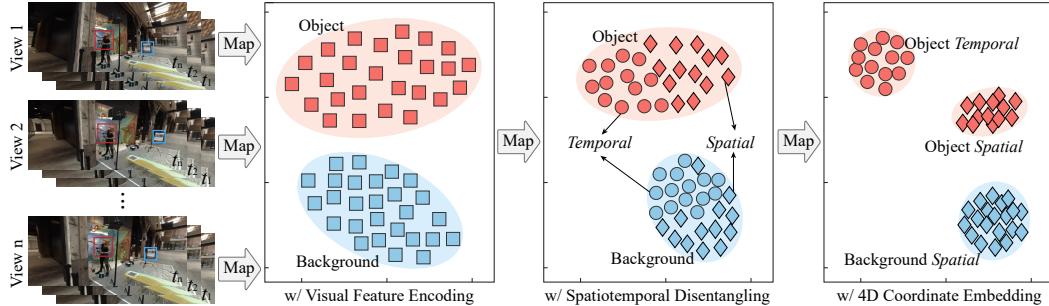


Figure 6: Feature visualization at different stages. Spatiotemporal disentanglement improves the discriminability of background and objects, which are further separated by 4D coordinate embedding.

[21], Grounded 3D-LLM [57], PQ3D [58], LLaVA-3D [11], and Video-3D LLM [23]. For a fair comparison, all methods are trained on the same evaluation benchmark via instruction fine-tuning.

Evaluation Metric. We compare all competing methods on multiple 3D datasets: Scan2Cap [43], ScanQA [41], ScanRef [55] and Multi3DRefer [44] and our Chat4D dataset. We evaluate the quality of generated text response for Scan2Cap and ScanQA in terms of CiDER (C), BLEU-4 (B-4), METEOR (M). We choose the F1 metric of object prediction precision for Multi3DRefer, and the accuracy of intersection over unions for grounding task from ScanRef. The metrics are also applicable to the evaluation on our Chat4D, where grounding accuracy is divided into spatial and temporal components: S/TAcc. Note that the experiments in Sec. 5.3 are evaluated on 4D tasks.

5.2 Comparison with State-of-the-Art Models

Quantitative Results. In Table 1, we compare the competing methods on 3D and 4D datasets. For 3D understanding comparison, our method performs better than other methods. This shows that spatial features disentangled from multi-view images have stronger representation than ordinary visual features for 3D scene. For 4D understanding comparison, our method achieve a significant strength due to dynamic-aware 4D coordinate as spatiotemporal prompt.

Qualitative Results. In Fig. 5, we select a typical 4D scene from our Chat4D dataset to visualize the comparison between our model and 3D LMMs. The results show that 3D LMMs cannot respond to timestamp and corresponding temporal information, while our method can understand the temporal content. This is because 3D LMMs lack the representation of temporal characteristic. In contrast, our method introduces the spatiotemporal prompt to enhance the dynamic representation of 4D scenes.

5.3 Ablation Study and Discussion

Effect of Visual Representation Modules. In Table 2, we verify the effectiveness of coordinate embedding, feature disentanglement and feature fusion modules in visual representation. Coordinate embedding is the key to improving the overall performance of 4D understanding tasks by a large margin. Feature disentanglement improves the upper limit of 4D scene understanding to a certain extent by strengthening the representation of spatial and temporal characteristics. Feature fusion further enhances the spatiotemporal understanding ability of the LMM.

Role of 4D Coordinate Encoding. In Table 3, we analyze the impact of 3D position encoding and 1D time encoding on the performance of 4D understanding. When 4D coordinates are not encoded, the spatiotemporal understanding performance of the LMM is negatively affected to a certain extent. 3D position encoding mainly contributes to the spatial understanding ability of the LMM, and 1D time encoding can further improve the performance of temporal understanding.

Table 4: Discussion on spatiotemporal fusion.

Fusion strategy	C↑	B-4↑	SAcc@0.5↑	TAcc↑
w/ Concatenation	89.0	16.5	54.3	51.2
w/ Weighting	89.5	16.5	55.1	51.4
w/ Attention	93.5	17.2	58.9	54.6

Table 5: Impact of textual coordinate encoding.

Text instruction	C↑	B-4↑	SAcc@0.5↑	TAcc↑
w/o Coordinate	83.5	13.2	43.2	25.8
w/ Coordinate	w/o Encoding	90.1	16.7	56.3
w/ Coordinate	w/ Encoding	93.5	17.2	58.9
				54.6

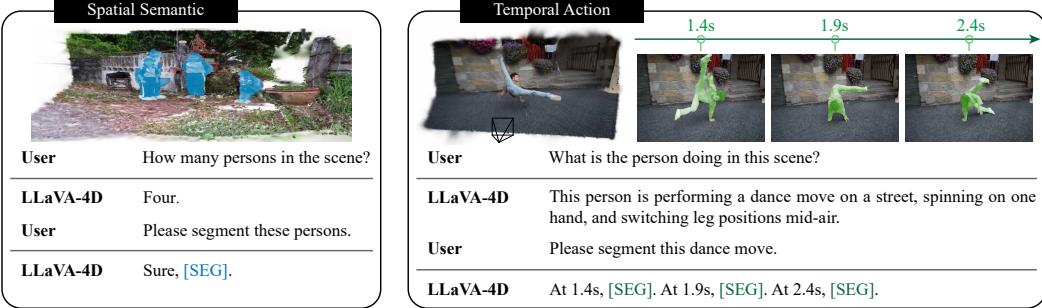


Figure 7: Visualization of spatiotemporal prompt extended to other spatiotemporal vision tasks.

How Spatiotemporal Features Work? We study how spatiotemporal features work within our model in Fig. 6. Initially, the visual features of objects and backgrounds appear relatively scattered. After spatiotemporal disentanglement, object features are distinctly divided into spatial and temporal components with background features remain clustered. Incorporating coordinate embedding further organizes object features into two distinct sets: spatial and temporal where background features consolidate into a unified spatial set. This demonstrates the strong spatiotemporal representation capability of our method for dynamic objects and static backgrounds.

Choice of Spatiotemporal Fusion Strategy. Table 4 shows attention-based fusion outperforms concatenation and weighting fusion strategies. This is because concatenation and weighting rely on global unified fusion with fixed weights. In contrast, attention-based fusion can dynamically adjust the fusion weights of spatiotemporal features according to 4D coordinate embedding. This allows the LMM to effectively focus more on meaningful spatiotemporal features for 4D understanding.

Impact of Textual Coordinate Encoding. Table 5 ablates the impact of textual coordinate encoding on scene understanding by the LMM. We deduce: 1) Textual coordinates as instructions improve the fine-grained spatiotemporal understanding of the LMM. 2) Textual coordinate encoding further improves the upper limit of 4D spatiotemporal understanding. This is because coordinate encoding helps minimize the risk of large language models misinterpreting coordinate values.

Extensibility of Spatiotemporal Prompt. To verify that the spatiotemporal prompt in our model is an extensible feature, we introduce additional spatial semantic and temporal action masks as prompts based on the encoded 4D coordinates to train our model. As shown in Fig. 7, our model can reason about the visual features of semantic and action based on specific text instructions. Incorporating spatiotemporal prompts thus enhances the generality of our model for various vision tasks.

Limitation. While our model performs well on most 3D and 4D dynamic scenes, it struggles with fast-moving objects due to motion blur from frame-based cameras. This reduces discriminability of the spatiotemporal feature and thus weakens 4D understanding. In future work, we plan to incorporate event cameras [60] with high temporal resolution to improve dynamic representation.

6 Conclusion

In this work, we propose LLaVA-4D, a first general vision-language LMM for 4D scene understanding. We introduce a dynamic-aware 4D coordinate encoding as a spatiotemporal prompt for scene content localization. Additionally, we propose a spatiotemporal-disentangled vision embedding method that integrates 4D spatiotemporal prompts into disentangled spatiotemporal features for effective scene representation. By aligning visual spatiotemporal embeddings with language embeddings, our approach allows LMMs to comprehend the 4D physical world. To support training, we construct Chat4D, a comprehensive dataset covering 2D, 3D and 4D vision-language data for multimodal spatiotemporal understanding. Extensive experiments validate the effectiveness of our method.

References

- [1] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Arthur Mensch, Katie Millican, David Moore, Michael Needham, et al. Flamingo: a visual language model for few-shot learning. *Advances in Neural Information Processing Systems*, 35:23716–23732, 2022.
- [2] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- [3] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pam Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, pages 8748–8763. PMLR, 2021.
- [4] Yujia Gong, Changhan Wang, Yun Tang Wang, and Jiatao Gu. Contrastive learning for speech translation. In *International Conference on Learning Representations*, 2022.
- [5] Jianfeng Wang, Jianwei Yang, Xiaowei Wang, Lu Yuan, Lei Zhang, Yejin Choi, and Jianfeng Gao. Git: A generative image-to-text transformer for vision and language. In *Advances in Neural Information Processing Systems*, volume 35, pages 18002–18014, 2022.
- [6] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. BLIP: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 12888–12900. PMLR, 2022.
- [7] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. BLIP-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 19730–19742. PMLR, 2023.
- [8] Aishwarya Kamath, Mannat Singh, Yann LeCun, Ishan Misra, Gabriel Synnaeve, Nicolas Carion, and Karteek Alahari. Mdetr: Modulated detection for end-to-end multi-modal understanding. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1780–1790, 2021.
- [9] Mandy Chen, Adams Wei Yu, Hamid Palangi, Paul Smolensky, Yinfei Yang, Xiaowei Yuan, Kathy Meier-Hellstern, Jianfeng Gao, Ed Chi, et al. Pali: A jointly-scaled multilingual language-image model. *arXiv preprint arXiv:2303.07892*, 2023.
- [10] Yining Hong, Haoyu Zhen, Peihao Chen, Shuhong Zheng, Yilun Du, Zhenfang Chen, and Chuang Gan. 3d-llm: Injecting the 3d world into large language models. *Advances in Neural Information Processing Systems*, 36:20482–20494, 2023.
- [11] Chenming Zhu, Tai Wang, Wenwei Zhang, Jiangmiao Pang, and Xihui Liu. Llava-3d: A simple yet effective pathway to empowering lmms with 3d-awareness. *arXiv preprint arXiv:2409.18125*, 2024.
- [12] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [13] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [14] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwäl Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [15] Jun Chen, Deyao Zhu, Xiaoqian Shen, Xiang Li, Zechun Liu, Pengchuan Zhang, Raghuraman Krishnamoorthi, Vikas Chandra, Yunyang Xiong, and Mohamed Elhoseiny. Minigpt-v2: large language model as a unified interface for vision-language multi-task learning. *arXiv preprint arXiv:2310.09478*, 2023.
- [16] Ji Lin, Hongxu Yin, Wei Ping, Pavlo Molchanov, Mohammad Shoeybi, and Song Han. Vila: On pre-training for visual language models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 26689–26699, 2024.
- [17] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26296–26306, 2024.

- [18] Hongyu Li, Jinyu Chen, Ziyu Wei, Shaofei Huang, Tianrui Hui, Jialin Gao, Xiaoming Wei, and Si Liu. Llava-st: A multimodal large language model for fine-grained spatial-temporal understanding. *arXiv preprint arXiv:2501.08282*, 2025.
- [19] Zehan Wang, Haifeng Huang, Yang Zhao, Ziang Zhang, and Zhou Zhao. Chat-3d: Data-efficiently tuning large language model for universal dialogue of 3d scenes. *arXiv preprint arXiv:2308.08769*, 2023.
- [20] Sijin Chen, Xin Chen, Chi Zhang, Mingsheng Li, Gang Yu, Hao Fei, Hongyuan Zhu, Jiayuan Fan, and Tao Chen. Ll3da: Visual interactive instruction tuning for omni-3d understanding reasoning and planning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26428–26438, 2024.
- [21] Jiajun Deng, Tianyu He, Li Jiang, Tianyu Wang, Feras Dayoub, and Ian Reid. 3d-llava: Towards generalist 3d lmms with omni superpoint transformer. *arXiv preprint arXiv:2501.01163*, 2025.
- [22] Hongyan Zhi, Peihao Chen, Junyan Li, Shuailei Ma, Xinyu Sun, Tianhang Xiang, Yinjie Lei, Mingkui Tan, and Chuang Gan. Lscenellm: Enhancing large 3d scene understanding using adaptive visual preferences. *arXiv preprint arXiv:2412.01292*, 2024.
- [23] Duo Zheng, Shijia Huang, and Liwei Wang. Video-3d llm: Learning position-aware video representation for 3d scene understanding. *arXiv preprint arXiv:2412.00493*, 2024.
- [24] Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, and George Drettakis. 3d gaussian splatting for real-time radiance field rendering. *ACM Trans. Graph.*, 42(4):139–1, 2023.
- [25] Wanhua Li, Renping Zhou, Jiawei Zhou, Yingwei Song, Johannes Herter, Minghan Qin, Gao Huang, and Hanspeter Pfister. 4d langsplat: 4d language gaussian splatting via multimodal large language models. *arXiv preprint arXiv:2503.10437*, 2025.
- [26] Zhichao Deng, Xiangtai Li, Xia Li, Yunhai Tong, Shen Zhao, and Mengyuan Liu. Vg4d: Vision-language model goes 4d video recognition. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 5014–5020. IEEE, 2024.
- [27] Jingtao Sun, Yaonan Wang, Mingtao Feng, Yulan Guo, Ajmal Mian, and Mike Zheng Shou. L4d-track: Language-to-4d modeling towards 6-dof tracking and shape reconstruction in 3d point cloud stream. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 21146–21156, 2024.
- [28] Guanjun Wu, Taoran Yi, Jiemin Fang, Lingxi Xie, Xiaopeng Zhang, Wei Wei, Wenyu Liu, Qi Tian, and Xinggang Wang. 4d gaussian splatting for real-time dynamic scene rendering. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 20310–20320, 2024.
- [29] Johannes L Schonberger and Jan-Michael Frahm. Structure-from-motion revisited. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 4104–4113, 2016.
- [30] Steven M Seitz, Brian Curless, James Diebel, Daniel Scharstein, and Richard Szeliski. A comparison and evaluation of multi-view stereo reconstruction algorithms. In *2006 IEEE computer society conference on computer vision and pattern recognition (CVPR'06)*, volume 1, pages 519–528. IEEE, 2006.
- [31] Yuliang Zou, Zelun Luo, and Jia-Bin Huang. Df-net: Unsupervised joint learning of depth and flow using cross-task consistency. In *Eur. Conf. Comput. Vis.*, pages 1–18. Springer, 2018.
- [32] Tinghui Zhou, Matthew Brown, Noah Snavely, and David G Lowe. Unsupervised learning of depth and ego-motion from video. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 1851–1858, 2017.
- [33] Yang Li, Si Si, Gang Li, Cho-Jui Hsieh, and Samy Bengio. Learnable fourier features for multi-dimensional spatial positional encoding. *Advances in Neural Information Processing Systems*, 34:15816–15829, 2021.
- [34] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Adv. Neural Inform. Process. Syst.*, 30, 2017.
- [35] Chun-Fu Richard Chen, Quanfu Fan, and Rameswar Panda. Crossvit: Cross-attention multi-scale vision transformer for image classification. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 357–366, 2021.
- [36] Tsai-Shien Chen, Aliaksandr Siarohin, Willi Menapace, Ekaterina Deyneka, Hsiang-wei Chao, Byung Eun Jeon, Yuwei Fang, Hsin-Ying Lee, Jian Ren, Ming-Hsuan Yang, et al. Panda-70m: Captioning 70m videos with multiple cross-modality teachers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13320–13331, 2024.

- [37] Yi Wang, Yinan He, Yizhuo Li, Kunchang Li, Jiashuo Yu, Xin Ma, Xinhao Li, Guo Chen, Xinyuan Chen, Yaohui Wang, et al. Internvid: A large-scale video-text dataset for multimodal understanding and generation. *arXiv preprint arXiv:2307.06942*, 2023.
- [38] Ruipu Luo, Ziwang Zhao, Min Yang, Junwei Dong, Da Li, Pengcheng Lu, Tao Wang, Linmei Hu, Minghui Qiu, and Zhongyu Wei. Valley: Video assistant with large language model enhanced ability. *arXiv preprint arXiv:2306.07207*, 2023.
- [39] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed video understanding via large vision and language models. *arXiv preprint arXiv:2306.05424*, 2023.
- [40] Hanoona Rasheed, Muhammad Maaz, Sahal Shaji, Abdelrahman Shaker, Salman Khan, Hisham Cholakkal, Rao M Anwer, Eric Xing, Ming-Hsuan Yang, and Fahad S Khan. Glamm: Pixel grounding large multimodal model. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 13009–13018, 2024.
- [41] Daichi Azuma, Taiki Miyanishi, Shuhei Kurita, and Motoaki Kawanabe. Scanqa: 3d question answering for spatial scene understanding. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 19129–19139, 2022.
- [42] Ruiyuan Lyu, Jingli Lin, Tai Wang, Xiaohan Mao, Yilun Chen, Runsen Xu, Haifeng Huang, Chenming Zhu, Dahua Lin, and Jiangmiao Pang. Mmscan: A multi-modal 3d scene dataset with hierarchical grounded language annotations. *Advances in Neural Information Processing Systems*, 37:50898–50924, 2024.
- [43] Zhenyu Chen, Ali Gholami, Matthias Nießner, and Angel X Chang. Scan2cap: Context-aware dense captioning in rgb-d scans. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 3193–3203, 2021.
- [44] Yiming Zhang, ZeMing Gong, and Angel X Chang. Multi3drefer: Grounding text description to multiple 3d objects. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 15225–15236, 2023.
- [45] Xiaojian Ma, Silong Yong, Zilong Zheng, Qing Li, Yitao Liang, Song-Chun Zhu, and Siyuan Huang. Sqa3d: Situated question answering in 3d scenes. *arXiv preprint arXiv:2210.07474*, 2022.
- [46] Hang Gao, Ruilong Li, Shubham Tulsiani, Bryan Russell, and Angjoo Kanazawa. Monocular dynamic view synthesis: A reality check. *Advances in Neural Information Processing Systems*, 35:33768–33780, 2022.
- [47] Keunhong Park, Utkarsh Sinha, Peter Hedman, Jonathan T Barron, Sofien Bouaziz, Dan B Goldman, Ricardo Martin-Brualla, and Steven M Seitz. Hypernerf: A higher-dimensional representation for topologically varying neural radiance fields. *arXiv preprint arXiv:2106.13228*, 2021.
- [48] Tianye Li, Mira Slavcheva, Michael Zollhoefer, Simon Green, Christoph Lassner, Changil Kim, Tanner Schmidt, Steven Lovegrove, Michael Goesele, Richard Newcombe, et al. Neural 3d video synthesis from multi-view video. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5521–5531, 2022.
- [49] Jonathon Luiten, Georgios Kopanas, Bastian Leibe, and Deva Ramanan. Dynamic 3d gaussians: Tracking by persistent dynamic view synthesis. In *2024 International Conference on 3D Vision (3DV)*, pages 800–809. IEEE, 2024.
- [50] Federico Perazzi, Jordi Pont-Tuset, Brian McWilliams, Luc Van Gool, Markus Gross, and Alexander Sorkine-Hornung. A benchmark dataset and evaluation methodology for video object segmentation. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 724–732, 2016.
- [51] Michael Broxton, John Flynn, Ryan Overbeck, Daniel Erickson, Peter Hedman, Matthew Duvall, Jason Dourgarian, Jay Busch, Matt Whalen, and Paul Debevec. Immersive light field video with a layered mesh representation. *ACM Trans. Graph.*, 39(4):86–1, 2020.
- [52] Yingfei Liu, Junjie Yan, Fan Jia, Shuailin Li, Aqi Gao, Tiancai Wang, and Xiangyu Zhang. Petrv2: A unified framework for 3d perception from multi-camera images. In *Int. Conf. Comput. Vis.*, pages 3262–3272, 2023.
- [53] Danila Rukhovich, Anna Vorontsova, and Anton Konushin. Imvoxelnet: Image to voxels projection for monocular and multi-view general-purpose 3d object detection. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 2397–2406, 2022.
- [54] Zhengyuan Yang, Linjie Li, Kevin Lin, Jianfeng Wang, Chung-Ching Lin, Zicheng Liu, and Lijuan Wang. The dawn of lmms: Preliminary explorations with gpt-4v (ision). *arXiv preprint arXiv:2309.17421*, 9(1):1, 2023.

- [55] Dave Zhenyu Chen, Angel X Chang, and Matthias Nießner. Scanrefer: 3d object localization in rgb-d scans using natural language. In *European conference on computer vision*, pages 202–221. Springer, 2020.
- [56] Haifeng Huang, Zehan Wang, Rongjie Huang, Luping Liu, Xize Cheng, Yang Zhao, Tao Jin, and Zhou Zhao. Chat-3d v2: Bridging 3d scene and large language models with object identifiers. *arXiv preprint arXiv:2312.08168*, 2023.
- [57] Yilun Chen, Shuai Yang, Haifeng Huang, Tai Wang, Runsen Xu, Ruiyuan Lyu, Dahua Lin, and Jiangmiao Pang. Grounded 3d-llm with referent tokens. *arXiv preprint arXiv:2405.10370*, 2024.
- [58] Ziyu Zhu, Zhuofan Zhang, Xiaojian Ma, Xuesong Niu, Yixin Chen, Baoxiong Jia, Zhidong Deng, Siyuan Huang, and Qing Li. Unifying 3d vision-language understanding via promptable queries. In *European Conference on Computer Vision*, pages 188–206. Springer, 2024.
- [59] Mehdi Cherti, Romain Beaumont, Ross Wightman, Mitchell Wortsman, Gabriel Ilharco, Cade Gordon, Christoph Schuhmann, Ludwig Schmidt, and Jenia Jitsev. Reproducible scaling laws for contrastive language-image learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2818–2829, 2023.
- [60] Guillermo Gallego, Tobi Delbrück, Garrick Orchard, Chiara Bartolozzi, Brian Taba, Andrea Censi, et al. Event-based vision: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(1):154–180, 2020.