

Quiz 01

- Average was an 84%. Great job!!!
- We are waiting on some makeups before we can release grades.

Hack110 Interest Form!


When: Saturday, April 18th from 10 AM - 12 AM (Midnight)

Where: Sitterson and Fred Brooks 1st floor (Floor 0)

Who can join? Anyone in COMP 110! No prior experience required.

Bring a partner, find one there, or go solo!

Come for a fun day of coding, workshops and events (also **food and CLE credit will be provided**):

- Choose 1 of many tracks like web dev, game dev, etc - and WIN PRIZES too!
- Go to various **workshops & events** such as: Navigating the CS Major, Resume workshop, ice cream station, and kahoot trivia and MORE!
- Link: [Interest Form Here!](#) Or via the QR code 
- **Interest form will close Sunday, Mar 1st at 11:59 pm**
 - Fill out this form to get **priority notice** of when we release the sign-up form.

Instagram







Interest Form!






While Loops





Finding the Lowest Card

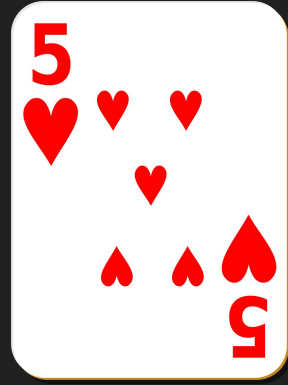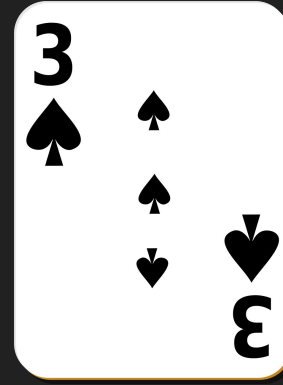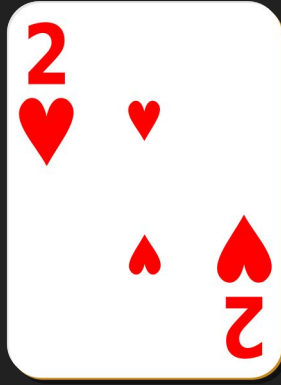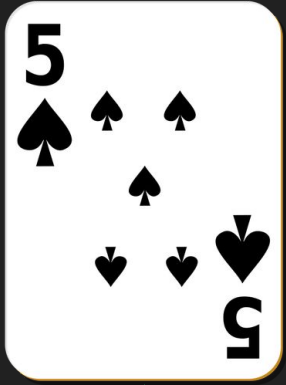

Low card:

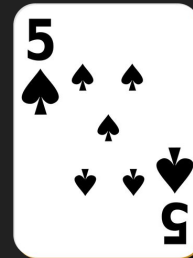


Finding the Lowest Card

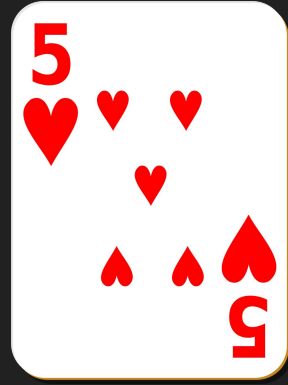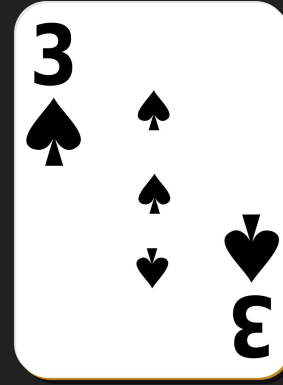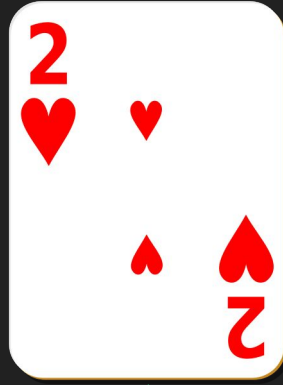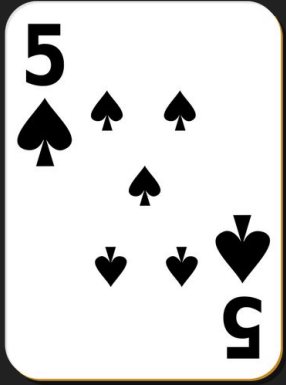





$2 < 5?$



Low card:

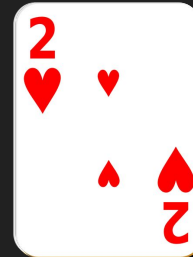


Finding the Lowest Card

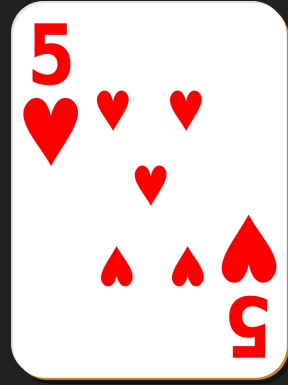
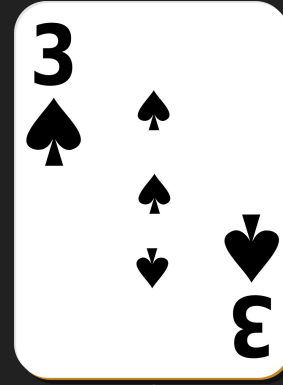
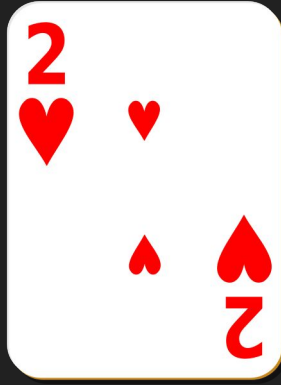
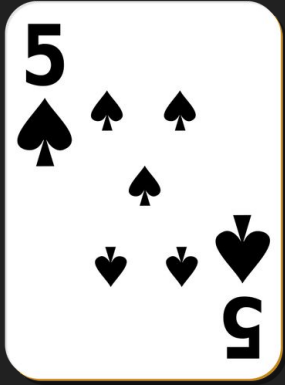


$3 < 2?$ 

Low card:

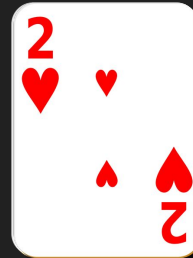


Finding the Lowest Card

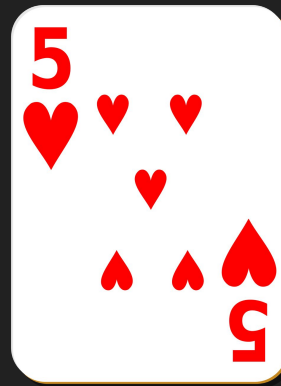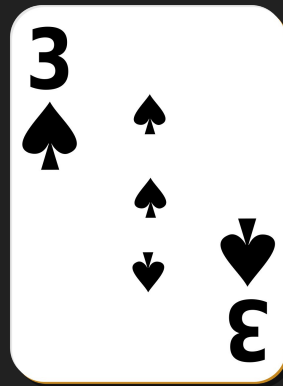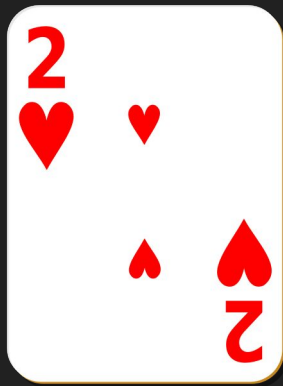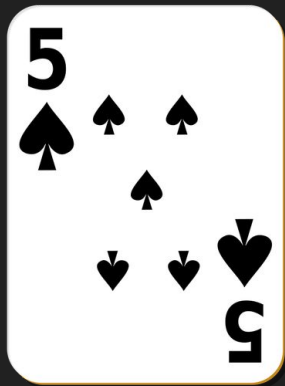

5 < 2? 

Low card:

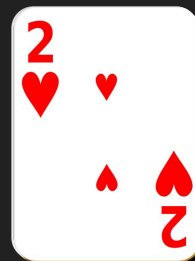

Finding the Lowest Card


Finding the low card pseudocode:

1 lowest_card = first card in deck

2 Repeatedly until end of deck:

3 if current_card < lowest_card:

4 lowest_card = current_card

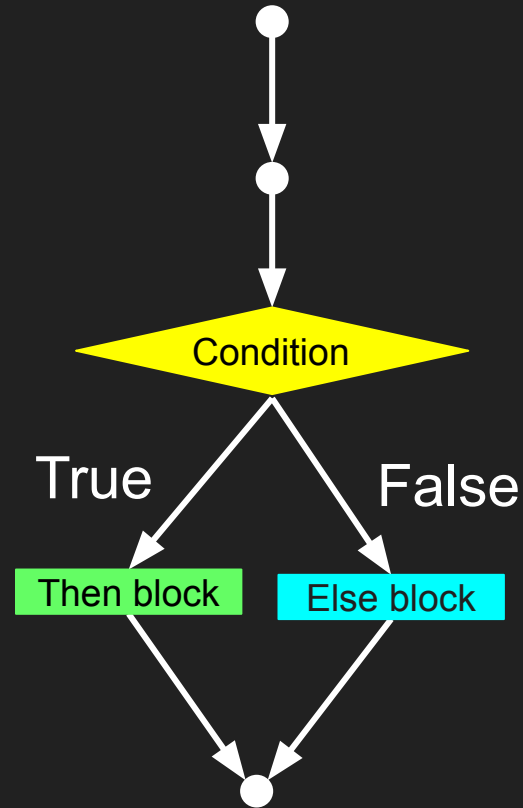

Finding the Lowest Card


Finding the low card pseudocode:

1 lowest_card = first card in deck

2 Repeatedly until end of deck:

3 if current_card < lowest_card:

4 lowest_card = current_card

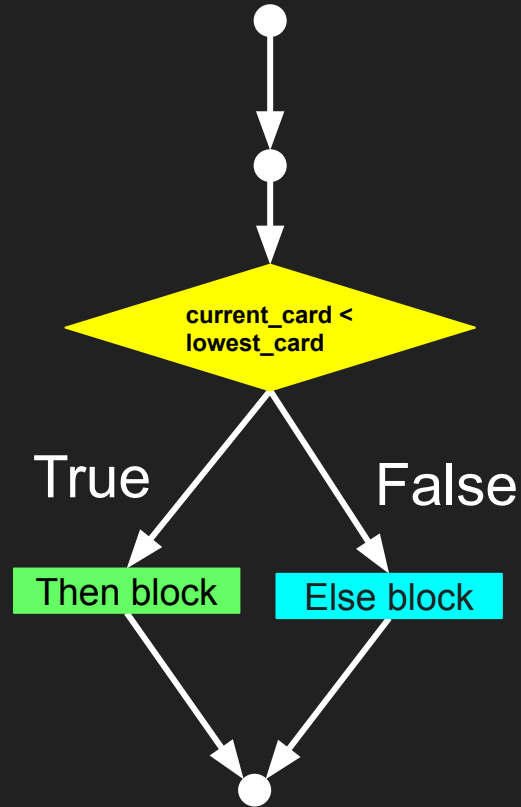

Finding the Lowest Card


Finding the low card pseudocode:

1 lowest_card = first card in deck

2 Repeatedly until end of deck:

3 if current_card < lowest_card:

4 lowest_card = current_card

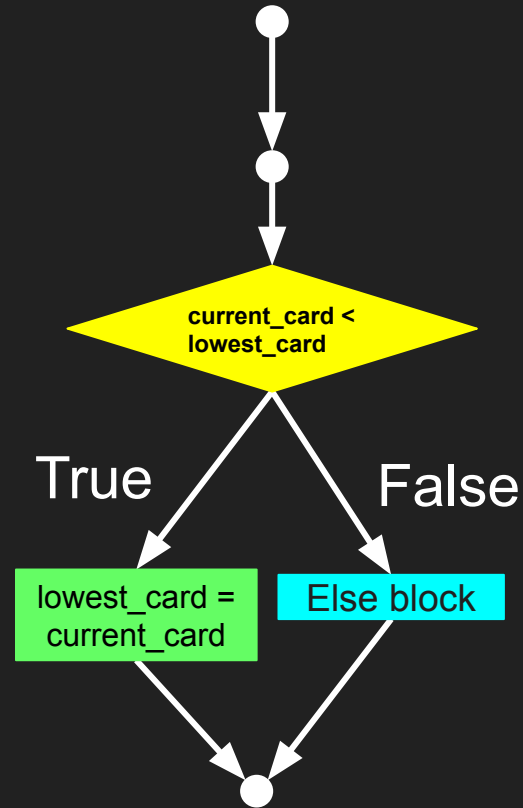

Finding the Lowest Card


Finding the low card pseudocode:

1 lowest_card = first card in deck

2 Repeatedly until end of deck:

3 if current_card < lowest_card:

4 lowest_card = current_card

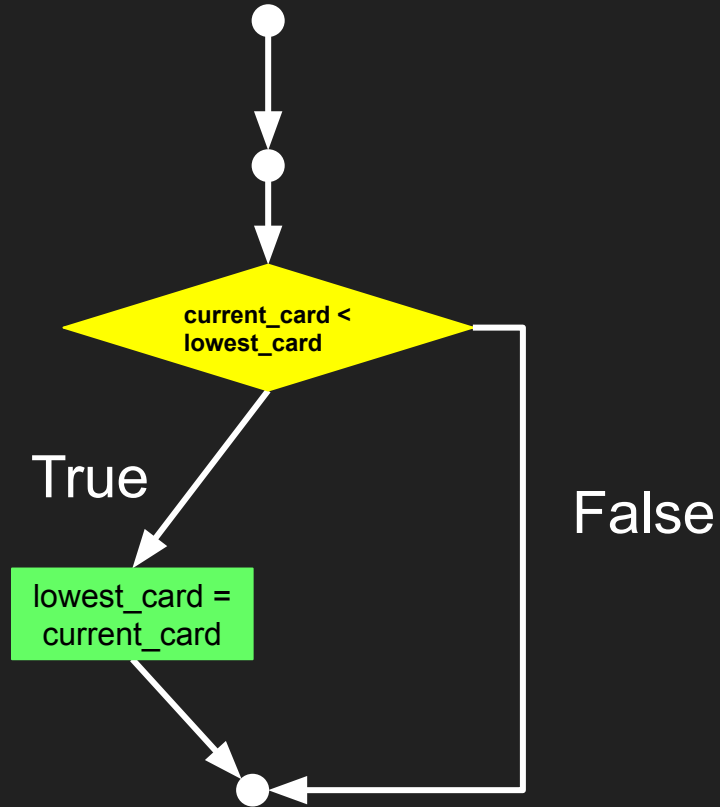

Finding the Lowest Card


Finding the low card pseudocode:

1 lowest_card = first card in deck

2 Repeatedly until end of deck:

3 if current_card < lowest_card:

4 lowest_card = current_card

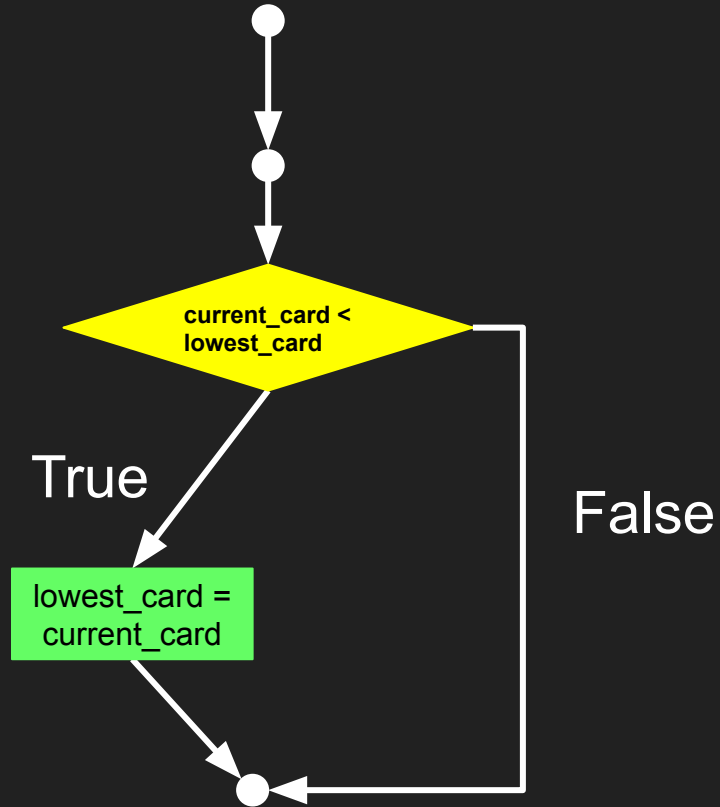

Loops

- Used to carry out statements in a program repeatedly an arbitrary number of times.

Loops

- Used to carry out statements in a program repeatedly an arbitrary number of times.

Finding the low card pseudocode:




1 lowest_card = first card in deck

2 Repeatedly until end of deck:


3 if current_card < lowest_card:

4 lowest_card = current_card


Loop




Loops

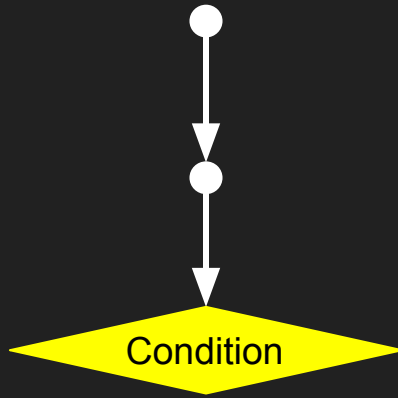


Loops

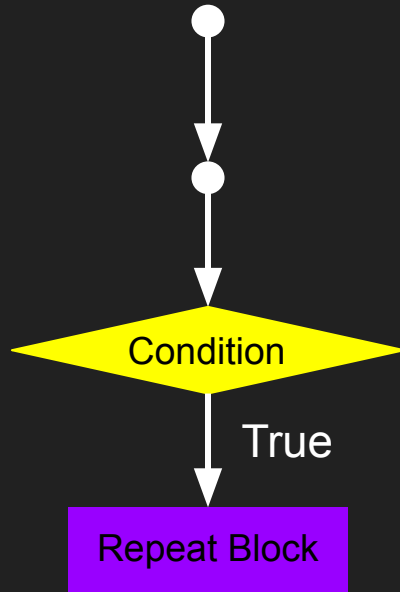

Loops

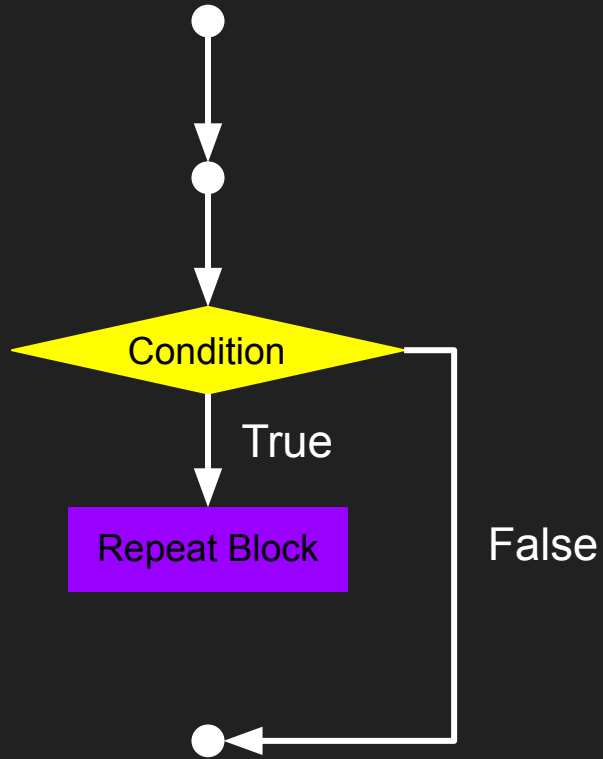


Loops

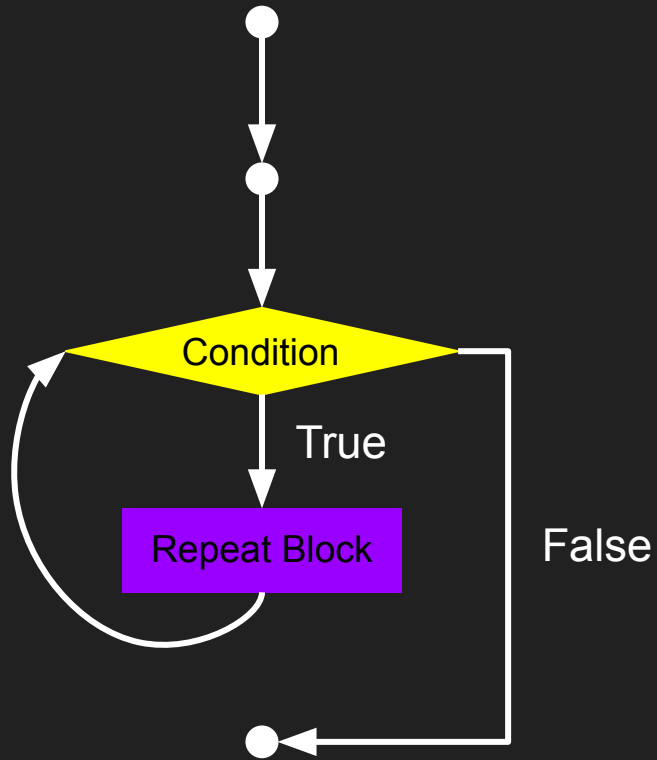

“While” Loops


Repeat while
condition is true

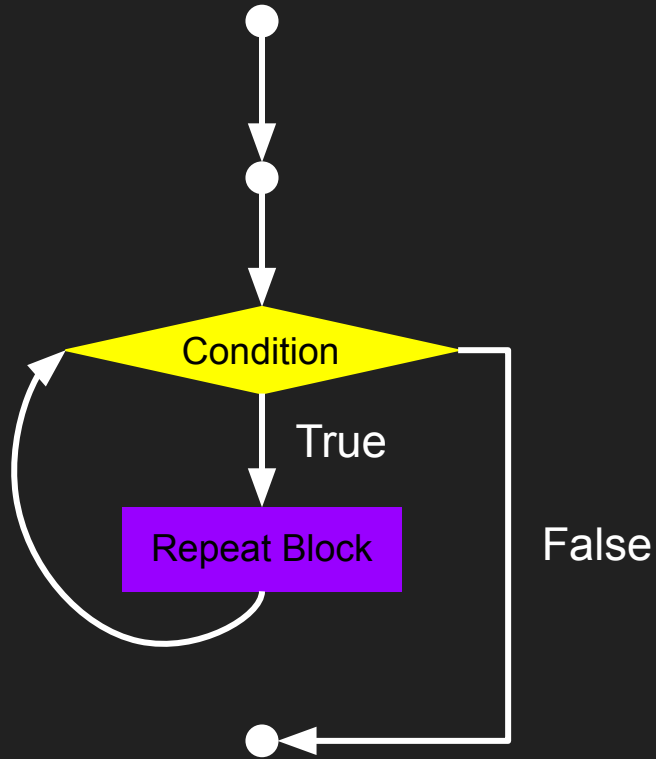

Loops

Finding the low card pseudocode:


- 1 lowest_card = first card in deck
- 2 Repeatedly until end of deck:
- 3 if current_card < lowest_card:
- 4 lowest_card = current_card

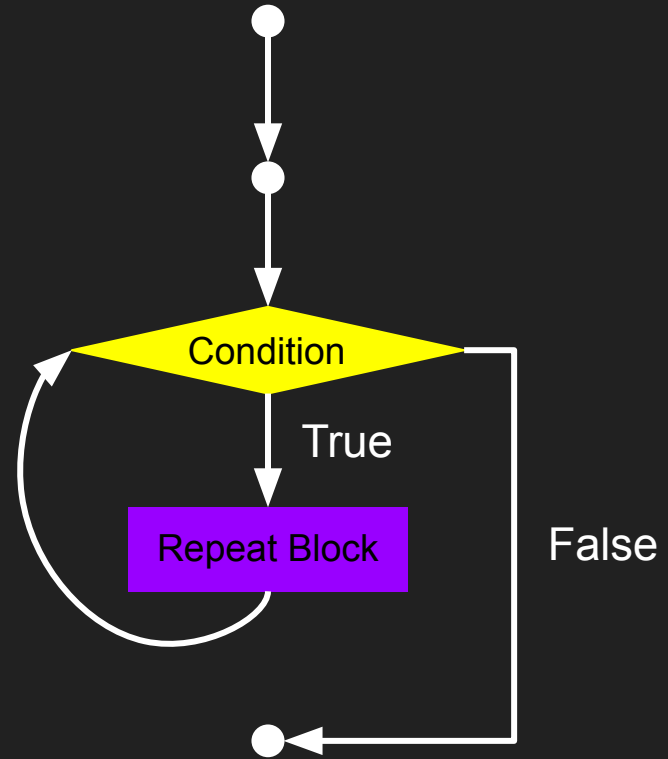

Loops

Finding the low card pseudocode:


- 1 lowest_card = first card in deck
- 2 Repeatedly until end of deck:
- 3 if current_card < lowest_card:
- 4 lowest_card = current_card

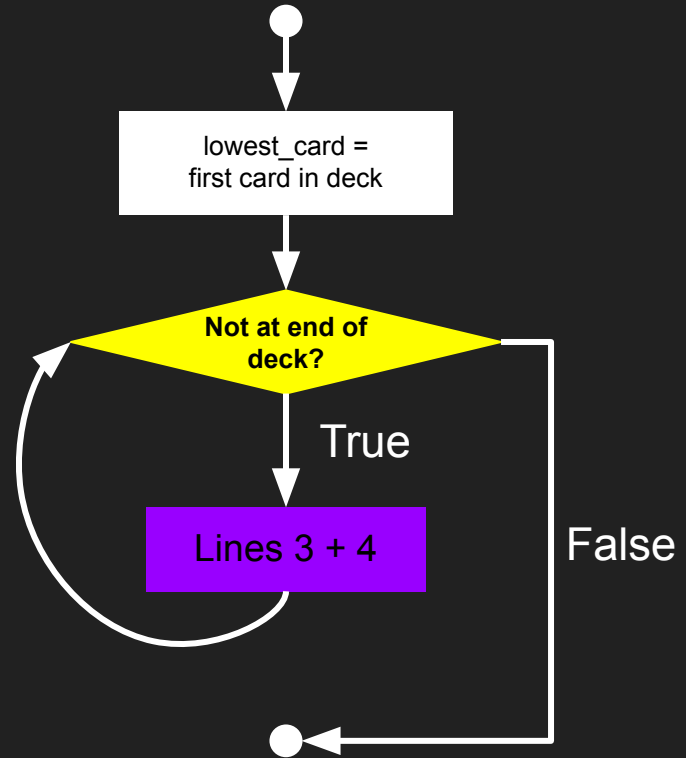

Loops

Finding the low card pseudocode:


- 1 lowest_card = first card in deck
- 2 Repeatedly until end of deck:
- 3 if current_card < lowest_card:
- 4 lowest_card = current_card

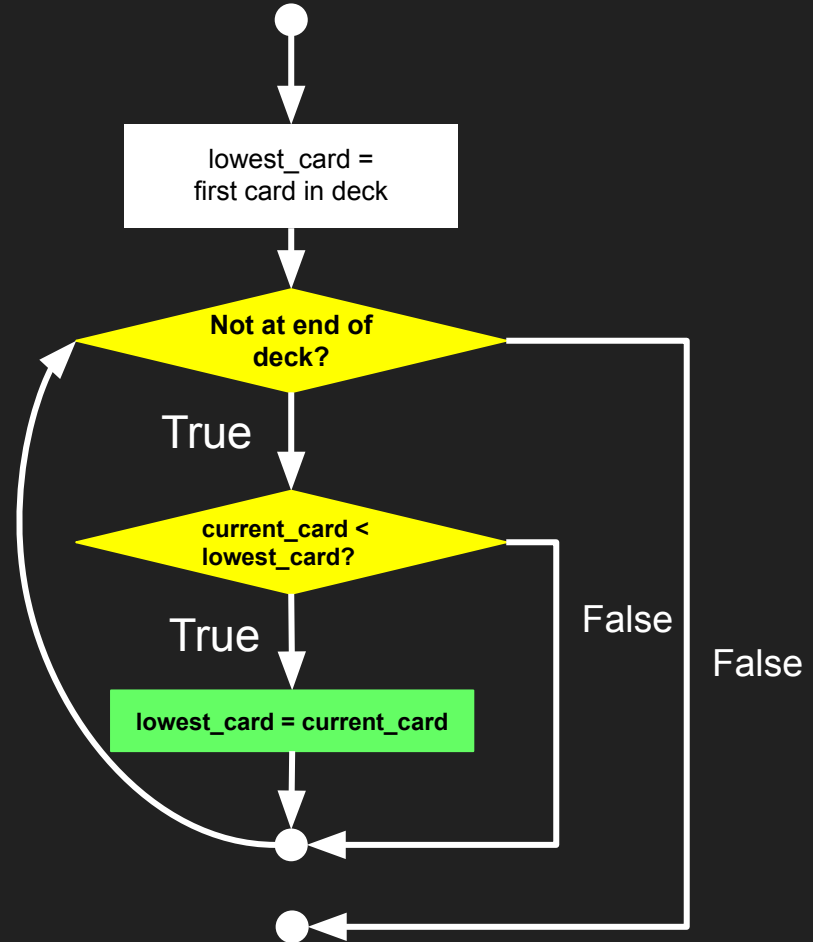

Syntax

while <condition>:

<repeat action>

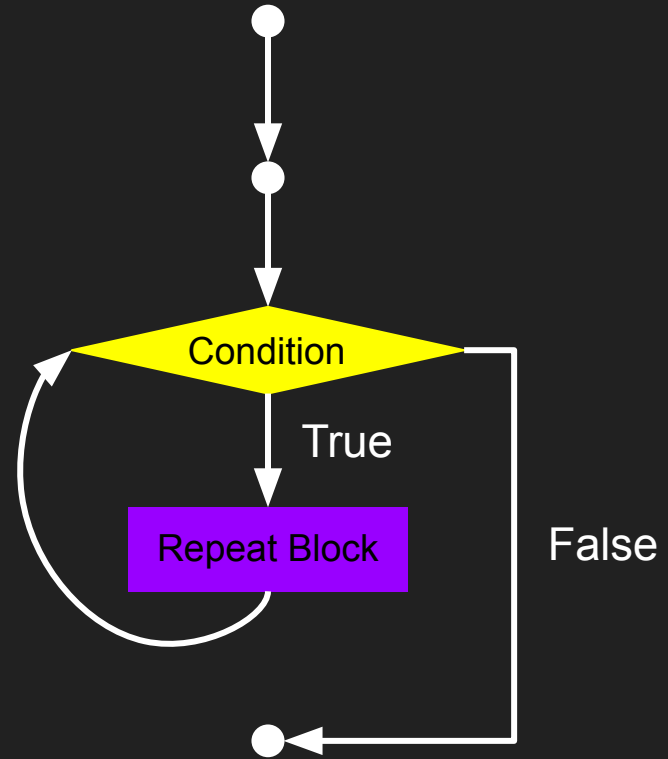

Practice Memory Diagram

```
1  def loop(stop: int) -> None:
2      condition: bool = True
3      num_loops: int = 0
4      while condition:
5          print(num_loops)
6          num_loops = num_loops + 1
7          if num_loops >= stop:
8              condition = False
9
10 loop(stop=2)
```


Practice Memory Diagram

```
1  def characters(msg: str) -> None:
2      index: int = 0
3      while index < len(msg):
4          print(msg[index])
5          index = index + 1
6
7  characters(msg="Howdy")
```

Practice

Create a function called `find_small_card`. It should have parameter `cards: str` and return an `int` of the lowest value in `cards`

For example,

`find_small_card(cards="8675309")` should return 0

Bonus Lesson: Relative Reassignment Operators

Reassigning a variable relative to its current value: `i = i + 1`

Addition reassignment operator shorthand has the same effect: `i += 1`

Since you will use meaningfully descriptive variable names, this is a big improvement!

`total_dollars = total_dollars + next_donation` vs `total_dollars += next_donation`

```
1 def characters(msg: str) -> None:
2     index: int = 0
3     while index < len(msg):
4         print(msg[index])
5         index = index + 1
6
7 characters(msg="Howdy")
```

```
1  def characters(msg: str) -> None:
2      index: int = 0
3      while index < len(msg):
4          print(msg[index])
5          index += 1
6
7  characters(msg="Howdy")
```

Before	After
<code>i = i + expr</code>	<code>i += expr</code>
<code>i = i - expr</code>	<code>i -= expr</code>
<code>i = i * expr</code>	<code>i *= expr</code>
<code>i = i / expr</code>	<code>i /= expr</code>
<code>i = i % expr</code>	<code>i %= expr</code>
<code>i = i // expr</code>	<code>i //= expr</code>
<code>i = i ** expr</code>	<code>i **= expr</code>