


Лабораторная работа № 11

Текстовый редактор emacs

Хохлачёва П.Д.

Российский университет дружбы народов, Москва, Россия

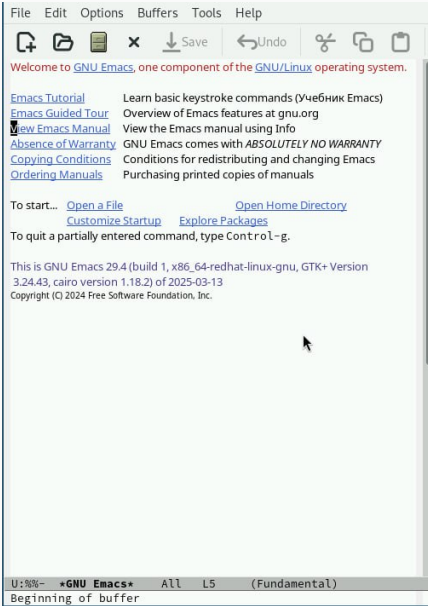

emacs

A screenshot of a Sh-Script editor window. The window has a menu bar with 'File', 'Edit', 'Options', 'Buffers', 'Tools', 'Sh-Script', and 'Help'. Below the menu bar is a toolbar with icons for creating a new file, opening a file, saving a file, closing a file, saving, undo, cut, copy, and paste. The main text area contains a shell script with the following content:

```
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}
```

A mouse cursor is visible on the right side of the text area.

Набираем текст

The screenshot shows the Emacs editor interface. The top menu bar includes File, Edit, Options, Buffers, Tools, Shell, and Help. Below the menu is a toolbar with icons for file operations and editing. The main text area contains a shell script:

```
#!/bin/bash
HELL=Hello
function hello {
  LOCAL HELLO=World
  echo $HELLO
}
echo $HELLLO
hello
```


Below the text area is a buffer list window. The title bar reads "U:--- lab07.sh All L9 (Shell-script[sh])". The list contains the following entries:

CRM	Buffer	Size	Mode	File
	lab07.sh	90	Shell-script[sh]	~/lab07.sh
%	*GNU Emacs*	730	Fundamental	
%	*scratch*	145	Lisp Interaction	
%*	*Messages*	712	Messages	
%*	*Async-native-compile-...	165	Fundamental	

At the bottom, there is another window titled "U:%%- *Buffer List* All L1 (Buffer Menu)" with the text "C-x C-b" below it.

Список буферов



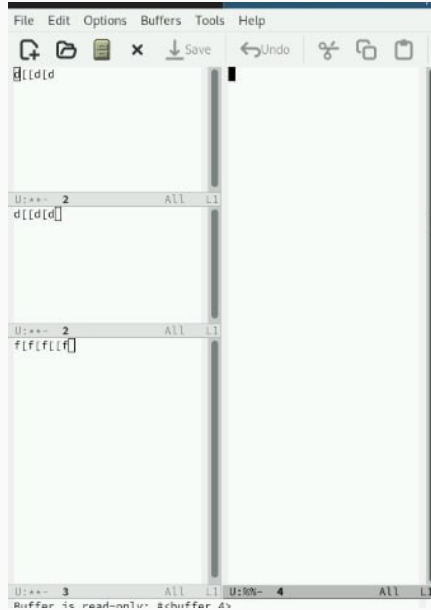

Выполняем задание