00

CompanyGraph — Your landscape, in ArchiMate's words

Systems and their kinds, connections, data and services, written as pages a check holds and mapped to ArchiMate in both directions.

RESTS ON `concept Pack`

Robert Blust · Software Engineer & Architect

Ask the model

01

The method you know

The pack writes ArchiMate's elements down as pages, and its README maps them both ways.

THE OPEN GROUP	ArchiMate 4 Specification
THE OPEN GROUP	ArchiMate Model Exchange File Format
LEANIX	Application lifecycle

RESTS ON `concept Pack`

Ask the model

02

A system and its kind

One type where ArchiMate has six elements. Its kind is a page in your company's words that carries the ArchiMate element once.

RESTS ON `system-kind Deployment` `system-kind Platform` `system-kind SaaS`

model/system-kinds/deployment.md

```
---
id: 01a1256e-57e2-7acc-a706-3177ef8b8dac
source: Local
rank: 10
element: application-component
---
# Deployment
> Software CompanyGraph builds, releases and deploys to a platform it rents or takes free.
…
```


Ask the model

03

A system

A system names its kind, the seat that owns it, the data processor behind it and what it runs on.

RESTS ON `system MCP server` `system Cloud Run`

model/systems/mcp-server.md

```
---
id: 01a1256e-8662-7925-9097-a884e87a2658
source: Local
kind: Deployment
owner: Owner
processor: Google Cloud
part-of: Cloud Run
---
# MCP server
> Answers questions about CompanyGraph's own model, read at one pinned commit when its
  image is built and not live, over the Model Context Protocol at mcp.companygraph.io, for
  any agent that connects and for the chat.
…
```


Ask the model

04

What it connects to

A row is written on the side that takes the data, with the interface's name in `As` and the service it calls in `Service`.

RESTS ON `system Chat server` `service MCP endpoint` `system Claude API`

model/systems/chat-server.md

```
…
## Connects to
| System | As | Service | Carries | Via |
| --- | --- | --- | --- | --- |
| MCP server | Streamable HTTP | MCP endpoint | Entity | HTTPS |
| Claude API | Messages API | | | HTTPS |
| TypeSafe | System One API | | | HTTPS |
…
```


Ask the model

05

What it holds

A row names a concept, the data object that keeps it and the access. One system holds each concept as `master`.

RESTS ON `system GitHub` `data-object Repository` `data-object Snapshot` `concept Instance`

model/systems/github.md

```
…
# GitHub
> Holds CompanyGraph's repositories, among them the vocabulary, the tools and its own
  model, with their pull requests, issues and releases, for the seats that work on them.

## Holds
| Concept | Data object | Access |
| --- | --- | --- |
| Instance | Repository | master |
…
```


Ask the model

06

A service

What a system exposes to others, provided by the systems that expose it, realizing the feature the business sees.

RESTS ON `service MCP endpoint` `feature An agent reads the model`

model/services/mcp-endpoint.md

```
---
id: 01a1256f-009b-7dca-b327-76f8b78a27cf
source: Local
provided-by:
  - MCP server
realizes:
  - An agent reads the model
---
# MCP endpoint
> The Model Context Protocol endpoint at mcp.companygraph.io/mcp, where any agent client,
  and the chat, lists the types CompanyGraph's model declares, reads its entities and
  searches it, without signing in.
…
```


Ask the model

07

The mapping

A generator reads it both ways: from a tool's export into pages, and from pages back into the exchange format.

RESTS ON `concept Pack`

Application Component, Node, System Software, Device, Equipment, Communication Network	a `system`, whose kind's `element` names which one it is
Application Interface, Technology Interface	the `As` of a Connects to row
Data Object	a `data-object`, realizing its business object, a core `concept`
Access, with its mode	a Holds row: `writes` or `reads`, the leading writer `master`
Function, Artifact	dropped: internal behavior nobody can name a user of

Ask the model

08

Where it departs

Where the pack does not do what ArchiMate or LeanIX do, its README says so and says why.

RESTS ON `concept Pack`

Six elements	one type, the kind's `element` naming which one, so the element comes back exact
An interface	a row, not an element; its name survives in `As`
Triggering	comes back as Flow: a row says what is carried and how, not whether it starts something
Functions and artifacts	no page, by core's rule that a thing nobody can name a user of is not a feature
Access	`readwrite` is `writes`, since a writer reads, and `master` is a claim ArchiMate does not make
Lifecycle	LeanIX's phase-in and active are one `active`: the model says what is, not when it will be


Ask the model

09

How the pack joins core

A system serves a process or realizes a feature, a service realizes a feature and a data object realizes a concept. A system names the seat that owns it and its data processor. Every edge runs one way and is optional.

RESTS ON `process Answering` `feature An agent reads the model` `concept Instance` `seat Owner` `data-processor Google Cloud`

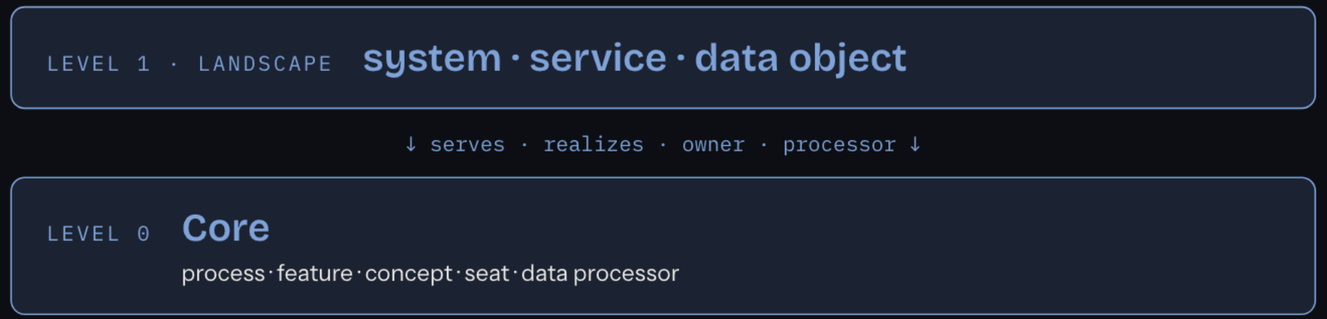

Ask the model

10

Left for later

What the pack does not have yet is named in its README, not hidden.

LATER	Location, as a type of this pack
LATER	an integration type
LATER	functions
LATER	license and cost
LATER	a collaboration, ArchiMate 4's element for several systems working together
LATER	a notation on the kind
LATER	an artifact realizing a data object
LATER	a field list on a data object
LATER	a generator from an architecture tool's export, which is an instance's own


RESTS ON `concept Pack`

Ask the model

The landscape, drawn

Nobody drew these. The MCP server's own code draws them from our pages at the commit this site pins — the same code that answers an agent at mcp.companygraph.io.

RESTS ON `system MCP server` `system GitHub` `data-object Snapshot` `data-object Repository`

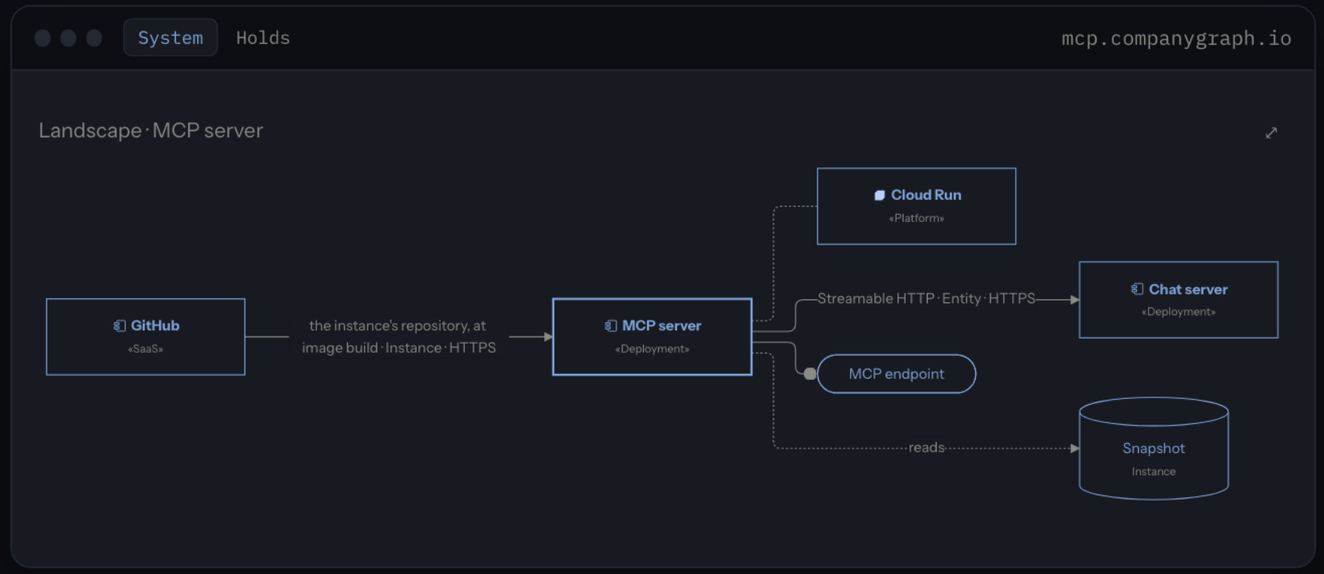


Ask the model

12

Your landscape, as pages

ArchiMate's elements as pages a check holds, mapped in both directions. Where the pack departs, its README says why.

RESTS ON `concept Pack`

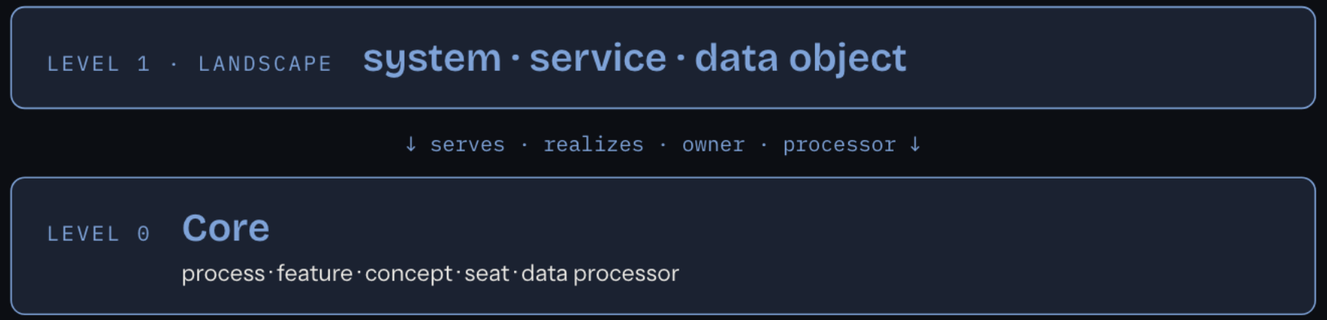

Ask the model