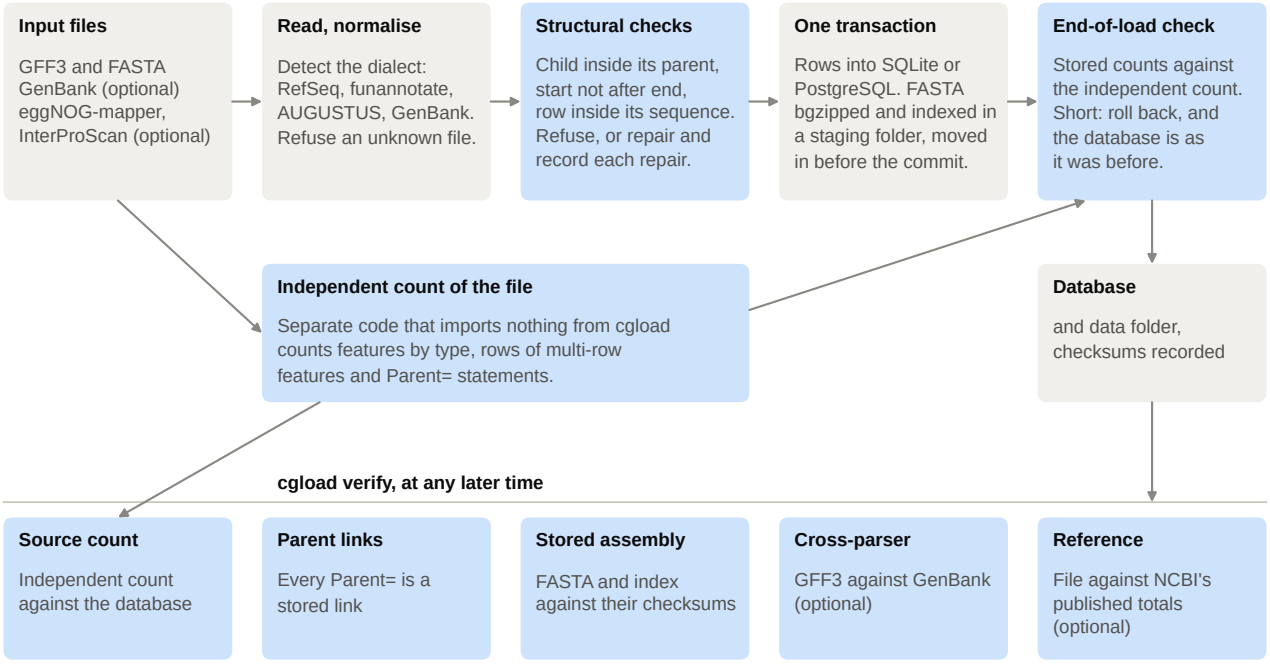
Input files
GFF3 and FASTA
GenBank (optional)
eggNOG-mapper,
InterProScan (optional)
Read, normalise
Detect the dialect:
RefSeq, funannotate,
AUGUSTUS, GenBank.
Refuse an unknown file.
Structural checks
Child inside its parent,
start not after end,
row inside its sequence.
Refuse, or repair and
record each repair.
One transaction
Rows into SQLite or
PostgreSQL. FASTA
bgzipped and indexed in
a staging folder, moved
in before the commit.
End-of-load check
Stored counts against
the independent count.
Short: roll back, and
the database is as
it was before.
Independent count of the file
Separate code that imports nothing from cgload
counts features by type, rows of multi-row
features and Parent= statements.
Database
and data folder,
checksums recorded
cgload verify, at any later time
Source count
Independent count
against the database
Parent links
Every Parent= is a
stored link
Stored assembly
FASTA and index
against their checksums
Cross-parser
GFF3 against GenBank
(optional)
Reference
File against NCBI's
published totals
(optional)