

THALES

CYBERSECURITY

Thales – Data Security

Fortifying your data security posture

cpl.thalesgroup.com



Persistent control around the data itself

Security follows sensitive data across on-premises, cloud and hybrid environments.

Visibility

A current view of sensitive data, its location, classification and exposure.

Consistent protection

The right protection technique without forcing every workload into the same model.

Governed control

Central policies, key ownership, access separation and audit evidence.

This is what “fortifying your data security posture” means: reducing uncertainty, exposure and operational fragmentation.


Data value is rising, but confidence in control is not keeping pace

- Where is our sensitive data?
- What data is it, and which obligations apply?
- Who and what can access it?
- How is it protected across hybrid environments?
- Can we detect abnormal access or destructive behaviour?
- Can we prove control quickly to auditors and executives?




The cost of uncertainty is slow transformation, fragmented controls and unprioritised risk.

Thales Offers an **Expanded** Unified Approach to Data Security

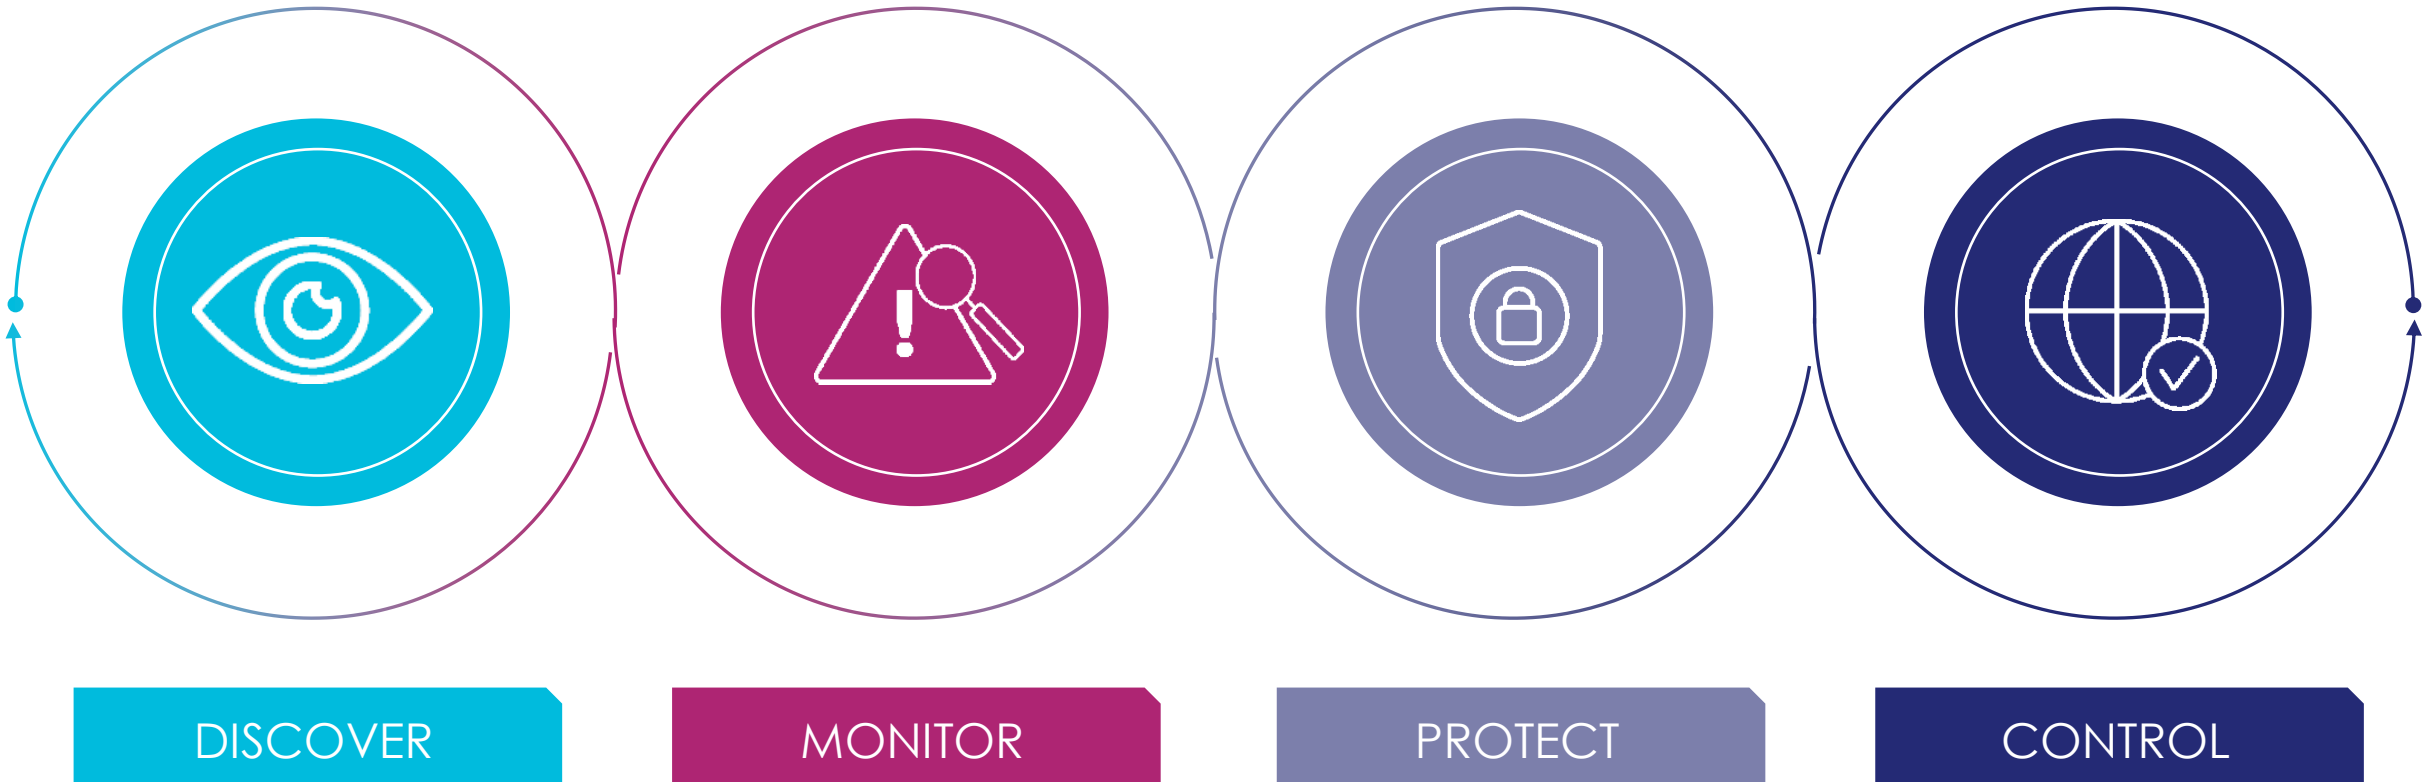

Data Discovery and Classification creates the fact base

Know what data exists, where it resides and what deserves action first.

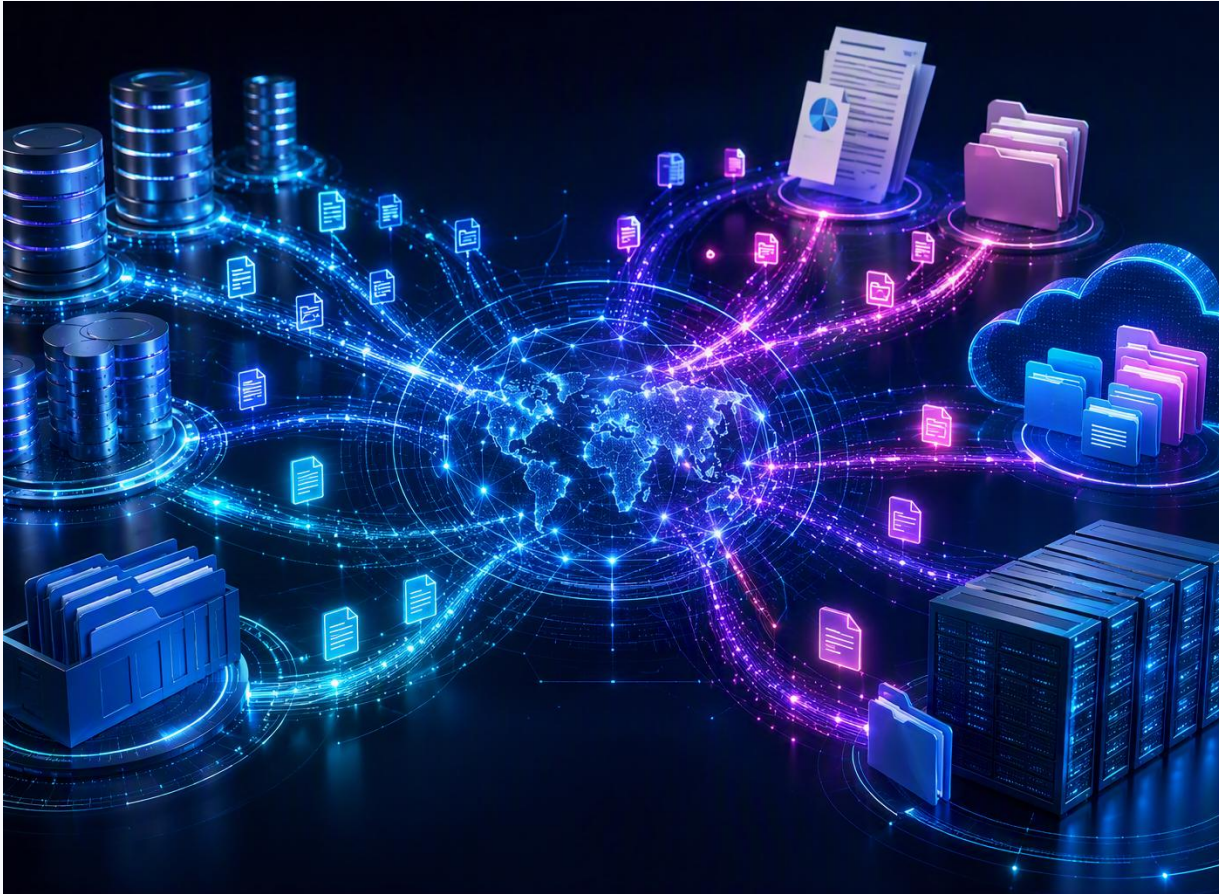

- 1 Define** Locations, credentials, profiles and scan scope
- 2 Discover** Scan representative structured and unstructured stores
- 3 Classify** Identify regulated and customer-defined data types
- 4 Prioritise** Use findings and risk context to focus remediation
- 5 Report** Share evidence with security, privacy and data owners

Protect: Flexible Data Protection Techniques



Transparent Encryption

File, volume, database and big data encryption with granular access controls. No application changes.



Tokenization

Vaultless with dynamic data masking or vaulted. Reduce PCI scope and protect sensitive fields.



Format-Preserving Encryption

Keep data format intact for applications and analytics while encrypting the sensitive content.



Database Protection

Column-level encryption without application rewrites. Strong separation of duties.



Privileged Access Control

Let admins do their jobs without seeing clear-text data. Stop insider and ransomware abuse.




Application Data Protection

APIs and libraries for encryption, hashing, signing at the application layer.

Use Case: Control your data

Enabled By: Key Management

Control your sensitive data across the environment

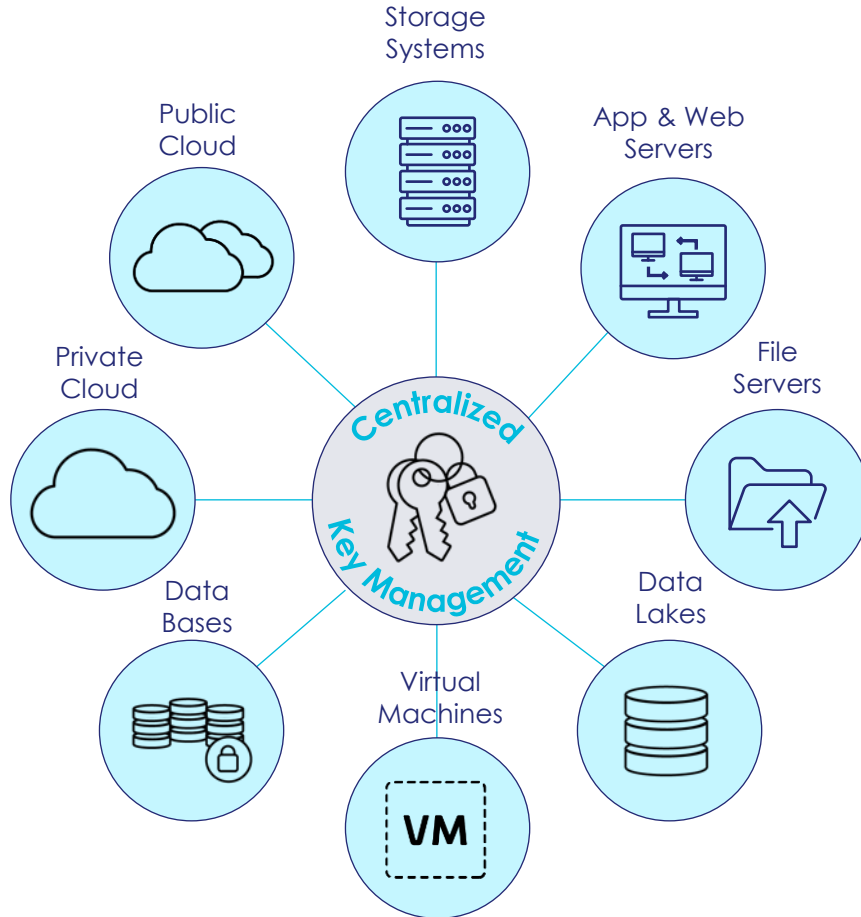

Focus

- "Who holds the keys?"
- "Where are the keys stored?"

Best Practices

- Encryption is only as good as the keys
- Keys must be of high quality
- Keys must be rotated regularly
- Keys must be protected and secured away from the data

You need more than a **Fast Engine** to Win a Race

CipherTrust Transparent Encryption (CTE)

- ▶ Patented, high-performance transparent encryption engine
- ▶ Live Data Transformation (LDT) enables key rotation without application downtime
- ▶ Broadest coverage across file, database, and application use cases

CipherTrust Cloud Key Management (CCKM)

- ▶ Own your data by owning your keys
- ▶ Centralized key management supports digital sovereignty
- ▶ Crypto key discovery


Data Security Fabric (DSF)

- ▶ Monitor and audit all database activity, including privileged users
- ▶ Real-time policy alerts and blocking
- ▶ User rights management and virtual patching

Data Risk Analytics and Intelligence (DRA/DRI)

- ▶ Context-aware ML analytics on data activity
- ▶ Condenses large datasets into high-confidence signals with low false positives
- ▶ Risk scoring and prioritization for actionable insights

Data security fabric provides broadest coverage across multicloud, hybrid, and on-premises environments

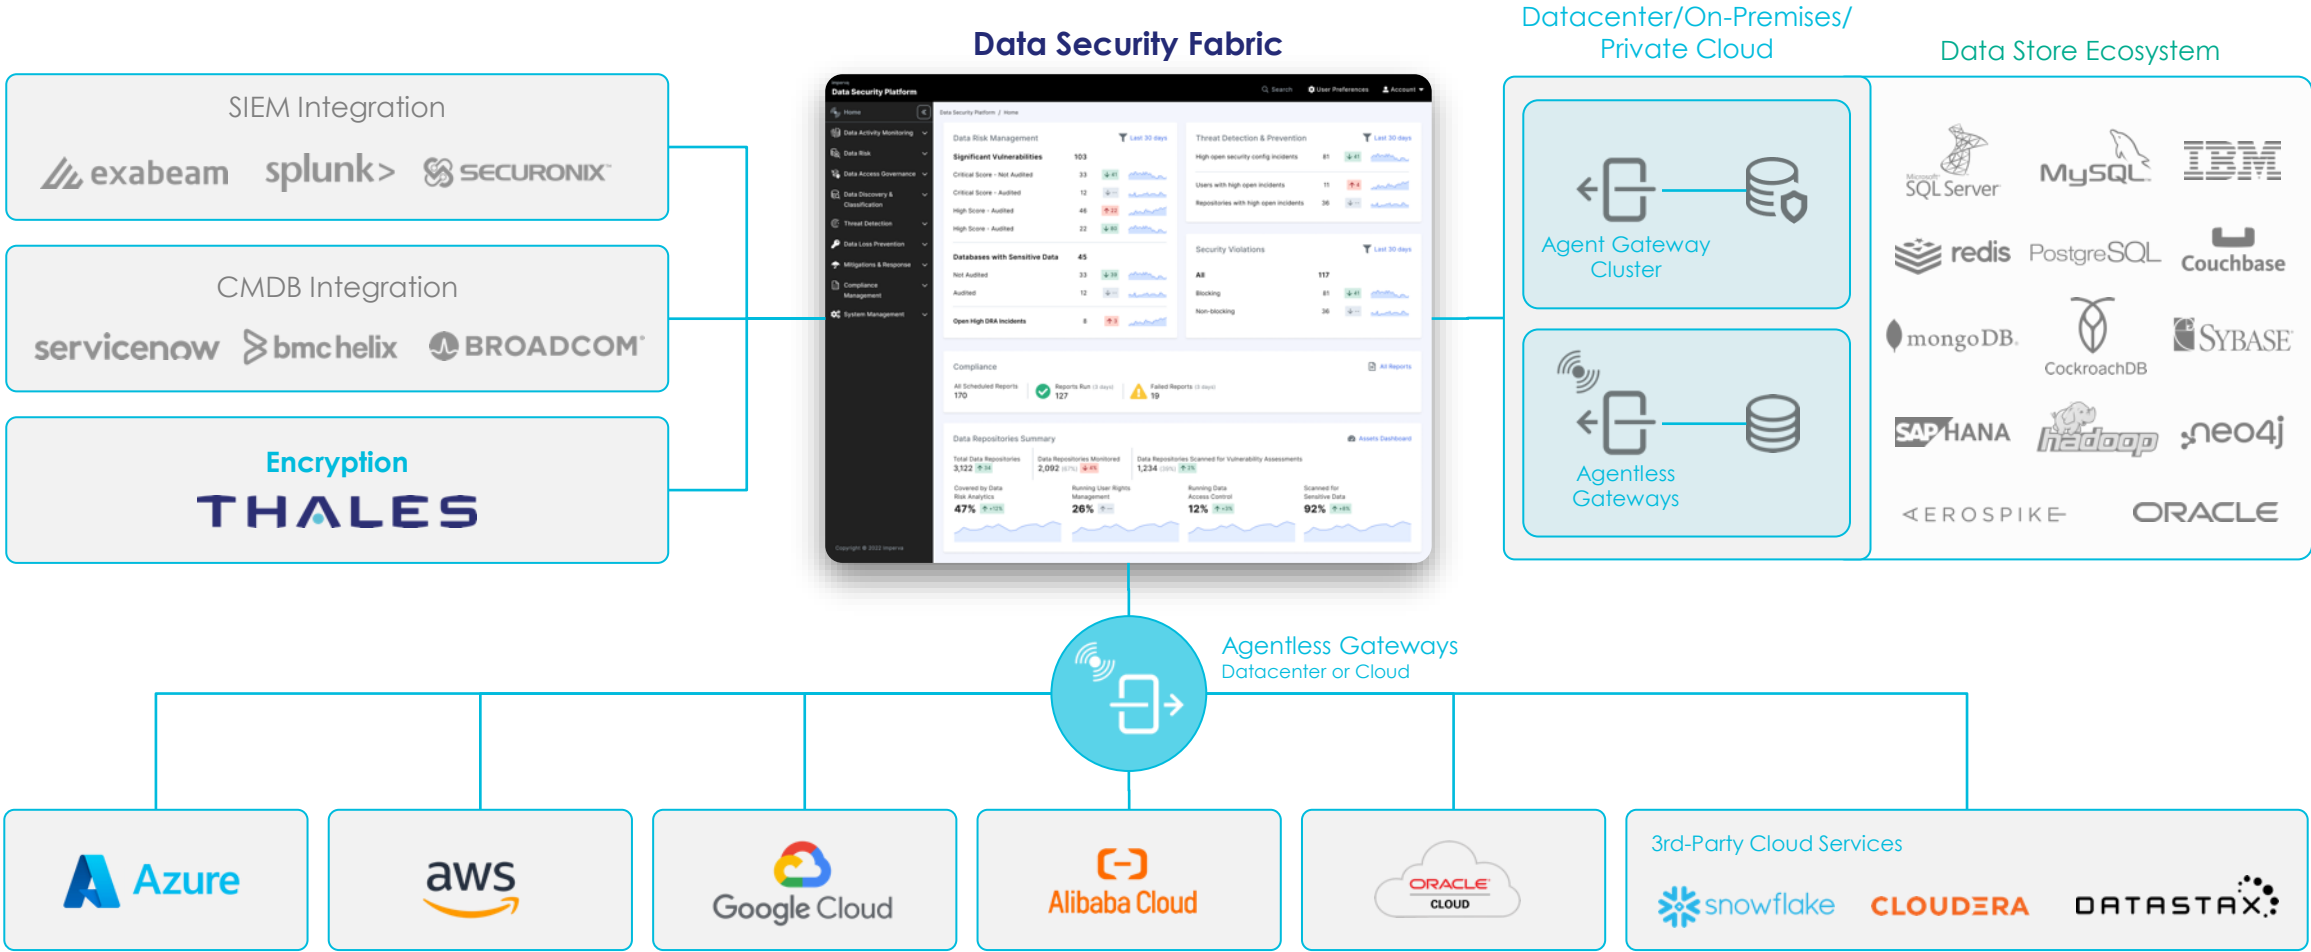

Use Case: Forensic analysis of structured data activity

Enabled by: Data Activity Monitoring (DAM)



Track & Flag Database Activity

- Users
- Data Accessed
- Data Operations
- Privileged Operations



How it Helps:

- Single view across data footprint
- Comprehensive incident details
- Enables both compliance and security teams

Real Time Alerts

Description	User Accessed SQL Server from Unauthorized IP172.165.10.23
When?	March 20, 2025 8:35:14
Where?	MS SQL Server, London UK Data Center
Who?	User: dev_app
How?	MS SQL Studio Management Studio Express
What?	SELECT * from 'ShortPositions'
Why?	Enrichment: Dev_Admin

Use Case: Advanced Threat Detection using AI

Enabled by: Data Risk Analytics (DRA)

Security Events > Incidents

Critical 95 Excessive Multiple Database Access

☆ | Event Time: May 4, 2015 12:00:00 PM | Status: Open | ID: 1203

EXPORT INCIDENT | CLOSE INCIDENT | CREATE WHITELIST RULE

Interactive (non-application) user 'john.heidorn' attempted to access an abnormally high number of different databases (29 databases) over a short period of time (2 hours and 45 minutes).

Learn how to investigate this type of incident

Comment

What influenced the severity of this incident

Client Details



john.heidorn
Information Technology Contractor

Host: win7x-john.h-desk

IP Address: 10.10.32.41

Source Application: microsoft sql server ...

User Endpoint | Interactive Tool

Server Details



Multiple IPs 1
MsSql Servers

DB User: john.heidorn

DB Name: master

Personal Account

Show details

Incident Details

Typical Behavior

29 Different databases (10.51.45.118, 10.51.45.116, 10.51.45.120...) attempted access



The user attempted to access 29 different DBs over a short period of time.



Prioritize what matters the most.



Interpret security incident in plain language.

THALES
Building a future we can all trust

REF xxxxxxxxxxxx rev xxx – date Name of the company / Template: 87211168-DOC-GRP-EN-007
This document may not be reproduced, modified, adapted, published, translated, in any way, in whole or in part or disclosed to a third party without the prior written consent of Thales © 2023 THALES. All rights reserved.

11

Use Case: Understand and manage your data security posture

Enabled by: Data Risk Intelligence (DRI)

Posture Indicators

Vulnerabilities



User Permissions Misconfigurations




Coverage



Sensitive Data



Encryption

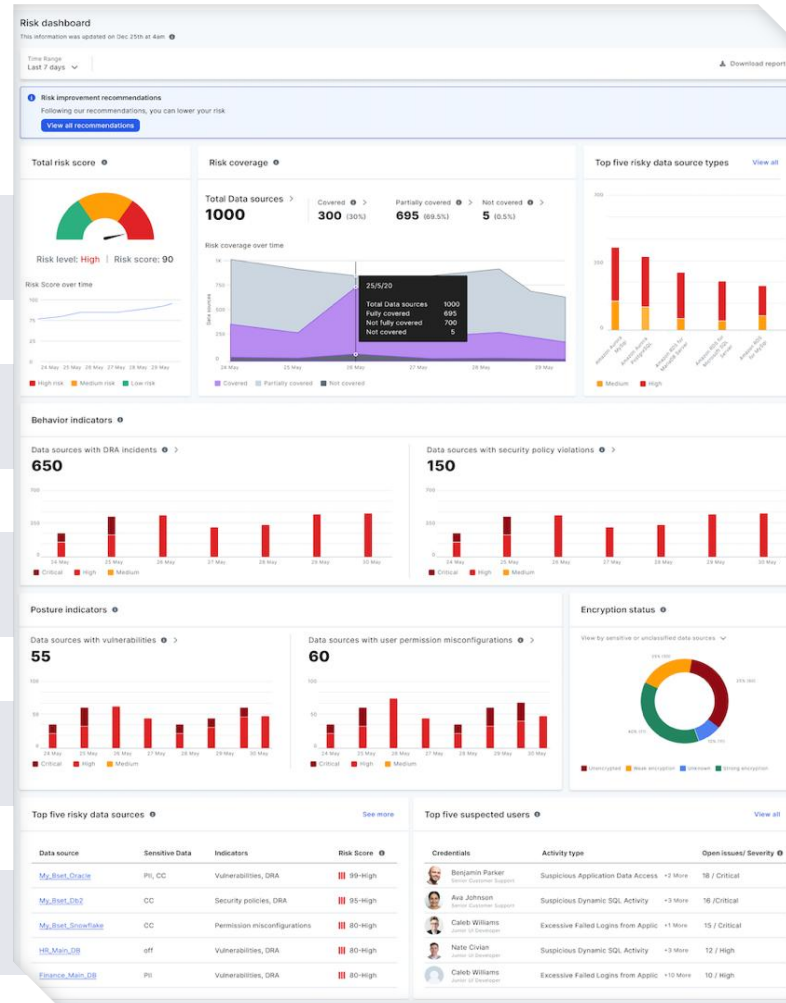

Behavioral Indicators

Active Attacks on Databases



Suspicious Scans



Suspicious Logins



Suspicious Command Execution



Suspicious DB Access Scenarios



Use Case: Forensics on Unstructured File Data Usage

Enabled by: File Activity Monitoring (FAM)

Value Proposition



Discover and classify sensitive data

Automatically monitor accesses

Manage compliance

Gen AI powered data security assistant

Enrich audit with encrypted information

Simple & Intuitive UX

Customer Benefits




Protect unstructured data in organization

Same vendor for structured and unstructured data

Centralized place for protecting all data

Reduce labor work on unstructured data due to the Gen AI FAM chatbot and the intuitive UX


For existing customers - Leverage existing infrastructure for unstructured data security

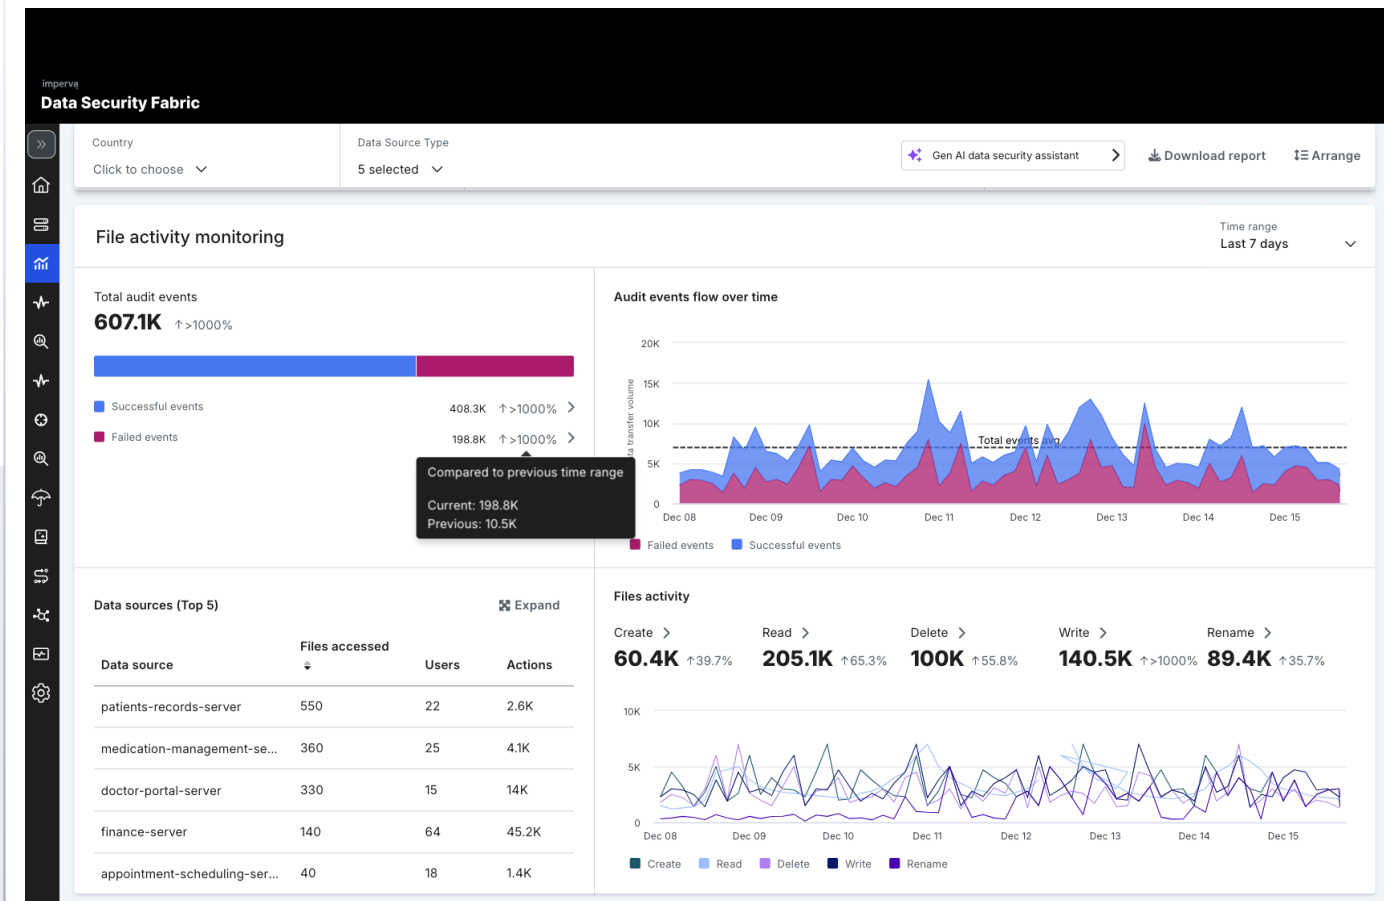


Positioning existing Thales solutions against DSPM use cases

Data Security Posture Management (DSPM) Use Cases


Foundational DSPM Use Cases

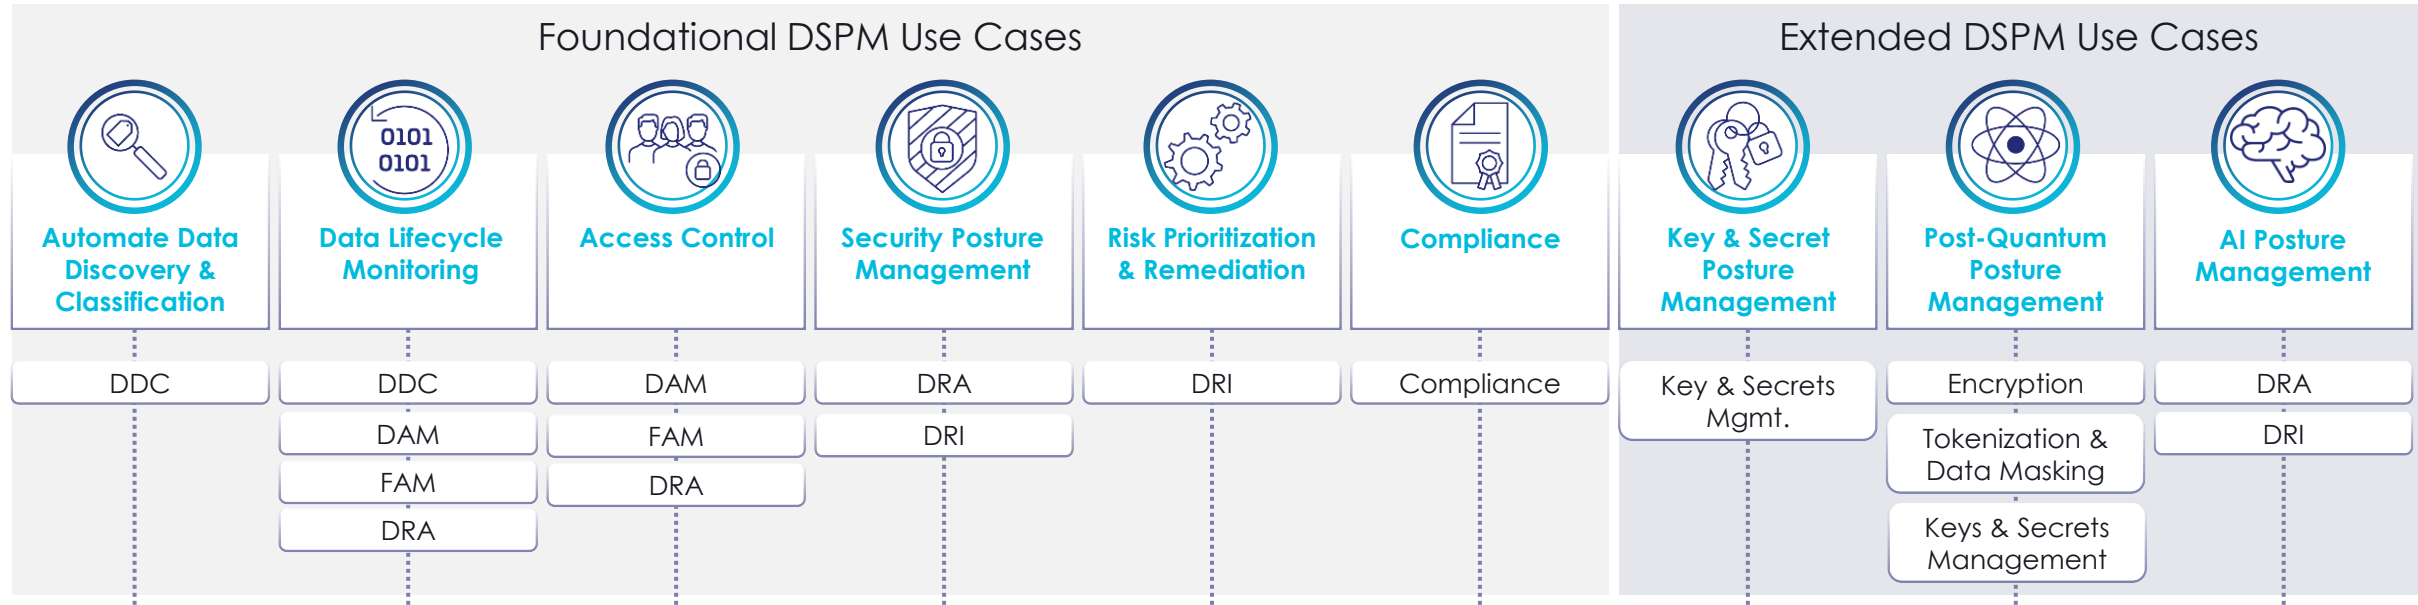

Extended DSPM Use Cases

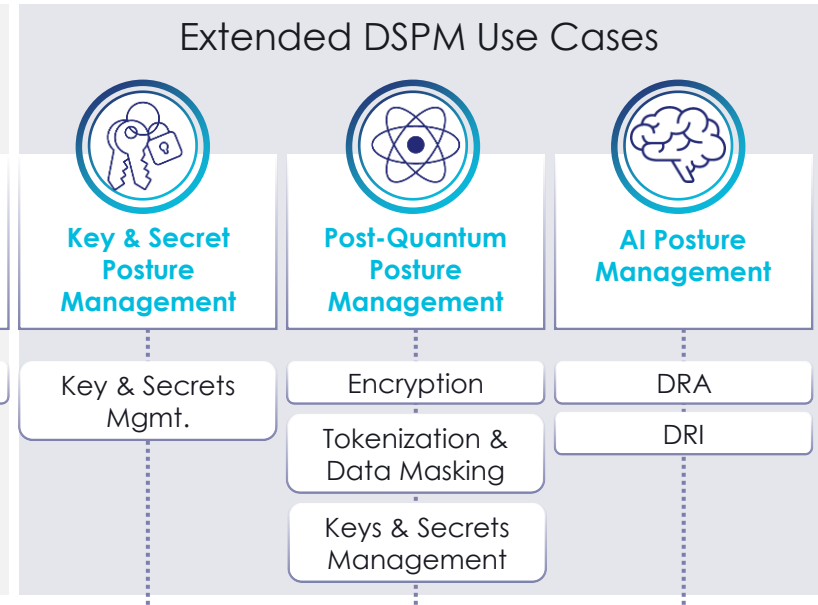

CipherTrust Data Security Platform

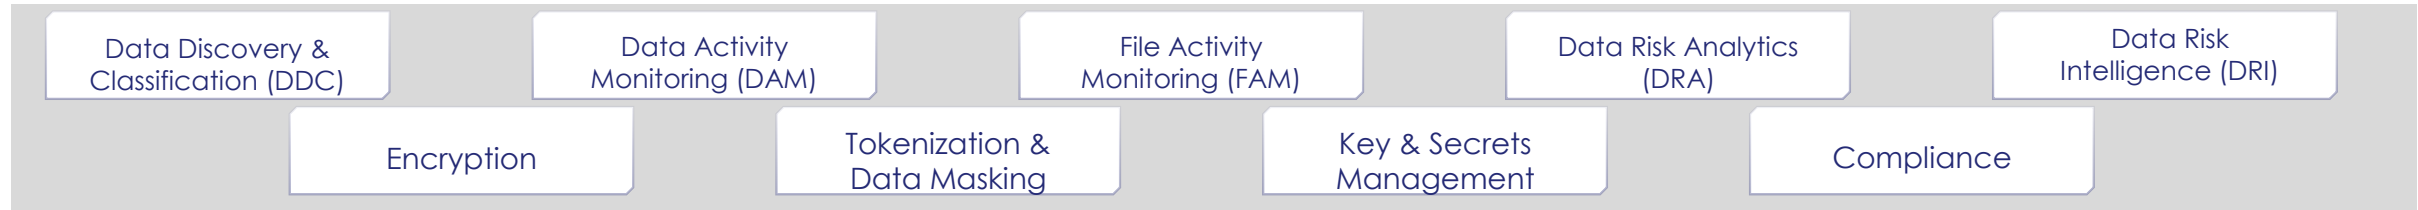



Y2K, or the Year 2000 bug, was a global computer flaw where systems used two digits instead of four for the year. This caused fears that systems would read the year 2000 ("00") as 1900, crashing critical infrastructure like banking and power grids

YOU THINK

"Massive hype, and then... nothing happened. Proof the whole thing was overblown."

ACTUALLY

Nothing happened because of years of quiet remediation.
A myriad of systems audited and fixed beforehand.

The prevention paradox: your entire profession is invisible when it works.


And the PQC timelines can't stay static....

- > **The 2029 Deadline:** Google has committed to migrating its core systems by 2029, a year ahead of NIST's 2030 deprecation date for older algorithms and four years earlier than Microsoft's 2033 target
- > **Focus on Authentication:** Google adjusted its threat model to prioritize PQC for authentication services and digital signatures, recognizing these as emerging threats.
- > **Chrome Quantum-Resistant Root Store (CQRS):** Google is developing a dedicated root store for post-quantum certificates, with requirements to be finalized by Q3 2027.
- > **Hybrid Implementation:** Rather than waiting, Google is already utilizing hybrid cryptography (pairing classical and PQC algorithms) in Chrome and internal traffic to secure connections now.



PQC: Simplifying a Complex Journey

Assess → Test and Transition → Operate Quantum-Safe Crypto-Agility

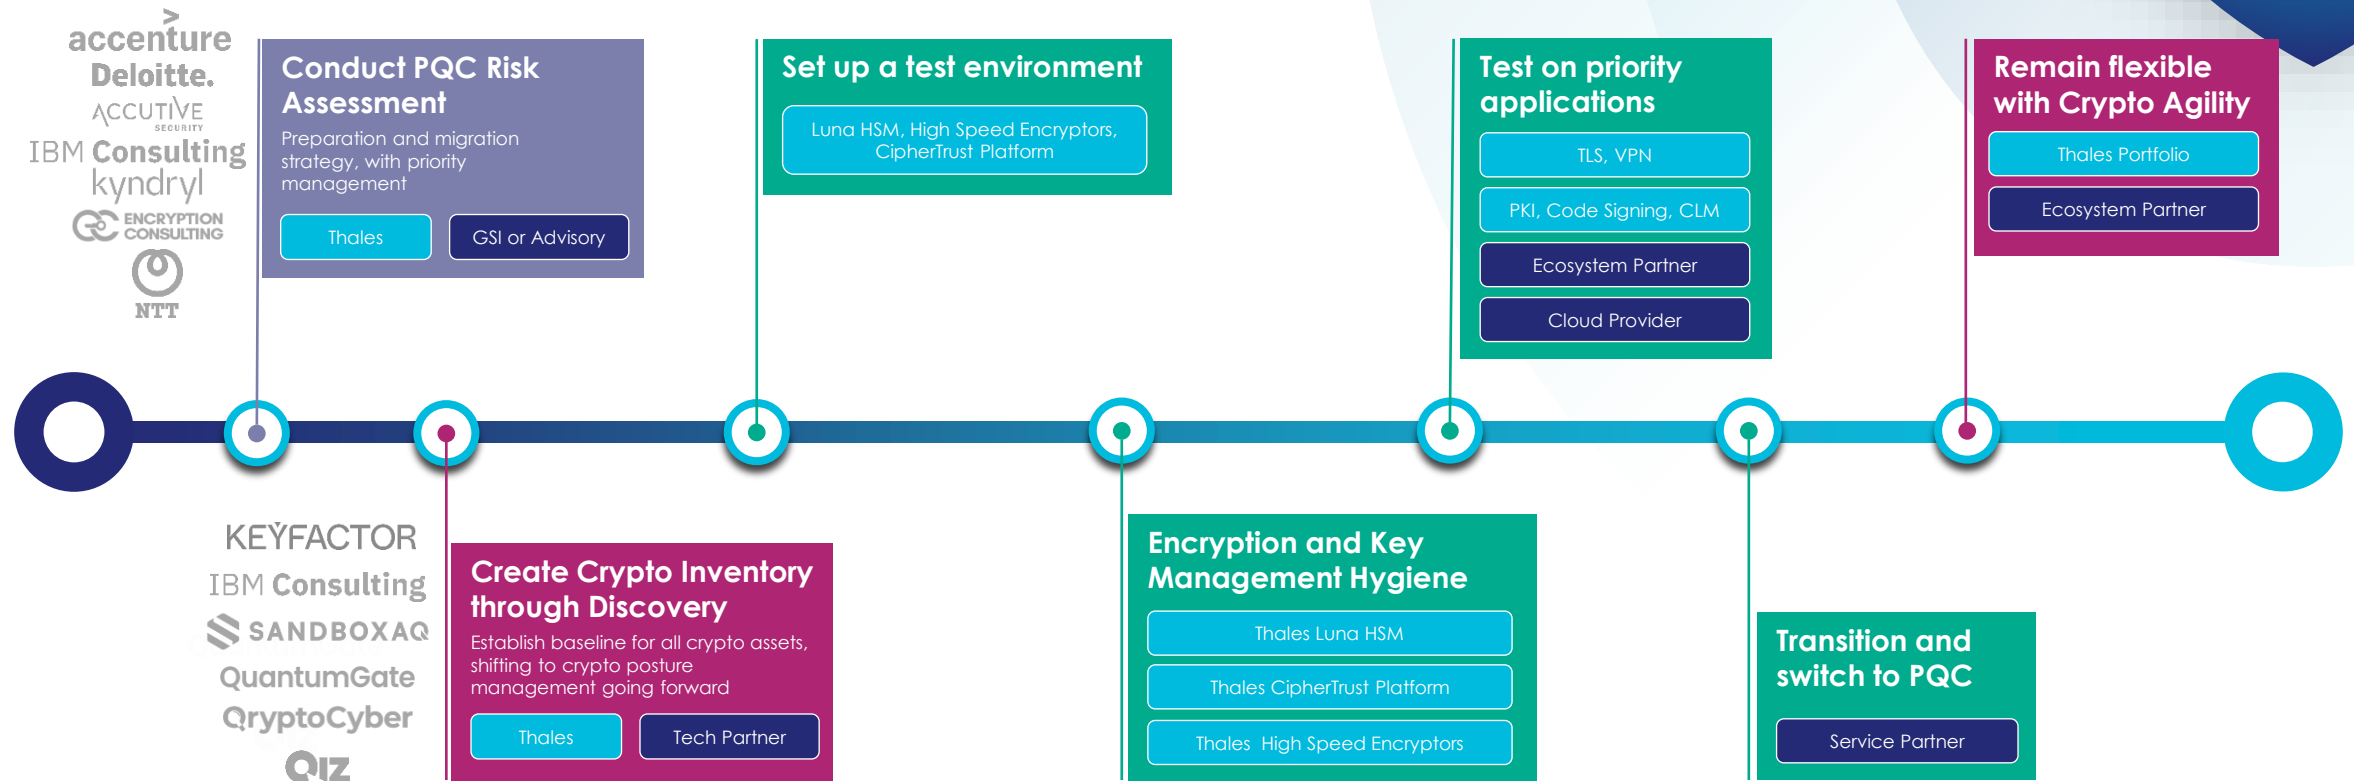

Selective Hybrid

Use classic + PQC only where it reduces operational or interoperability risk during transition (temporary safeguard, not end-state).

Build Ecosystem

Changing algorithms, protocols, and key infrastructure can be costly, complex, time-consuming & requires coordination across multiple parties.


Evolve with the standards

NIST-standardized algorithms
As standards evolve, implement, validate and re-certify as required

Thales has solutions and partnerships in place today to support your quantum safe migration

Unified DSPM Platform

First Unified Platform with a Unified User Experience

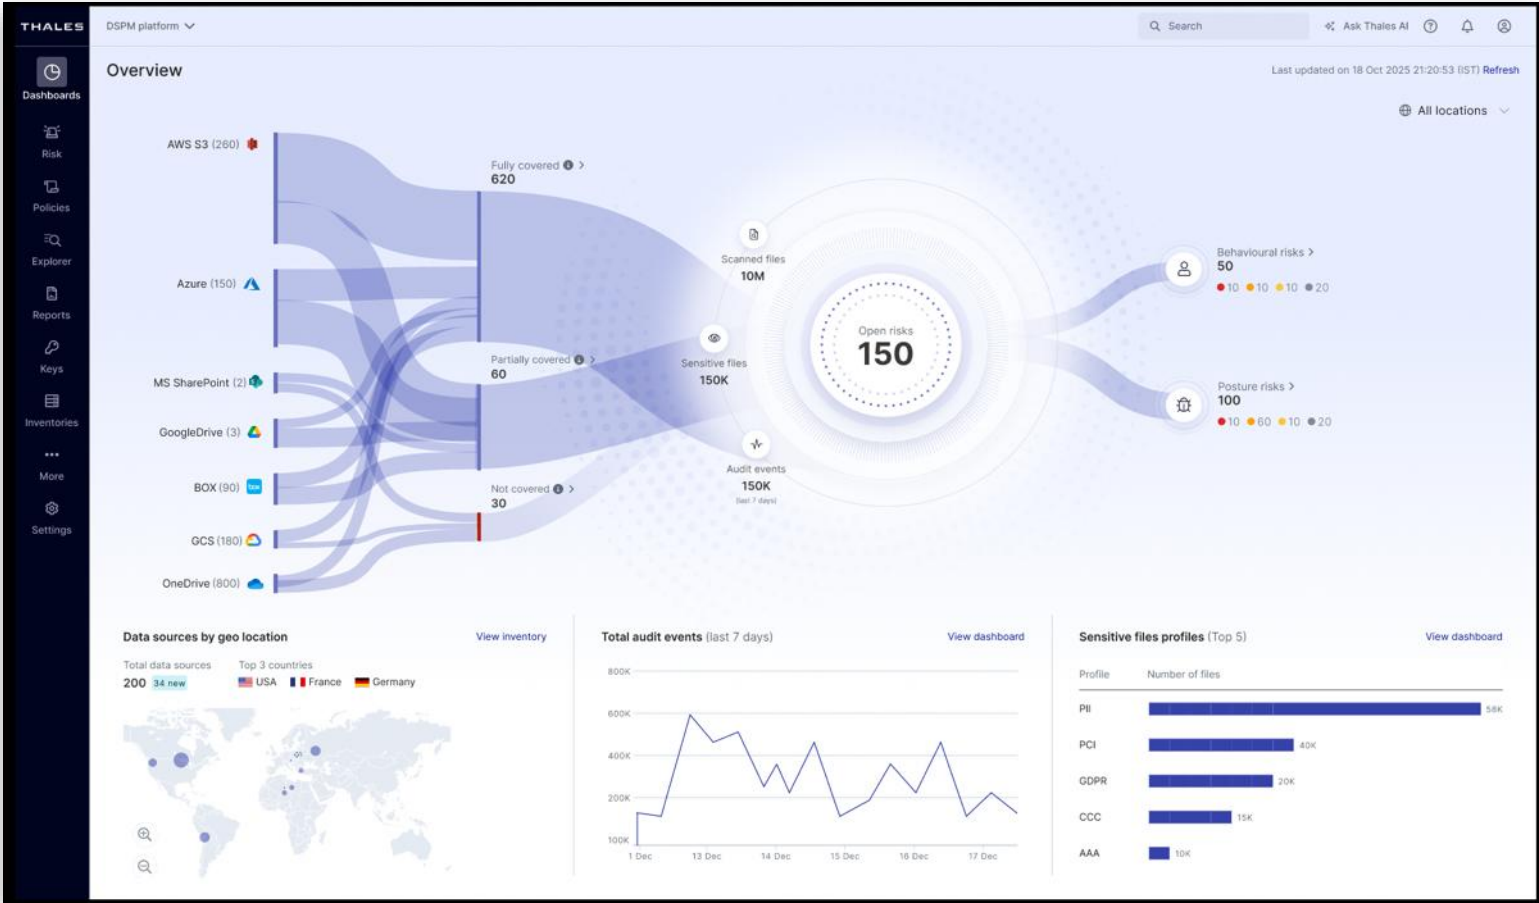

SaaS deployment based on
CDSPaaS



Structured Data



Unstructured Data

Use Cases



Continuous Data
Source Discovery



Data
Classification



Integrated MIPs
Tagging



File and Data Activity
Monitoring



File and Data
Entitlement
Management



Misconfiguration &
Vulnerability
Assessment



Data Risk
Analytics




Data Risk Intelligence



Risk Mitigation
(Protect and Control)

Know it. Protect it. Control it. Prove it.

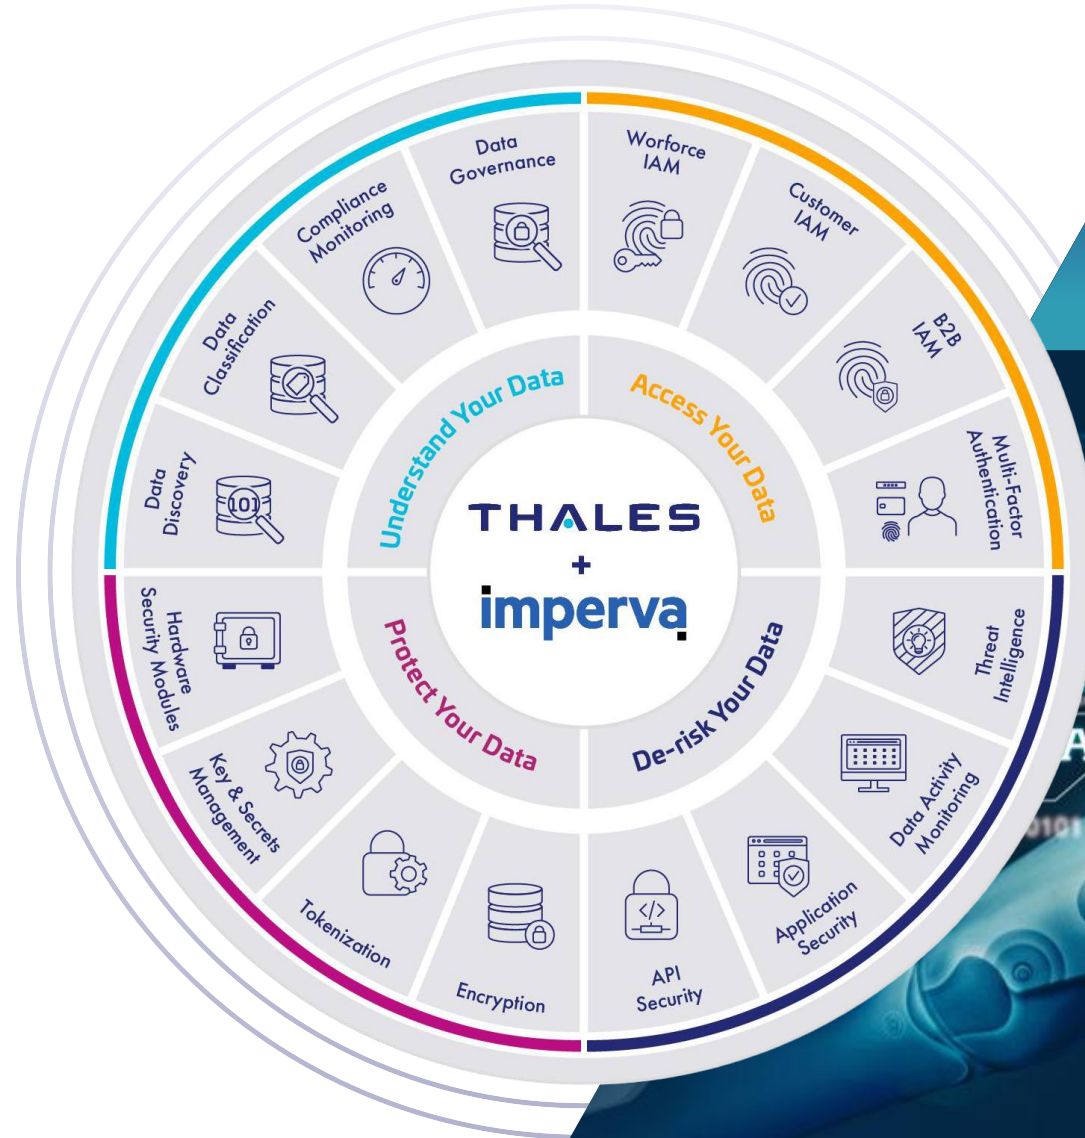

BUILDING A SECURE AND
TRUSTED FUTURE

Thank you