DO NOW — RECALL

HTML structures and forms

Name: _____ Class: _____ Date: _____

1. What does an HTML element supply to the browser?

2. Which part of a browser page contains displayed content?

3. What does HTTPS protect?

4. C# array int[] a={3,5,7}; append 9 conceptually using a new array and give sum.

DO NOW — CHECK / OBJECTIVES

Correct and improve

Check page 1 in GREEN PEN. Write corrections in full.

1. Model answer

Document structure or semantics.

2. Model answer

The HTML body.

3. Model answer

Confidentiality and integrity of transport, with server authentication.

4. Model answer

The new sequence is [3,5,7,9], sum 24; fixed-size arrays need allocation/copy or suitable list structure.

Vocabulary — know these terms

element — HTML start/end tags and content.

attribute — Property on HTML element.

form — Collects and submits user data.

label — Identifies a form control.

GET — HTTP method placing data in request URL.

WE DO — SOURCE CHECK / IMPROVE

Only use this section AFTER attempting the We Do, You Do and Exit Ticket. Compare with the original classroom lesson's CHECK explanation. Correct errors in GREEN PEN and explain why.

Guided 1 — original CHECK

Show method

The email input type provides built-in browser constraints, but the server must validate again.


IMPROVE: Explain one correction to your own reasoning.

We Do Check · original lesson diagrams

Diagrams appear after the related explanation. Annotate the original source visual.

Correct the accessible label connection in a form where for='email' but input id='user'.

The label for and input id must match exactly.

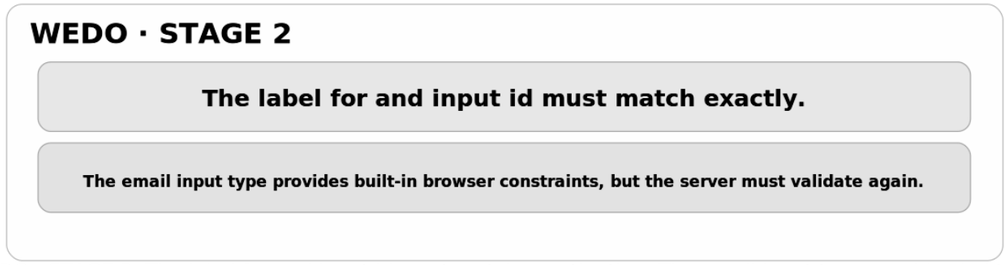

WEDO · STAGE 2: The label for and input id must match exactly. then The email input type provides built-in browser constraints, but the server must validate again.

NEW LEARNING

Read, annotate and explain

Understand

HTML uses nested elements to give structure and semantics: head contains metadata and body contains visible content.

Trace

Forms collect and submit inputs. The label's for value matches input's id; the input's name is the key submitted to the server.

Evaluate

With method GET, query parameters appear in the URL; don't use GET for confidential credentials. Client-side required validation improves usability but is not a substitute for server validation.

Explain one step in your own words, using the correct technical terms.

New Learning · original lesson diagrams


Diagrams appear after the related explanation. Annotate the original source visual.

New Learning




HTML structures and forms · STAGE 1: HTML document contains head and body

New Learning

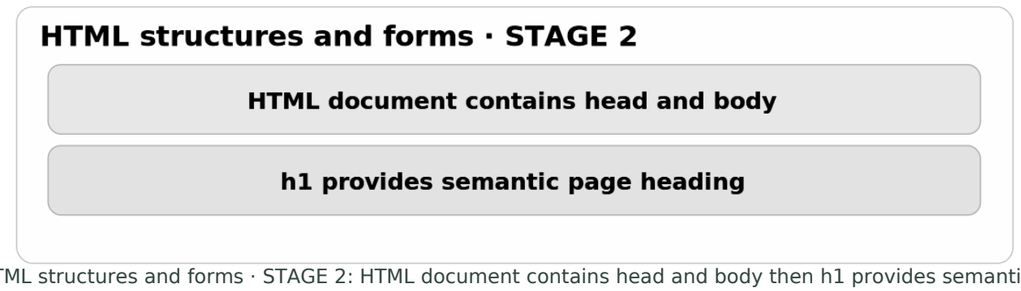

HTML structures and forms · STAGE 2: HTML document contains head and body then h1 provides semantic page heading

New Learning

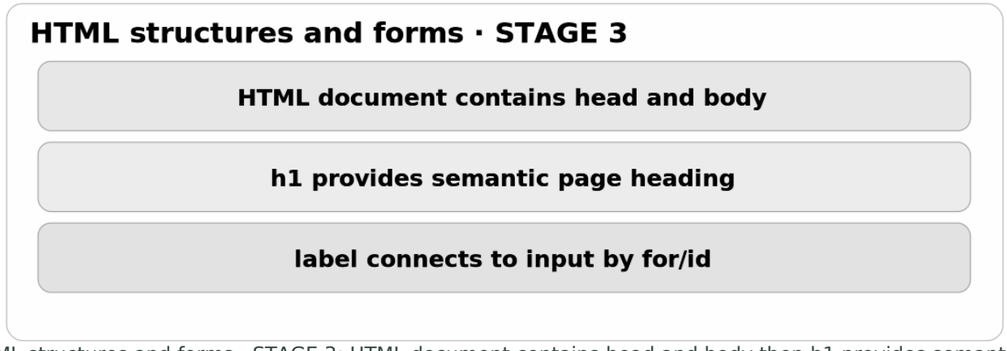

HTML structures and forms · STAGE 3: HTML document contains head and body then h1 provides semantic page heading then label connects to input by for/id

EXIT TICKET / REFLECTION

Check your understanding

Complete the actual lesson Exit Ticket before checking the answer.

Setting required on an HTML form is enough to secure a server from invalid data.

How confident are you? Circle one: Confident / Getting there / Need help

Explain your choice, identifying one concept you can now use independently.

GREEN PEN — Correct and explain

Choose one mistake from your independent work. Write the correct method and explain precisely why your original answer was wrong.

Next step: revisit the model or a relevant revision-guide section if needed.

YOU DO — INDEPENDENT PRACTICE

Questions · Part 2

Answer independently. Show code, calculations, a trace or justified reasoning as appropriate.


Question 3

Explain two shortcomings of relying entirely on required and type='email' for security-sensitive form validation. [6]

New Learning · original lesson diagrams

Diagrams appear after the related explanation. Annotate the original source visual.

New Learning

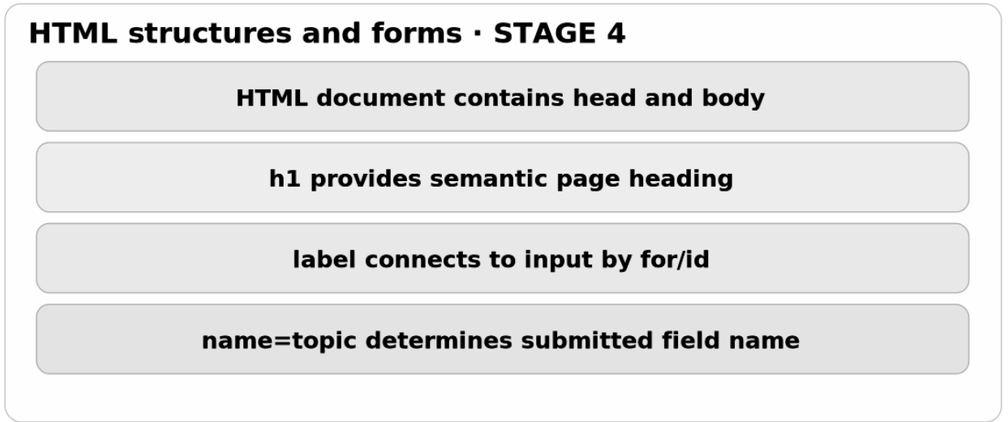

HTML structures and forms · STAGE 4: HTML document contains head and body then h1 provides semantic page heading then label connects to input by for/id then name=topic determines submitted field name

I DO — WORKED EXAMPLE

Follow the worked method

What is sent by a GET form whose input name is q and value is binary?

Predict first

The action sets the destination path '/find' and GET encodes form fields into URL query parameters.

Show method

The input name 'q' becomes the query key and 'binary' the value.

YOU DO — INDEPENDENT PRACTICE

Questions · Part 1

Answer independently. Show code, calculations, a trace or justified reasoning as appropriate.

Question 1

State roles of html, head, body, form, input and label. [6]

Question 2

Write a form that submits an age field by GET to /check and explain sent key. [6]

WE DO — TRY · DISCUSS · IMPROVE

TRY: Use the original guided questions and diagrams in the preceding We Do pages.
DISCUSS: Explain and challenge methods before independent practice. IMPROVE: Note one change now; compare with the source model only AFTER the Exit Ticket.

Guided 1: Predict first The label for and input id must match exactly.

DISCUSS — Compare your methods. Justify one important decision, identify one difference, and agree a specific improvement.


IMPROVE — Write one precise correction or stronger explanation in your own answer.

I Do · original lesson diagrams

Diagrams appear after the related explanation. Annotate the original source visual.

What is sent by a GET form whose input name is q and value is binary?


The action sets the destination path '/find' and GET encodes form fields into URL query parameters.

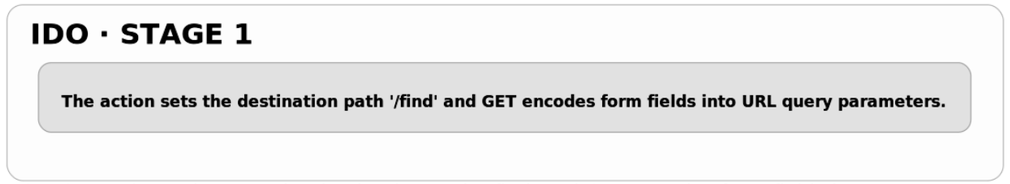

IDO · STAGE 1: The action sets the destination path '/find' and GET encodes form fields into URL query parameters.

What is sent by a GET form whose input name is q and value is binary?

The action sets the destination path '/find' and GET encodes form fields into URL query parameters.

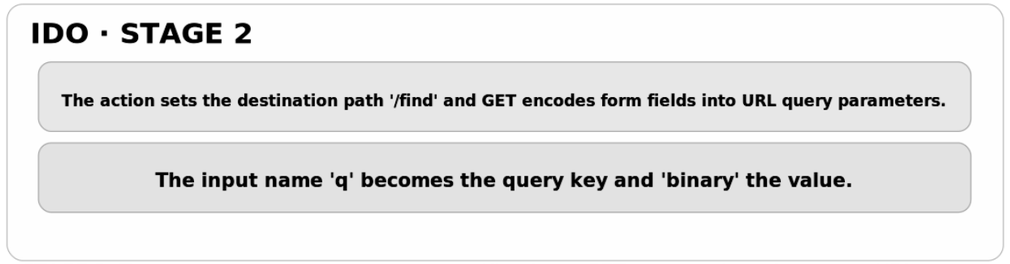

IDO · STAGE 2: The action sets the destination path '/find' and GET encodes form fields into URL query parameters. then The input name 'q' becomes the query key and 'binary' the value.

WE DO — GUIDED PRACTICE

Try → Discuss → Improve

We Do · original lesson diagrams

Diagrams appear after the related explanation. Annotate the original source visual.

Correct the accessible label connection in a form where for='email' but input id='user'.

The label for and input id must match exactly.



WEDO · STAGE 1: The label for and input id must match exactly.