


Section Cheat Sheet (PPT)

Overview of Minimal API

- It is a Microsoft's API that is used to create HTTP services (or HTTP APIs) with minimal dependencies on packages.
- Alternative to Web API Controllers. Mainly used to create HTTP services or Microservices.

REST API (Representational State Transfer)

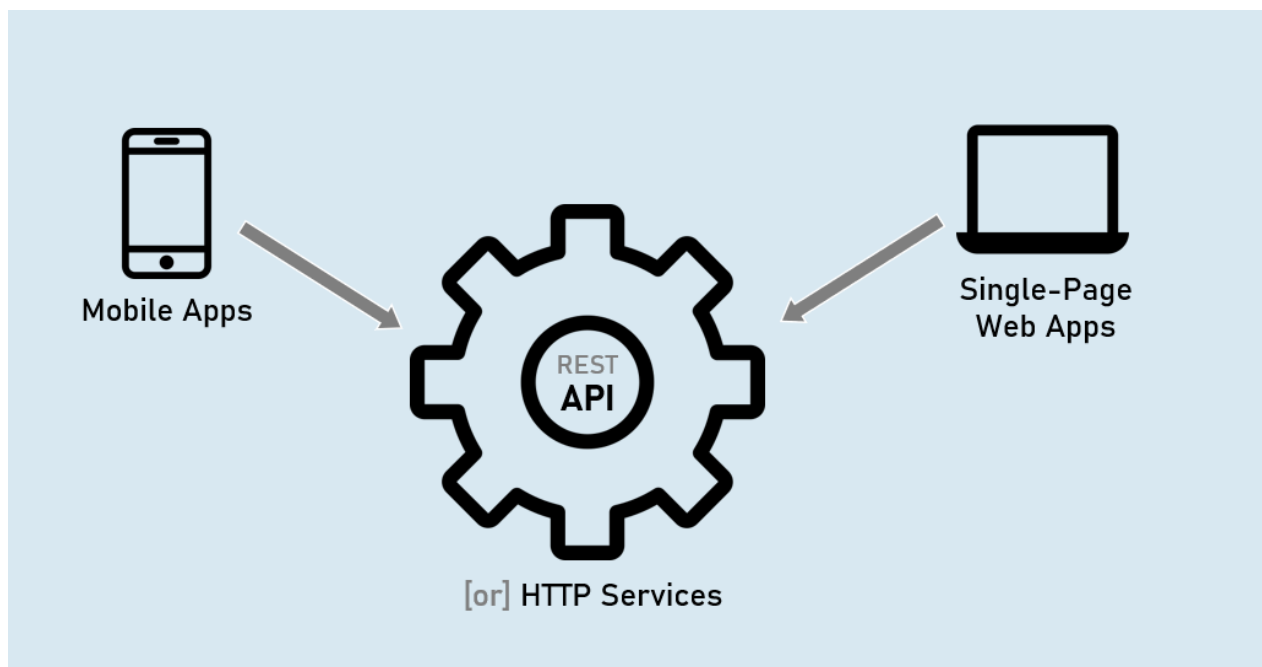

MVC Controller (Microsoft.AspNetCore.Mvc.Controller)

- Full support for model binding and model validation.
- Full support for views.
- Full support for filters & filter pipeline.

API Controller

(Microsoft.AspNetCore.Mvc.ApiControllerAttribute)

- Full support for model binding and model validation.
- No support for views.
- Full support for filters & filter pipeline.

Minimal API (IApplicationBuilder.Map* Methods)

- Limited support for custom model binding and custom model validation (needs to improve).
- No support for views.
- No support for filters & filter pipeline; but supports "Endpoint Filters" alternatively.

Routing in Minimal API

1. MapGet()

Creates an endpoint that receives HTTP GET request.

```
app.MapGet("/route", async (HttpContext context) => {  
    await context.Response.WriteAsync("your response");  
});
```

2. MapPost()

Creates an endpoint that receives HTTP DELETE request.

```
app.MapDelete("/route", async (HttpContext context) => {  
    await context.Response.WriteAsync("your response");  
});
```

3. MapPut()

Creates an endpoint that receives HTTP PUT request.

```
app.MapPut("/route", async (HttpContext context) => {  
    await context.Response.WriteAsync("your response");  
});
```

4. MapDelete()

Creates an endpoint that receives HTTP DELETE request.

```
app.MapDelete("/route", async (HttpContext context) => {  
    await context.Response.WriteAsync("your response");  
});
```

Route Parameters in Minimal API

Route parameters can be created as you were creating them in UseEndpoints() or in MVC controllers.

```
app.MapGet("/route/{parameter}", async (HttpContext  
    context) => {  
    await context.Response.WriteAsync("your response");  
});
```

Route Constraints in Minimal API

Route constraints can be used as you were using them in UseEndpoints() or in MVC controllers.

```
app.MapGet("/route/{parameter:constraint}", async  
    (HttpContext context) => {  
    await context.Response.WriteAsync("your response");  
});
```

Eg: int, bool, datetime, decimal, double, float, guid, long, Minlength, maxlength, length, min, max, range, alpha, regex, required

Map Groups in Minimal API

A map group (or route group) is a set of endpoints with a common prefix.

A map group is a collection of endpoints created with Map* methods such as MapGet(), MapPost() etc.

MapGet()

Creates an endpoint that receives HTTP GET request.

```
var mapGroup = app.MapGroup("/route-prefix");
```

```
mapGroup.MapGet(...);
```

```
mapGroup.MapPost(...);
```

IResult

The `Microsoft.AspNetCore.Http.IResult` is the base interface that is implemented by different result types such as `Ok`, `Json`, `BadRequest` etc., which can be returned by endpoints in minimal API.

1. `Results.Ok()`
2. `Results.Json()`
3. `Results.Text()`
4. `Results.File()`
5. `Results.BadRequest()`
6. `Results.NotFound()`
7. `Results.Unauthorized()`
8. `Results.ValidationProblem()`

IResult Implementations

1. Results.Ok

Response Content-type: application/json [or]
text/plain

Response Status Code: 200

```
return Results.Ok(response_object); //can be a string or model
```

2. Results.Json

Response Content-type: application/json

Response Status Code: 200

```
return Results.Json(response_object); //should be a model
```

3. Results.Text

Response Content-type: text/plain

Response Status Code: 200

```
return Results.Text(response_string); //should be a string
```

4. Results.File

Response Content-type: application/octet-stream

Response Status Code: 200

```
return Results.File(stream_object); //should be 'System.IO.Stream'  
type
```

5. Results.BadRequest

Response Content-type: N/A

Response Status Code: 400

```
return Results.BadRequest(response_object); //can be a string or model
```

6. Results.NotFound

Response Content-type: N/A

Response Status Code: 404

```
return Results.NotFound(response_object); //can be a string or model
```

7. Results.Unauthorized

Response Content-type: N/A

Response Status Code: 401

```
return Results.Unauthorized(response_object); //can be a string or model
```

8. Results.ValidationProblem

Response Content-type: application/json


Response Status Code: 400

```
return Results.ValidationProblem(response_object); //automatically  
creates JSON with validation errors
```

Endpoint Filter

EndPoint Filters execute much like 'action filters' i.e., 'before' and 'after' the execution of minimal API endpoint.

They are mainly used to validate parameters of the endpoint.

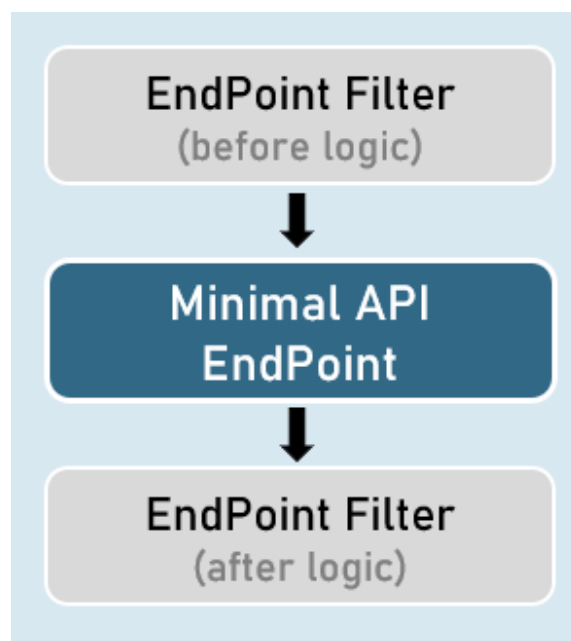

Creating an Endpoint Filter

Endpoint filters can be registered by providing a Delegate that takes a `EndpointFilterInvocationContext` and returns a `EndpointFilterDelegate`.

```
app.MapGet("/route", () => {  
    //your endpoint code here  
})  
.AddEndpointFilter(async (context, next) => {  
    //before logic  
    var result = await next(context); //calls subsequent  
        filter or endpoint  
  
    //after logic  
    return result;  
});
```

IEndpointFilter

Creating an Endpoint Filter by implementing `IEndpointFilter` interface

The `InvokeAsync()` method takes a `EndpointFilterInvocationContext` and returns a `EndpointFilterDelegate`.

```
class CustomEndpointFilter : IEndpointFilter
{
    public async ValueTask<object?>
        InvokeAsync(EndpointFilterInvocationContext context,
            EndpointFilterDelegate next)
    {
        //before logic
        var result = await next(context); //calls subsequent
            filter or endpoint

        //after logic
        return result;
    }
}
```